

INTRODUCTION

The C The a The H The A The B

Company	07
automation of buildings	09
KNX standard	10
advantages	12
Ekinex® devices	15



4





We believe

in technology that makes life easier. We develop devices that make everyday gestures easier. Our scenario is the whole world.


287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

We want

to combine technology and design. To give life to something unique that combines two seemingly distant worlds.





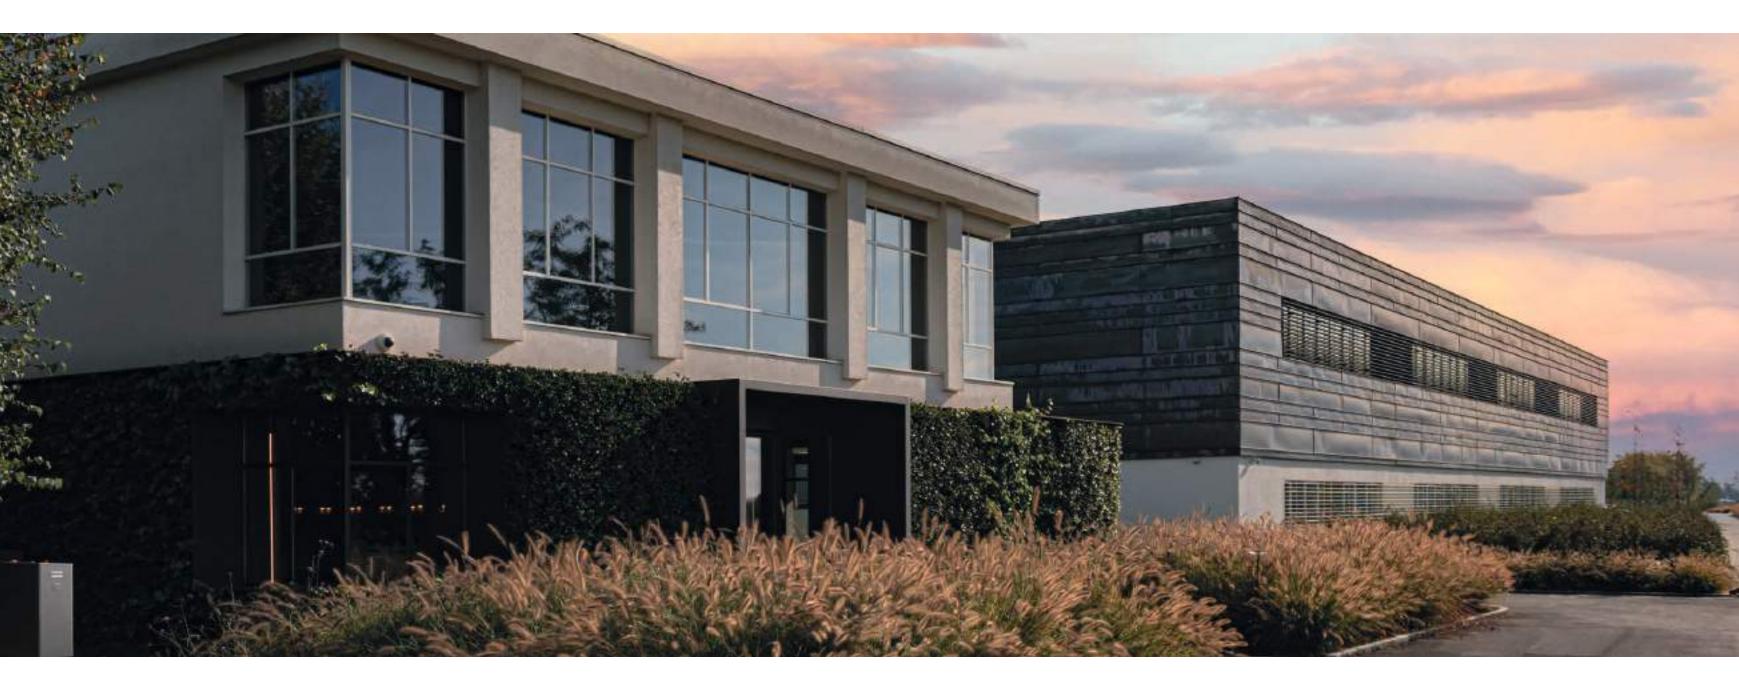

The Company

Technology meets design.

We offer a form without ever leaving aside its content. We present a product with a strong technological content which is also cutting edge from an aesthetic point of view. Design becomes the driving force behind technology, the key to opening our doors to the world of smart homes. We use the potential of the KNX system to guarantee high quality standards for a project we have called Ekinex[®].

287 357 373 421 439 451 455 461 471 475 JIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General index								
	287	357	3/3	421	400	 0.1.1.1.	 471 General terms of sale	

Our devices are developed and manufactured in Italy.

Ekinex[®] has created a line of objects that encloses the essence of the Made in Italy: design, attention to detail, technological innovation and advancement. Designed for a global market, Ekinex[®] products are an expression of the new Italian tradition, which combines the attention of craftsmanship in the creation of the product to high technological levels. Ekinex[®] supports the idea of a design that is not just an aesthetic exercise, but one that understands, as fundamental factors, ease of use, immediate understanding of the function and the balanced and intelligent application of technology.



The automation of buildings

Ekinex® is an intelligent system for controlling homes and buildings, developed in accordance with the open KNX standard. Having an Ekinex® system means to increase comfort and safety, reduce energy consumption and raise the long-term value of a building using products characterized by fine aesthetics and a great simplicity of use.

Setting up an Ekinex® system is easy: a signal network is arranged at project level, reaching all those areas where commands, sensors or loads to be systemcontrolled are expected. The arrangement, achieved by means of a simple signal cable, represents an authentic network for the exchange of information between Ekinex® devices.

8



287 357 373 421 439 451 455 461 471 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale	475 General index

The scalability, typical of Ekinex® building control systems, even allows to start off with a basic equipment, both in terms of functions and devices, which may be extended at a later stage, depending on individual requirements, the location's infill and economic availability. The investment is quickly paid back, and is protected in time. Thanks to the native openness and interoperability of the KNX standard, the system can even integrate functions that may not be available within the Ekinex® range of products.





The KNX standard

Great developments in the field of home and building automation were made possible especially thanks to an open, modular and interoperable standard like KNX. This innovative standard was born from the merging of three European systems (EIB, BatiBUS and EHS), developed and brought to the market in the early 90's. The diffusion of the system was facilitated by an intense work of cooperation at normative level in the standard committee at European level. For this reason, too, **KNX is a standard characterized by a total conformity with norm EN 50090** on electronic systems for the control of homes and buildings (HBES, Home and Building Electronic Systems).

The twenty-year presence on the market of this standard offers the best guarantee in terms of reliability and consolidation of the technology used. The openness of the standard and that of the KNX Association, on the other hand, ensure availability of products in the long run and a constant development, both in terms of technology and offering of products, functions and applications. The vitality of KNX proposals is witnessed by the sustained expansion of the association, seeing the entry of manufacturers, coming from many different areas, and from the tens of thousands of technicians who chose it to specialize in the field of building automation.

Achievable savings with the adoption of the KNX system for Home & Building control:

40% over shutters control 50% over individual ambient control 60% over ambient lighting control 60% over ventilation control For customers, the variety and availability of KNX products has no comparison in other technological areas, and the system openness translates into the highest free choice, thereby avoiding the disadvantageous dependence of having to buy from a single supplier. Thanks to the modularity of the system, a project can be extended in time, starting with a basic configuration and adding more functions later. The native interoperability of KNX products is fundamental to technicians, as it allows to design a system by always choosing the most suitable technical options, reducing compromise and ties caused by isolated systems which do not converse with one another. Moreover, the system offers new professional opportunities to designers and system integrators, making it possible to receive a consistent and high-level technical training and become certified KNX Partners.


287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



The KNX standard is entirely compliant with norm EN 50090 on HBES (Home and Building Electronic Systems) systems)





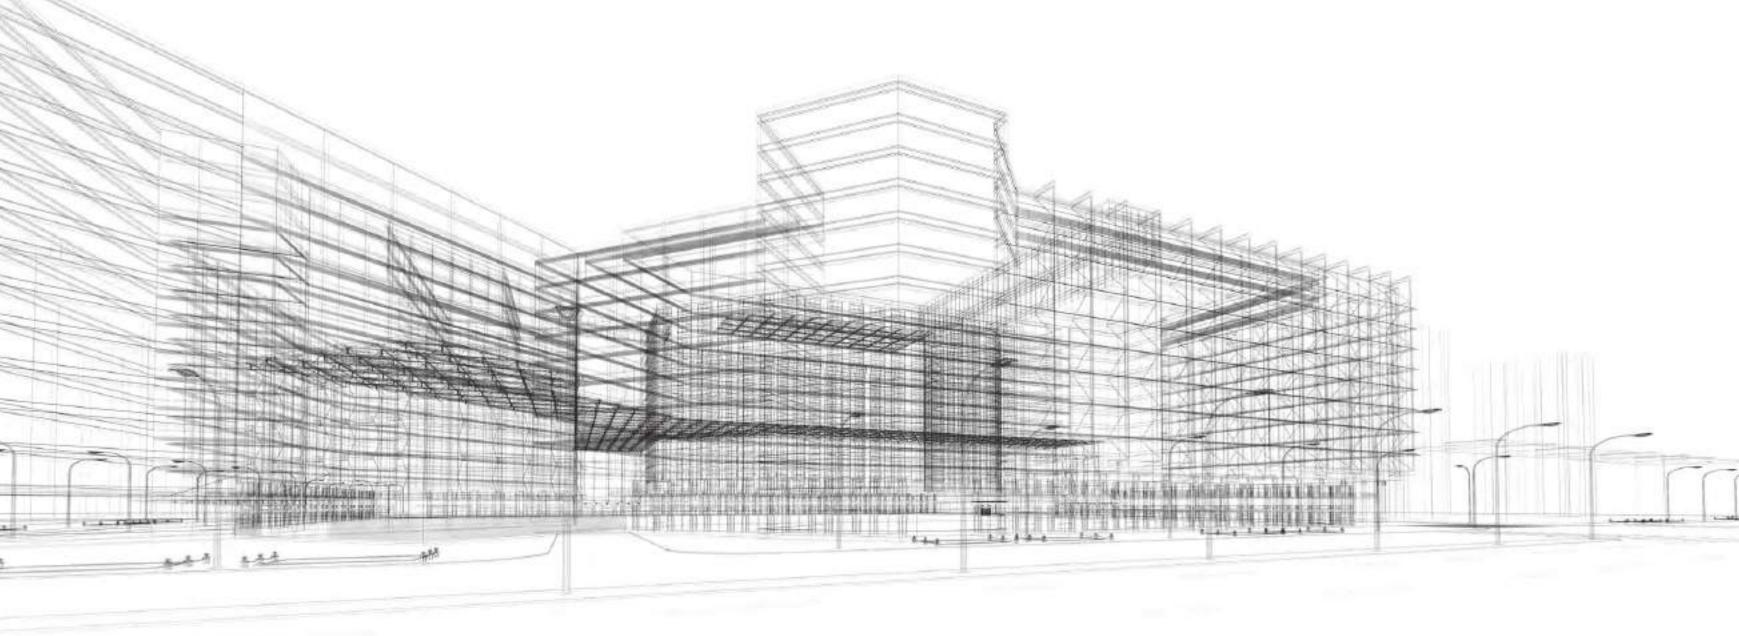

The advantages

Design, realize and use a home & building control plant with the KNX system has many advantages.

Designer

- Compliant, open, interoperable system
- Can be used in all types of buildings, from small residential to large service industry ones
- Devices, from over 300 manufacturers, communicating between each other in native mode
- Constant expansion of available functions and applications
- System design by means of standard software (ETS), manufacturer-independent
- Easy realization of commands, controls, visualisations and displays
- Wide availability of complex logic
- Interfacing towards numerous other systems, protocols and standards
- Simple logic connections between functions and devices
- Large choice of device parametrizing options based on single requirements
- Reduction of building's fire load
- Certified training, standardized and available worldwide


Installer

- Reduced device assembly and cabling times
- Unique, fast connection system (cable and bus terminal block) for all manufactures
- High quality and reliability of products (consolidated system)
- Configuration and service commissioning by means of standard, manufacturer-independent software (ETS)
- Speed and flexibility in the expansion and the modification of use
- Remote access for maintenance and diagnosis interventions
- Reduction of cables needed for command, control and distribution circuits
- Certified training, standardized and available worldwide
- Opportunities for professional advancements
- Access to the world of innovative systems

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

User

- Large choice of products
- High comfort, great operation safety
- More information, verification of own consumption habits
- Coordinated working of all building systems
- Multifunctional deployment of several devices
- System scalability and modularity
- Easy upgrading, without needing interventions on cabling nor masonry works
- Independence from single manufacturer
- More efficient building energy class (as per EN 15232)
- Easy system adaptations in case of changing needs
- Time-protected investment (open system)
- Building increase in value

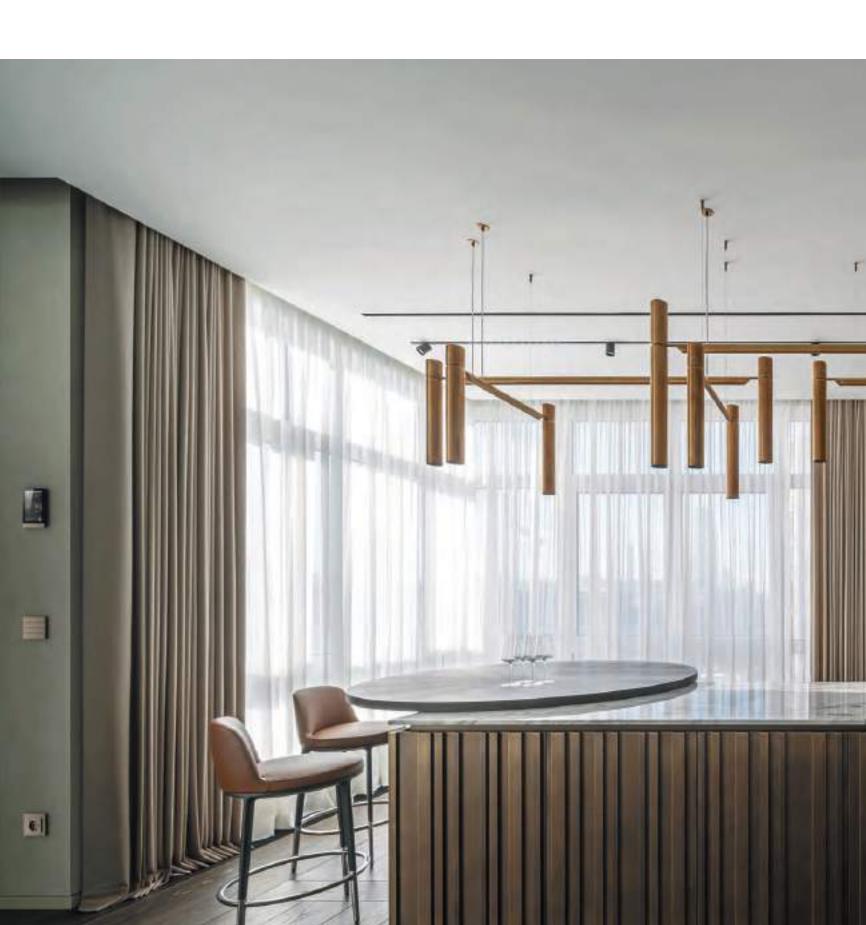

The Ekinex[®] devices

The range of Ekinex[®] KNX devices includes system devices, devices dedicated to single application functions and accessories. System devices allow basic operation of the bus system, while the devices dedicated to single application functions are developed specifically to execute the command, control and/or monitoring the technical systems in the building, like lighting, heating or shading.

They include switching, control and display units, sensors and actuators, etc. Each device is fitted internally with a communication module linking to the KNX bus. All devices are realized in multiple mounting versions (protruding or recessed walls, electric cabinets or panels on DIN rails as per EN 60715) in accordance with their destination of use and with the main installation modality. The KNX certification guarantees the interoperability among the devices of different KNX manufacturers. The entire procedure is disciplined by the certification system developed by the KNX Association and is based on conformity tests carried out by third-party laboratories. The tests verify that the devices support the KNX protocol and that any information is coded in accordance with KNX specifications



	03	17	287	357	373	421	439	451	455	461	471	475
In	troduction	Wall-mount devices	DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

The presence of a KNX trademark on Ekinex® devices is a guarantee for the customer:

- Ekinex[®] respects the quality management system in accordance with ISO 9001;
- The devices are compliant with the European norm EN 50090-2-2, concerning fundamental aspects
- like electromagnetic compatibility, electrical safety and environmental conditions of use;
- They comply with indications in volumes 3 and 6 of KNX specifications;
- They comply with KNX interoperability requirements concerning standardized data type and functional blocks.

Proxima	
Pushbuttons	
Signum	
Pushbuttons	
20venti series	
Pushbuttons	
FF series	
Pushbuttons	
Room thermostats	
Display Touch&See	
71 series	
Pushbuttons	
Room thermostats	
Multisensors	
Touch&Control	
Touch&Control 4"	
Hotel solutions	
Card reader	
Card holder	
Cards programmer	

WALL-MOUNT DEVICES

19
25
31
39
45
55
61
75
83
91
91
91 95
95 109
95
95 109
95 109 117
95 109 117
95 109 117 120
95 109 117 120 124
95 109 117 120 124 131
95 109 117 120 124 131
95 109 117 120 124 131

Accédo software	146
Smart card	147
Tosibox®	148
Sensors	151
Motion sensor	153
Presence sensor	154
Power sockets / keystone system	157
Power sockets and USB	160
Keystone system	192
Accessories	207
Rockers and front covers	208
Thermoformed covers	215
Plates and adapters Proxima series	216
Frames	222
Plates and adapters	225
Templates	234
Mounting supports	236
Swiss market solutions	238
Material and finishes	248
Fenix NTM®	250
Orders and symbols	251







Proxima WALL-MOUNT DEVICES

Proxima is not just a product line: it is a sensory experience.

Its refined surfaces, clean lines and sophisticated finishes create a perfect harmony between advanced technology and timeless design to blend in with any style of décor, from minimalist to classic. Thanks to its compatibility with KNX standard home automation systems, you have full control of your home with a simple gesture.

Available colour solutions

	Plates	Rockers
Metal	•	•
Metal HT	•	•

For more information see page 248








EKINEX



287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

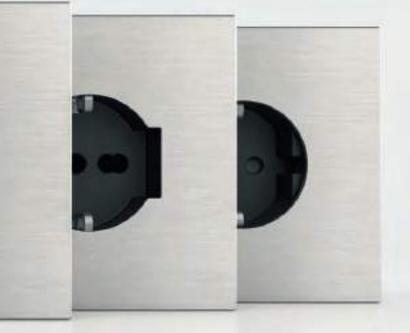



86 x 86 x 5 mm

86 x 86 x 5 mm



158 x 86 x 5 mm



86 x 86 x 5 mm



86 x 86 x 5 mm







86 x 86 x 5 mm




158 x 86 x 5 mm

158 x 86 x 5 mm





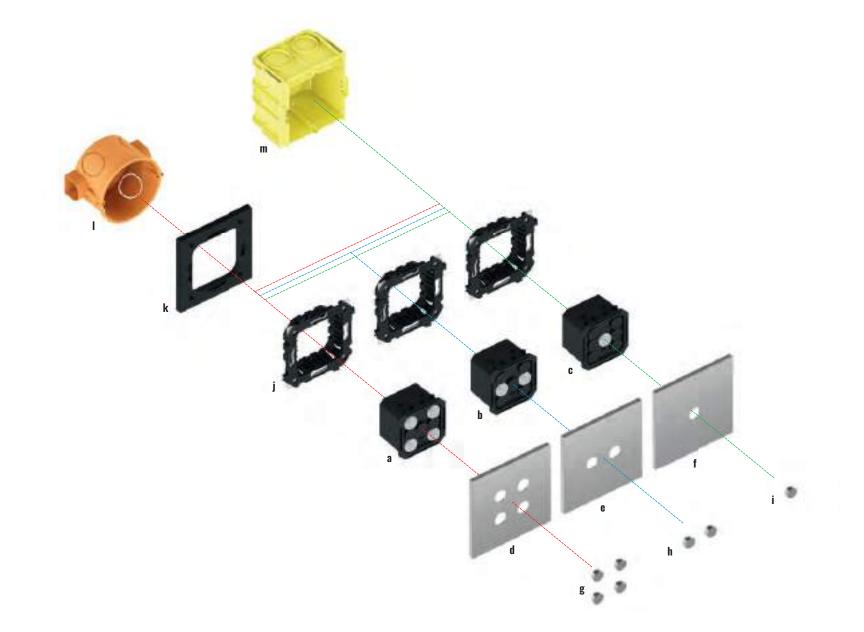



Every element is designed to harmonise with your world, whatever your aesthetic language. Every material, every detail, is carefully chosen to make you feel in balance with your surroundings.

Proxima

Description	Code
a) Proxima 4-rockers push-buttons	EK-EZ2-TP-4
b) Proxima 2-rockerspush-buttons	EK-EZ2-TP-2
c) Proxima 1-rocker push-buttons	EK-EZ2-TP-1
d) Proxima square magnetic plate (4 rockers)	EK-PQA-4
e) Proxima square magnetic plate (2 rockers)	EK-PQA-2
f) Proxima square magnetic plate (1 rocker)	EK-PQA-1
g) 4-rockers set	EK-TTP-4

Description	Code
h) 2-rockers set	EK-TTP-2
i) 1-rocker set	EK-TTP-1
j) Square mounting bracket	EK-SMP-71-1
k) Additional bracket for compatibility with round flush-mounted boxes	EK-SMP-Q-1
I) Round flush-mounting box	not delivered by Ekinex®
m) Square flush-mounting box	not delivered by Ekinex®



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Pulsanti Proxima

WALL-MOUNT DEVICES



The Ekinex[®] Proxima series pushbutton panel combines advanced functionality and practicality to simplify room control. It allows you to manage switching on and off, adjust light intensity, control motorised blinds and other programmable functions, adapting to your needs thanks to the ability to distinguish between short and long presses.

The integrated temperature sensor adds an extra level of comfort, transforming the button into a climate controller to keep the room temperature at the right level at all times. RGB LEDs for each button offer a touch of discreet customisation, while KNX technology ensures optimal integration into automation systems.

Proxima also stands out for its innovative magnetic mounting system, which allows for easy and stable installation on any surface, offering great flexibility of use. Designed for wall mounting in flush-mounted boxes, it is the ideal choice for combining technology and simplicity in a modern design.



1-fold pushbutton with thermostat **RGB LED - Proxima series**

WALL-MOUNT DEVICES

Description

The Proxima series 1-button combines advanced functionality and convenience to simplify room management. It allows you to control on/off switching, adjust light intensity, control motorised blinds and other programmable functions, and adapts to your needs by separating short and long presses. For added convenience, an integrated temperature sensor turns the push-button into a climate controller that keeps the room temperature at the right level at all times. RGB LEDs on each button provide a subtle individual touch, while KNX technology ensures optimal integration into automation systems. Designed for wall mounting in flush boxes, it is the ideal choice when you want to combine technology and simplicity with timeless design.

Main features

- 1-button version (up to 2 different functions can be configured)
- RGB LED for each freely programmable key
- Integrated temperature sensor
- Room thermostat function
- Connection to bus line via KNX terminal
- Recessed wall mounting on round or square box
- IP20 degree of protection (installed)

Technical data

- 30 Vdc power supply via KNX bus
- Power consumption from the bus < 17 mA


Delivery

The delivery includes a terminal for connection to the BUS line and site protection.

Accessories

- The following accessories are available as add-ons and must be ordered separately:
- Proxima series keys EK-TTP-1-...
- Square magnetic plate EK-PQA-1-...
- Mounting bracket EK-SMP-71-1
- Optional: mounting bracket EK-SMP-Q-1 (check compatibility with flush box).

Dimensions [mm]

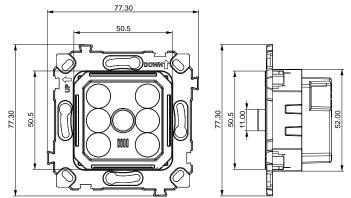



Code	LEDs colour	Mounting	Rockers
EK-EZ2-TP-1	RGB	without frame	1 central rocker



By means of ETS5 software or later versions Application program: **APEKEZ2TPX##.knxprod** (## = version_download from www.ekinex.com)





Tormation			
	LEDs colour	Mounting	Rockers
[P-2	RGB	without frame	2 central ro

For more information see the technical documentation nload from www.ekinex.com





Description

The Proxima series 2-buttons combines advanced functionality and convenience to simplify room management. It allows you to control on/off switching, adjust light intensity, control motorised blinds and other programmable functions, and adapts to your needs by separating short and long presses. For added convenience, an integrated temperature sensor turns the push-button into a climate controller that keeps the room temperature at the right level at all times. RGB LEDs on each button provide a subtle individual touch, while KNX technology ensures optimal integration into automation systems. Designed for wall mounting in flush boxes, it is the ideal choice when you want to combine technology and simplicity with timeless design.

Main features

- 2-buttons version (up to 4 different functions can be configured)
- RGB LED for each freely programmable key
- Integrated temperature sensor
- Room thermostat function
- Connection to bus line via KNX terminal
- Recessed wall mounting on round or square box
- IP20 degree of protection (installed)

DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General	287	357	373	421	439	451	455	461	471	475
	DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General ir



2-fold pushbutton with thermostat **RGB LED - Proxima series**

WALL-MOUNT DEVICES

Technical data

- 30 Vdc power supply via KNX bus
- Power consumption from the bus < 17 mA

Delivery


The delivery includes a terminal for connection to the BUS line and site protection.

Accessories

The following accessories are available as add-ons and must be ordered separately:

- Proxima series keys EK-TTP-2-...
- Square magnetic plate EK-PQA-2-...
- Mounting bracket EK-SMP-71-1
- Optional: mounting bracket EK-SMP-Q-1 (check compatibility with flush box).

Dimensions [mm]



guration and co

al rockers

0 By means of ETS5 software or later versions Application program: **APEKEZ2TPX##.knxprod** (## = version, download from www.ekinex.com)



For more information see the technical documentation download from **www.ekinex.con**





4-fold pushbutton with thermostat RGB LED - Proxima series

WALL-MOUNT DEVICES

Description

The Proxima series 4-buttons combines advanced functionality and convenience to simplify room management. It allows you to control on/off switching, adjust light intensity, control motorised blinds and other programmable functions, and adapts to your needs by separating short and long presses. For added convenience, an integrated temperature sensor turns the push-button into a climate controller that keeps the room temperature at the right level at all times. RGB LEDs on each button provide a subtle individual touch, while KNX technology ensures optimal integration into automation systems. Designed for wall mounting in flush boxes, it is the ideal choice when you want to combine technology and simplicity with timeless design.

Main features

- 4-buttons version (up to 8 different functions can be configured)
- RGB LED for each freely programmable key
- Integrated temperature sensor
- Room thermostat function
- Connection to bus line via KNX terminal
- Recessed wall mounting on round or square box
- IP20 degree of protection (installed)

Technical data

- 30 Vdc power supply via KNX bus
- Power consumption from the bus < 17 mA


Delivery

The delivery includes a terminal for connection to the BUS line and site protection.

Accessories

- The following accessories are available as add-ons and must be ordered separately: • Proxima series keys EK-TTP-4-...
- Square magnetic plate EK-PQA-4-...
- Mounting bracket EK-SMP-71-1
- Optional: mounting bracket EK-SMP-Q-1 (check compatibility with flush box).

Dimensions [mm]

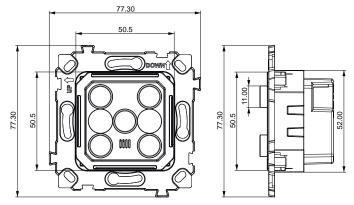



Code	LEDs colour	Mounting	Rockers
EK-EZ2-TP-4	RGB	without frame	4 central rockers



By means of ETS5 software or later versions Application program: **APEKEZ2TPX##.knxprod** (## = version, download from www.ekinex.com)





For more information see the technical documentation, download from www.ekinex.com

















Signum Deep WALL-MOUNT DEVICES **New KNX standard "virtual" pushbutton controls** with graphic colour display, haptic feedback, touch interface, borderless display, Bluetooth LE (Low Energy) for customising text and graphics from mobile device apps. In perfect family feeling with the 20venti Deep series.

	Deep	Surface
		Plate
Plastic	-	-
Metal	•	٠
Metal HT	•	۰
Fenix NTM®	•	•





287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index





Signum Surface WALL-MOUNT DEVICES

New KNX standard "virtual" pushbutton controls with graphic colour display, haptic feedback, touch interface, borderless display, Bluetooth LE (Low Energy) for customising text and graphics from mobile device apps. In perfect family feeling with the 20venti Surface series.

Available colour solutions Surface* Deep Plate Plastic -_ Metal . • Metal HT . • Fenix NTM® . .

-

 * The Fenix NTM $^{\otimes}$ colour effect on the Surface plate is achieved by painting For more information see page 248

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



98 x 98 x 3 mm



98 x 98 x 3 mm



98 x 98 x 3 mm



133 x 98 x 3 mm




98 x 98 x 3 mm



168 x 98 x 3 mm





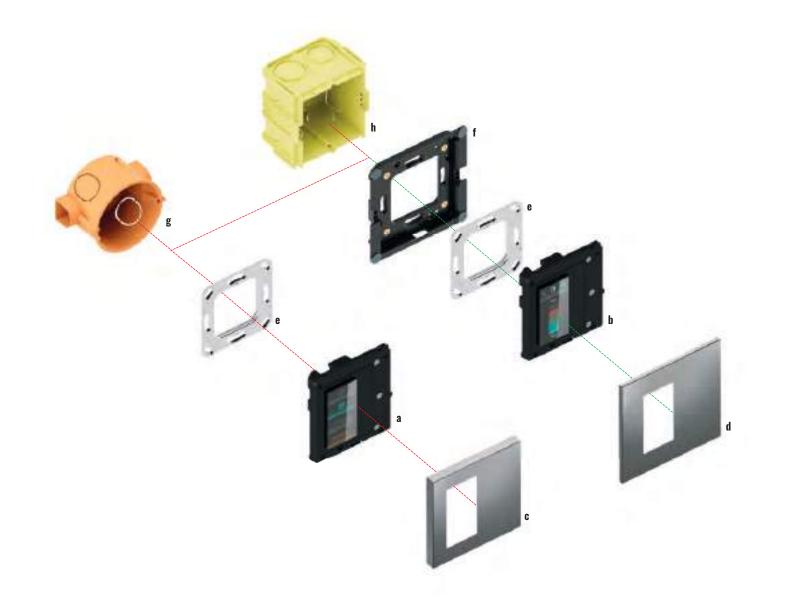



The "virtual" pushbutton controls of the Signum series and their accessories offer the possibility of numerous variants to meet the most diverse requirements.

Signum	
Description	Code
a) Signum pushbutton Deep version	FK-FV3-TP
b) Signum pushbutton Surface version	EN-EVJ-IP
c) Square plate Deep version (30 x 60 mm window)	EK-DQZ
d) Square plate Surface version (30 x 60 mm window)	EK-SQZ
e) Metal mounting support Deep version	EK-SMQ-71-S
f) Mounting support Surface version (included in delivery)	
g) Round flush-mounting box	not delivered by Ekinex®
h) Square flush-mounting box	not delivered by $Ekinex^{\mathbb{B}}$



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Pushbuttons Signum

WALL-MOUNT DEVICES



The EK-EV3-TP "virtual" pushbutton, which contains a KNX communication module inside, is suitable for mounting on a round or square wall flush-mounting box, provided with fixing holes with a centre distance of 60 mm. Each button is supplied with a metal mounting bracket, which can also be ordered separately if required; a terminal for connection to the bus line completes the supply.

The pushbutton is completed with a Deep or Surface version plate. The 2.65", 162 x 320 pixel, 262K colours IPS RGB touch borderless display with haptic feedback can be configured to manage up to 4 buttons per screen and up to 3 screens in total. Each button can be customised via a dedicated app and certain attributes of each button can be changed even after installation, e.g. position, symbols and lettering. The pushbutton also offers the function of a room thermostat, thanks to the integrated temperature sensor. The proximity sensor integrated in the faceplate (to be ordered separately) provides visual comfort at night.

Configuration and commissioning of the devices is carried out using ETS® software; the relevant application programmes can be downloaded from www.ekinex.com.





Description

"Virtual"KNX-standard button, i.e. based on a borderless IPS touch display, in which each button can be customised via a dedicated app. it is possible to modify certain attributes of each button even after installation, e.g. position, symbols and lettering.

Main features

- Up to 4 buttons per screen and up to 3 screens in total can be configured
- Haptic pressure feedback
- Control and dimming of lighting devices
- Control of motorised drives for blinds (such as roller shutters, awnings blinds or shutters)
- Partially programmable attributes for each button
- 2.65" IPS RGB display, 162 x 320 pixels, 262K colours with haptic feedback
- Bluetooth BLE module for connection to programming app
- Room temperature detection via integrated sensor
- Proximity sensor integrated in the faceplate (to be ordered separately)
- Room thermostat function
- Connection to bus line via KNX terminal
- Recessed wall mounting on round or square box
- Configuration via App

Order informat

ordor information						
Code	Version	Mounting				
EK-EV3-TP	Deep / Surface	without frame				
EK-EV3-TP-TER	Deep / Surface with thermostat voucher	without frame				
EK-EV3-TP-H	Deep / Surface with humidity sensor	without frame				
Code	Voucher					
EK-EV3-V1-TER	Voucher to enable graphic display of thermostat function					
EK-EV3-V1-AUD	Voucher to enable the graphic display of the audio function					

Technical data

- 30 Vdc power supply via KNX bus
- Stand-by current consumption: 8 mA @30Vdc / max: 35 mA @30Vdc
- Wall mounting on round or square box
- IP20 degree of protection (installed)
- Plastic housing
- Climatic classification 3K5 and mechanical classification 3M2 (according to EN 50491-2)
- Pollution degree 2 (according to IEC 60664-1)
- Dimensions: 83 x 77 x 37 mm
- Operating temperature: 5... + 45°C
- Storage temperature: 25... + 55°C
- Transport temperature: 25... + 70°C
- Relative humidity: 95% non-condensing

Deliverv


Delivery includes a terminal block for connection to the bus, a plastic adapter, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart), two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

• square plate of the Deep or Surface version with 30 x 60 mm window

Dimensions [mm]







4 buttons page

Pushbuttons can be used to control devices lighting devices, scenarios and motorised drives. A long press can call up graphic pages for precise control of home automation elements.



Motorisation control page The motorisation page allows you to control motorised locking elements using the up and down buttons.




Audio page The audio page allows you to select an audio source, change the track currently playing and to raise or lower the volume.

For more information see the technical documentation download from www.ekinex.com



Configuration and cor

By means of ETS5 software or later versions Application program: **APEKEV3TP##.knxprod** (## = version, download from www.ekinex.com)



Signum WALL-MOUNT DEVICES

Pushbuttons

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



Brightness control page The graphic slider allows precise control of motorised or luminescent drives in percentages.



Colour temperature adjustment page

It is possible to enable a dedicated page for controlling the hue of the light emitted by a light source. Switching from a cool colour to a warmer one will provide a completely different atmosphere.



Room thermostat page

The thermostat page, designed to be simple and intuitive, allows the room temperature to be monitored and the desired temperature to be controlled.



Air conditioning page

The air conditioning page allows you to monitor the cooling temperature of the room, control the desired temperature, position of the fins and the ventilation speed.



Audio settings page

The audio settings page also allows control the volume level and equalisation of treble and bass. treble and bass equalisation.



PIN Code Protection Page The PIN code protection page allows only authorised users to use the various commands and functions.



EKINEX TOOL" APP CONFIGURATION Main Page From the main page, you can select the theme (Gradient or Flat) and customise the texts and symbols of the virtual buttons.



EKINEX TOOL" APP CONFIGURATION Symbol library page The application gives access to a continuously updated library of 120 symbols.



EKINEX TOOL" APP CONFIGURATION Pushbutton customisation page With a horizontal swipe you can scroll between the screens of the device and customise the related pushbuttons.







EKINEX TOOL" APP CONFIGURATION Settings page From the settings page, the main operating parameters of the device can be configured: display brightness, sensor enablement haptic feedback and stand-by time.







20VENTI SERIES

WALL-MOUNT DEVICES






20venti Deep WALL-MOUNT DEVICES

Intuition, flexibility and continuous growth. 20venti series in its Deep version represents an evolution of the compact and essential design of 71 series, enriched with new features that facilitate the recognition of functions from the first use. The materials used are plastic, metal, Metal HT and the nanotechnological Fenix NTM®.

Available colour solutions


	Deep	Surface	Dookoro	
	Plate		Rockers	
Plastic	•	-	•	
Metal	•	٠	-	
Metal HT	•	•	_	
Fenix NTM®	•	٠	-	
	0.10			

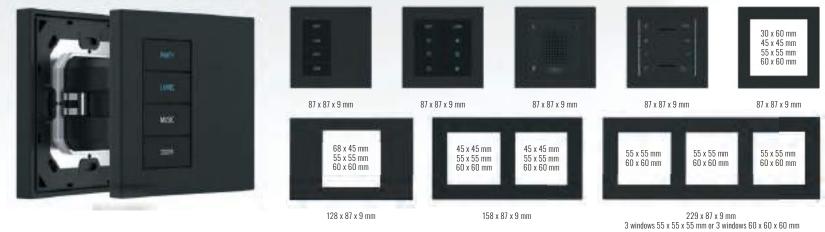

For more information see page 248

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



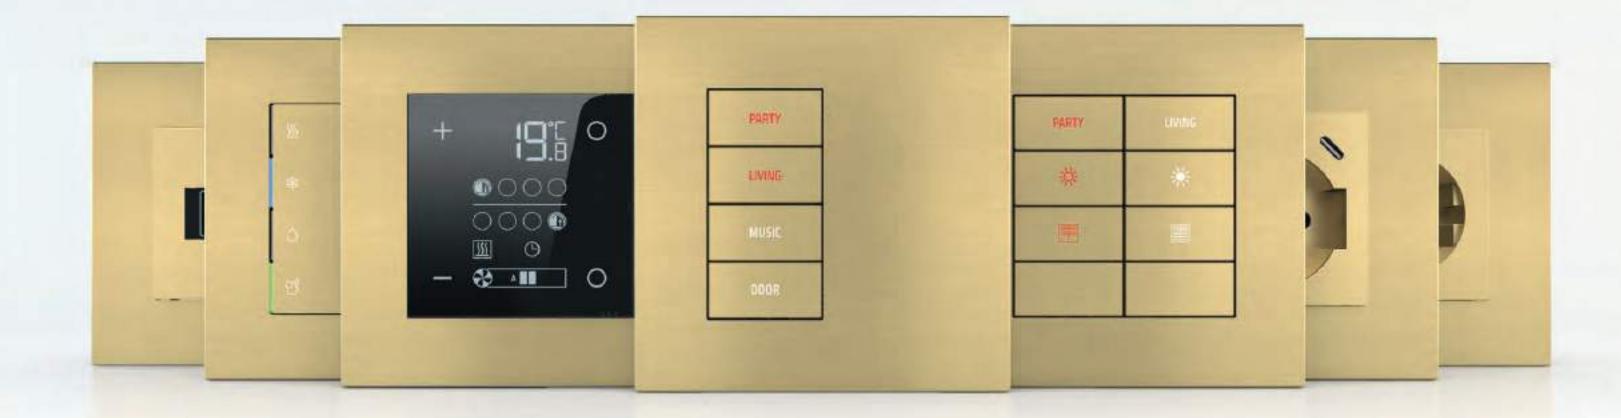

20venti Surface

WALL-MOUNT DEVICES

Essentiality and functionality in a single product. 20venti series in its Surface version represents an evolution of the compact and essential design of 71 series but is enriched with new features that make it easier to recognize the functions of the keyboard from the first use. The materials used are plastic, metal, Metal HT and the nanotechnological Fenix NTM[®] that make it a contemporary proposal that finds its place in homes, offices and hotels.


Available colour solutions

	Deep	Surface	Rockers	
		Plate	- Ruckers	
Plastic	•	-	•	
Metal	•	•	-	
Metal HT	۰	•	-	
Fenix NTM®	0	•	-	





287 357 373 421 439 451 455 461 471 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale	475 General index

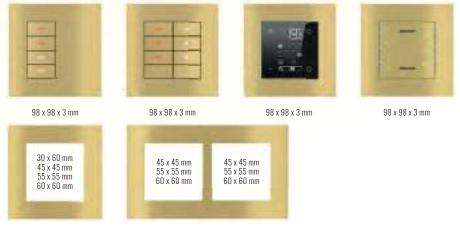


98 x 98 x 3 mm

168 x 98 x 3 mm

51




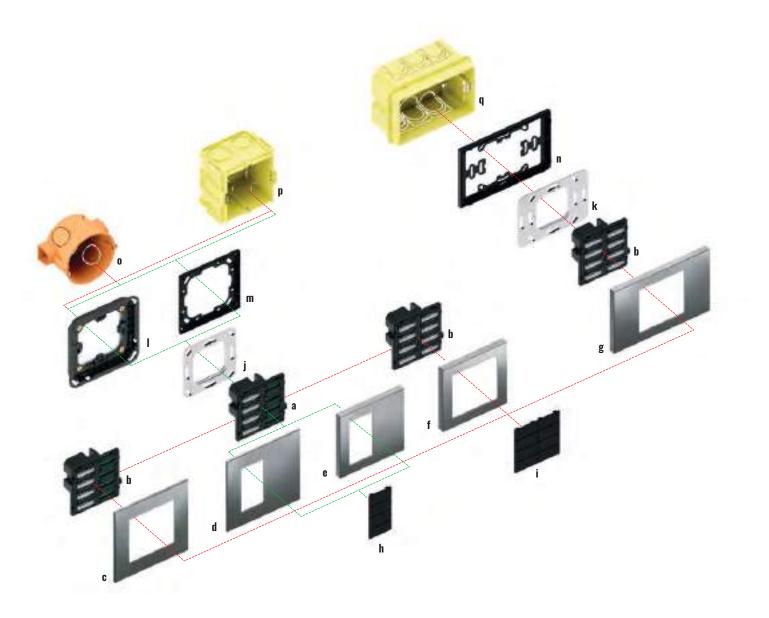

Pushbuttons 20venti series with backlit text/symbols and proximity sensor (4/8 rockers)

Description	Code
a) Pushbuttons 20venti series with backlit text/symbols and proximity sensor 4 rockers	EK-E2E-TP-4L
b) Pushbuttons 20venti series with backlit text/symbols and proximity sensor 8 rockers	EK-E2E-TP-8
c) Square plate Surface version (60 x 60 mm window)	EK-SQS
d) Square plate Surface version (30 x 60 mm window)	EK-SQT
e) Square plate Deep version (30 x 60 mm window)	EK-DQT
f) Square plate Deep version (60 x 60 mm window)	EK-DQS
g) Rectangular plate Deep version (60 x 60 mm window)	EK-DRS
h) Rectangular rockers (4 pcs)	EK-T4R-20

Description	Code
i) Rectangular rockers (8 pcs)	EK-T4R-20
j) Metal mounting support	EK-SMQ-71-1
k) Metal mounting support with adapter	EK-SMR-71-1
I) Adapter for square Surface plate	EK-TAS-Q-W or EK-TAS-Q-N
m) Adapter for square plate 'NF and Deep version	EK-TAQE-1-NF
n) Adapter for rectangular plate 'NF and Deep version	EK-TAR-1-NF
o) Round flush-mounting box	not delivered by $Ekinex^{\circledast}$
p) Square flush-mounting box	not delivered by Ekinex®
q) Rectangular flush-mounting box (3 modules)	not delivered by Ekinex®

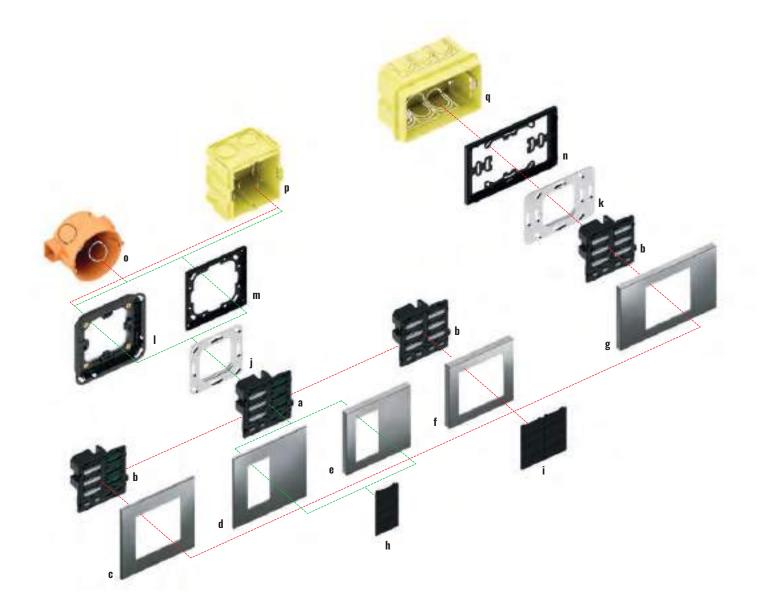


Pushbuttons 20venti series with backlit text/symbols and proximity sensor (5/10 rockers)

Description	Code	Description	Code
a) Pushbuttons 20venti series with backlit text/symbols and proximity sensor 5 rockers	EK-E2E-TP-5L	i) Rectangular rockers (6 pcs) Rectangular rockers dimmer (2 pcs)	EK-T4R-20 EK-T2B-20
b) Pushbuttons 20venti series with backlit text/symbols	EK-E2E-TP-10	j) Metal mounting support	EK-T2B-20
and proximity sensor 10 rockers	EN-EZE-IF-IU	k) Metal mounting support with adapter	EK-SMQ-71-1
c) Square plate Surface version (60 x 60 mm window)	EK-SQS	I) Adapter for square Surface plate	EK-SMR-71-1
d) Square plate Surface version (30 x 60 mm window)	EK-SQT	${\bf m}{\bf)}$ Adapter for square plate 'NF and Deep version	EK-TAS-Q-W or EK-TAS-Q-N
e) Square plate Deep version (30 x 60 mm window)	EK-DQT	n) Adapter for rectangular plate 'NF and Deep version	EK-TAQE-1-NF
f) Square plate Deep version (60 x 60 mm window)	EK-DQS	o) Round flush-mounting box	not delivered by Ekinex®
g) Rectangular plate Deep version (60 x 60 mm window)	EK-DRS	p) Square flush-mounting box	not delivered by Ekinex®
h) Rectangular rockers (3 pcs)	EK-T4R-20	q) Rectangular flush-mounting box (3 modules)	not delivered by Ekinex®
Rectangular rockers dimmer (1 pcs)	EK-T2B-20		

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



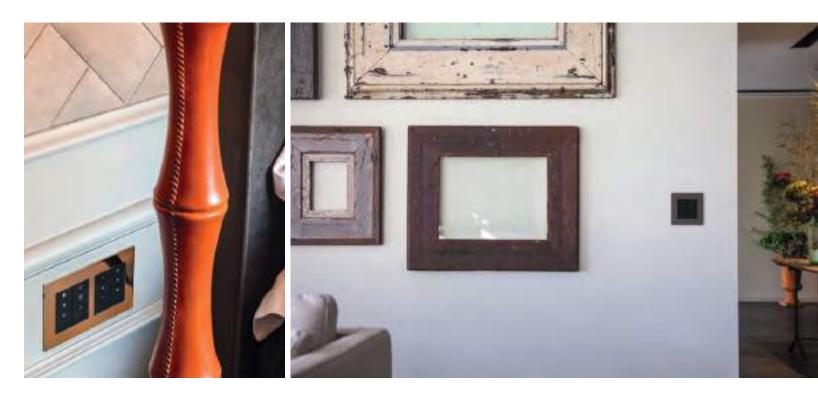

A wider range of combinations and features. The 20venti series pushbuttons are available on Deep and Surface plates with 4 or 8 rockers modularity and built-in RGB LEDs to create any colour shade. Buttons with 5 or 10 rockers modularity are also available for dimming lights or managing shutters.



54

287 357 373 421 439 451 455 461 471 475 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General	475 eral index


Pushbuttons 20venti series

WALL-MOUNT DEVICES

The Ekinex[®] 20venti pushbuttons' series controls offer the possibility of numerous variants to meet the most diverse requirements. The basis is represented by the pushbutton that contains a KNX communication module inside. The EK-E20-TP-... is suitable both for mounting on a round or square wall-mounting box with fixing holes with 60 mm centre distance, and for mounting on a 3-place Italian standard rectangular wall-mounting box with fixing holes with 83.5 mm centre distance. Each pushbutton is delivered with a terminal block and two pairs of fixing screws.

The button must be completed with its relative metal support, a plastic adapter, the keys and a plate from the Deep or Surface version. The buttons are available in rectangular shape, in plastic material. The button has integrated RGB LEDs that can be freely programmed: for example, for status indication or as a night orientation light. The device also offers the function of a room thermostat, thanks to the integrated temperature sensor. The integrated proximity sensor ensures maximum readability when using the push-button panel and allows visual comfort during the night.

The devices are configured and commissioned using the ETS® software; the relevant application programs can be downloaded from www.ekinex.com.



4/8-fold pushbutton with backlit text/symbols and proximity sensor 20venti series WALL-MOUNT DEVICES

Description

The Ekinex® 20venti series 4/8-fold pushbutton is used for on/off control of utility devices, dimming of luminaires, control of motorized drives for roller shutters or other programmable control functions. Thanks to the integrated temperature sensor, the button can act as a temperature controller for a room or zone. RGB LED for each rocker. The switch has an integrated KNX bus communication module and is designed for installation in a flush-mounted wall box.

Main features

- 4/8 fold version (possibility to configure up to 4 or 8 independent functions)
- RGB LED for each freely programmable rocker
- Integrated temperature sensor
- Integrated proximity sensor
- Room thermostat function
- Plastic casing
- Connection to bus line with KNX terminal block
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 17 mA


Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

- The following accessories are available to be ordered separately:
- 4 or 8 rectangular 30 x 15 mm plastic rockers with or without backlit text/symbol
- square plate of the Deep and Surface version with 30 x 60 mm or 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square mounting box (fixing holes 60 mm apart)

Dimensions [mm]





Code	LED colours	Mounting	Rockers
EK-E2E-TP-4L	RGB		4 left with backlit text/symbols
EK-E2E-TP-4R	RGB	without frame	4 right with backlit text/symbols
EK-E2E-TP-8	RGB		8 with backlit text/symbols

Configuration and com

00 By means of ETS5 software or later versions Application program: APEKE2ETP##.knxprod (## = version, download from www.ekinex.com)





Description

The Ekinex® 20venti series 8-fold pushbutton is used for on/off control of utility devices, dimming of luminaires, control of motorized drives for roller shutters or other programmable control functions. Thanks to the integrated temperature sensor, the button can act as a temperature controller for a room or zone. RGB LED for each rocker. The switch has an integrated KNX bus communication module and is designed for installation in a flush-mounted wall box.

Main features

- 8 fold version (possibility to configure up to 8 independent functions)
- RGB LED for each freely programmable rocker
- Integrated temperature sensor Integrated proximity sensor
- Room thermostat function
- Plastic casing
- Connection to bus line with KNX terminal block
- · Wall-mounting installation on round, square or rectangular wall box
- IP20 protection degree (installed)

Technical data

o 1 · · ·

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 17 mA

Urder Informati	on		
Code	LED colours	Mounting	Rockers
EK-E2E-TP-8	RGB	without frame	8 with back



For more information see the technical documentation download from **www.ekinex.com**



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General inde

8-fold pushbutton with backlit text/symbols and proximity sensor for rectangular wall-box 20venti series

WALL-MOUNT DEVICES

Delivery


Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- 8 rectangular 30 x 15 mm plastic rockers with or without backlit text/symbol
- rectangular plate of the Deep version with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square (fixing holes 60 mm apart) or rectangular (fixing holes 83,5 mm apart) mounting box

Dimensions [mm]



Configuration and comm 0

backlit text/symbols


By means of ETS5 software or later versions Application program: **APEKE2ETP##.knxprod** (## = version, download from www.ekinex.com)





For more information see the technical documentation download from www.ekinex.con





10-fold pushbutton with backlit text/symbols and proximity sensor 20venti series

WALL-MOUNT DEVICES

Description

The Ekinex® 20venti series 5/10-fold pushbutton is used for on/off control of utility devices, dimming of luminaires, control of motorized drives for roller shutters or other programmable control functions. Thanks to the integrated temperature sensor, the button can act as a temperature controller for a room or zone. RGB LED for each rocker. The switch has an integrated KNX bus communication module and is designed for installation in a flush-mounted wall box.

Main features

- 5/10 fold version (possibility to configure up to 5 or 10 independent functions including 2 or 4 functions for adjustments)
- RGB LED for each freely programmable rocker
- Integrated temperature sensor
- Integrated proximity sensor
- Room thermostat function
- Plastic casing
- Connection to bus line with KNX terminal block
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 17 mA

Delivery


Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- 3 or 6 rectangular 30 x 15 mm plastic rockers with or without backlit text/symbol and 1 or 2 rectangular 30 x 15 mm plastic rockers for adjustments
- square plate of the Deep and Surface version with 30 x 60 mm or 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square mounting box (fixing holes 60 mm apart)

Dimensions [mm]





Code	LED colours	Mounting	Rockers		
EK-E2E-TP-5L	RGB		3 left with backlit text/symbols 1 left for adjustments		
EK-E2E-TP-5R	RGB	without frame	3 right with backlit text/symbols 1 right for adjustments		
EK-E2E-TP-10	RGB		6 with backlit text/symbols 2 for adjustments		

Configuration and con

Ö By means of ETS4 2.0 software (or later versions) Application program: APEKE2ETP##.knxprod (## = version, download from www.ekinex.com)



For more information see the technical documentation download from **www.ekinex.com**





Description

The Ekinex® 20venti series 10-fold pushbutton is used for on/off control of utility devices, dimming of luminaires, control of motorized drives for roller shutters or other programmable control functions. Thanks to the integrated temperature sensor, the button can act as a temperature controller for a room or zone. RGB LED for each rocker. The switch has an integrated KNX bus communication module and is designed for installation in a flush-mounted wall box.

Main features

- 10 fold version (possibility to configure up to 10 independent functions including 4 functions for adjustments)
- RGB LED for each freely programmable rocker
- Integrated temperature sensor
- Integrated proximity sensor
- Room thermostat function
- Plastic casing
- Connection to bus line with KNX terminal block
- Wall-mounting installation on round, square or rectangular wall box
- IP20 protection degree (installed)

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 17 mA

Order informatio	n		
Code	LED colours	Mounting	Rockers
EK-E2E-TP-10	RGB	without frame	6 with bac 2 for adjus

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



10-fold pushbutton with backlit text/symbols and proximity sensor for rectangular wall-box 20venti series

WALL-MOUNT DEVICES

Delivery


Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- 6 rectangular 30 x 15 mm plastic rockers with or without backlit text/symbol and 2 rectangular 30 x 15 mm plastic rockers for adjustments
- rectangular plate of the Deep version with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square (fixing holes 60 mm apart) or rectangular (fixing holes 83,5 mm apart) mounting box

Dimensions [mm]



Configuration and commi **0**-

acklit text/symbols ustments

By means of ETS4 2.0 software (or later versions) Application program: **APEKE2ETP##.knxprod** (## = version, download from www.ekinex.com)



For more information see the technical documentation download from www.ekinex.con





FF SERIES wall-mount devices

n	52
k	54
	56
р	58
face	60



Simple and linear. An essential form that suggests an idea of reliability

and rigour. The FF series in Form version features a wide range of devices with integrated LEDs with adjustable light intensity, touch-displays, power sockets and keystone modules. The materials used are plastic, metal, Metal HT, the nanotechnological Fenix $\mathsf{NTM}^{\circledast}$ and the different finishes can be freely combined with each other.

Available colour solutions

	Form	Flank	'NF	Deep	Surface	- Rockers	
_	Frai	nes		Plates		NUCKEIS	
Plastic	•	٠	٠	٠	-	•	
Metal	•	۰	۰	٠	٠	•	
Metal HT	-	-	-	٠	٠	•	
Fenix NTM®	-	-	۰	٠	٠	•	

For more information see page 248





218

22-12-101.4 16:30 î L

2

000

000


63 · III


Θ

338



287 357 373	421 43	455	461	471	475
IN-Rail mount modules Visualisation Audio Multi	pom IP Door Phone Lift	Sales kit	Technical section	General terms of sale	General index



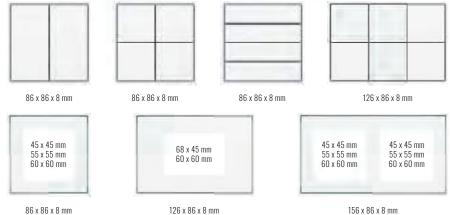

86 x 86 x 8 mm

126 x 86 x 8 mm



FF Flank WALL-MOUNT DEVICES

Minimal and rigorous. Distinguished by its characteristic side edges, the Flank version of the FF series features a wide range of devices with integrated LEDs with adjustable luminous intensity, touch-displays, power sockets and keystone modules. The materials used are plastic, metal, Metal HT, the nanotechnological Fenix NTM[®] and the different finishes can be freely combined with each other.

Available colour solutions

	Form	Flank	'NF	Deep	Surface	Deeleese
	Fra	imes		- Rockers		
Plastic	۰	•	۰	0	-	•
Metal	٠	•	٠	•	٠	•
Metal HT	-	-	-	•	٠	•
Fenix NTM®	_	-	٠		•	•





287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
		1					1		
						-			
94 x 8	0 x 8 mm	94	x 80 x 8 mm		94 x 80 x 8 m	m	134	x 80 x 8 mm	
45 x 55 x 60 x	45 mm 55 mm 60 mm		68 60	8 x 45 mm 9 x 60 mm			45 x 45 mm 55 x 55 mm 60 x 60 mm	45 x 45 mm 55 x 55 mm 60 x 60 mm	
94 x 8	0 x 8 mm		134 >	x 80 x 8 mm			165 x 80	x 8 mm	

Essential geometry in forms and a decisive trait. More than ever less is

more. The range of FF series devices in 'NF' version offer the possibility to create numerous variants to meet the most different needs. Devices with integrated LEDs with adjustable luminous intensity, touch-displays, power sockets and keystone modules. The materials used are plastic, metal, Metal HT and the nanotechnological Fenix NTM®.

Available colour solutions

Frames	•	•	Plates		- Rockers
	•	•			
				-	•
	•	•	•	٠	•
	-	-	٠	٠	•
	-	•	0	٠	•

For more information see page 248










287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



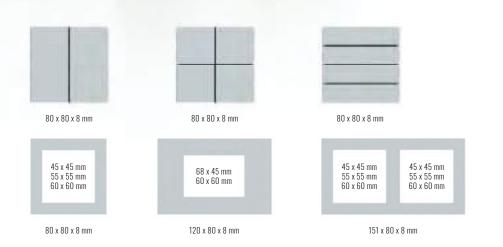





Versatile and suitable for any setting. The Deep version of the FF series consists of devices with integrated LEDs with adjustable light intensity, touchdisplays, power sockets and keystone modules. Versatile and compact, it lends itself to various combinations and blends in with all furnishing styles. The materials used are plastic, metal, Metal HT and the nanotechnology ${\sf Fenix}\;{\sf NTM}^{\textcircled{B}}.$


Available colour solutions

	Form	Flank	'NF	Deep*	Surface	Deelverre
_	Frames			- Rockers		
Plastic	•	•	۰	•	-	•
Metal	٠	•	•	•	٠	•
Metal HT	-	_	-	•	•	•
Fenix NTM®	-	-	•	•		•

For more information see page 248 *) In the FF Deep we suggest the use of the pushbuttons and room thermostats of the FF - 'NF series



287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

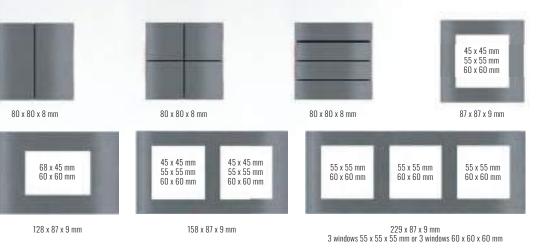



72

Compact and essential. Creates a continuum with the wall in a few millimetres of thickness. The Surface version of the FF series caresses surfaces to create a uniform effect between button and wall. It consists of devices with integrated LEDs with adjustable light intensity, touch-displays, power sockets and keystone modules. Declined in materials with a strong personality such as metal, Metal HT and Fenix NTM®, it finds its ideal place in all rooms of the contemporary home.

Available colour solutions

	Form	Flank	'NF	Deep	Surface*	Rockers
	Frai	Frames		Plates		
Plastic	•	٠	0	٠	-	•
Metal	•	•	٠		•	•
Metal HT	_	_	_	•	•	•
Fenix NTM®	-	-	•	٠	•	•

For more information see page 248 *) In the FF Surface we suggest the use of the pushbuttons and room thermostats of the FF - 'NF series









287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



80 x 80 x 8 mm



98 x 98 x 3 mm



80 x 80 x 8 mm




168 x 98 x 3 mm



80 x 80 x 8 mm





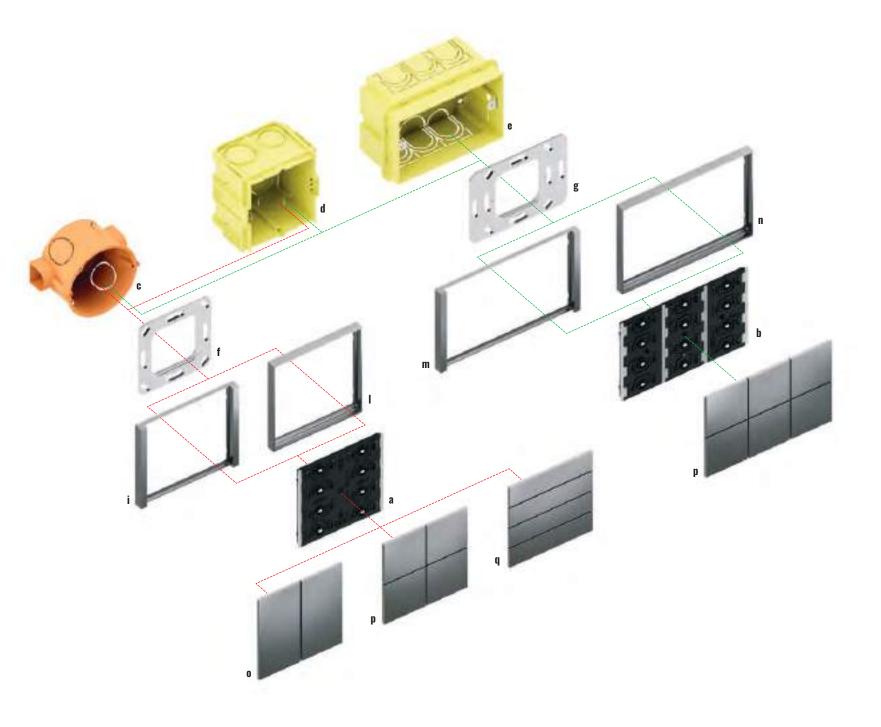



Four or six channels,square or rectangular keys, with or without frame, with or without LED, with or without temperature sensor and thermostat function. Choose the combination that best suits your needs of style and features.

Pushbuttons FF series

Description	Code
a) Pushbutton and room thermostat FF series	EK-ED2-TP or EK-E32-TP
b) 6-fold pushbutton FF series	EK-EH2-TP
c) Round flush-mounting box	not delivered by Ekinex®
d) Square flush-mounting box	not delivered by Ekinex®
e) Rectangular flush-mounting box (3 modules)	not delivered by Ekinex®
f) Metal mounting support	EK-SMQ-71-1
g) Metal mounting support	EK-SMR-71-1

Description	Code	
i) Square frame Flank version	EK-FLQ	
I) Square frame Form version	EK-FOQ	
m) Rectangular frame Flank version	EK-FLR	
n) Rectangular frame Form version	EK-FOR	
o) Rectangular vertical rockers	EK-TRV	
p) Square rockers	EK-TQQ	
q) Rectangular horizontal rockers	EK-TRO	



the second se

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Pushbuttons FF series

WALL-MOUNT DEVICES

The Ekinex[®] pushbuttons of FF series range and related accessories offer the possibility to realize several variations that will satisfy the most diverse needs. The base is represented by the 4-fold (EK-ED2-TP and EK-E32-TP) and 6-fold (EK-EH2-TP) pushbuttons; each one is fitted with a KNX communication module. The 4-fold pushbutton is suitable for mounting into a flush mounting box, either round or square, provided with fixing holes 60 mm apart, while the 6-fold version is also ideal for mounting into a rectangular wall mounting box 3 seater according to the Italian installation standard provided with fixing holes 83,5 mm apart. Each device is supplied with its relative metal support which, in case of necessity, can also be ordered separately. A terminal block complete the supply.

The pushbuttons must be finished off with an operation surface (rockers) and a frame. The rockers are available in square and rectangular shapes, plastic material, aluminium or Fenix NTM[®], in several colour and finishing variations. The rockers can be personalized with symbols and texts, so to make their function immediately understandable. Versions EK-ED2-TP and EK-EH2-TP have integrated LEDs which can be programmed freely: as an example, as a status feedback or as an orientation light at night time. Two colour combinations are available for the LEDs: blue / green or red / white. The same versions also offer a room thermostat function, thanks to the integrated temperature sensor. The frames, square and rectangular, are available in two stylish alternatives (Form and Flank) and are available in plastic material or aluminium. The 'NF version of the 4-fold pushbutton is mounted without frame and is provided with a side profile in white or black colour.

The pushbuttons simply get connected to the unique signal bus cable and do not require auxiliary power supply: the devices are supplied at SELV (Safety Extra Low Voltage) voltage, thus offering a much higher safety level than traditional commands. The configuration and commissioning is carried out by means of the ETS® software. The related application programs can be downloaded from the www.ekinex.com website.



The 4-fold pushbutton of Ekinex® FF series commands loads on/off switching, controls the dimming of lighting devices, controls motor drives for shutters or executes any other programmable command and control function. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- 4-fold (possibility to configure up to 8 independent functions)
- Plastic casing
- Wall-mounting installation
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- IP20 protection degree (installed)
- Weight 80 g (with mounting support)

4-fold basic pushbutton FF series WALL-MOUNT DEVICES

Technical data

- 30 Vdc power supply through KNX bus
- Current consumption from bus < 15 mA


Delivery

Delivery includes a terminal block for connection to the bus, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart) and two pairs of fixing screws.

Accessories

- The following accessories are available to be ordered separately:
- square or rectangular rockers
- square frame Form or Flank version

Dimensions [mm]






Code	Mounting	Side profile
EK-E32-TP	with square frame Form or Flank version	black
EK-E32-TP-NF	without frame	
EK-E32-TP-NFW	('NF version)	white



For more information see the technical documentation, download from www.ekinex.com







Description

The 4-fold pushbutton of Ekinex® FF series commands loads on/off switching, controls the dimming of lighting devices, controls motor drives for shutters or executes any other programmable command and control function. Thanks to the integrated temperature sensor, the pushbutton can work as a thermostat for a room or a zone. The LEDs can be chosen in the colour combinations blue / green or white / red. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features


- 4-fold (possibility to configure up to 8 independent functions)
- 4 freely programmable LEDs for each channel
- 2 colour combination available for the LEDs (blue/green or red/white)
- Integrated temperature sensor
- Room thermostat function
- Plastic casing

o 1 - - - -

- Wall-mounting installation on round or square wall box
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- IP20 protection degree (installed)
- Weight 80 g (with mounting support)

Order information		
Code	LED colours	Mounting
EK-ED2-TP	blue / green	with square frame Form
EK-ED2-TP-RW	red / white	or Flank version
EK-ED2-TP-BG-NF	blue / green	
EK-ED2-TP-RW-NF	red / white	without frame
EK-ED2-TP-BG-NFW	blue / green	('NF version)
EK-ED2-TP-RW-NFW	red / white	_

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



4-fold pushbutton and room thermostat FF series WALL-MOUNT DEVICES

Technical data

- 30 Vdc power supply through KNX bus
- Current consumption from bus < 15 mA

Delivery


Delivery includes a terminal block for connection to the bus, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart) and two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- square or rectangular rockers
- square frame Form or Flank version

Dimensions [mm]











The 6-fold pushbutton of Ekinex® FF series commands loads on/off switching, controls the dimming of lighting devices, controls motor drives for shutters or executes any other programmable command and control function. Thanks to the integrated temperature sensor, the pushbutton can send the room temperature value on the bus to other KNX devices. The LEDs can be chosen in the colour combinations blue / green or white / red. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- 6-fold (possibility to configure up to 12 independent functions)
- 4 freely programmable LEDs for each channel
- 2 colour combination available for the LEDs (blue/green or red/white)
- Integrated temperature sensor
- Plastic casing
- Wall-mounting installation on round, square or rectangular wall box
- Connection to bus line with KNX terminal block
- Rear programming pushbutton and LED
- IP20 protection degree (installed)
- Weight 75 g (with mounting support)

Technical data

- 30 Vdc power supply through KNX bus
- Current consumption from bus < 15 mA

Delivery

Delivery includes a terminal block for connection to the bus, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart) or rectangular mounting box (fixing holes 83,5 mm apart) and two pairs of fixing screws.


6-fold pushbutton FF series

WALL-MOUNT DEVICES

Accessories

- The following accessories are available to be ordered separately:
- square rockers
- rectangular frame Form or Flank version

Dimensions [mm]



Order informatio

Code	LED colours	Mounting	
EK-EH2-TP	blue / green	with rectangular frame Form	
EK-EH2-TP-RW	red / white	or Flank version	

Configuration and co


download from **www.ekinex.com**

°0-By means of ETS5 software or later versions Application program: APEKEH2TP##.knxprod (## = version_downloadable from www.ekinex.com)

For more information see the technical documentation







Description

Ekinex® FF OMNIA series devices are low-voltage 5-24 Vdc Dry contact (model EK-ED2-NC-...) or Open Drain (model EK-ED2-NB-...) pushbuttons for the on/off control of consumers, luminaires, the control of motorised drives or scenes and other control functions, e.g. for the actuation of relays on the rear or in junction boxes. The devices are equipped with 8 outputs and 8 inputs for driving the integrated LEDs. The low-voltage outputs allow wide compatibility with many control systems. The devices are designed for flush-mounting on the wall, suitable for residential applications. They are powered at SELV 5-24 Vdc and integrate perfectly with the aesthetic parts of the $\mathsf{Ekinex}^{\circledast}\,\mathsf{FF}$ series.

Main features

- Control of luminaires
- Control of motorised shutter drives (such as roller shutters, awnings, blinds or blinds)
- Different functions programmable by short press / long press of a button
- Piloting of third-party logics and interfaces
- Relay drive (EK-ED2-NB only)
- LED for status indication

Technical data

- LED Power supply: 5-24 Vdc Output voltage: 5-24 Vdc Dry contact
- Control and signalling elements: physical buttons, white LEDs
- Current consumption per output < 50mA (200mA for EK-ED2-NB)
- LED driving current: settable via dip-switch
- Physical connection via pre-assembled flat cables or rear board
- with adapter (to be screwed onto the rear of the push-button panel) and spring contacts
- Permitted wiring diagrams
- a) connection of an I/O module with digital inputs and Open Drain outputs
- b) connection of a series of output pulse relays for driving
- of lamps without electronics (protection diode not supplied)
- c) Direct connection of inputs and outputs with Crestron C2N-UNI8IO interface
- Operating temperature: 5 ... + 45°C
- Storage temperature: 25 ... + 55°C Transport temperature: 25 ... + 70°C
- Relative humidity: 95% non-condensing

Order information Code Version LED colours Mounting EK-ED2-NC Dry Contact with square frame Form or Flank vers EK-ED2-NB Open Drain EK-ED2-NC-NF Drv Contact white EK-ED2-NB-NF Open Drain without frame ('NF version) EK-ED2-NC-NFW Dry Contact EK-ED2-NB-NFW Open Drain FK-ACC-SCM universal interface with terminal block EK-ACC-CAA universal pre-wired connector pre-wired connector for Crestron product compatibility (C2N-UNI8IO) EK-ACC-CAC

287	357	373	421	439	451	455	461	471	
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	





• Plastic housing - Design for flush wall mounting

• Pollution degree 2 (according to IEC 60664-1)

• **EK-ACC-SCM:** universal interface with terminal block

• **EK-ACC-CAA:** universal pre-wired connector

• Degree of protection IP20 (device installed)



	Side	profile
)		
sion	hlack	

white



Delivery

Accessories



• Climatic classification 3K5 and mechanical classification 3M2 (according to EN 50491-2)

The scope of supply includes the device, a square metal bracket, plastic screws and fixing

The following accessories are available for completion and must be ordered separately:

• **EK-ACC-CAC:** pre-wired connector for Crestron product compatibility (C2N-UNI8IO)

screws (1 pair M2.9x25 mm and 1 pair M2.9x38 mm countersunk flat head screws).


• Dimensions (LxHxW) 82 x 79 x 19 mm - Weight 65 g (with mounting bracket)



19 7

• square or rectangular rockers - square frame Form or Flank version






Configuration and co

- · Standard con adattatore universale e morsettiera (cod. EK-ACC-SCM)
- · Standard con cavo flat
- Dedicato con interfaccia Crestron C2N-UNI8IO

Ω

For more information see the technical documentation, download from www ekinex com







Room thermostats

WALL-MOUNT DEVICES

Aesthetics and functionality conjugated according to the Ekinex® style.

The room temperature controls of the FF series contain the characteristics of a product with a strong technological footprint combined with a focus on aesthetic component. Available in different models, integrated LEDs and two custom keys, the Ekinex® room controllers are with their high performance able to meet the most different needs.

Available colour solutions

	Form	Flank	- Rockers
		Frames	NUCKEIS
Plastic	•	•	•
Metal	•	•	•
Metal HT	_	-	•
Fenix NTM®	-	-	•
-			




For more information see page 248

+	+	+	
-		-	
	Reference for the second secon	94 x 86 x 8 mm Flank	80 x 80 x 8 mm 'NF - Deep - Surface
			81

475 General index





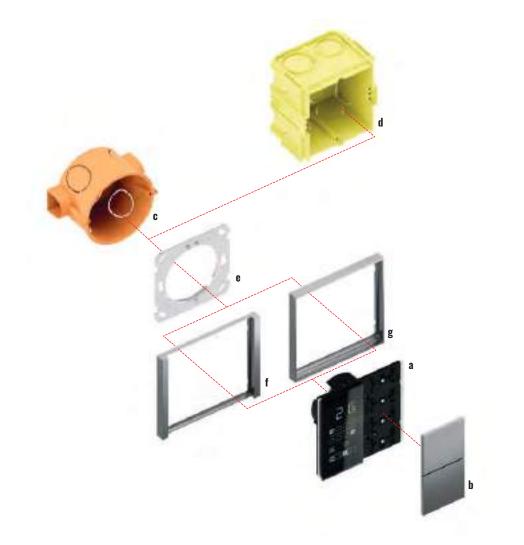



Form, Flank, 'NF. Three different variations for a room temperature control device with unique performance.

Room thermostats FF series					
Description	Code				
a) Room thermostat FF series	EK-ER2-TP or EK-EP2-TP or EK-EQ2-TP				
b) Set 2 rockers for thermostat FF series	EK-TQQEP2				
c) Round flush-mounting box	not delivered by Ekinex®				
d) Square flush-mounting box	not delivered by Ekinex®				
e) Metal mounting support	EK-SMQ-1				
f) Square frame of Flank version	EK-FLQ				
g) Square frame of Form version	EK-FOQ				



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Room thermostats FF series

WALL-MOUNT DEVICES

The Ekinex[®] thermostats of FF series range and related accessories offer the possibility to realize several variations that will satisfy the most diverse needs. The base is represented by the thermostats EK-ER2-TP, EK-EP2-TP and EK-EQ2-TP (with relative humidity sensor); each one integrates a KNX communication module. The device is suitable for mounting into a flush mounting box, either round or square , provided with fixing holes 60 mm apart. Each thermostat is delivered with its relative metal support which, in case of necessity, can also be ordered separately. A terminal block completes the delivery.

The pushbuttons must be finished off with an operation surface (rockers) and a frame. The rockers are available in square shape, plastic material, aluminium or Fenix NTM® in several colour and finishing variations. A special set includes two customized rockers with symbols for the thermostat functions. Each thermostat has integrated LEDs which can be programmed freely: as an example, as a status feedback or as an orientation light at night time. Two colour combinations are available for the LEDs: blue / green or red / white. The square frames are available in two stylish alternatives, Form and Flank , and share the same choice of materials, colours and finishings as for rockers. The 'NF version of the thermostat is mounted without frame and is provided with a side profile in white or black colour.

The thermostats simply get connected to the unique signal bus cable and do not require auxiliary power supply: the devices are powered at SELV (Safety Extra Low Voltage) voltage, thus offering a much higher safety level than traditional commands. The configuration and commissioning is carried out by means of the ETS® software. The related application programs can be downloaded from the www.ekinex.com website.



The Ekinex® Easy room thermostat FF-series is a digital electronic thermostat with a user-friendly interface for the end user and system integrator. While using a single differentiated set point for heating and cooling with only one on/off operating mode, the unit allows the control of terminals with one or two stages (such as radiators, floor and ceiling radiant panels, etc.) and fan-coil units with 2 or 4 pipe hydraulic supply. The product is equipped with an LCD display with adjustable back-lighting, a sensor for room temperature measurement and two freely configurable inputs. The indicator LEDs can be chosen in blue/green or white/red colour combinations. The device has an integrated KNX bus communication module and is designed for installation in a flush-mounted wall box; it is powered by the KNX bus and requires no auxiliary power supply.

Main features

- LCD display with adjustable backlighting
- 2 keys for controlling the thermostat functions
- 4 freely programmable LEDs for each button
- 2 colour combinations available for LEDs (blue/green or white/red)
- Integrated temperature sensor
- 2 freely programmable inputs
- Plastic housing
- Bus line connection via KNX terminal
- Programming button and LED on front panel
- Recessed wall mounting on round or square box
- IP20 degree of protection (installed)
- Weight 85 g (with mounting bracket)

Technical data

- 30 Vdc power supply through KNX bus
- Current consumption from bus < 13 mA

Delivery

Delivery includes a terminal block for connection to the bus, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart) and two pairs of fixing screws.


Easy room thermostat FF series

WALL-MOUNT DEVICES

Accessories

- The following accessories are available to be ordered separately:
- set of two square rockers with symbols for room thermostat
- square frame Form or Flank version

Dimensions [mm]





oruer information			
Code	LED colours	Mounting	Side profile
EK-ER2-TP	blue / green	with square frame	
EK-ER2-TP-RW	red / white	Form or Flank version	-
EK-ER2-TP-BG-NF	blue / green		black
EK-ER2-TP-RW-NF	red / white	— without frame	DIACK
EK-ER2-TP-BG-NFW	blue / green	('NF version)	white
EK-ER2-TP-RW-NFW	red / white	_	white



By means of ETS5 software or later versions Application program: **APEKER2TP##.knxprod** (## = version_download from www.ekinex.com



For more information see the technical documentation download from www.ekinex.com







Description

The Ekinex® room temperature controller of FF series regulates independently the temperature of a room or a zone. In combination with one or more KNX actuators. the room temperature controller is able to control the heating and cooling emission of a series of terminal units for the thermal exchange (such as radiators, fan-coils, floor and ceiling radiant panels, etc.). The device is provided with a LCD-display with adjustable backlight, sensors for temperature and brightness measuring and two freely configurable inputs. The LEDs can be chosen in the colour combinations blue / green or white / red. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is powered by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- LCD-display with adjustable backlight
- 2 rockers for controlling thermostat functions
- 4 freely programmable LEDs for each channel
- 2 colour combination available for the LEDs (blue/green or red/white)
- Integrated temperature sensor
- 2 freely configurable inputs

. . . .

- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)
- Weight 85 g (with mounting support)

Order information		
Code	LED colours	Mounting
EK-EP2-TP	blue / green	with square frame
EK-EP2-TP-RW	red / white	Form or Flank vers
EK-EP2-TP-BG-NF	blue / green	
EK-EP2-TP-RW-NF	red / white	
EK-EP2-TP-BG-NFW	blue / green	('NF version)
EK-EP2-TP-RW-NFW	red / white	_

287	357	272	//21	130	//51	455	/61	//71	175
287 DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	401 Tools	400 Sales kit	461 Technical section	General terms of sale	General index



Room thermostat FF series

WALL-MOUNT DEVICES

Technical data

- 30 Vdc power supply through KNX bus
- Current consumption from bus < 13 mA

Delivery


Delivery includes a terminal block for connection to the bus, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart) and two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- set of two square rockers with symbols for room thermostat
- square frame Form or Flank version

Dimensions [mm]





0

sion

black

white

Configuration and commissio

By means of ETS5 software or later versions Application program: APEKEP2TP##.knxprod (## = version, download from www.ekinex.com)



For more information see the technical documentation, download from www.ekinex.con





Room thermostat with relative humidity sensor FF series WALL-MOUNT DEVICES

Description

The Ekinex[®] room temperature controller of FF series regulates independently the temperature of a room or a zone. In combination with one or more KNX actuators, the room temperature controller is able to control the heating and cooling emission of a series of terminal units for the thermal exchange (such as radiators, fan-coils, floor and ceiling radiant panels, etc.). The device is provided with a LCD-display with adjustable backlight, sensors for temperature, relative humidity and brightness measuring and two freely configurable inputs. The LEDs can be chosen in the colour combinations blue / green or white / red. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is powered by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- LCD-display with adjustable backlight
- 2 rockers for controlling thermostat functions
- 4 freely programmable LEDs for each channel
- 2 colour combination available for the LEDs (blue/green or red/white)
- Integrated temperature and relative humidity sensor
- 2 freely configurable inputs
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)
- Weight 85 g (with mounting support)

Order information

Code	LED colours	Mounting	Side profile
EK-EQ2-TP	blue / green	with square frame	
EK-EQ2-TP-RW	red / white	Form or Flank version	-
EK-EQ2-TP-BG-NF	blue / green		hla al.
EK-EQ2-TP-RW-NF	red / white	— without frame	black
EK-EQ2-TP-BG-NFW	blue / green	('NF version)	
EK-EQ2-TP-RW-NFW	red / white	_	white

Technical data

- 30 Vdc power supply through KNX bus
- Current consumption from bus < 13 mA

Delivery


Delivery includes a terminal block for connection to the bus, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart) and two pairs of fixing screws.

Accessories

- The following accessories are available to be ordered separately:
- set of two square rockers with symbols for room thermostat
- square frame Form or Flank version

Dimensions [mm]

Ö



By means of ETS5 software or later versions Application program: **APEKEQ2TP##.knxprod** (## = version, download from www.ekinex.com)

For more information see the technical documentation,

download from www.ekinex.com











Touch&See

WALL-MOUNT DEVICES (PHASE OUT)



Technology in a touch. When you want to touch the technology, see with your eyes your settings, know the weather or create the comfort you would like, trust Touch&See. The high resolution touch-display and the versatile and intuitive interface are thought to provide highest user comfort and uncompromising aesthetics. The transition from one function to the next one is via side-scrolling pages, from those you can access several sub-menus. You can also set the display brightness according to your own needs or it can be automatically adjusted according to the brightness.

Available colour solutions

	Form	Flank	Dealvara
	Fi	rames	Rockers
Plastic	•	•	•
Metal	•	•	•
Metal HT	-	-	•
Fenix NTM®	-	-	•

For more information see page 248



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index




126 x 86 x 8 mm **Form**

134 x 86 x 8 mm **Flank**







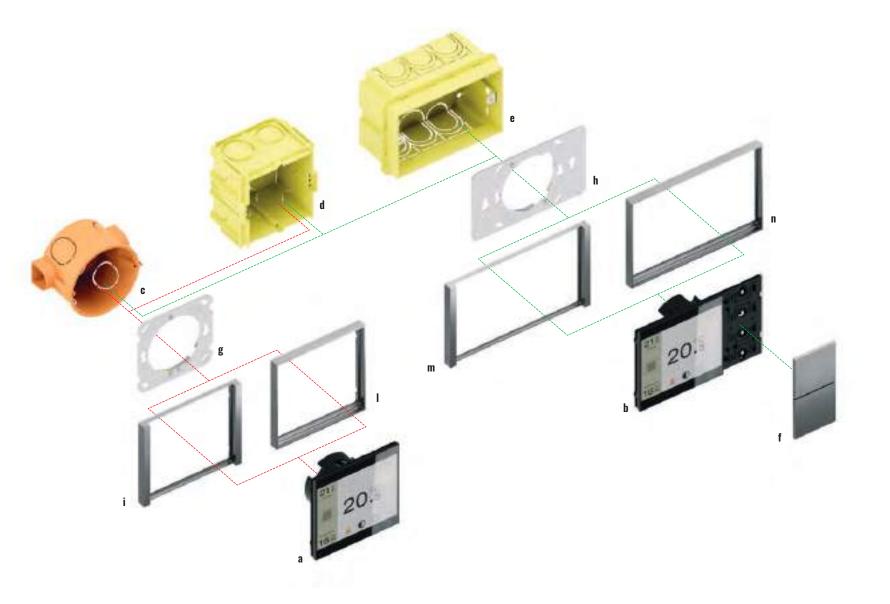



Control and display unit with two-channel pushbutton. You will be amazed at all you can do.

Touch&See FF series

Description	Code
a) Touch&See display	EK-EC2-TP
b) Touch&See display with 2-fold pushbutton	EK-EF2-TP
c) Round flush-mounting box	not delivered by Ekinex®
d) Square flush-mounting box	not delivered by Ekinex®
e) Rectangular flush-mounting box (3 modules)	not delivered by Ekinex®
f) Square rockers	EK-TQQ

Description	Code	
g) Metal mounting support	EK-SMQ-1	
h) Metal mounting support	EK-SMR-1	
i) Square frame Flank version	EK-FLQ	
I) Square frame Form version	EK-FOQ	
m) Rectangular frame Flank version	EK-FLR	
n) Rectangular frame Form version	EK-FOR	



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Touch&See FF series

WALL-MOUNT DEVICES (PHASE OUT)

The Ekinex[®] Touch&See display and control units allow to perform a great number of switching, control and display bus functions, utilizing the easiest and most compact devices, with their 3.5" touch-screen and their graphic pages having a clear meaning and immediate understanding.

The base is represented by the control and display unit (EK-EC2-TP-...) and the control and display unit with integrated 2-fold pushbutton (EK-EF2-TP-...); each one integrates a KNX communication module. The control and display unit is suitable for round or square wall mounting boxes with fixing holes 60 mm apart: the unit with the integrated 2-fold pushbutton is also suitable for rectangular wall mounting boxes provided with fixing holes 85 mm apart (3 seater according to the Italian installation standard).

Each Touch&See unit is delivered with a metal mounting support which, in case of necessity, can also be obtained separately: the terminal blocks complete the supply. The Touch&See unit needs to be finished with a frame; in the case of units with integrated 2-fold pushbuttons, it will also be necessary to provide it with two square rockers, available in plastic or aluminium and in several colours and finishings. The frames, either square or rectangular, are available in two alternative styles (Form and Flank) and share the same choice of materials, colours and finishing. The rockers can be personalized with symbols and text, in order to make their function immediately understandable. Each channel of the 2-fold pushbutton has integrated LEDs which can be programmed freely: as an example, as a status feedback or as an orientation light at night time. Two colour combinations are available for the LEDs: blue / green or red / white. The 'NF version of the Touch&See EK-EC2-TP-... is mounted without frame and is provided with a side profile in white or black colour.

The Touch&See units have to be connected to the signal bus cable and to an auxiliary power supply; the devices are powered at SELV (Safety Extra Low Voltage) voltage, thus offering a much higher safety level than traditional commands. The configuration and commissioning is carried out by means of the ETS® software. The related application programs can be downloaded from the www.ekinex.com website.



Ekinex® Touch&See is a KNX device for the switching, control and display of bus functions. By means of its touch-screen and its graphical user interface, it is possible to control KNX actuators in an easy and intuitive way, to display the information coming from the KNX actuators and sensors and to perform as a room thermostat for up to 8 independent zones, receiving the measured room temperature values from the bus. The device integrates a KNX bus communication module and is designed for wall mounting boxes; it is powered by a SELV voltage directly from the KNX bus and requires an auxiliary 30 Vdc power supply.

Main features

- 3,5" TFT back-lit touch display, 320 x 240 pixel resolution, 65,536 colours
- Seven main graphic pages
- Plastic casing
- Connection to bus line with KNX terminal block
- Connection to auxiliary power supply with yellow / white terminal block
- Programming pushbutton and LED on the rear
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)
- Weight 110 g (with mounting support)

Technical data

- SELV power supply from KNX bus (communication)
- 30 Vdc auxiliary power supply (screen)

Delivery

Delivery includes a terminal block for connection to the bus, a terminal block for connection to the auxiliary power supply, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart) and two pairs of fixing screws.

Touch&See display

WALL-MOUNT DEVICES


(PHASE OUT)

Accessories

The following accessories are available to be ordered separately:

square frame Form or Flank version

Dimensions [mm]



Order information

Code	Mounting	Side profile
EK-EC2-TP	with square frame of Form or Flank version	-
K-EC2-TP-00-NF		black
K-EC2-TP-00-NFW	— without frame ('NF version)	white

Configuration and commission

Ö By means of ETS5 software or later versions Application program: APEKEC2TP##.knxprod (## = version, download from www.ekinex.com)



For more information see the technical documentation download from www.ekinex.com







Description

Ekinex® Touch&See with 2-fold pushbutton is a KNX device for the switching, control and display of bus functions. By means of its touch-screen and the graphical user interface, it is possible to control KNX actuators in an easy and intuitive way, to display information coming from KNX actuators and sensors and to perform as a room thermostat for a maximum of 8 independent zones. One temperature value can be measured from the integrated sensor, while the other values can be received from the bus. The integrated 2-fold pushbutton allows the on/off command of loads, the dimming of lighting devices, the control of motor drives for shutters or the execution of any other programmable command and control function. The LEDs can be chosen in the colour combinations blue / green or white / red. The device integrates a KNX bus communication module and is designed or mounting onto a wall-mounting box; it is powered by SELV voltage directly from the KNX bus and requires an auxiliary 30 Vdc power supply.

Main features

- 3,5" TFT back-lit touch display, 320 x 240 pixel resolution, 65,536 colours
- Seven main graphic pages
- Integrated temperature sensor
- 2-fold pushbutton (possibility to configure up to 4 independent functions)
- 4 freely programmable LEDs for each channel
- 2 colour combination available for the LEDs (blue/green or red/white)
- Plastic casing
- Connection to bus line with KNX terminal block
- Connection to auxiliary power supply with yellow / white terminal block
- Programming pushbutton and LED on the rear
- Wall-mounting installation on round, square or rectangular wall box
- IP20 protection degree (installed)
- Weight 130 g (with mounting support)

Technical data

- SELV power supply from KNX bus (communication)
- 30 Vdc auxiliary power supply (screen)

Order information

Code	LED colours	Mount
EK-EF2-TP	blue / green	with rec
EK-EF2-TP-RW	red / white	Form or

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General in

Touch&See display with 2-fold pushbutton WALL-MOUNT DEVICES

(PHASE OUT)

Delivery


Delivery includes a terminal block for connection to the bus, a terminal block for connection to the auxiliary power supply, a metal support for installation onto round or square mounting box (fixing holes 60 mm apart) or rectangular mounting box (fixing holes 83,5 mm apart) and two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- square rockers
- rectangular frame Form or Flank version

Dimensions [mm]

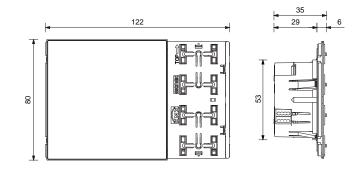

Configuration and commissio °**O**-

By means of ETS5 software or later versions Application program: APEKEF2TP##.knxprod (## = version, download from www.ekinex.com)



ting

ectangular frame of nr Flank version

For more information see the technical documentation, download from www.ekinex.com





n	86
k	88
	90
р	92
face	94







71 Form WALL-MOUNT DEVICES **Elegant and refined. The compactness that adapts to your style.** With an ultra-slim frame, the Form version of the 71 series features devices with integrated LEDs with adjustable light intensity, power sockets and keystone modules. The materials used are plastic, metal, Metal HT, the nanotechnological Fenix NTM[®] and the different finishes can be freely combined to each other.


Available colour solutions

	Form	Form Flank 'NF Deep		Deep	Surface	
	Fran	nes		Plates		Rockers
Plastic	•	•	•	•	-	•
Metal	•	٠	•	٠	•	•
Metal HT	_	-	-	٠	•	•
Fenix NTM®	-	_	٠	٠	٠	•



For more information see page 248

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

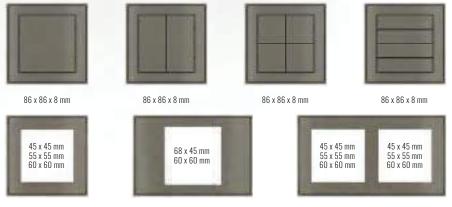

86 x 86 x 8 mm

156 x 86 x 8 mm



71 Flank WALL-MOUNT DEVICES **Harmony and essentiality. The rigorous simplicity of detail.** The Flank version of the 71 series features a wide range of devices with integrated LEDs with adjustable light intensity, power sockets and keystone modules with simple shapes and distinctive side edges. The materials used are plastic, metal, Metal HT, the nanotechnological Fenix NTM® and the different finishes can be freely combined to each other.

Available colour solutions

	Form	Flank	'NF	Deep	Surface	Dealara
	Fra	imes		Plates	– Rockers	
Plastic		•	•	۰	-	•
Metal	•	•	•	•	•	•
Metal HT	-	-	_	٠	٠	•
Fenix NTM®	_	-	0	•	٠	•



For more information see page 248

287 DIN-Rail mount modules	357 Visualisation	329 Tools	333 335 Sales kit Technical	9 349 section General terms of sa	345 General index	
	1	-				
		2	œ,			
				11		
			τνος		н.	



94 x 80 x 8 mm

134 x 80 x 8 mm

165 x 80 x 8 mm







71 'NF WALL-MOUNT DEVICES

Simple and rational. Frameless, the 'NF' version of the 71 series features devices with integrated LEDs with adjustable light intensity, power sockets and keystone modules. The materials used are plastic, metal, Metal HT, the nanotechnological Fenix NTM[®] and the different finishes can be freely combined to each other.


Available colour solutions

	Form	Flank	'NF	Deep	Surface	Deelvere
_	Fra	imes		Plates		Rockers •
Plastic	٠	٠	•	٠	-	•
Metal	•	٠	•	•	٠	•
Metal HT	-	-	-	•	٠	•
Fenix NTM®	-	_	•	•	•	•






287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

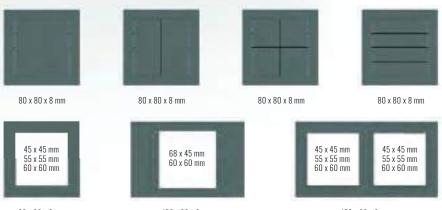

80 x 80 x 9 mm





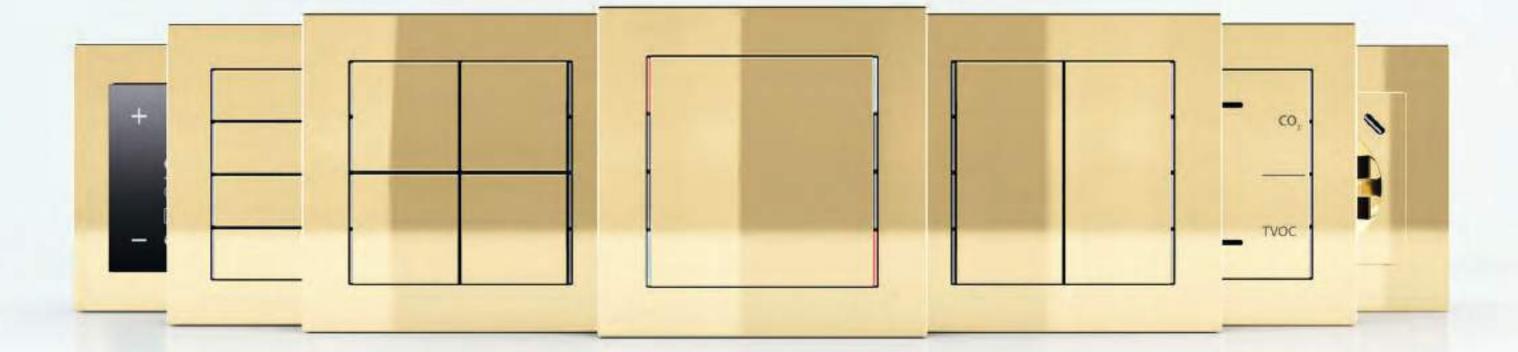




Slim and elegant. The Deep version of the 71 series features devices with integrated LEDs with adjustable light intensity, power sockets and keystone modules. The materials used are plastic, metal, Metal HT, the nanotechnological Fenix NTM[®]. The different finishes can be freely combined with each other, to match even the most eclectic and design-intensive spaces.

Available colour solutions

	Form	Flank	'NF	Deep	Surface		
_	Fra	mes		Plates		Rockers	
Plastic	٠	۰	۰	•	_	•	
Metal	٠	•	•	•	٠	•	
Metal HT	-	-	_	•	•	•	
Fenix NTM®	-	-	•	•	۰	•	



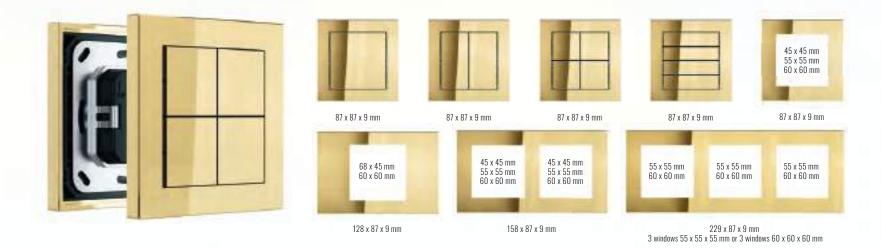

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

105

71 Surface WALL-MOUNT DEVICES **Essentiality and functionality for the contemporary home.** Designed to create a continuum with the wall, the Surface version of the 71 series integrates with the background until it almost becomes part of it. It features devices with integrated LEDs with adjustable light intensity, power sockets and keystone modules. The different available combinations make it particularly versatile and successful in the most different situations. The materials used are metal, Metal HT and the nanotechnological Fenix NTM[®].

Available colour solutions

	Form	Flank	'NF	Deep	Surface	Deeleen
_	Fra	ames		Plates		Rockers
Plastic	•	•	•	۰	-	•
Metal	•	•	٠	٠	•	•
Metal HT	_	-	-	•	•	•
Fenix NTM®	-	-	٠	•	•	•

For more information see page 248




287 357	373 421	439	451	455	461	471	475
DIN-Rail mount modules Visualisation Audic	io Multiroom IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index





98 x 98 x 3 mm



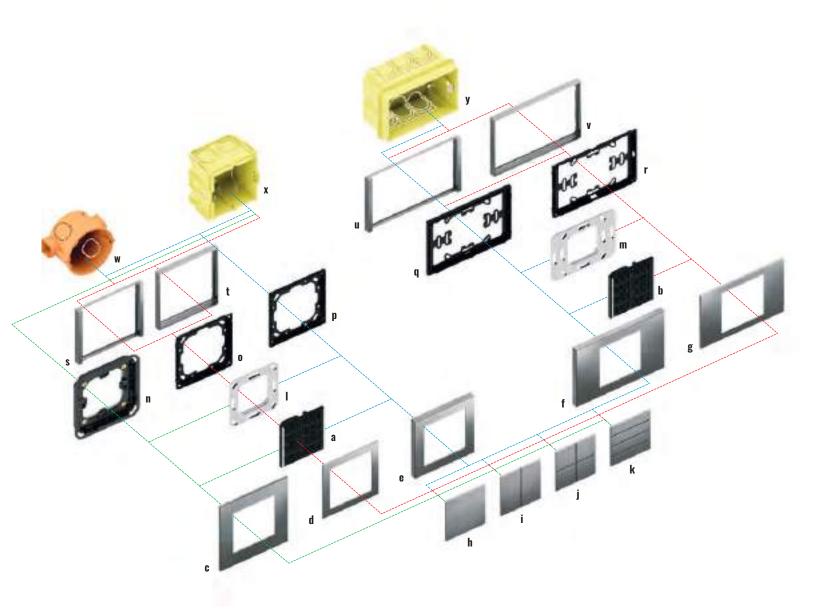



Description	Code
a) b) Pushbutton 71 series	EK-E13-TP o EK-E23-TP
c) Square plate Surface version*	EK-SQS
d) Square plate*	EK-PQS
e) Square plate Deep version*	EK-DQP
f) Rectangular plate Deep version*	EK-DRS
g) Rectangular plate*	EK-PRS
h) Square rocker (1)	EK-T1Q
i) Rectangular vertical rockers (2)	EK-T2R
j) Square rockers (4)	EK-T4Q
k) Rectangular horizontal rockers (4)	EK-T4R
I) Metal mounting support	EK-SMQ-71-1
m) Metal mounting support with adapter	EK-SMR-71-1

Description	Code
n) Adapter for square Surface plate	EK-TAS-Q-W or EK-TAS-Q-N
o) Adapter for square plate Form or Flank frames	EK-TAQE-1
p) Adapter for square plate 'NF and Deep version	EK-TAQE-1-NF
q) Adapter for rectangular plate 'NF and Deep version	EK-TAR-1-NF
r) Adapter for rectangular plate Form or Flank frames	EK-TAR-1
s) Square frame Flank version	EK-FLQ
t) Square frame Form version	EK-FOQ
u) Rectangular frame Flank version	EK-FLR
v) Rectangular frame Form version	EK-FOR
w) Round flush-mounting box	not delivered by $Ekinex^{\circledast}$
x) Square flush-mounting box	not delivered by Ekinex®
y) Rectangular flush-mounting box (3 modules)	not delivered by Ekinex®
*) 60 x 60 mm window	



71 series: infinite number of combinations for a unique style. The series of 71 buttons are available in square or rectangular version with single, double or triple window (Deep version only).



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index


Pushbuttons 71 series

WALL-MOUNT DEVICES

The Ekinex[®] pushbuttons of 71 series range and related accessories offer the possibility to realize several variations that will satisfy the most diverse needs. The base is represented by the device which is fitted with a KNX communication module. The pushbutton is suitable for mounting into a flush mounting box, either round or square, provided with fixing holes 60 mm apart and for mounting into a rectangular wall mounting box 3 seater according to the Italian installation standard provided with fixing holes 83,5 mm apart. Each pushbutton is delivered with a terminal block and two pairs of fixing screws.

The pushbuttons must be finished off with its relative metal support, a plastic adapter, an operation surface (rockers), a plate with 60 x 60 mm window and a frame. The rockers are available in square and rectangular shapes of different modularities, in plastic material, aluminium or Fenix NTM[®] and in several colours. Version EK-E13-TP-.. has integrated LEDs which can be programmed freely: as an example, as a status feedback or as an orientation light at night time. Two colour combinations are available for the LEDs: blue / green or red / white. The same version also offers a room thermostat function, thanks to the integrated temperature sensor. The frames, square and rectangular, are available in two stylish alternatives (Form and Flank) and are available in plastic material or aluminium and in several colours and finishings. The 'NF version of the pushbutton is mounted without frame and is provided with a side profile in white or black colour.

The pushbuttons simply get connected to the unique signal bus cable and do not require auxiliary power supply: the devices are supplied at SELV (Safety Extra Low Voltage) voltage, thus offering a much higher safety level than traditional commands. The configuration and commissioning is carried out by means of the ETS® software. The related application programs can be downloaded from the www.ekinex.com website.



The 4-fold pushbutton of Ekinex® 71 series commands loads on/off switching, controls the dimming of lighting devices, controls motor drives for shutters or executes any other programmable command and control function. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- 4-fold (possibility to configure up to 8 independent functions)
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)
- Weight 70 g (with mounting support)

Technical data

A 1 1 4 1

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 15 mA

4-fold basic pushbutton 71 series WALL-MOUNT DEVICES


Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

- The following accessories are available to be ordered separately:
- set of 1 square rocker, 2 vertical rectangular rockers, 4 square rockers or 4 horizontal rectangular rockers
- square and double frame Form or Flank version
- square, double and triple plate with 60 x 60 mm window
- a plastic adapter
- metal support for installation onto round or square mounting box (fixing holes 60 mm apart)

Dimensions [mm]



Mounting with frame: 81 x 77 (L x H) Mounting without frame ('NF): 80 x 80 (L x H)

Configuration and com

°**O**-By means of ETS5 software or later versions Application program: APEKE23TP##.knxprod (## = version, downloadable from www.ekinex.com)





Description

The 4-fold pushbutton of Ekinex® 71 series commands loads on/off switching, controls the dimming of lighting devices, controls motor drives for shutters or executes any other programmable command and control function. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- 4-fold (possibility to configure up to 8 independent functions)
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round, square or rectangular wall box
- IP20 protection degree (installed)
- Weight 100 g (with mounting support)

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 15 mA

Order information	
Code	Mounting
EK-E23-TP	with square and double version, without frame (

Urder information	
Code	Mounting
EK-E23-TP	with square and double frame Form or Flank version, without frame ('NF version)



For more information see the technical documentation download from www.ekinex.com



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



4-fold basic pushbutton and room thermostat for rectangular wall-box 71 series

WALL-MOUNT DEVICES

Delivery


Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- set of 1 square rocker, 2 vertical rectangular rockers, 4 square rockers or 4 horizontal rectangular rockers
- rectangular frame Form or Flank version
- rectangular plate with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square (fixing holes 60 mm apart) or rectangular (fixing holes 83,5 mm apart) mounting box

Dimensions [mm]



Mounting with frame: 122 x 77 (L x H) Mounting without frame ('NF): 120 x 80 (L x H)

Configuration and commis O

e frame Form or Flank e ('NF version)

- Ó

By means of ETS5 software or later versions Application program: APEKE23TP##.knxprod (## = version, downloadable from www.ekinex.com)





For more information see the technical documentation, download from www.ekinex.con



4-fold pushbutton and room thermostat 71 series WALL-MOUNT DEVICES

Description

The 4-fold pushbutton of Ekinex® 71 series commands loads on/off switching, controls the dimming of lighting devices, controls motor drives for shutters or executes any other programmable command and control function. Thanks to the integrated temperature sensor, the pushbutton can work as a thermostat for a room or a zone. The LED can be chosen in the colour combinations blue / green or white / red. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is powered by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- 4-fold (possibility to configure up to 8 independent functions)
- 4 freely programmable LED for each channel
- 2 colour combination available for the LED (blue / green or red / white)

LED colours

blue / green

red / white

Mounting

with square and double

frame Form or Flank version,

without frame ('NF version)

- Room thermostat function
- Integrated temperature sensor
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)
- Weight 70 g (with mounting support)

Technical data

Order information

EK-E13-TP-BG

EK-E13-TP-RW

Code

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 15 mA


Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

- The following accessories are available to be ordered separately:
- set of 1 square rocker, 2 vertical rectangular rockers, 4 square rockers or 4 horizontal rectangular rockers
- square and double frame Form or Flank version
- square, double and triple plate with 60 x 60 mm window
- a plastic adapter
- metal support for installation onto round or square mounting box (fixing holes 60 mm apart)

Dimensions [mm]



Mounting with frame: 81 x 77 (L x H) Mounting without frame ('NF): 80 x 80 (L x H)

Configuration and commissioning

°Q. By means of ETS5 software or later versions Application program: APEKE13TP##.knxprod (## = version, download from www.ekinex.com)





Description

The 4-fold pushbutton of Ekinex® 71 series commands loads on/off switching, controls the dimming of lighting devices, controls motor drives for shutters or executes any other programmable command and control function. Thanks to the integrated temperature sensor, the pushbutton can work as a thermostat for a room or a zone. The LED can be chosen in the colour combinations blue / green or white / red. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is powered by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- 4-fold (possibility to configure up to 8 independent functions)
- 4 freely programmable LED for each channel
- 2 colour combination available for the LED (blue / green or red / white)
- Room thermostat function
- Integrated temperature sensor
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round, square or rectangular wall box
- IP20 protection degree (installed)
- Weight 100 g (with mounting support)

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 15 mA

Order information		
Code	LED colours	Moun
EK-E13-TP-BG	blue / green	with s
EK-E13-TP-RW	red / white	frame withou



For more information see the technical documentation nload from www.ekinex.com



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General in



4-fold pushbutton and room thermostat for rectangular wall-box 71 series

WALL-MOUNT DEVICES


Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

- The following accessories are available to be ordered separately:
- set of 1 square rocker, 2 vertical rectangular rockers, 4 square rockers or 4 horizontal rectangular rockers
- rectangular frame Form or Flank version
- rectangular plate with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square (fixing holes 60 mm apart) or rectangular (fixing holes 83,5 mm apart) mounting box

Dimensions [mm]



Mounting with frame: 122 x 77 (L x H) Mounting without frame ('NF): 120 x 80 (L x H)

Configuration and commissionin


nting square and double ne Form or Flank version, out frame ('NF version)

By means of ETS5 software or later versions Application program: **APEKE13TP##.knxprod** (## = version, download from www.ekinex.com)



For more information see the technical documentation download from www.ekinex.con







Room thermostats

WALL-MOUNT DEVICES

Create a positive atmosphere. The different operating modes of the 71 series room temperature control allow you to adapt the control to your needs, save energy and ensure your comfort. The numerous integrated functions ensure a comfortable environment in all seasons. The 71 room temperature control will make you want to come back home.

Available colour solu

	Form	Flank	'NF	Deep	Surface
-	Frai	mes		Plates	
Plastic	•	•	•	•	-
Metal	•	•	•	•	•
Metal HT	-	-	-	•	•
Fenix NTM®	-	-	•	•	•



For more information see page 248

86 x 86 x 9 mm **Deep**



86 x 86 x 8 mm **Form**





98 x 98 x 3 mm Surface

94 x 86 x 8 mm **Flank**






80 x 80 x 8 mm **'NF**





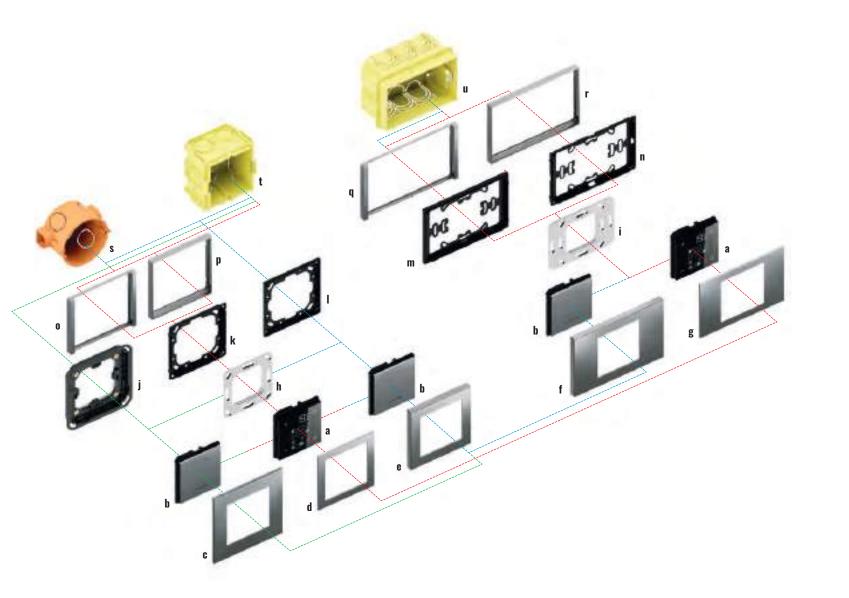



Many different combinations, possibilities installation horizontally or vertically, 71 room temperature control meets all requirements. Yours too...

Room thermostats and Multisensors 71 series

Description	Code
a) Thermostat 71 series	EK-E73-TP
b) Multisensor 71 series	EK-ET3-TP or EK-ES3-TP
c) Square plate Surface version*	EK-SQS
d) Square plate*	EK-PQS
e) Square plate Deep version*	EK-DQP
f) Rectangular plate Deep version*	EK-DRS
g) Rectangular plate*	EK-PRS
h) Metal mounting support	EK-SMQ-71-1
i) Metal mounting support with adapter	EK-SMR-71-1
j) Adapter for square Surface plate	EK-TAS-Q-W or EK-TAS-Q-N
k) Adapter for square plate Form or Flank frames	EK-TAQE-1

Description	Code
I) Adapter for square plate 'NF and Deep version	EK-TAQE-1-NF
m) Adapter for rectangular plate 'NF and Deep version	EK-TAR-1-NF
n) Adapter for rectangular plate Form or Flank frames	EK-TAR-1
o) Square frame Flank version	EK-FLQ
p) Square frame Form version	EK-FOQ
q) Rectangular frame Flank version	EK-FLR
r) Rectangular frame Form version	EK-FOR
s) Round flush-mounting box	not delivered by Ekinex®
t) Square flush-mounting box	not delivered by Ekinex®
u) Rectangular flush-mounting box (3 modules)	not delivered by Ekinex®
*) 60 x 60 mm window	



287 357 373 421 439 451 455 461 471 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General terms of sale	475 General index

Room thermostats 71 series

WALL-MOUNT DEVICES



The Ekinex[®] thermostats of 71 series range and related accessories offer the possibility to realize several variations that will satisfy the most diverse needs. The base is represented by the device which is fitted with a KNX communication module. The thermostat is suitable for mounting into a flush mounting box, either round or square, provided with fixing holes 60 mm apart or for mounting into a rectangular wall mounting box 3 modules according to the Italian installation standard provided with fixing holes 83,5 mm apart. Each thermostat is delivered with a terminal block and two pairs of fixing screws.

Depending on the version, the thermostat must be completed with its relative metal support, a plastic adapter, a square or rectangular plate with 60 x 60 mm window and a square or rectangular frame. The frames are available in two stylish alternatives (Form and Flank). Plates and frames are in plastic material, aluminium or Fenix NTM[®], in several colour and finishing variations. The 'NF versions of the thermostats are mounted without frame and are provided with a side profile in white or black colour.

The thermostats simply get connected to the unique signal bus cable and do not require auxiliary power supply; the devices are powered at SELV (Safety Extra Low Voltage) voltage, thus offering a much higher safety level than traditional commands. The configuration and commissioning is carried out by means of the ETS® software. The related application programs can be downloaded from the www.ekinex.com website.



The Ekinex® room temperature controller of 71 series regulates independently the temperature of a room or a zone. In combination with one or more KNX actuators. the room temperature controller is able to control the heating and cooling emission of a series of terminal units for the thermal exchange (such as radiators, fan-coils, floor and ceiling radiant panels, etc.). The device is provided with a LCD-Display with adjustable backlight, and a sensor for temperature measuring. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is powered by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Mounting

with square and double frame Form or Flank

version, without frame ('NF version)

Main features

- LCD-Display with adjustable backlight
- 4 capacitive pushbuttons for controlling of the thermostat functions
- Integrated temperature sensor
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)
- Weight 90 g (with mounting support)

Technical data

Order information

Code

EK-E73-TP

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 13 mA

Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.


Room thermostat 71 series

WALL-MOUNT DEVICES

Accessories

- The following accessories are available to be ordered separately:
- square and double frame Form or Flank version
- square, double and triple plate with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square mounting box (fixing holes 60 mm apart)

Dimensions [mm]



Mounting with frame: 81 x 77 (L x H) Mounting without frame ('NF): 80 x 80 (L x H)

Configuration and commissionin Ö

By means of ETS5 software or later versions Application program: APEKE73TP##.knxprod (## = version, download from www.ekinex.com)





Description

The Ekinex® room temperature controller of 71 series regulates independently the temperature of a room or a zone. In combination with one or more KNX actuators. the room temperature controller is able to control the heating and cooling emission of a series of terminal units for the thermal exchange (such as radiators, fan-coils, floor and ceiling radiant panels, etc.). The device is provided with a LCD-Display with adjustable backlight, and a sensor for temperature measuring. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is powered by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- LCD-Display with adjustable backlight
- 4 capacitive pushbuttons for controlling of thermostat functions
- Integrated temperature sensor
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round, square or rectangular wall box
- IP20 protection degree (installed)
- Weight 120 g (with mounting support)

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 13 mA

Order information	
Code	Mounting
ЕК-Е73-ТР	with square and double f version, without frame ('



For more information see the technical documentation nload from www.ekinex.com



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General inde

Room thermostat for rectangular wall-box 71 series WALL-MOUNT DEVICES

Delivery


Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- rectangular frame Form or Flank version
- rectangular plate with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square (fixing holes 60 mm apart) or rectangular (fixing holes 83,5 mm apart) mounting box

Dimensions [mm]



Mounting with frame: 122 x 77 (L x H) Mounting without frame ('NF): 120 x 80 (L x H)

figuration and commi

frame Form or Flank 'NF version)

By means of ETS5 software or later versions Application program: APEKE73TP##.knxprod (## = version, download from www.ekinex.com)



For more information see the technical documentation, download from **www.ekinex.con**



119





The Ekinex® multisensor 71 series detects values of temperature, relative humidity and CO₂ equivalent concentration in an air mass. The device can act as a temperature regulator of a room or zone; it can also perform the regulation by thresholds of relative humidity and CO_2 concentration. The frontal LEDs indicate if the device is in heating, cooling, dehumidification or CO₂ threshold mode. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- Integrated temperature and relative humidity sensors
- Integrated VOCs (Volatile Organic Compounds) sensor with output signal for CO₂ equivalent
- Room thermostat function
- Threshold regulator function for relative humidity and CO₂
- LEDs for heating, cooling, dehumidification or CO₂ threshold mode indication

Mounting

with square and double frame Form or Flank

version, without frame ('NF version)

- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)
- Weight 90 g (with mounting support)

Technical data

Order information

Code

EK-ET3-TP

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 13 mA

Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Multisensor quality


air with regulator

WALL-MOUNT DEVICES

Accessories

- The following accessories are available to be ordered separately:
- 1 full front cover with 60 x 60 mm modularity
- square and double frame Form or Flank version
- square, double and triple plate with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square mounting box (fixing holes 60 mm apart)

Dimensions [mm]



Mounting with frame: 81 x 77 (L x H) Mounting without frame ('NF): 80 x 80 (L x H)

°Q. uration and co

By means of FTS5 software or later versions Application program: **APEKET3TP##.knxprod** (## = version, downloadable from www.ekinex.com)





Description

The Ekinex® multisensor 71 series detects values of temperature, relative humidity and CO₂ equivalent concentration in an air mass. The device can act as a temperature regulator of a room or zone; it can also perform the regulation by thresholds of relative humidity and CO₂ concentration. The frontal LEDs indicate if the device is in heating, cooling, dehumidification or CO₂ threshold mode. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- Integrated temperature and relative humidity sensors
- Integrated VOCs (Volatile Organic Compounds) sensor with output signal for CO₂ equivalent
- Room thermostat function
- Threshold regulator function for relative humidity and CO₂
- LEDs for heating, cooling, dehumidification or CO₂ threshold mode indication
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round, square or rectangular wall box
- IP20 protection degree (installed)
- Weight 120 g (with mounting support)

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 13 mA

Order information	
Code	Mounting
EK-ET3-TP	with square and double version, without frame



For more information see the technical documentation download from www.ekinex.com



<u>− 21</u> −13 –9

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General ind

Multisensor quality air with regulator for rectangular wall-box WALL-MOUNT DEVICES


Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws

Accessories

- The following accessories are available to be ordered separately:
- 1 full front cover with 60 x 60 mm modularity
- rectangular frame Form or Flank version
- rectangular plate with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square (fixing holes 60 mm apart) or rectangular (fixing holes 83,5 mm apart) mounting box

Dimensions [mm]



Mounting with frame: 122 x 77 (L x H) Mounting without frame ('NF): 120 x 80 (L x H)

Configuration and commissionin

e frame Form or Flank e ('NF version)

By means of ETS5 software or later versions Application program: **APEKET3TP##.knxprod** (## = version, downloadable from www.ekinex.com)





For more information see the technical documentation, download from **www.ekinex.con**







The Ekinex® multisensor with controller is a KNX S-mode device for independent temperature control of a room or building area. The module includes 3 sensors: temperature, humidity percentage and air quality, expressed in terms of TVOC (Total Volatile Organic Compounds) or CO₂ equivalent. It can also function as a controller for these three quantities, valid for a single zone to be controlled. The front LEDs indicate the heating, cooling, dehumidification, humidification and TVOC or CO₂ threshold status. The push-button and the programming LED are located on the front in the area below the button. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- Integrated temperature and relative humidity sensors
- VOC (Volatile Organic Compounds) sensor with output signal for CO₂ equivalent and TVOC
- Room thermostat function
- Threshold regulator function for relative humidity, TVOC and CO₂
- Available an alarm signal on the CO₂ level also useful to obtain 1 LEED certification point
- Compatibility with Belimo actuators for the control of dampers in VAV boxes and 6-way valves
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round or square wall box
- IP20 protection degree (installed)
- Weight 90 g (with mounting support)

Order informatio

Code	Mounting
EK-ES3-TP	with square and double frame Form or Flank version, without frame ('NF version)

Multisensor with humidity, **TVOC and CO2 eq. regulator**

WALL-MOUNT DEVICES

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 13 mA
- Max. bus power < 390 mW

Delivery


Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- 1 full front cover with 60 x 60 mm modularity
- square and double frame Form or Flank version
- square, double and triple plate with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square mounting box (fixing holes 60 mm apart)

Dimensions [mm]



Mounting with frame: 81 x 77 (L x H) Mounting without frame ('NF): 80 x 80 (L x H)

00

By means of FTS5 software or later versions Application program: **APEKES3TP##.knxprod** (## = version_downloadable_from_www.ekinex.com)





Description

The Ekinex® multisensor with controller is a KNX S-mode device for independent temperature control of a room or building area. The module includes 3 sensors: temperature, humidity percentage and air quality, expressed in terms of TVOC (Total Volatile Organic Compounds) or CO₂ equivalent. It can also function as a controller for these three quantities, valid for a single zone to be controlled. The front LEDs indicate the heating, cooling, dehumidification, humidification and TVOC or CO_2 threshold status. The push-button and the programming LED are located on the front in the area below the button. The device integrates a KNX bus communication module and is intended for mounting onto a wall mounting box; it is supplied by a SELV voltage directly from the KNX bus and does not require any auxiliary power supply.

Main features

- Integrated temperature and relative humidity sensors
- VOC (Volatile Organic Compounds) sensor with output signal for CO₂ equivalent and TVOC
- Room thermostat function
- Threshold regulator function for relative humidity, TVOC and CO₂
- Available an alarm signal on the CO₂ level also useful to obtain 1 LEED certification point
- Compatibility with Belimo actuators for the control of dampers in VAV boxes and 6-way valves
- Plastic casing
- Connection to bus line with KNX terminal block
- Frontal programming pushbutton and LED
- Wall-mounting installation on round, square or rectangular wall box
- IP20 protection degree (installed)
- Weight 120 g (with mounting support)

Order information	
Code	Mounting
EK-ES3-TP	with square and double version, without frame



For more information see the technical documentation download from www.ekinex.com





287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General in

Multisensor with humidity, **TVOC and CO2 eq. regulator** for rectangular wall-box

WALL-MOUNT DEVICES

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 13 mA
- Max. bus power < 390 mW

Delivery


Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

The following accessories are available to be ordered separately:

- 1 full front cover with 60 x 60 mm modularity
- rectangular frame Form or Flank version
- rectangular plate with 60 x 60 mm window
- a plastic adapter
- a metal support for installation onto round or square (fixing holes 60 mm apart) or rectangular (fixing holes 83,5 mm apart) mounting box

Dimensions [mm]



Mounting with frame: 122 x 77 (L x H) Mounting without frame ('NF): 120 x 80 (L x H)

Configuration and commission



By means of ETS5 software or later versions Application program: APEKES3TP##.knxprod (## = version_downloadable from www.ekinex.com





For more information see the technical documentation nload from www.ekinex.con





TOUCH&CONTROL

WALL-MOUNT DEVICES







Main page









Climate control 22:25



Screen saver



Designed to integrate into any building. Touch&Control is the new KNX capacitive touch-screen with compact dimensions but great performance. The 4" colour IPS display is a perfect combination of design and technology.

Dimming

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index





86 x 101,3 x 10,5 mm







Touch & Control is a touch display device designed for independent temperature control and control of KNX devices in a building.



|--|

Touch&Control	
Description	Code
a) Touch&Control 4"	EK-EI2-TP-4
b) Mounting support (included in delivery)	
c) Round flush-mounting box	not delivered by Ekinex®
d) Square flush-mounting box	not delivered by Ekinex®

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

Touch&Control

WALL-MOUNT DEVICES

The Ekinex[®] EK-EI2-TP-4 device is a KNX S-mode appliance designed for the independent regulation of the temperature of a room or an area of a building. It also allows to view the status and control a variety of KNX devices by touching the icons on the touch display interface to perform some pre-set functions: room thermostat, ON/OFF control of utilities, scenes activation, control of motorized drives for blinds (such as roller shutters, curtains, venetian blinds or roller shutters), control and dimming of lighting devices, logics and other functions via bus.

The device is primarily designed for use in the control system of houses and buildings. Wall installation is envisaged, with assembly in conventional junction boxes as per the Ekinex® planner (which can be reached at https://planner.ekinex.com/). The product is suitable not only for European standards, but also for Chinese and American ones. It is powered by the KNX bus and requires a 24-30 Vdc auxiliary power supply. Physical addressing and parameter configuration can be carried out using the ETS KNX software (starting from version 5.7) with the .knxprod file.







Designed to integrate into any building, the KNX Touch&Control 4" display is a perfect combination of design and technology. The display provides users with a wide range of KNX functions allowing control of one or more rooms. The device is equipped with an LED that can be used for night orientation or to inform users of any alarms, which in combination with the integrated proximity sensor allows the screen to be switched on or off automatically. A dedicated widget is available for each type of automation: lights, dimmers, RGB, RGBW, blinds, audio solutions, air conditioning, air quality and 4 temperature control zones are just some of the functions integrated in this display.

Main features

- Control and dimming functions for luminaires, motorised shutter control
- Room thermostat function for 4 independent zones
- Control of room temperature, air conditioning, underfloor heating and ventilation system
- Control of audio functions
- RGB, RGBW, RGBCW brightness control and colour temperature setting
- Air quality display, with PM2.5, AQI, CO2, VOC etc.
- Display of energy measurement parameters: current, voltage, power, energy.
- 8 time functions, 8 scene group functions
- 8 logic functions, with AND, OR, XOR, logic port forwarding, threshold comparator, format conversion
- Delay and staircase light function
- Integrated proximity sensor, screen brightness setting, indication with coloured LED strip
- Haptic feedback with vibration
- Date and time display, temperature and humidity display, day/night status output
- Password protection, screen saver and panel lock
- Alarm function

Order information

Code	Mounting	Version
EK-EI2-TP-4	- without frame	black
EK-EI2-TP-4-W	- without frame	white

Documentati

For more information see the technical documentation, download from **www.ekinex.com**



Configuration and commissioning

By means of ETS5 software or later versions Application program: **APEKEI2TP##.knxprod** (## = version, downloadable from www.ekinex.com)



Touch&Control 4" WALL-MOUNT DEVICES

- Integrated temperature sensor
- Weekly timer
- Dimensions (WxHxD): 86 x 101.3 x 10.5mm (32.2mm)
- Weight: 200 g


Technical data


- Power supply 21-30 Vdc via KNX bus and current consumption 4mA@30Vdc
- SELV auxiliary power supply 12-30 Vdc and current consumption < 71mA@30Vdc
- 4" colour IPS capacitive touch screen, resolution 480x480 pixels
- Proximity sensor activation distance: approx. 30 cm
- Dimensions (WxHxD): 86 x 101.3 x 10.5 mm

Delivery

The supply includes two terminals for connection to the bus line and auxiliary power supply.

Dimensions [mm]



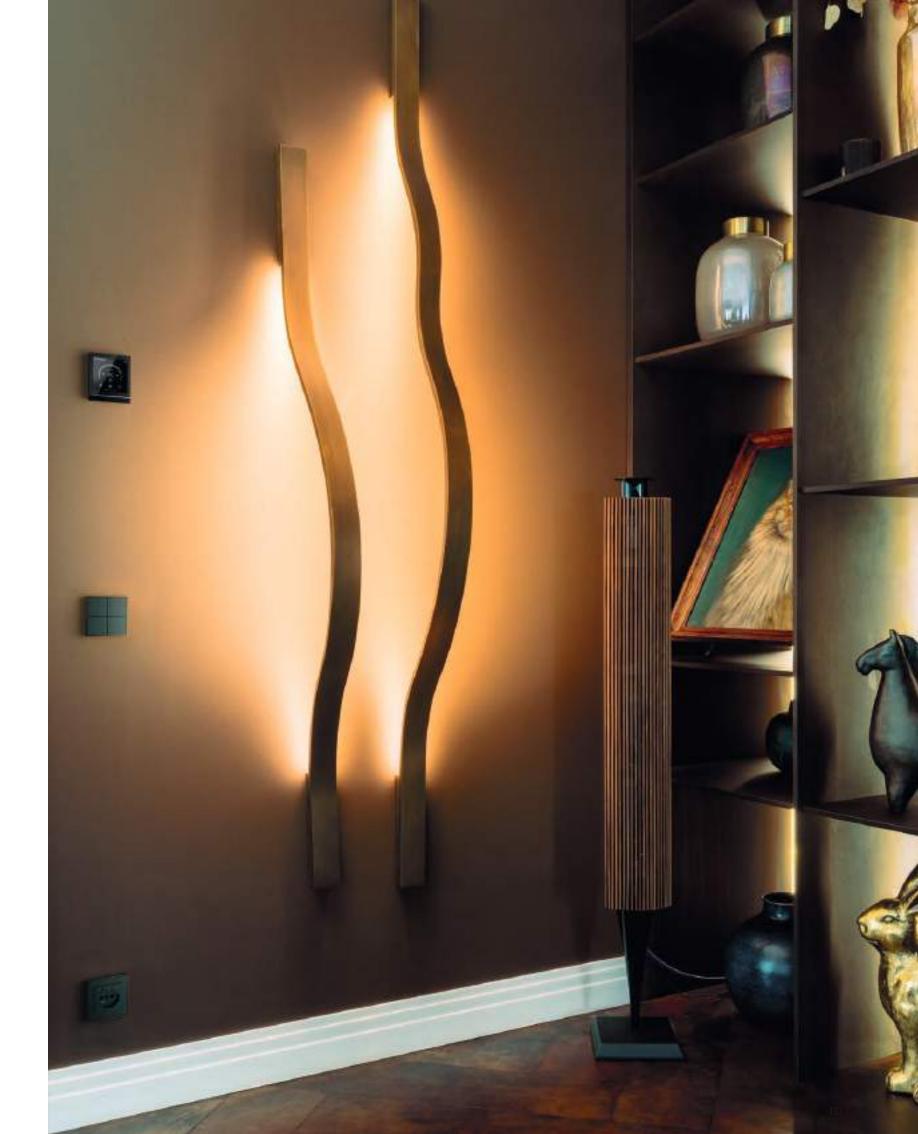



HOTEL SOLUTIONS

WALL-MOUNT DEVICES

reader	130
holder	131
programmer	132
xtop cards programmer kit	133
do Software	134
rt-card	135
er Tosibox® Lock	136
Tosibox® Key	137









Hotel solutions

WALL-MOUNT DEVICES (PHASE OUT)

Ideal for building automation functions in accommodation and hospitality facilities Ekinex offers advanced solutions for the automation of accommodation facilities, designed to offer guests comfort and environmental quality and high energy efficiency to managers and owners.

Available colour solutions

	Form	Flank	'NF	Deep	Surface	Card reader
	Fra	mes		Plates		Card programmer
Plastic	•	•	•	•	-	-
Metal	•	•	•	•	•	-
Metal HT	-	-	_	•	•	-
Fenix NTM®	-	-	•	•	•	-



For more information see page 248

287	357	373	421	439	451	455	461	471	475
I-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



86 x 86 x 8 mm **Form**



86 x 86 x 9 mm **Deep**



94 x 86 x 8 mm **Flank**



98 x 98 x 3 mm **Surface**




80 x 80 x 8 mm **'NF**







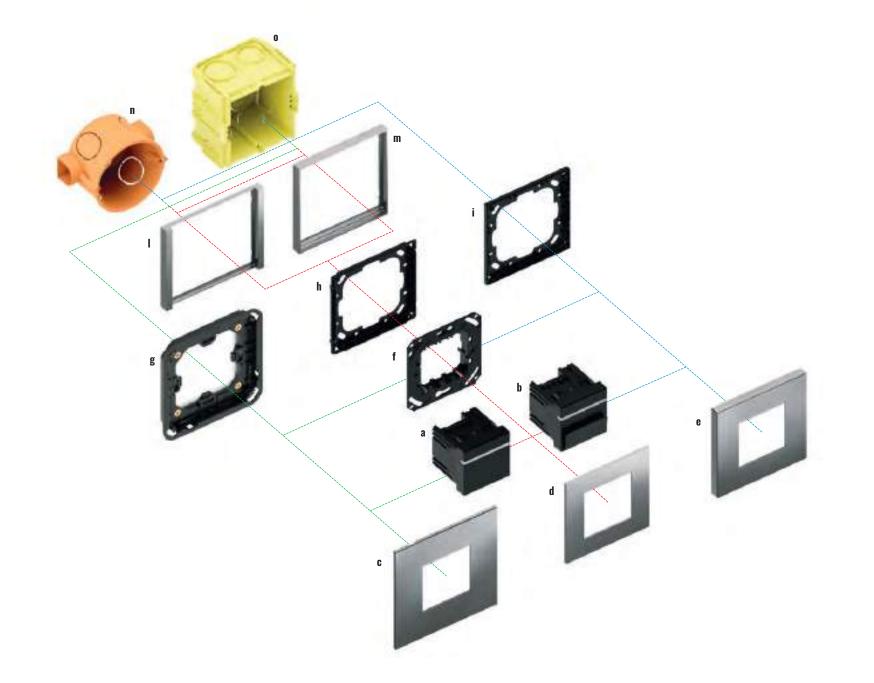



The use of Ekinex[®] temperature control devices in combination with the system for access and presence detection, makes it possible to offer guests of a hotel maximum comfort and, at the same time, to safeguard the objectives of energy efficiency and cost savings defined in the technical and economic planning.

ſ		

-		
Access	control	


Description	Code
a) Card reader	EK-TR2-TP
b) Card holder	EK-TH2-TP
c) Square plate Surface version*	EK-SQG
d) Square plate*	EK-PQG
e) Square plate Deep version*	EK-DQG
f) Adapter for card holder and card reader	EK-SP-TX2
g) Adapter for Surface square plate	EK-TAS-Q-W or EK-TAS-Q-N

Description	Code
h) Adapter for square plate	EK-TAQE-1
i) Adapter for 'NF and Deep square plate	EK-TAQE-1-NF
I) Square frame of Flank version	EK-FLQ
m) Square frame of Form version	EK-FOQ
1) Round flush-mounting box	not delivered by Ekinex®
b) Square flush-mounting box	not delivered by Ekinex®
*) 45 x 45 mm window	

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Access control

WALL-MOUNT DEVICES (PHASE OUT)

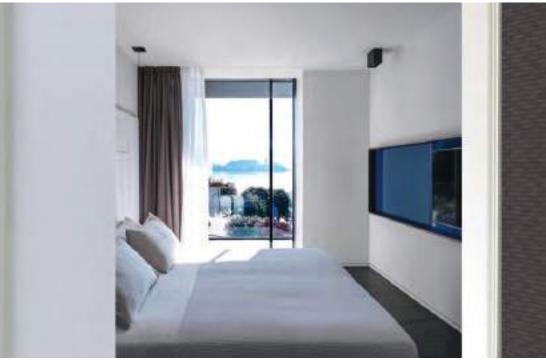

KNX devices series for controlled access to rooms and for detection of presence by means of smart-cards. Ideal for creating KNX standard automation functions in hospitality and hospitality structures (hotels, residences, guest houses or bed & breakfasts) with the aesthetic uniformity of Ekinex[®] wall products (push-button controls and room thermostats), in combination with products from switchboard (EK-H01-TP and EK-HU1-TP controllers) and with the Ekinex[®] Accédo management and visualisation software.

The products are equipped with an RFID-type front antenna capable of feeding the smart-card that is approached and reading the programmed information. The EK-TR2-TP wall reader enables access following validation of the card based on the configured authorizations. The EK-TH2-TP wall pocket activates presence following the insertion of the card in the appropriate front pocket. Both products can manage guest cards of the accommodation facility, based on the system codes, the reservation and the check-in / check-out period, service cards based on time slots and pass-dates. To program cards, use the product EK-TP2-TP, which is very similar to the reader with the possibility of activating the front antenna also for writing operations.

The programming of the cards in the reception area as well as the activation of a reader outside the room and an inside pocket takes place on the KNX network infrastructure. In addition to the power supplied by the KNX bus, an external auxiliary power supply is required for the RFID antenna at 12/24 Vac / dc. The basic programming of the devices as well as the configuration of the automation functions is carried out through the ETS application program: card programming and enabling room and controlled access devices in common areas requires the use of Ekinex[®] Accédo management and visualisation software. Both devices can notify the passage and validation events of each type of card via the KNX bus with an internal buffer to cope with the unavailability of the communication bus due to excessive data traffic.





The Ekinex® EK-TR2-TP card reader with RFID technology is used for access control in combination with the EK-TH2-TP card holder pocket. Equipped with a bi-stable relay (4A@24Vac/dc), an input for potential-free contacts and a 3-colour front signal LED (white, green and red). The device has an integrated KNX bus communication module and is designed for wall mounting in a flush-mounted box; it is supplied with SELV voltage via the KNX bus and requires an auxiliary power supply at 12-24 Vac/dc.

Functionality

- Access control via KNX TP bus (twisted pair)
- Enabling access after card validation
- Management of the guest based on the booking and the check-in/check-out time; management of users based on time slots and passe-partouts
- Programmable output for electric lock activation or as simple actuator activated by KNX telegrams
- Validation in progress signalling (green led) or unauthorized card (red led); possibility of enabling the " don't disturb" or "camera remake" commands
- · Notification of validation events to supervisory system with memory buffer

Main features

- Plastic casing
- Bus line connection via KNX terminal
- Recessed wall mounting on round box
- Degree of protection IP20 (installed)
- Weight 50 g (with mounting bracket)

Technical data

- 30 Vdc power supply via KNX bus
- Auxiliary power supply 12-24 Vac/dc
- Current consumption from the bus < 10 mA


Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Accessories

- The following accessories are available to be ordered separately:
- Smart-card EK-TCE-10 (Ekinex logo in black, pack of 10 cards) or EK-TCC-10 (personalised with customer logo, on request)
- square frame Form or Flank version
- square plate with 45 x 45 mm window
- a plastic adapter

Dimensions [mm]



Code	Mounting	Package
-K-TR2-TP	square plate with 45x45 mm window	1
IN-INZ-IF	optional frame Form or Flank version	—— 1 pcs.

curation and c

Ekinex® Accédo software for programming access control functions and cards. Project file: APEKTRTPTH2TP##.knxproj (downloadable from www.ekinex.com)

For more information see the technical documentation download from www.ekinex.com





Description

The Ekinex® EK-TH2-TP card holder with RFID technology is used for presence detection in combination with the EK-TR2-TP card reader. Equipped with a bistable relay (4A@24Vac/dc), an input for potential-free contacts and a front signal LED (white). The luminaire has an integrated KNX bus communication module and is designed for wall mounting in a flush-mounted box; it is supplied with SELV voltage via the KNX bus and requires an auxiliary power supply at 12-24 Vac/dc.

Functionality

- Presence detection via bus and communication to visualisation system via KNX TP bus (twisted pair)
- Enabling presence after inserting the card into the front pocket
- Guest management of the structure according to the booking and the check-in/ check-out period; user management according to time slots and passe-partouts
- Output programmable according to card validation or as actuator activated by KNX telegrams. Delay to card extraction configurable for courtesy light management
- Binary input available for connection of conventional button (with switching, dimming or roller shutter/awning function) or signal contact (e.g. window opening) • White front LED: flashing when the card is not inserted, off when the card is
- inserted; LED control via KNX bus telegrams possible
- Notification of presence events detected to visualisation system with memory buffer

Main features

- Plastic casing
- Bus line connection via KNX terminal
- Recessed wall mounting on round box
- Degree of protection IP20 (installed)
- Weight 50 g (with mounting bracket)

Order information					
Code	Mounting				
FK-TH2-TP	square plate with 45x45 mm window				
	optional frame Form or Flank version				

(PHASE OUT)

Card reader

WALL-MOUNT DEVICES

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



Card holder WALL-MOUNT DEVICES (PHASE OUT)

Technical data

- 30 Vdc power supply via KNX bus
- Auxiliary power supply 12-24 Vac/dc
- Current consumption from the bus < 10 mA

Delivery


Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.


Accessories

The following accessories are available to be ordered separately:

- Smart-card EK-TCE-10 (Ekinex logo in black, pack of 10 cards) or EK-TCC-10 (personalised with customer logo, on request)
- square frame Form or Flank version
- square plate with 45 x 45 mm window
- a plastic adapter

Dimensions [mm]





Configuration and cou



Ekinex® Accédo software for programming access control functions and cards. Project file: APEKTRTPTH2TP##.knxproj (downloadable from www.ekinex.com)

— 1 pcs.

entation

For more information see the technical documentation. download from www.ekinex.com





Description

The Ekinex[®] EK-TP2-TP card programmer with RFID technology is used for programming cards to be used with the EK-TR2-TP card reader and the Ekinex EK-TH2-TP card holder. Equipped with a bi-stable relay (4A@24Vac/dc) and an input for potential-free contacts the device has an integrated KNX bus communication module and is designed to be mounted in a flush-mounted wall box; it is supplied with SELV voltage via the KNX bus and requires an auxiliary power supply at 12-24 Vac/dc.

Functionality

- Programming of cards via KNX TP bus (twisted pair) and Ekinex Accédo software
- Card programming with different user profiles: guest, staff and passe-partouts
- Guest booking management and check-in/check-out operation
- Card activation based on time slots for service personnel
- Event notification to the visualisation system with memory buffer

Main features

- Plastic casing
- Bus line connection via KNX terminal
- Recessed wall mounting on round box
- Degree of protection IP20 (installed)
- Weight 50 g (with mounting bracket)

Technical data

- 30 Vdc power supply via KNX bus
- Auxiliary power supply 12-24 Vac/dc
- Current consumption from the bus < 10 mA

Delivery

Delivery includes a terminal block for connection to the bus, two pairs of fixing screws.

Cards programmer


WALL-MOUNT DEVICES

(PHASE OUT)

Accessories

- The following accessories are available to be ordered separately:
- Smart-card EK-TCE-10 (Ekinex logo in black, pack of 10 cards) or EK-TCC-10 (personalised with customer logo, on request)
- square frame Form or Flank version
- square plate with 45 x 45 mm window
- a plastic adapter

Dimensions [mm]



Order information					
Code	Mounting	Package	_ ``		
FK-TP2-TP	square plate with 45x45 mm window	1 noo			
EN-IFZ-IF	optional frame Form or Flank version	—— 1 pcs.	F		

Configuration and co

Ekinex® Accédo software for programming access control functions and cards. Project file: APEKTRTPTH2TP##.knxproj (downloadable from www.ekinex.com)

entatio

For more information see the technical documentation. download from **www.ekinex.com**





Description

The card programmer kit is a table-top control panel, coordinated with the aesthetic lines of the Ekinex[®] wall-mounted products, to be installed at one or more reception points in an accommodation facility, in combination with the KNX standard products for controlled access to rooms and public areas EK-TR2-TP and EK-TH2-TP and the Ekinex® Accédo EK-ACC-SW visualisation and card programming software.

Functionality

The programmer kit, suitable for reception desks in hospitality facilities such as hotels and reception centres, is equipped with an elegant frame in pre-painted aluminium in bromine grey and performs the following functions:

- Programming smart-cards with RFID (Radio Frequency
- Identification) technology, 13,56 MHz frequency, Mifare Classic 1kB protocol
- Signaling via buzzer of the bathroom tie rod alarms
- Alarm silencing through manual button

Main features

- 1 KNX transponder card programmer cod. EK-TP2-TP
- 1 universal KNX interface EK-CC2-TP (2 IN / 2 OUT)
- 1 buzzer 12Vac, 5VA anthracite Colour
- 1 push-buttons 1P NO, 10A at 250Vac anthracite Colour

The external power supply not included in the supply must be made with transformer 12Vac 1A. The card programmer and the universal interface with 2 inputs and 2 outputs must be connected to the KNX TP bus (twisted pair) by means of the redblack terminal provided.

Order information	
Code	Mounting
EK-TPBOX-TP	plate with 45x45 mm windows

287 357 373 421 439 451 455 461 471 475 DIV. Pail mount modules Visualisation Audia Multironam IP Door Phone Lift TV Tools Sales kit Technical section Constraint forms of sale							
	287 DIN-Rail mount modules	3/3	421 IP Door Phone		461	471 General terms of sale	475 General index



Desktop cards programmer kit WALL-MOUNT DEVICES

(PHASE OUT)


Other features

- card programming with RFID technology, 13,56 MHz frequency, Mifare protocol, Classic 1 KB
- 4M table-top box, Colour grey, with plastic housing
- Degree of protection IP20 when installed (according to EN 60529)
- Insulation class II (according to EN 60335-1)
- Climatic classification 3K5 (indoor use, dry) and mechanical classification 3M2 (according to EN50491-2)
- Device weight: 250 g
- Dimensions 148,8 x 92 x 25,1 mm (W x H x D)

Environmental conditions

- Operating temperature: 0°C ... + 40°C
- Storage temperature: 10 ... + 70°C
- Transport temperature: 10 ... + 70°C
- Relative humidity: 95% non condensing

Dimensions [mm]

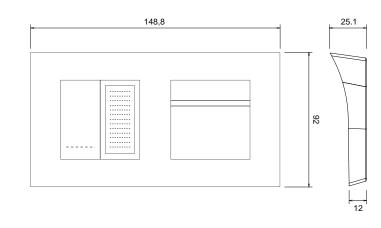

Package

1 pcs.

Configuration and cou

Ekinex® Accédo software for programming access control functions and cards. Project file: APEKTRTPTH2TP##.knxproj (downloadable from www.ekinex.com)

entation

For more information see the technical documentation. download from www.ekinex.com









Software for the management of systems technology, particularly suitable for hotels, residences, guest houses or bed&breakfast. Client-servers' architecture with HTML5 server functionality. Programming of transponder cards for access control, presence detection and (optional) electronic money functionality. Automatic import of ETS projects with easy and intuitive creation of graphic pages, drag&drop functionality, advanced copy/paste and undo/redo. Integrated control of calendars, scenarios and schedules. Interface to other communication protocols such as BACnet, Modbus, M-Bus, etc.

Order information

Code	Code Composition				
EK-ACC-L15	Software License up to 15 reader				
EK-ACC-L30	Software License up to 30 reader	_			
EK-ACC-L50	Software License up to 50 reader	1			
EK-ACC-L100	Software License up to 100 reader	— 1 pcs.			
EK-ACC-L200	Software License up to 200 reader	_			
EK-ACC-LC	Client License for additional programming workstation	_			

Requirements

- Operating System: Windows 10 I/O RS232
- Processor: Intel Core i5 3.3 GHz or higher
- RAM memory: min. 4 GB
- SSD: 240 GB
- Resolution: Full HD

Documentation

For more information see the technical documentation, download from **www.ekinex.com**



Accédo software

SOFTWARE (PHASE OUT)

- EX	

Description

Smart-card with RFID technology to be used with the EK-TR2-TP reader and the EK-TH2-TP card holder for controlled access to rooms and for presence detection in accommodation and hospitality facilities (hotels, residences, guest houses or bed&breakfast).

Order information

Code	Customization
EK-TCE-10	Ekinex® logo in black colour
EK-TCC-10	personalized with customer logo

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Smart-card ACCESSORIES

(PHASE OUT)

Main features

- Plastic material, standard dimensions 85 x 54 x 1 mm (W x H x D)
- Maximum non-contact recognition distance with EK-TR2-TP reader: 3-5 cm

Package	- <mark>.0</mark> -
10 pcs.	_
on request	_

Configuration and commissioning

The **EK-TP2-TP** card programming device and the **Ekinex® Accédo software**, dedicated to the management of accommodation and hospitality facilities, are required for card programming.





Tosibox[®] Lock router

REMOTE ASSISTANCE



Description

Quickly and securely create a Virtual Private Network (VPN) tunnel between a PC and one or more Lock routers and generate activation codes for iOS and Android VPN client apps on smartphones using 2048-bit RSA encryption. The Key can be configured as Master Key, Backup Key or Sub Key with limited access to a subset of installations. The Tosibox® SoftKey is a purely software key that can be combined with a Key to avoid transporting the physical dongle.

Supported operating systems

- Windows 8-10 (32/64 bit)
- Windows 7 (32/64 bit)
- Windows Vista (32/64 bit)
- Windows XP (SP3)
- Mac OS X Leopard 10.5 or newer


Order information		
Code	Composition	Package
EK-DEL-TBK1	Key with Tosibox® Cryptographic microcontroller Key that makes 1 PC client + 1 mobile client	
EK-DEL-TBSK1	Tosibox $^{\otimes}$ SoftKey software key to be combined with a key, with Sub Key function	
EK-DEL-TBMC1	Additional license for Tosibox [®] Key with 1 mobile client	1 pcs.
EK-DEL-TBMC5	Additional license for Tosibox® Key with 5 mobile clients	
EK-DEL-TBMC10	Additional license for Tosibox® Key with 10 mobile clients	

Description

It establish a secure connection via VPN (Virtual Private Network) tunnel with an automation system. The connection can be made via a PC or with one or more iOS or Android smartphone users. If a KNX/IP interface/router is installed on the KNX standard automation system, it can be accessed remotely directly via ETS. Quick and easy physical association between the Lock module and the Key and realization of a point-to-point VPN via the MatchMaking service. Remote connection of installations with Internet connection with dynamic, static and private IP. Possibility to connect modems with 2G/3G/4G radiotelephone network.

Tosibox[®] Lock 150

Dimensions [mm]



Tosibox[®] Lock 500i

General features			
Power supply	12/24Vdc, with Jack, power supply included	12/48Vdc with connector, power supply not included	12/48Vdc with connector, power supply not included
Installation	external	DIN Rail	DIN Rail
Dimension	132 x 99 x 35.5 mm	110 x 58 x 127 mm	110 x 58 x 127 mm
Temperature range	-20 °C +55 °C	-20 °C +60 °C	-20 °C +60 °C
Degree of protection	IP20	IP20	IP20
Connections			
WAN		1xRJ45 – 10/100TX	
LAN		3xRJ45 – 10/100TX (one door for local service acces	s)
WiFi		Client mode e Access Point, 802.11b/g/n	
2G/3G/4G	External modem	External modem	Integrated dual-SIM modem
VPN Features			
VPM throughput	10 Mbps	70 Mbps	70 Mbps
VPN Encryption		Blowfish 128 bit CBC, AES 128/192/256 bit CBC	
VPN Authentication		PKI, 3072 bit RSA	
Certifications			
	CE, FCC	CE, FCC, UL	CE, FCC, UL

Tosibox[®] Lock 500

Order information

Code	Composition	Package
EK-DEL-TBL1	Tosibox® Lock 150 Router, external installation, for VPN connections with automation system	
EK-TBL5	Tosibox [®] Lock 500 Router, DIN rail installation, for VPN connections with automation system	1 pcs.
EK-DEL-TBL5-SIM	Tosibox® Lock 500i Router, DIN rail installation, with integrated 2G/3G/4G dual SIM modem, for VPN connections with automation system	_

Awards and recognitions



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index


USB Tosibox[®] Key

REMOTE ASSISTANCE



Main features

- Hardware-based 2048-bit RSA key encryption. 4096 bit RSA Soft Keys
- TLS Data Encryption, Blowfish-128-CBC, AES-128-CBC, AES-256-CBC
- Layer2/Layer3 VPN Types (OpenVPN)
- Two-factor authentication support
- Dimensions: 74.8 x 23.2 x 10.3 mm (L x W x H)
- Weight: 25 g
- Case: metallic
- Operating temperature: -0°C, ..., +70°C
- Storage temperature: -20°C, ..., +85°C

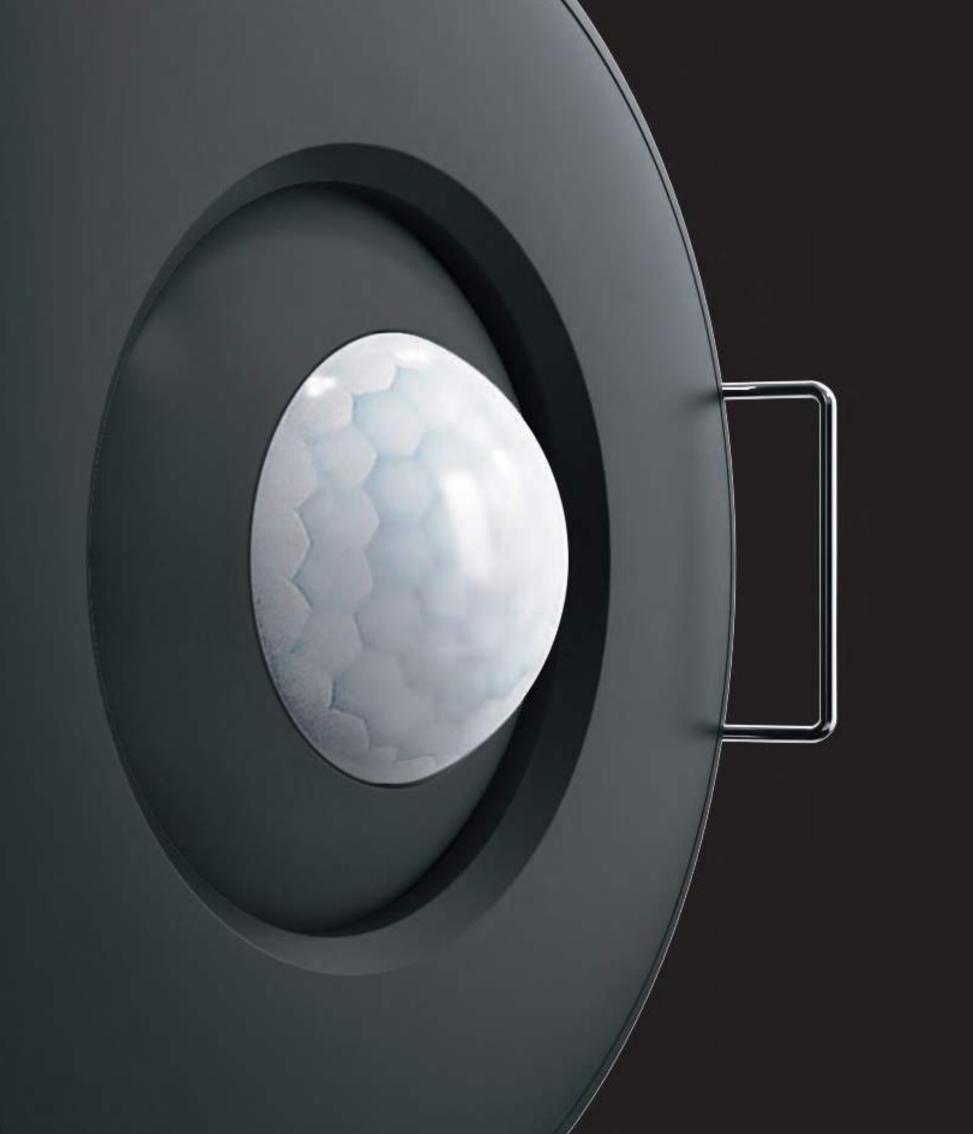

KNX S KNX S Motior



Secure multi-function movement sensor	153
Secure multifunctional presence sensor	154
on sensor for outdoor mounting	155



Sensors WALL-MOUNT DEVICES



Motion sensors complete with frames Form, Flank or in the' 'NF, Deep and Surface versions for aesthetics coordinated to the Ekinex® pushbuttons.



Ekinex presence and motion sensors are advanced devices designed to automate the control of bus functions, such as lighting and air conditioning in rooms.

KNX Secure multifunction PIR presence sensor

This sensor uses passive infrared (PIR) technology to detect normal and small movements and is equipped with an adjustable lens for optimal coverage. It incorporates sensors for measuring ambient brightness, temperature and air humidity, allowing integrated and precise control of systems. It offers up to four output channels and supports both automatic and semi-automatic modes. It is also compatible with the KNX Data Secure security protocol, ensuring secure communication within the home automation system.

KNX Secure multifunction real presence sensor

This sensor uses 24 GHz microwave technology to detect the actual presence of individuals in rooms, proving highly sensitive even to micro-movements. It is particularly suitable for environments such as hotel rooms, offices and other spaces where people tend to remain sedentary. Similar to the PIR model, it integrates brightness, temperature and humidity sensors, offering up to four output channels and supporting both automatic and semiautomatic modes. This device also complies with the KNX Data Secure protocol, ensuring secure communication within the system.

Both sensors are designed for ceiling or false ceiling mounting and can be installed in master/slave mode to extend the detection area. Accessories such as wall mounting brackets are also available for greater installation flexibility.



Description

The Ekinex KNX Secure multifunctional movement sensor can detect not only the movement of individuals but also brightness, air humidity and room temperature. Up to 4 channels are available for lighting (with constant brightness control) and temperature control functions.

Despite its compact size, the sensor has a wide detection range and the functions within it make it suitable for any use, from residential to commercial.

Main features

- Detection of normal and small movements with PIR technology and directional lens
- Up to 4 output channels and up to 3 brightness levels for both the start and end situation
- Automatic and semi-automatic modes
- Built-in brightness sensor
- Built-in room temperature sensor
- Built-in air humidity sensor
- Constant brightness control
- Thermoregulation functions
- Advanced logic functions
- Master/slave working mode
- Configurable orientation light
- Support of the KNX data Secure protocol

Technical data

- 360° movement detection range up to 15.5m (at 6m height)
- Installation height approx. 2.5 6m
- Power supply 21-30 Vdc via KNX bus and current consumption 5.5mA@30Vdc
- Illumination measurement range 0-2000 lux
- Body diameter Ø 48.5 mm
- Outer diameter Ø 70 mm
- Mounting hole diameter Ø 53-55 mm
- Recess depth 37 mm

Order information		
Code	Colours	Package
EK-SG2-TP-M	White	
EK-SG2-TP-M-B	Black	1 noo
EK-AMP-1	White	——————————————————————————————————————
EK-AMP-1-B	Black	

287 357 373 421 439 451 455 461 471 475										
	287 DIN-Rail mount modules	357	373	421 IP Door Phone	439 Lift TV	451 Tools	455	461	471 General terms of sale	475 General index

KNX Secure multi-function movement sensor

WALL-MOUNT DEVICES

Accessories

The following accessories are available for completion and must be ordered separately: • Wall mounting bracket EK-AMP-1






EK-AMP-1

EK-AMP-1-B







Configuration and con

By means of ETS5 software or later versions Application program: APEKSG2TPM##.knxprod (## = version, download from www.ekinex.com)





For more information see the technical documentation, download from www.ekinex.com





KNX Secure multifunctional presence sensor WALL-MOUNT DEVICES

Description

With the KNX Secure multifunctional presence sensor with microwave technology it is possible to detect the actual presence of individuals in rooms. Due to its very high sensitivity to micro movements, its ideal use is in hotel rooms, offices and any place of sedentary presence.

Despite the multiple functionalities inside, the presence sensor comes in an ultracompact design that is almost invisible in environments.


Main features

- Detection of normal and small movements with 24GHz microwave technology
- Up to 4 output channels and up to 3 brightness levels for both the start and end situation
- Automatic and semi-automatic modes
- Built-in brightness sensor
- Built-in room temperature sensor
- Built-in air humidity sensor
- Constant brightness control
- Thermoregulation functions
- Advanced logic functions
- Master/slave working mode
- Configurable orientation light
- Support of the KNX data Secure protocol

Technical data

- 360° static presence detection range up to 8.5m diameter (at 4m height)
- Installation height approx. 2.5-4 m
- Power supply 21-30 Vdc via KNX bus and current consumption 4mA@30Vdc
- SELV auxiliary power supply 12-30 Vdc and current consumption 20mA@30Vdc
- Illumination measurement range 0-2000 lux
- Body diameter Ø 48.5 mm
- Outer diameter Ø 65 mm
- Mounting hole diameter Ø 53-55 mm
- Recess depth 38 mm

Dimensions [mm]











Description

Plastic mounting bracket for installing an EK-SG2-TP-M or EK-SG2-TP-P sensor on the surface of a wall or ceiling, eliminating the need for a flush-mount box.

Order informatio

Code	Colours	Pack
EK-AME-1	White	1 pcs



Description

Plastic mounting bracket for installing an EK-SG2-TP-M or EK-SG2-TP-P sensor on the surface of a wall or ceiling, eliminating the need for a flush-mount box.

Order information		
Code	Colours	Packa
EK-AME-1-B	White	1 pcs.

Order information			
Code	Colours	Package	
EK-SG2-TP-P	White	1 200	
EK-SG2-TP-P-B	Black	————— 1 pcs.	

ion and co

By means of ETS5 software or later versions Application program: APEKSG2TPP##.knxprod (## = version, download from www.ekinex.com)

For more information see the technical documentation, wnload from www.ekinex.com

287 357 373 421 439 451 455 461 471 475 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General index								
	357	3/3		451	455	461	471 General terms of sale	4/5



Surface wall mounting bracket for presence sensors (white)

WALL-MOUNT DEVICES

Main features

- plastic mounting bracket
- installation without flush-mounting box
- snap-in locking mechanism



For more information see the technical documentation. download from www ekinex com





Surface wall mounting bracket for presence sensors (black)

WALL-MOUNT DEVICES

Main features

- plastic mounting bracket
- installation without flush-mounting box
- snap-in locking mechanism

kage



For more information see the technical documentation. download from www.ekinex.com



Proxin Proxin Proxin Proxin Proxin Italiar Schuk Frenc UK ve Water Keyst Keyst

POWER SOCKETS / KEYSTONE SYSTEM

WALL-MOUNT DEVICES

ima series power socket, Italian version	168
ima series power socket, Schuko version	169
ma series power socket, French version	169
ma series power socket, Israeli version	170
ma series power socket, UK version	171
ma series power socket, multistandard version	171
ima series wiring devices	171
n version power socket (standard and USB A-C)	182
ko version power socket (standard and USB A-C)	183
ch version power socket (standard and USB A-C)	184
ersion power socket (standard and USB A-C)	185
rproof cover IP65	186
tone system	192
tone system Proxima series	202









Power sockets Proxima series

The Proxima series of power sockets is an advanced solution for system integration in residential and commercial settings. Designed to ensure maximum safety, versatility and compatibility with the Proxima series of cover plates, they combine a minimalist design with reliable performance.

Available finishes

	Proxima		
	Plates	Front cover	
Anthracite plastic	-	•	
Metal	•	-	
Metal HT	•	-	

SCHUKO Fr Il

IT

86 x 86 x 5 mm


86 x 86 x 5 mm



86 x 86 x 5 mm

158 x 86 x 5 mm

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

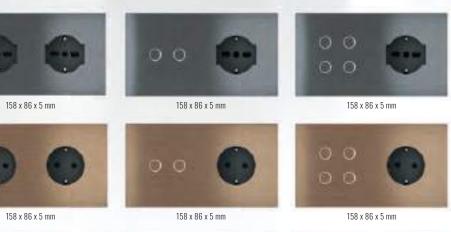




158 x 86 x 5 mm

158 x 86 x 5 mm





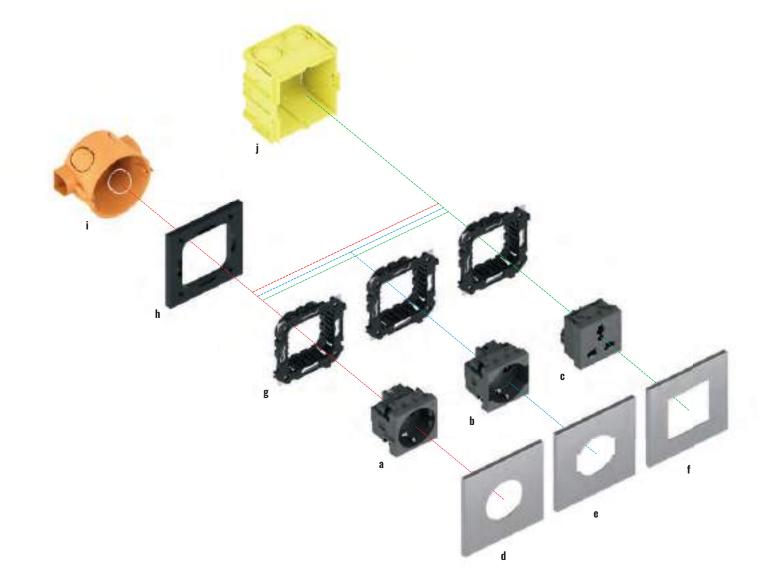

Single installation

Description	Code
	EK-PWT-DE / EK-PWT-DE-S
a) Schuko / FR / IL power socket	EK-PWT-FR / EK-PWT-FR-S
	EK-PWT-FR / EK-PWT-FR-S
b) IT Unel power socket	EK-PWT-IT-U
c) Multistandard / UK / Wiring devices modules power socket	EK-PWA-UN / EK-PWT-UK
G Multistanuaru / OK / Withing devices modules power socket	EK-PWT
d) Proxima Schuko / FR / IL square magnetic plate	EK-PQA-T
e) Proxima IT Unel square magnetic plate	EK-PQA-U

Description	Code
f) Proxima Multistandard square magnetic plate / UK / Wiring devices modules*	EK-PQA-P
g) Square mounting bracket	EK-SMP-71-1
h) Bracket for compatibility with round flush-mounted boxes	EK-SMP-Q-1
i) Round flush-mounted box	not supplied by Ekinex®
j) Square flush-mounted box	not supplied by Ekinex®
*) 45 x 45 mm window	

Double installation

- Description

 a) Proxima push-buttons with 2 rockers


 b) d) Unel IT power socket

 c) Proxima push-buttons with 4 rockers

 e) Proxima double rectangular magnetic plate

 f) Proxima double rectangular magnetic plate
- g) Proxima push-buttons with 2 rockers

287 357 373 421 439 451 455 461 471 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale	475 General index

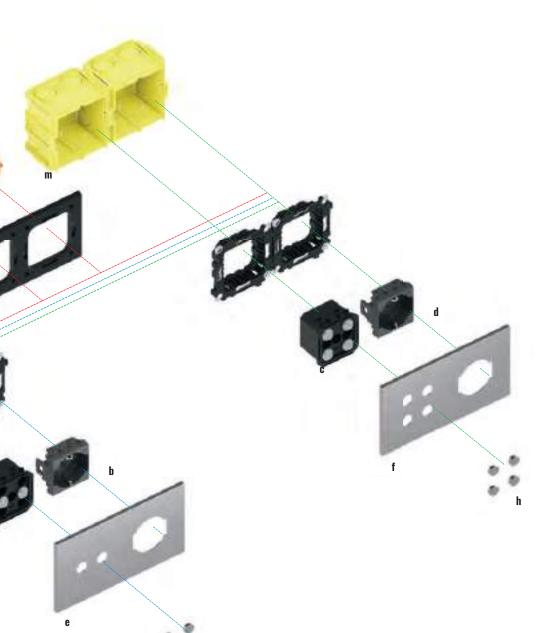

Code	Description
EK-EZ2-TP-2	h) Proxima button with 4 rockers
EK-PWT-IT-U	i) Square mounting bracket
EK-EZ2-TP-4	j) Bracket for compatibility with round flush-mounting boxes
EK-P2A-2U	k) Double flush-mounting box for walls up to 35 mm
EK-P2A-4U	I) Double round flush-mounting box for masonry walls
EK-EZ2-TP-2	m) Double square flush-mounting box for masonry walls
	· · · · · · · · · · · · · · · · · · ·

Ð

g

Code

EK-EZ2-TP-4

EK-SMP-71-1


EK-SMP-D-1

not supplied by Ekinex®

not supplied by $\mathsf{Ekinex}^{\circledast}$

not supplied by Ekinex®



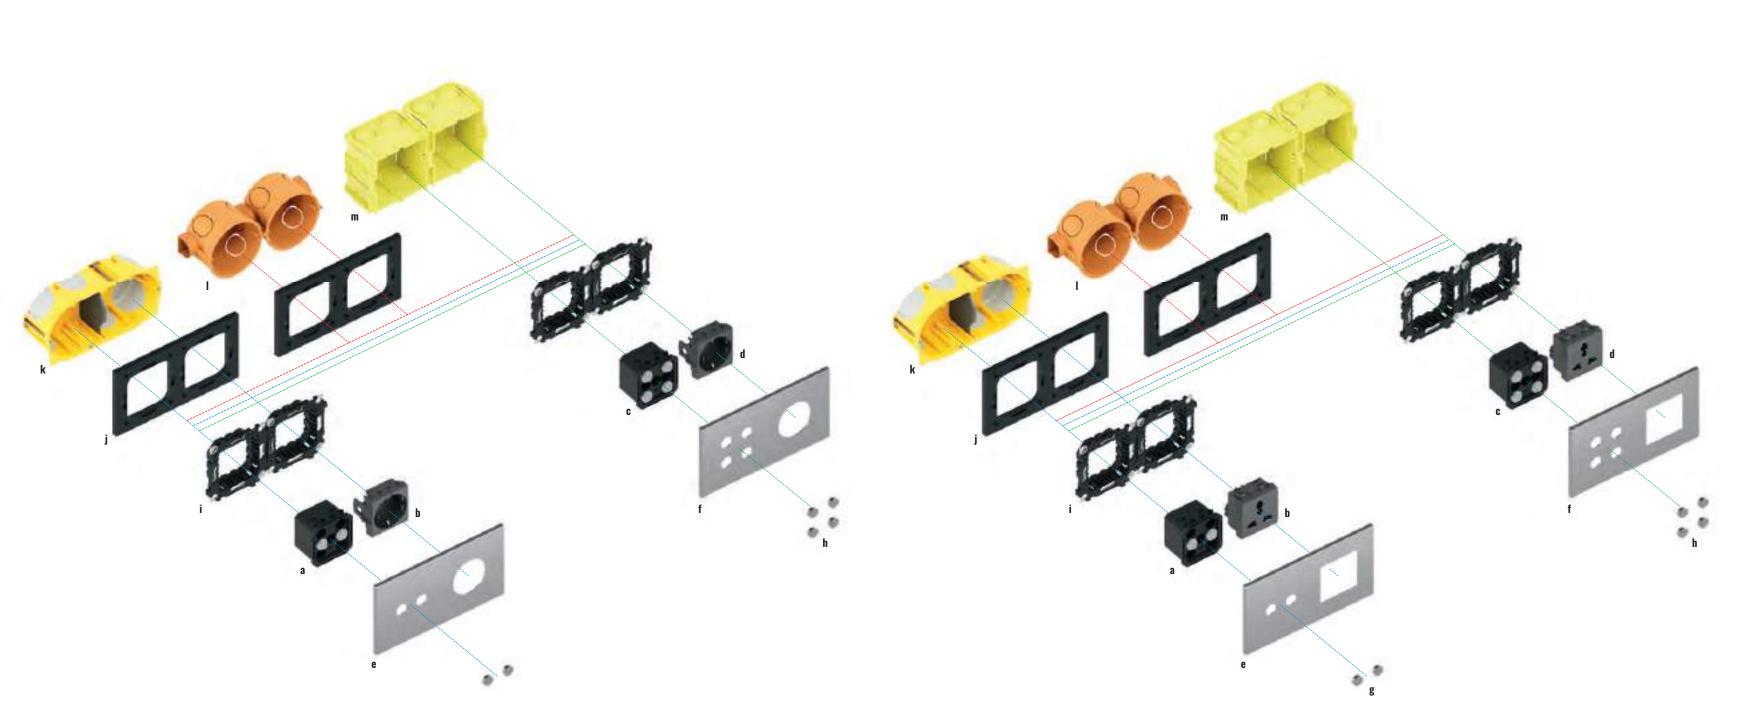

Double installation

EKINEX | TECHNICALO25EN

Description	Code
a) Proxima button with 2 rockers	EK-EZ2-TP-2
	EK-PWT-DE / EK-PWT-DE-S
b) d) Schuko / FR / IL power socket	EK-PWT-FR / EK-PWT-FR-S
	EK-PWT-FR / EK-PWT-FR-S
c) Proxima button with 4 rockers	EK-EZ2-TP-4
e) Proxima double rectangular magnetic plate	EK-P2A-2T
f) Proxima double rectangular magnetic plate	EK-P2A-4T
g) Proxima button with 2 rockers	EK-EZ2-TP-2

Description	Code
h) Proxima button with 4 rockers	EK-EZ2-TP-4
i) Square mounting bracket	EK-SMP-71-1
j) Bracket for compatibility with round flush-mounting boxes	EK-SMP-D-1
k) Double flush-mounting box for walls up to 35 mm	not supplied by $Ekinex^{^{(\!$
I) Double round flush-mounting box for masonry walls	not supplied by $Ekinex^{\circledast}$
m) Double square flush-mounting box for masonry walls	not supplied by Ekinex®

Double installation

Description	C
a) Proxima 2-button push-buttons	E
b) d) Multistandard / UK / Wiring devices modules power socket	E
b) a) multistandard / OK / withing devices modules power socket	E
c) Proxima 4-button push-buttons	E
d) IT Unel power socket	E
e) Proxima 2-position rectangular magnetic plate*	E
f) Proxima 2-position rectangular magnetic plate*	E
g) Proxima 2-button push-buttons	E


287 357 373 421 439 451 455 461 471 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale	475 General index


Code
EK-EZ2-TP-2
EK-PWA-UN / EK-PWT-UK
EK-PWT
EK-EZ2-TP-4
EK-PWT-IT-U
EK-P2A-2P
EK-P2A-4P
EK-EZ2-TP-2

Description	Code
h) Proxima button with 4 rockers	EK-EZ2-TP-4
i) Square mounting bracket	EK-SMP-71-1
j) Bracket for compatibility with round flush-mounted boxes	EK-SMP-D-1
k) Double flush-mounted box for walls up to 35 mm	not supplied by $Ekinex^{\circledast}$
I) Double round flush-mounted box for masonry walls	not supplied by Ekinex®
m) Double square flush-mounted box for masonry walls	not supplied by Ekinex®
*) 45 x 45 mm window	





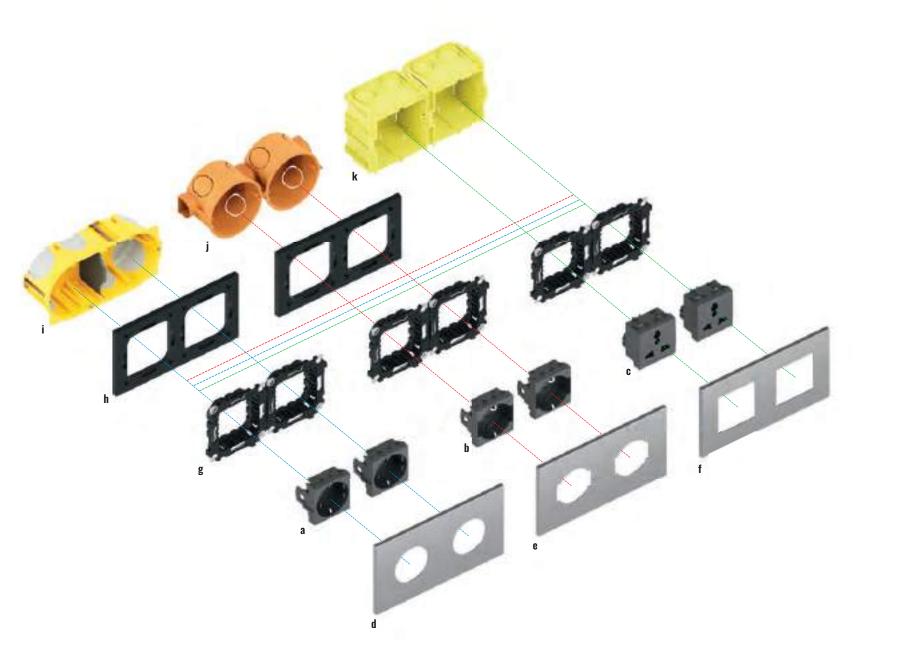

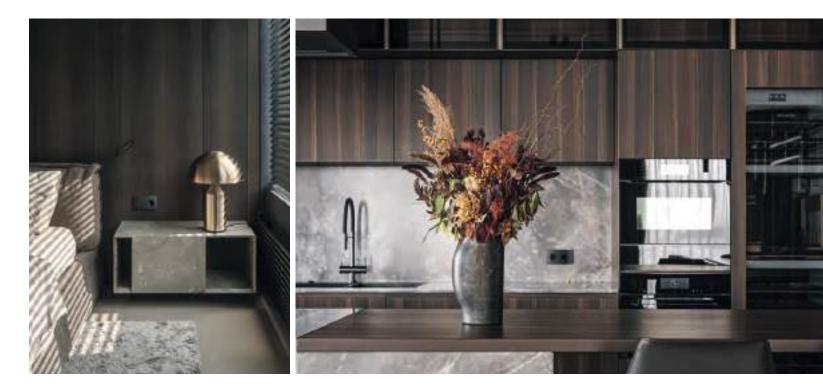

Every component in the Proxima series speaks a modern, intuitive language that can communicate with the most advanced home automation systems. Available in a range of colours and materials, from ultra-matt to metallic textures, Proxima fits like a tailor-made suit to the spirit of your home or your design vision.

Double installation

Code
EK-PWT-DE / EK-PWT-DE-S
EK-PWT-FR / EK-PWT-FR-S
EK-PWT-FR / EK-PWT-FR-S
EK-PWT-IT-U
EK-PWA-UN / EK-PWT-UK
EK-PWT
EK-P2A-TT

Description	Code
e) Proxima double rectangular magnetic plate	EK-P2A-UU
f) Proxima double rectangular magnetic plate*	EK-P2A-44
g) Square mounting bracket	EK-SMP-71-1
h) Bracket for compatibility with round flush-mounted boxes	EK-SMP-D-1
i) Double flush-mounted box for walls up to 35 mm	not supplied by Ekinex®
j) Double round flush-mounted box for masonry walls	not supplied by Ekinex®
k) Double square flush-mounted box for masonry walls	not supplied by Ekinex®
*) 45 x 45 mm window	



287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

Proxima series power sockets

WALL-MOUNT DEVICES

Proxima's wiring devices components represent technological evolution in high-end electrical installations. Designed to combine maximum functionality and aesthetic integration, Proxima stands out for its clean, geometric design and high-quality construction. The plates, made from selected materials, are designed to blend harmoniously into high-profile residential, office and hospitality environments.

The modularity of the system allows flexible installation on standard flush-mounted boxes (Italian, German, French, Israeli), ensuring compatibility and quick installation. The mechanisms are designed to offer reliable performance over time, with precise feedback on actuation and aesthetics coordinated with Ekinex home automation systems.

Available in different configurations, the Proxima series is designed to meet contemporary design requirements, with a particular focus on integration with KNX smart home systems, offering perfect aesthetic continuity between traditional devices and intelligent technologies.



The UNEL Proxima two-pin Schuko socket is a Type F+L (2P+T) socket designed to combine versatility and safety. Thanks to its compatibility with Schuko and Bipass UNEL plugs, it offers high flexibility of use. Manufactured in anthracite grey (RAL 7016), it fits perfectly to modern and refined environments. Installation is carried out in combination with the Proxima EK-PQA-... series plates, ensuring a perfect balance between design and functionality.

Type

power socket

Main features

Order information

Code

EK-PWT-IT-U

- Connection of domestic consumers with AC voltage up to 250 V $^{\rm \sim}$
- Blanking plug for contact protection
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm².

Accessories

• The following accessories are available for completion and must be ordered separately:


Italian power socket

Proxima series

WALL-MOUNT DEVICES

- Magnetic square plate EK-PQA-U-...
- Holder EK-SMP-71-1
- Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility))

Dimensions [mm]



For more information see the technical documentation, download from www.ekinex.com



Schuko power socket **Proxima series**

WALL-MOUNT DEVICES



Description

The EK-PWT-DE P30 Schuko socket is a 16A, 2-pin + earth (2P+E) German Type F socket (with screw terminals), designed for functionality and safety. Manufactured in anthracite grey (RAL 7016), it integrates perfectly into modern environments. The compact 2-module format makes it suitable for installation in combination with Proxima series plates EK-PQA-...

Main features


Order information

- Connection of domestic consumers with AC voltage up to 250 V ~
- Blanking plug for contact protection
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm².

Accessories

- The following accessories are available for completion and must be ordered separately:
- Magnetic square plate EK-PQA-T-...
- Holder EK-SMP-71-1
- Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility)

Dimensions [mm]





Description

The EK-PWT-DE Schuko P30 is a 16A, 2-pole + earth (2P+E) German F-type socket (with spring-loaded terminals), designed for functionality and safety. Manufactured in anthracite grey (RAL 7016), it blends in perfectly with modern environments. Its compact 2-module format means it can be installed in combination with Proxima series panels EK-PQA-....

Main features

- Connection of domestic consumers with AC voltage up to 250 V \sim
- Blanking plug for contact protection
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm².

Order information	
Code	Туре
EK-PWT-DE-S	power socket with spring



Description

The Proxima French socket is a 16A, 2-pole + earth (2P+E) Type E socket (with screw terminals), designed for functionality and safety. Manufactured in anthracite grey (RAL 7016), it integrates perfectly into modern environments. The compact 2-module format makes it suitable for installation in combination with Proxima series plates EK-PQA-....

Main features

- Connection of domestic consumers with AC voltage up to 250 V \sim
- Blanking plug for contact protection
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm².

Order information Code Туре EK-PWT-FR power socke

Туре	J	
power socket with spring-loaded terminals		

Code

EK-PWT-DE

For more information see the technical documentation download from www.ekinex.com



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General inc


Schuko power socket with spring-loaded terminals Proxima series

WALL-MOUNT DEVICES

Accessories

- The following accessories are available for completion and must be ordered separately:
- Magnetic square plate EK-PQA-T-...
- Holder EK-SMP-71-1
- Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility)

Dimensions [mm]



ig-loaded terminals

For more information see the technical documentation, download from www.ekinex.com




French power socket **Proxima series**

WALL-MOUNT DEVICES

Accessories

- The following accessories are available for completion and must be ordered separately:
- Magnetic square plate EK-PQA-T-...
- Holder EK-SMP-71-1
- Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility)

Dimensions [mm]







French power socket with spring-loaded terminals Proxima series

WALL-MOUNT DEVICES

Description

The Proxima French socket is a 16A, 2-pole + earth (2P+E) Type E socket (with spring terminals), designed for functionality and safety. Manufactured in anthracite grey (RAL 7016), it integrates perfectly into modern environments. The compact 2-module format makes it suitable for installation in combination with Proxima series plates EK-PQA-....


Main features

- Connection of domestic consumers with AC voltage up to 250 V ~
- Blanking plug for contact protection
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm².

Accessories

- The following accessories are available for completion and must be ordered separately:
- Magnetic square plate EK-PQA-T-...
- Holder EK-SMP-71-1
- Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility)

Dimensions [mm]



Order information		
Code	Туре	
EK-PWT-FR-S	power socket with spring-loaded terminals	



For more information see the technical documentation, download from www.ekinex.com



Israeli power socket **Proxima series**

WALL-MOUNT DEVICES



Description

The Proxima Israeli socket is a 16A, pole + earth (P+T) Type H socket, designed for functionality and safety. Manufactured in anthracite grey (RAL 7016), it integrates perfectly into modern environments. The compact 2-module format makes it suitable for installation in combination with Proxima series plates EK-POA-....


Main features

- Connection of domestic consumers with AC voltage up to 250 V \sim
- Blanking plug for contact protection
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm².

Accessories

- The following accessories are available for completion and must be ordered separately:
- Magnetic square plate EK-PQA-T-...
- Holder EK-SMP-71-1
- Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility)

Dimensions [mm]





Description

The Proxima EK-PWA-UK, in anthracite grey (RAL 7016), combines functionality and refined design. With a voltage of 230V~ and 1-module format, it fits discreetly into any environment, offering a practical and elegant solution.

Main features

- Connection of domestic consumers with AC voltage up to 250 V ~
- Blanking plug for contact protection
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm².

Order information	
Code	Туре
EK-PWT-UK	power socket



Description

The Proxima EK-PWA-UN multi-standard socket outlet in anthracite grey (RAL 7016) combines functionality and refined design. With a voltage of 230V~ and consisting of 2 modules, it fits discreetly into any environment, offering a practical and elegant solution.

Main features

- Connection of domestic consumers with AC voltage up to 250 V \sim
- Blanking plug for contact protection
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm².

Code	Туре
EK-PWT-IL	power socket

For more information see the technical documentation download from www.ekinex.com



Order information	
Code	Туре
EK-PWA-UN	power socket

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index


UK power socket Proxima series

WALL-MOUNT DEVICES

Accessories

- The following accessories are available for completion and must be ordered separately:
- Magnetic square plate EK-PQA-P-...
- Holder EK-SMP-71-1
- Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility)

Dimensions [mm]



For more information see the technical documentation, download from www.ekinex.com




Multistandard power socket **Proxima series**

WALL-MOUNT DEVICES

Accessories

- The following accessories are available for completion and must be ordered separately:
- Magnetic square plate EK-PQA-P-...
- Holder EK-SMP-71-1
- Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility)

Dimensions [mm]







Wiring devices modules for square plates (45x45 mm window) Proxima series

The following accessories are available for completion and must be ordered

• Modules and components of the wiring devices to choose from: EK-PWT-IT-B,

• Optional: Mounting accessory EK-SMP-Q-1 (check flush-box compatibility)

WALL-MOUNT DEVICES

Description

The Proxima wiring devices modules for square plates with 45x45 mm window offer a combination of functionality and refined design, discreetly adapting to any environment. These modules are designed for the connection of domestic appliances with AC voltage up to 250 V~ and are equipped with shutter contact protection. They are mounted on a round or square wall box, with screw terminals for cables with a cross-section of up to 2.5 mm².


Main features

- Connection of domestic consumers with AC voltage up to 250 V $^{\rm \sim}$
- Contact protection via shutter
- Mounting on round or square wall box
- Screw terminals for cable cross-sections up to 2.5 mm²

Type of wiring devices modules



EK-PWT-IT-B



EK-PWA-CF





Accessories

separately:

• Square magnetic plate EK-PQA-P-...

Mounting Bracket EK-SMP-71-1

EK-PWA-RZ, EK-PWA-SN, EK-PWA-CF, EK-PWT-...




EK-PWT-IT-U

EK-PWA-UN





EK-PWT-DE-S



EK-PWA-RZ

EK-PWT-FR



EK-PWA-SN



EK-PWT-IL



EK-PWA-UK

EK-PWT-DE

Arder info


or dor information			
Code	Туре	Code	Туре
EK-PWA-CF	1M hole cover plug	EK-PWT-DE	Schuko socket
EK-PWT-IT-B	Bypass socket	EK-PWT-DE-S	Schuko socket with spring-loaded terminals
EK-PWA-RZ	230V buzzer	EK-PWT-FR	French socket
EK-PWA-SN	230V bell	EK-PWT-FR-S	French socket with spring-loaded terminals
EK-PWT-BG	Button puller	EK-PWT-UN	Multi-standard socket
EK-PWT-IL	lsraeli socket	EK-PWT-UK	UK socket
EK-PWT-IT-U	UNEL socket	EK-PWI-MG	Magnetic circuit breaker

For more information see the technical documentation, download from www.ekinex.com







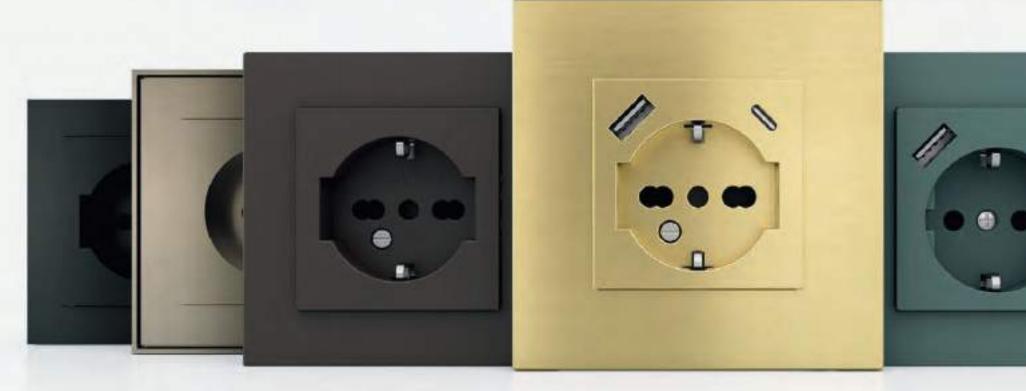


Power socket (standard and USB A-C) WALL-MOUNT DEVICES

The new Ekinex standard sockets are available in a dual-step version with and without USB, bringing them in line with the latest charging standards with A and C ports and a maximum of 3.5A.

Available colour solutions

	Farm	Flank	(M.F.	Deen	Curfood	handoud	
	Form	Flank	'NF	Deep	Surface	standard	USB A/C
	Fra	mes		Plates		Front	cover*
Raw plastic	-	-	-	-	-	•	•
Plastic	•	•	•	•	-	•	•
Metal	•	•	•	•	•	•	•
Metal HT	-	_	-	•	•	•	•
Fenix NTM®	-	-	•	•	•	•	•

* The metal or Fenix NTM® colour effect is achieved by painting For more information see page 248



98 x 98 x 3 mm

FORM

FLANK

'NF


DEEP


DIN-Kall mount modules Visualisation Audi	D MUITIROOM IP DOOL HUUUE TILLI IN TOOIS SAIES K	It IECHNICAL SECTION GENERAL TERMS OF SAIE GENERAL INDEX
	•	
2		
55 x 55 mm	55 x 55 mm	
3 mm	151 x 80 x 8 mm	
55 x 55 mm	55 x 55 mm 55 x 55 mm	55 x 55 mm 55 x 55 mm
9 mm	158 x 87 x 9 mm	229 x 87 x 9 mm

168 x 98 x 3 mm

55 x 55 mm



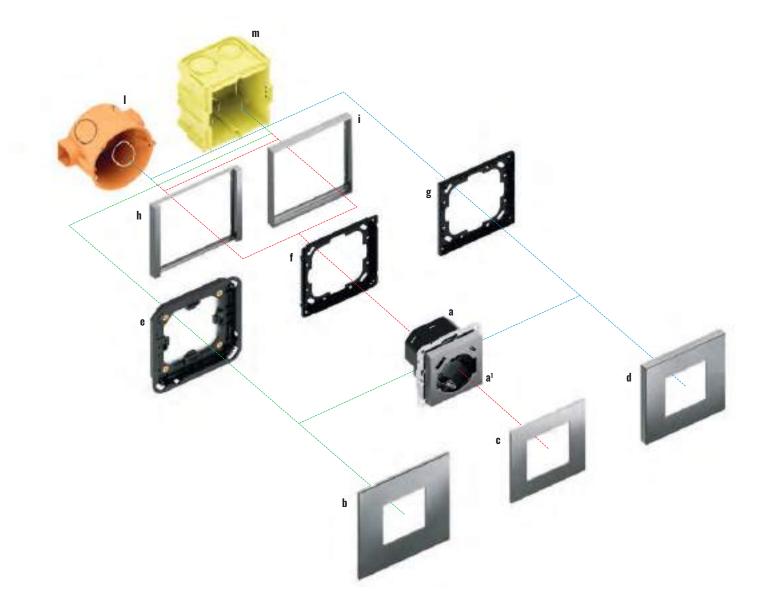

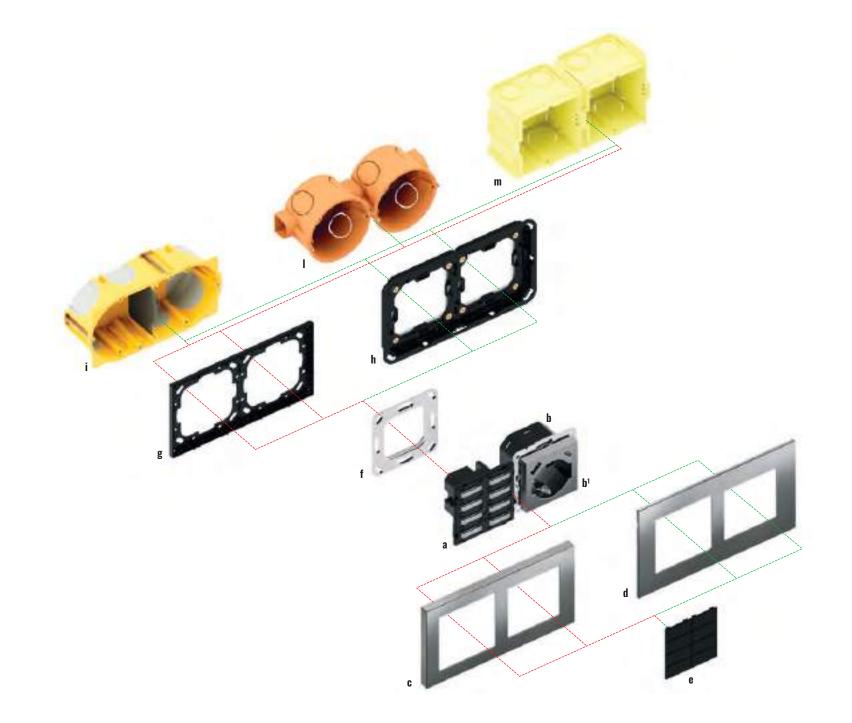

Single installation

Description	Code
	EK-PWS-IT or EK-PWS-IT-USB
a) Dowor coolect (window EE v EE mm)	EK-PWS-DE or EK-PWS-DE-USB
a) Power socket (window 55 x 55 mm)	EK-PWS-FR or EK-PWS-FR-USB
	EK-PWS-UK or EK-PWS-UK-USB
	EK-PSC-IT or EK-PSC-IT-USB
al) Front course	EK-PSC-DE or EK-PSC-DE-USB
a1) Front cover	EK-PSC-FR or EK-PSC-FR-USB
	EK-PWS-UK or EK-PWS-UK-USB
b) Surface square plate*	EK-SQG
c) Square plate*	EK-PQG

Description	Code
d) Deep square plate*	EK-DQG
e) Adapter for square Surface plate	EK-TAS-Q-W or EK-TAS-Q-N
f) Adapter for square plate Form or Flank frames	EK-TAQE-1
g) Adapter for square plate 'NF and Deep version	EK-TAQE-1-NF
h) Square frame of Flank version	EK-FLQ
i) Square frame of Form version	EK-FOQ
I) Round built-in box	not delivered by $Ekinex^{\circledast}$
m) Square built-in box	not delivered by Ekinex®
*) 55 x 55 mm window	

Double installation with centre distance 71 mm (20venti series)


Description	Code
a) Pushbutton 20venti series	EK-E2E-TP
	EK-PWS-IT or EK-PWS-IT-USB
b) Power socket (window 55 x 55 mm)	EK-PWS-DE or EK-PWS-DE-USB
D) I OWEI SOCKEL (WINDOW JJ X JJ IIIII)	EK-PWS-FR or EK-PWS-FR-USB
	EK-PWS-UK or EK-PWS-UK-USB
	EK-PSC-IT or EK-PSC-IT-USB
b1) Front cover	EK-PSC-DE or EK-PSC-DE-USB
b1) Front cover	EK-PSC-FR or EK-PSC-FR-USB
	EK-PWS-UK or EK-PWS-UK-USB
c) Deep double plate*	EK-D2G

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Description	Code
d) Surface double plate*	EK-S2G
e) Horizontal rectangular keys (8)	EK-T4R-20
f) Metal mounting support	EK-SMQ-71-1
g) Double adapter for frame-free installation	EK-A71E-1-NF
h) Double adapter for Surface double plate	EK-TAS-D-W or EK-TAS-D-N
i) Double box for walls up to 35 mm	not delivered by $Ekinex^{\texttt{B}}$
I) Single boxes for masonry walls	not delivered by $Ekinex^\circledast$
m) Single boxes for masonry walls	not delivered by $Ekinex^{\mathbb{B}}$
*) 60 x 60 mm + 55 x 55 mm window	





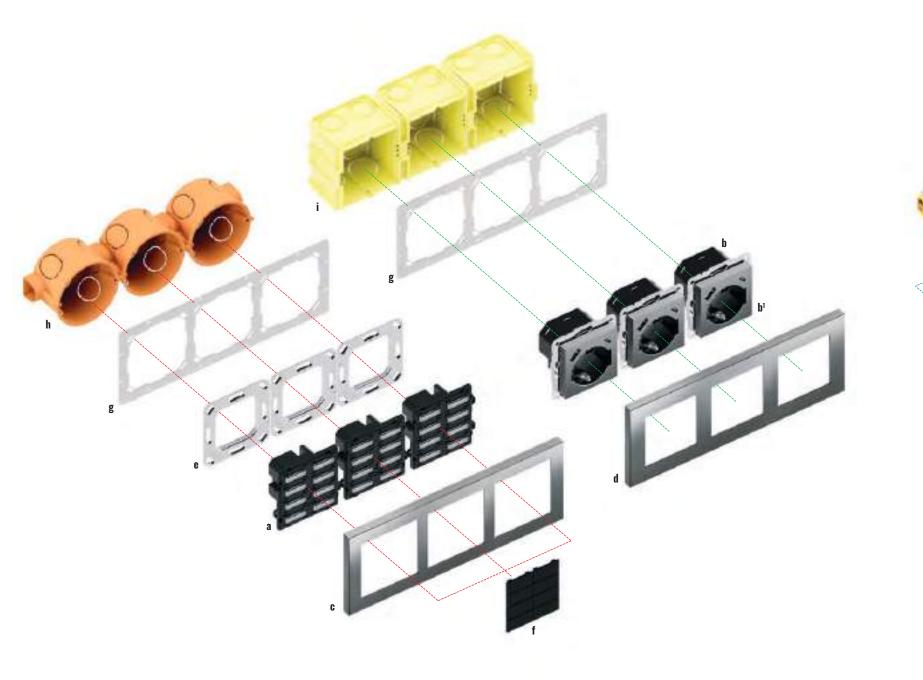

Double installation with centre distance 71 mm (71 series)

Description	Code
a) Pushbutton 71 series	EK-E13-TP o EK-E23-TP-
	EK-PWS-IT or EK-PWS-IT-L
b) Dower coolect (window EE v EE mm)	EK-PWS-DE or EK-PWS-DE
b) Power socket (window 55 x 55 mm)	EK-PWS-FR or EK-PWS-FR-
	EK-PWS-UK or EK-PWS-UK
	EK-PSC-IT or EK-PSC-IT-US
h1) Erent oover	EK-PSC-DE or EK-PSC-DE-L
b1) Front cover	EK-PSC-FR or EK-PSC-FR-L
	EK-PWS-UK or EK-PWS-UK
c) Deep double plate	EK-D2G
d) Double plate	EK-P2G
e) Surface double plate	EK-S2G
g) Rectangular vertical rockers (2)	EK-T2R

Triple installation with centre distance 71 mm (20venti series)

Description	Code			
a) Pushbutton 20venti series	ЕК-Е2Е-ТР			
	EK-PWS-IT or EK-PWS-IT-USB			
b) Dawar applicit (window EE v EE mm)	EK-PWS-DE or EK-PWS-DE-USB			
b) Power socket (window 55 x 55 mm)	EK-PWS-FR or EK-PWS-FR-USB			
	EK-PWS-UK or EK-PWS-UK-USB			
	EK-PSC-IT or EK-PSC-IT-USB			
b1) Front cover	EK-PSC-DE or EK-PSC-DE-USB			
	EK-PSC-FR or EK-PSC-FR-USB			
	EK-PWS-UK or EK-PWS-UK-USB			

Description	Code
c) Deep triple plate*	EK-D3S
d) Deep triple plate**	EK-D3P
e) Metal mounting support	EK-SMQ-71-1
f) Horizontal rectangular keys (8)	EK-T4R-20
g) Triple plate adapter - Deep version	EK-B71-1-NF
h) Single boxes for masonry walls	not delivered by Ekinex®
*) 60 x 60 mm window **) 55 x 55 mm window	


287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
	1	1					1 1		
		10	1						
	-								
B-6 8	1								
	100								
A.									
() t									
		1							
	100				-	2			
		q _		. 9	0				
	1		-						
		6			\sim	,			
	-	2 B		10					
			-						
		00			2				
12							\sim		-
	1			b					
1	-		1	20		\rightarrow			
18		•	1	-					
		·		-					
· ·	-				b ¹				
					1	14			
			U ~	-					
	a	-				e e			
		100						1	
	/								
			a second				1		
1			d						
					1000		h		
	and the second								
				-		g			
and the second s				Santa					
				f					

USB
E-USB
e-USB
K-USB
SB
USB
USB
K-USB

C

Description	Code
h) Square rockers (4)	EK-T4Q
f) Square rocker (1)	EK-T1Q
i) Rectangular horizontal rockers (4)	EK-T4R
I) Metal mounting support	EK-SMQ-71-1
m) Double adapter for frame-free installation	EK-A71E-1-NF
n) Adapter for double plate with a Form or Flank frame	EK-A71E
o) Double adapter for Surface double plate	EK-TAS-D-W or EK-TAS-D-N
p) Flank version double frame	EK-FL2
q) Form version double frame	EK-F02
r) Double box for walls up to 35 mm	not delivered by Ekinex®
s) Single boxes for masonry walls	not delivered by Ekinex®
t) Single boxes for masonry walls	not delivered by Ekinex®
*) 60 x 60 mm + 55 x 55 mm window	



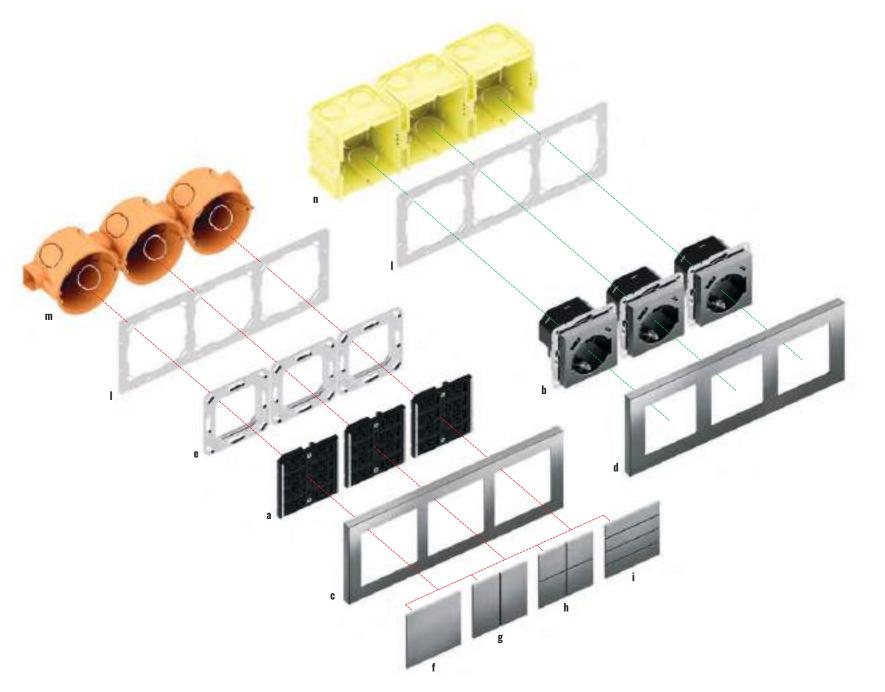





Ekinex has paid particular attention to this detail with a special painting process that allows the socket to be colour matched to the other wall elements in its range. The inclusion of a USB output responds to the increasingly pressing need to connect to numerous devices for home or work use.

Triple installation with centre distance 71 mm (71 series)

Description	Code				
a) Pushbutton 71 series	EK-E13-TP o EK-E23-TP				
b) Power socket (window 55 x 55 mm)	EK-PWS-IT or EK-PWS-IT-USB				
	EK-PWS-DE or EK-PWS-DE-USB				
	EK-PWS-FR or EK-PWS-FR-USB				
	EK-PWS-UK or EK-PWS-UK-USB				
	EK-PSC-IT or EK-PSC-IT-USB				
14) 5 1	EK-PSC-DE or EK-PSC-DE-USB				
b1) Front cover	EK-PSC-FR or EK-PSC-FR-USB				
	EK-PWS-UK or EK-PWS-UK-USB				
c) Deep triple plate 71 series	EK-D3S				

Description	Code
d) Deep triple plate 71 series	EK-D3P
e) Metal mounting support	EK-SMQ-71-1
f) Square rocker (1)	EK-T1Q
g) Rectangular vertical rockers (2)	EK-T2R
h) Square rockers (4)	EK-T4Q
) Rectangular horizontal rockers (4)	EK-T4R
) Triple plate adapter - Deep version*	EK-B71-1-NF
m) Single boxes for masonry walls	not delivered by $Ekinex^\circledast$
n) Single boxes for masonry walls	not delivered by $Ekinex^\circledast$
*) 60 x 60 mm window **) 55 x 55 mm window	



287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

Electrical and USB power sockets

WALL-MOUNT DEVICES

Essential: this is the most suitable adjective to describe the power socket. From the first one invented in America by Hubbel in 1904 to the German-made Schuko dated 1926, the socket has come down to us as the silent player in our electrical systems. Ekinex has given them a new lease of life with a colourful edition that matches keyboards and touch panels. The need to connect to the electricity network has increased in recent years; the list of devices that require a power supply is virtually endless. Ekinex power sockets come to your rescue with an extensive range for the Italian and international markets. Ekinex electric sockets are also equipped with USB type A and C ports and can be used to recharge all electronic devices in homes and offices. The many colours are in perfect family feeling with the FF, 71, 20venti and Signum series and can be combined with Fenix NTM®, metal, Metal HT and plastic finishes.





The Ekinex model EK-PWS-IT-USB and EK-PWS-IT universal Italian standard sockets are 2P+T 16 A universal type devices for wall installation, for 2P 2.5 A europlugs, 2P and 2P + E 10 A and 16 A Italian standard plugs, 2P+T 16 A German standard plugs, for powering household appliances. The EK-PWS-IT-USB model is equipped with a USB power unit, both type-A and type-C, for charging mobile phones and in general all electronic devices that can be recharged via USB sockets of the same type. Charging of two devices at the same time is allowed.

Main features

- Connection of home devices with AC 250 V ~ voltage
- Contacts protected by shutters
- Mounting on a round or square wall box
- Terminals for cables with section up to 2.5 mm²
- USB Type-A and Type-C ports for charging electronic devices such as smartphones, tablets, etc. (only for EK-PWS-IT-USB)

Technical data

- Max. rated input voltage: AC 250 V ~
- Max rated input current: 16 A
- Network frequency: 50/60 Hz
- USB output voltage (only for EK-PWS-IT-USB): DC 5 V
- USB output current (only for EK-PWS-IT-USB): 3.4 A
- Standby power (only for EK-PWS-IT-USB): ≤ 50mW
- Energy efficiency (only for EK-PWS-IT-USB): 83%
- Operating temperature: -10 ... +40 ° C (indoor use)
- Storage / transport temperature: -20 ... +50 ° C
- Protection degree : IP 20
- Safety class 2 (double insulation)
- Connection type: solid or stranded cable with 1.5 ... 2.5 mm² section
- Connection type: screw
- Mounting depth: min. 40 mm
- Plastic housing
- Dimensions: 70 x 70 x 44 mm (LxHxP)

Order information

Code	Туре	Code	Туре
EK-PWS-IT	power socket - italian	EK-PWS-IT-USB	power socket - italian USB
EK-PSC-IT	rough white cover	EK-PSC-IT-USB	rough white cover
EK-PSC-IT	painted cover	EK-PSC-IT-USB	painted cover

Delivery

A pair of screws for installation.

Accessories

The following accessories are available for completion and must be ordered separately:


Power socket and USB A-C


Italian version

WALL-MOUNT DEVICES

- square and double frame Form or Flank version
- square, double and triple plate with 55 x 55 mm window
- a plastic adapter

Dimensions [mm]





For more information see the technical documentation, lownload from **www.ekinex.com**

 $\bigcirc 0 \bigcirc \bigcirc$

θ





Description

The Ekinex model EK-PWS-DE-USB and EK-PWS-DE Schuko® sockets (German standard) are 2P + T 16 A type wall installation devices, for powering household appliances. The EK-PWS-DE-USB model is equipped with a USB power unit, both type-A and type-C, for charging mobile phones and in general all electronic devices that can be recharged via USB sockets of the same type. Charging of two devices at the same time is allowed.

Main features

- Connection of home devices with AC 250 V ~ voltage
- Contacts protected by shutters
- Mounting on a round or square wall box
- Terminals for cables with section up to 2.5 mm²
- USB Type-A and Type-C ports for charging electronic devices such as smartphones, tablets, etc. (only for EK-PWS-DE-USB)


Technical data

- Max. rated input voltage: AC 250 V ~
- Max rated input current: 16 A
- Network frequency: 50/60 Hz
- USB output voltage (only for EK-PWS-DE-USB): DC 5 V
- USB output current (only for EK-PWS-DE-USB): 3.4 A
- Standby power (only for EK-PWS-DE-USB): ≤ 50mW
- Energy efficiency (only for EK-PWS-DE-USB): 83%
- Operating temperature: -10 ... +40 ° C (indoor use)
- Storage / transport temperature: -20 ... +50 ° C
- Protection degree : IP 20
- Safety class 2 (double insulation)
- Connection type: solid or stranded cable with 1.5 ... 2.5 mm² section
- Connection type: screw
- Mounting depth: min. 40 mm
- Plastic housing
- Dimensions: 70 x 70 x 44 mm (LxHxP)
- Certifications: BS 1363 Pt 2: 2010

Order information

	Code	Туре	Code	Туре
	EK-PWS-DE	power socket - Schuko	EK-PWS-DE-USB	powe
	EK-PSC-DE	rough white cover	EK-PSC-DE-USB	rougl
	EK-PSC-DE	painted cover	EK-PSC-DE-USB	paint
1				

34.5 8.50



ekinex

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General inde



Power socket and USB A-C Schuko version

WALL-MOUNT DEVICES

Delivery


A pair of screws for installation.


Accessories

The following accessories are available for completion and must be ordered separately:

- square and double frame Form or Flank version
- square, double and triple plate with 55 x 55 mm window
- a plastic adapter

Dimensions [mm]





55.00 $\bigcirc \bigoplus \bigcirc$

er socket - Schuko USB gh white cover



For more information see the technical documentation, download from www.ekinex.com







Description The Ekinex EK-PWS-FR-USB and EK-PWS-FR French/Belgian standard sockets are E-type wall-mounted devices for supplying power to household appliances up to 16 A 250 V ~. The EK-PWS-FR-USB is equipped with a USB power supply unit, both type-A and type-C, for charging mobile phones and generally all electronic devices that can be charged via USB sockets of the same type. Charging of two devices at the same time is allowed.

Main features

- Connection of home devices with AC 250 V ~ voltage
- Contacts protected by shutters
- Mounting on a round or square wall box
- Terminals for cables with section up to 2.5 mm²
- USB Type-A and Type-C ports for charging electronic devices such as smartphones, tablets, etc. (only for EK-PWS-FR-USB)

Technical data

- Max. rated input voltage: AC 250 V ~
- Max rated input current: 16 A
- Network frequency: 50/60 Hz
- USB output voltage (only for EK-PWS-FR-USB): DC 5 V
- USB output current (only for EK-PWS-FR-USB): 3.4 A
- Standby power (only for EK-PWS-FR-USB): ≤ 50mW
- Energy efficiency (only for EK-PWS-FR-USB): 83%
- Operating temperature: -10 ... +40 ° C (indoor use)
- Storage / transport temperature: -20 ... +50 ° C
- Protection degree : IP 20
- Safety class 2 (double insulation)
- Connection type: solid or stranded cable with 1.5 ... 2.5 mm² section
- Connection type: screw
- Mounting depth: min. 40 mm
- Plastic housing
- Dimensions: 70 x 70 x 44 mm (LxHxP)

Power socket and USB A-C **French version** WALL-MOUNT DEVICES

Delivery


A pair of screws for installation.

Accessories

The following accessories are available for completion and must be ordered separately:

- square and double frame Form or Flank version
- square, double and triple plate with 55 x 55 mm window
- a plastic adapter

Dimensions [mm]



Order informati

Code	Туре	Code	Туре
EK-PWS-FR	power socket - french	EK-PWS-FR-USB	power socket - french USB
EK-PSC-FR	rough white cover	EK-PSC-FR-USB	rough white cover
EK-PSC-FR	painted cover	EK-PSC-FR-USB	painted cover

For more information see the technical documentation, lownload from **www.ekinex.com**





Description

The Ekinex EK-PWS-UK-USB and EK-PWS-UK model UK (British standard) sockets are G-type 13 A wall-mounted devices for supplying power to household appliances. The EK-PWS-UK-USB is equipped with a USB power supply unit, both type A and type C (Fast charge), for charging mobile phones and in general all electronic devices that can be charged via USB sockets. Charging of two devices at the same time is allowed. The EK-PWS-UK is equipped with a double-pole switch for electrical disconnection.

Main features

- Connection of home devices with AC 250 V ~ voltage
- Contacts protected by shutters
- Mounting on a round or square wall box
- Terminals for cables with section up to 2.5 mm²
- USB Type-A and Type-C ports for charging electronic devices such as smartphones, tablets, etc. (only for EK-PWS-UK-USB)

Technical data

- Max. rated voltage: AC 250 V ~
- Max. rated current: 13 A
- Mains frequency: 50/60 Hz
- USB output voltage (only for EK-PWS-UK-USB) DC 5 V
- USB output current (EK-PWS-UK-USB only): 4 A (Fast charge)
- Standby power (EK-PWS-UK-USB only): ≤ 50mW
- Switch (EK-PWS-UK only): double pole
- Ambient temperature: -10... +40 °C (indoor use)
- Storage / transport temperature -20... +50 °C
- Degree of protection: IP 20
- Safety class 2 (double insulation)
- Type of connection: rigid or flexible cable with 1.5... 2.5 mm²
- Type of connection: screw
- Mounting depth: min. 40 mm
- Plastic cover
- Dimensions: 70 x 70 x 44 mm (WxHxD)
- Certifications: BS 1363 Pt 2: 2010

Order information Turne

	Code	Туре	Code	Туре
	EK-PWS-UK	power socket - UK	EK-PWS-DE-USB	powe
	EK-PSC-UK	rough white cover	EK-PSC-DE-USB	roug
	EK-PSC-UK	painted cover	EK-PSC-DE-USB	paint
1				

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General ind



Power socket and USB A-C UK version WALL-MOUNT DEVICES

Delivery

A pair of screws for installation.

Accessories

The following accessories are available for completion and must be ordered separately:

- square and double frame Form or Flank version
- square, double and triple plate with 55 x 55 mm window
- a plastic adapter

Dimensions [mm]







wer socket - UK USB

gh white cover

nted cover



55.00



For more information see the technical documentation, download from www.ekinex.com



Waterproof cover IP65

WALL-MOUNT DEVICES

Thanks to its robust structure and high-quality materials, the IP65 waterproof cover guarantees resistance to atmospheric agents without sacrificing the sophisticated design that distinguishes Ekinex products.

Available colour solutions

	Waterproof cover IP65	Standard	USB A/C	20venti series*	71 series
	Plate	Front soc	ket cover*	Rock	ers
Raw plastic	-	•	•	-	-
Plastic	-	•	•	•	•
Metal	•	•	•	•	•
Metal HT	•	•	•	•	•
Fenix NTM®	•	•	•	•	•

* The metal or Fenix NTM® colour effect is achieved by painting For more information see page 248

20VENTI Series



WPC + 20VENTI SERIES Push-buttons - 8 ROCKERS

71 SERIES

POWER



WPC + 71 SERIES Push-buttons - 1 SQUARE ROCKER





WPC - IT SOCKET

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



WPC + 71 SERIES Push-buttons - 2 VERTICAL ROCKERS



WPC - SCHUKO SOCKET





WPC - FR SOCKET




WPC + 71 SERIES Push-buttons - 4 SQUARE ROCKERS WPC + 71 SERIES Push-buttons - 4 HORIZONTAL ROCKERS



WPC - UK SOCKET





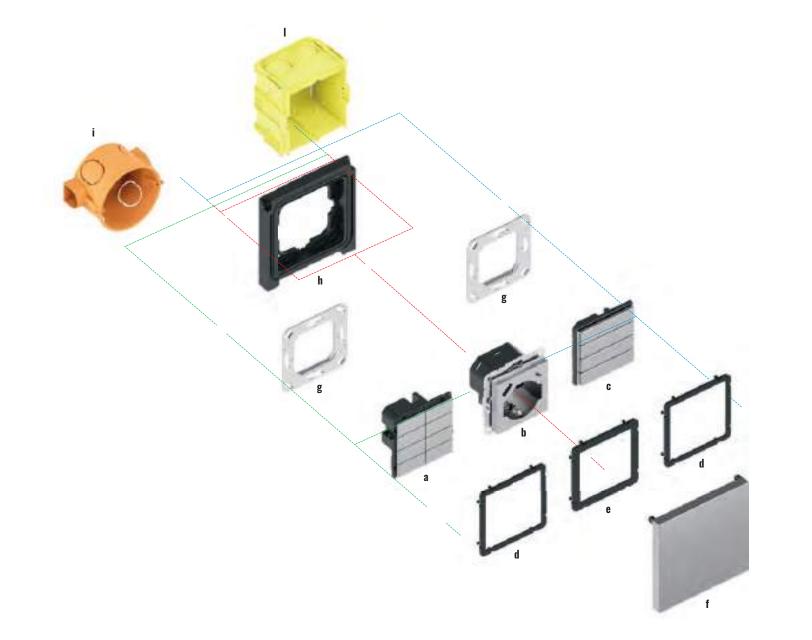

Single installation

Description	Code
a) 20venti series push-button (8 rockers)	EK-E2E-TP-8
a) Power socket (55 x 55 mm module)	EK-PWS o EK-PWSUSB
a) 71 series push-button	EK-E13-TP
d) Adapter for 20venti and 71 series push-buttons	EK-A60-B
e) Adapter for power and USB A-C socket	EK-A55-B
f) Square waterproof cover plate	EK-DQW
g) Square mounting bracket	EK-SMQ-71-1
h) Waterproof cover	EK-AWC-IP-B
i) Round flush-mounted box	not supplied by $Ekinex^{\circledast}$
I) Square flush-mounted box	not supplied by Ekinex®



Imagine an object capable of withstanding the elements with elegance, discreetly and stylishly protecting the most delicate elements of your smart home. The new IP65 Waterproof Cover from Ekinex is just that: a flawless fusion of refined aesthetics and advanced functionality.



287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

Waterproof cover IP65

WALL-MOUNT DEVICES

Thanks to its robust structure and high-quality materials, the waterproof cover guarantees resistance to atmospheric agents without sacrificing the sophisticated design that distinguishes Ekinex products. It offers IP65 protection, making it ideal for outdoor applications and industrial or residential environments with high safety requirements. Perfect for those looking for a reliable, functional and aesthetically flawless solution, the waterproof cover is the perfect combination of protection, innovation and style.



Thanks to its robust structure and high-quality materials, the waterproof cover guarantees resistance to atmospheric agents without sacrificing the sophisticated design that distinguishes Ekinex products. It offers IP65 protection, making it ideal for outdoor applications and industrial or residential environments with high safety requirements. Perfect for those looking for a reliable, functional and aesthetically flawless solution, the waterproof cover is the perfect combination of protection, innovation and style.

IP waterproof certifications

- Standard: IEC 60529
- Function: Protection against foreign bodies (solids and liquids)
- Abbreviation 'IP' followed by two digits:
- First digit: Resistance to solids
- Second digit: Resistance to liquids

Main features

Ergonomic design

• Hinge opening system for practical and safe use, without compromising accessibility to the socket

Premium materials

• Robust structure with high-quality finishes for perfect integration into any architectural context.

Universal compatibility

• Suitable for Ekinex socket standards, ensuring aesthetic and functional continuity in advanced home automation projects.

Guaranteed protection

- Dust resistant (partial, not harmful)
- Resistant to direct water jets

Applications

- Outdoor areas: verandas, courtyards, marine areas
- Damp areas: saunas, bathrooms, swimming pools

Specific regulations

• Mandatory in Israel for electrical outlets in bathrooms

Accessories


The following devices are available separately to complete the system:

Waterproof cover IP65

WALL-MOUNT DEVICES

power and USB A-C sockets

• power and USB A-C sockets

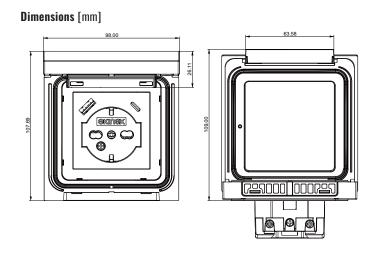

Order informatio

Code	Туре
EK-AWC-IP-B	waterproof cover IP65
EK-DQW	painted metal plate
EK-K55-B	adapter frame (power and USB A-C sockets)

For more information see the technical documentation download from www.ekinex.com





Description

Thanks to its robust structure and high-quality materials, the waterproof cover guarantees resistance to atmospheric agents without sacrificing the sophisticated design that distinguishes Ekinex products. It offers IP65 protection, making it ideal for outdoor applications and industrial or residential environments with high safety requirements. Perfect for those looking for a reliable, functional and aesthetically flawless solution, the waterproof cover is the perfect combination of protection, innovation and style.

IP waterproof certifications

- Standard: IEC 60529
- Function: Protection against foreign bodies (solids and liquids)
- Abbreviation 'IP' followed by two digits:
- First digit: Resistance to solids
- Second digit: Resistance to liquids

Main features

Ergonomic design

• Hinge opening system for practical and safe use, without compromising accessibility to the socket

Premium materials

• Robust structure with high-quality finishes for perfect integration into any architectural context.

Universal compatibility

 Suitable for Ekinex socket standards, ensuring aesthetic and functional continuity in advanced home automation projects.

Guaranteed protection

- Dust resistant (partial, not harmful)
- Resistant to direct water jets

Applications

- Outdoor areas: verandas, courtyards, marine areas
- Damp areas: saunas, bathrooms, swimming pools

Arder information

Code	Туре
EK-AWC-IP-B	waterproof cover IP65
EK-DQW	painted metal plate
ЕК-К6О-В	adapter frame (20venti series 8 rockers and 71 s
	EK-AWC-IP-B EK-DQW

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



Waterproof cover IP65 20venti and 71 series push-buttons

WALL-MOUNT DEVICES


Specific regulations

• Mandatory in Israel for electrical outlets in bathrooms

Accessories

- The following devices are available separately to complete the system:
- 20venti series push-button (8 rockers)
- 71 series push-button

Dimensions [mm]

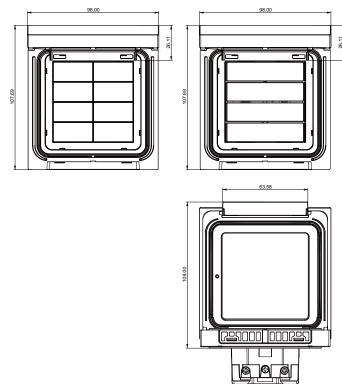







For more information see the technical documentation, download from www.ekinex.com







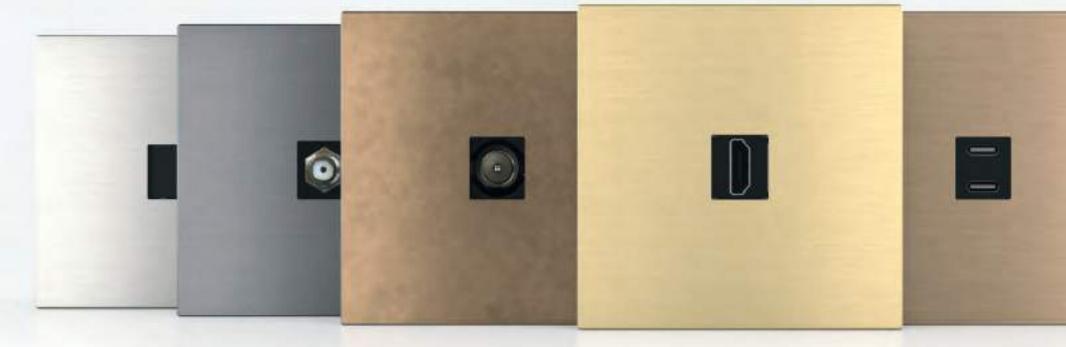

Keystone System Proxima series WALL-MOUNT DEVICES

The new Keystone modules in the Proxima series represent an advanced and versatile solution for integrating network, multimedia and antenna systems into KNX home automation systems. Designed with a modular layout and compatible with the Ekinex residential series, these modules offer simple installation and refined aesthetics.


Available finishes

	Proxima
	Plates
Metal	•
Metal HT	•

For more information see page 248

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
	-								
					Î.				
				ľ	Ł				
	_					-	_		



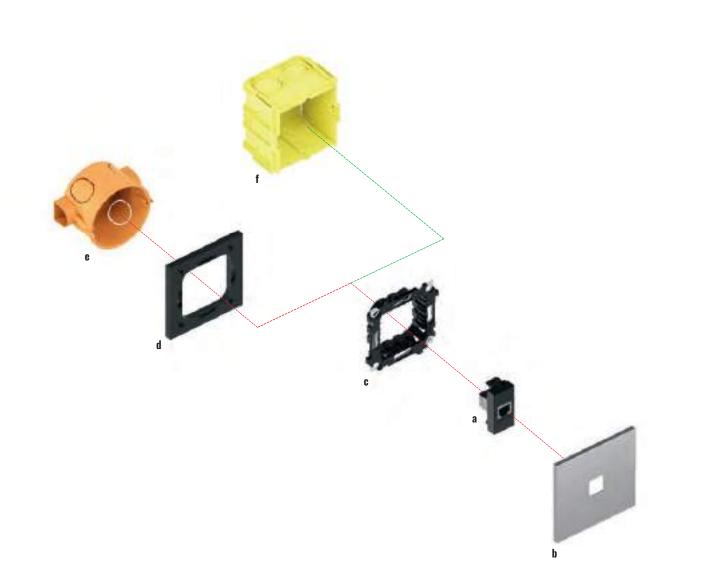



The Proxima Keystone holder is an element designed to hold Keystone plugs and ensures versatility and practical installations. It is manufactured in anthracite grey (RAL 7016) and blends perfectly into modern environments.

Keystone module types





EK-KSM-HDMI-BL

EK-KSM-TVF-BL

Single installation

Description	Code
	EK-KSM-HDMI
	EK-KSM-TVF
-) Koustana madula	EK-KSM-2USBC
a) Keystone module	EK-KSM-RJ45
	EK-KSM-TVM
	EK-KSM-PLUG

Description	Code
b) Proxima keystone square magnetic plate	EK-PQA-K
c) Square mounting bracket	EK-SMP-71-1
d) Bracket for compatibility with round flush-mount boxes	EK-SMP-Q-1
e) Round flush-mount box	not supplied by Ekinex®
f) Square flush-mount box	not supplied by Ekinex®

Code	Туре	Colour
EK-KSM-HDMI-WH	HDMI connector	white
EK-KSM-HDMI-BL	female/female	black
EK-KSM-TVF-WH	coaxial TV-SAT socket F	white
EK-KSM-TVF-BL	female connector	black
EK-KSM-2USBC	double USB-C socket*	black

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

Keystone System Proxima series

WALL-MOUNT DEVICES

Accessories

The following accessories are available as additions and must be ordered separately:

- Square magnetic plate EK-PQA-K-... or o EK-PQA-P-...
- Bracket EK-SMP-71-1
- Keystone accessories



EK-KSM-2USBC



EK-KSM-RJ45-BL



EK-KSM-PLUG-...



EK-KSM-PLUG-...

Code	Туре	Colour
EK-KSM-RJ45-WH	- RJ45 cat.6 UTP connector	white
EK-KSM-RJ45-BL		black
EK-KSM-TVM-WH	coaxial TV socket connector	white
EK-KSM-TVM-BL	IEC male	black
EK-KSM-PLUG	blanking plug	painted



cumentation

For more information see the technical documentation, download from www.ekinex.com






Keystone system WALL-MOUNT DEVICES

The Keystone system is a versatile modular connection system that can be used for numerous applications. Ekinex presents various modules such as HDMI cables, RJ45 8/8 sockets, SAT/Antenna, etc. that can solve any connection requirement.

Available colour solutions

	Form	Flank	'NF	Deep	Surface	Keystone system
	Fra	mes		Plates		Front cover*
Raw plastic	-	-	-	-		•
Plastic	•	•	•	•	_	•
Metal	•	•	•	•	•	•
Metal HT	-	-	-	•	•	•
Fenix NTM®	-	_	•	•	•	•

* The metal or Fenix NTM® colour effect is achieved by painting For more information see page 248




98 x 98 x 3 mm


'NF

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms o	of sale	475 General index
		-								
				100						
		5								
				1						
						_				
			-							
55 x 55 mm			55 x 55 mm							
8 mm	1	151 x 80 >	: 8 mm							
	12		-		1000	-	-			
55 x 55 mm			55 x 55 mm		55 x	55 mm	55 x 55 mm	55 x 55 mn	n	
9 mm		158 x 87 >	: 9 mm		1000		229 x 87 x 9 mm			
	F									
55 x 55 mm			55 x 55 mm							

168 x 98 x 3 mm



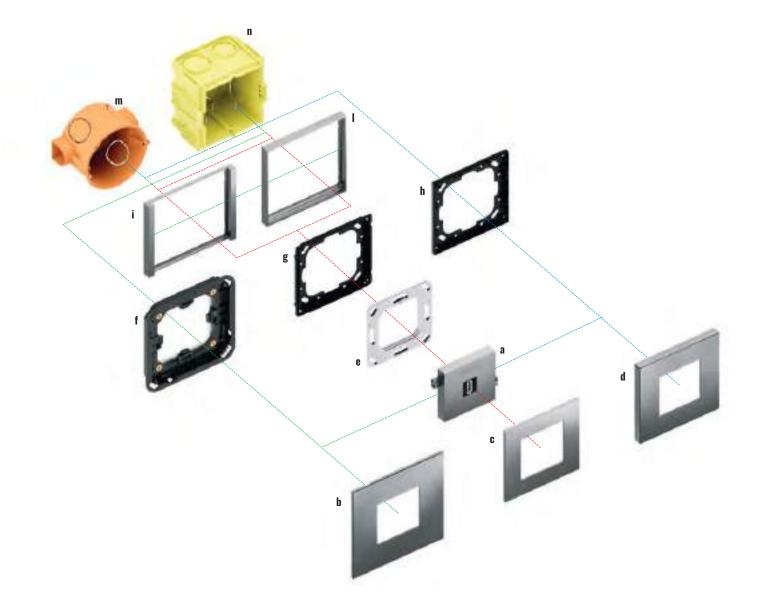

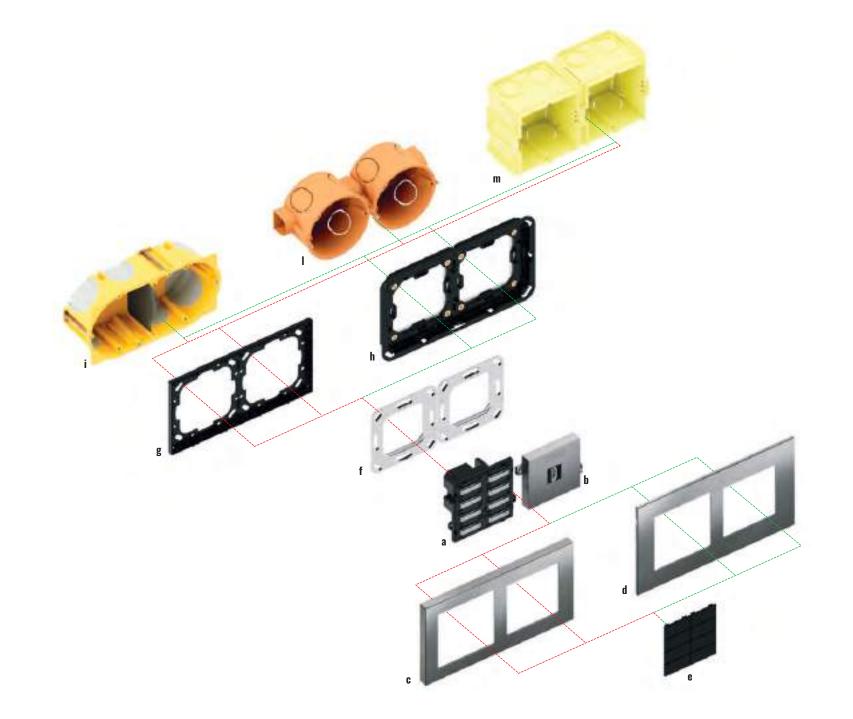

Single installation

Description	Code
a) Keystone system (55 x 55 mm module)	EK-KS
b) Surface square plate*	EK-SQG
c) Square plate*	EK-PQG
d) Deep square plate*	EK-DQG
e) Metal mounting support	EK-SMQ-71-1
f) Adapter for square Surface plate	EK-TAS-Q-W or EK-TAS-Q-N
g) Adapter for square plate Form or Flank frames	EK-TAQE-1


Description	Code
;) Adapter for square plate 'NF and Deep version	EK-TAQ-NF
h) Square frame of Flank version	EK-FLQ
i) Square frame of Form version	EK-FOQ
) Round built-in box	not delivered by Ekinex®
m) Square built-in box	not delivered by Ekinex®
*) 55 x 55 mm window	

iesj

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Description	Code
g) Double adapter for frame-free installation	EK-A71E-1-NF
h) Double adapter for Surface double plate	EK-TAS-D-W or EK-TAS-D-N
i) Double box for walls up to 35 mm	not delivered by $Ekinex^{\mathbb{B}}$
I) Single boxes for masonry walls	not delivered by $Ekinex^{\circledast}$
m) Single boxes for masonry walls	not delivered by $Ekinex^{\mathbb{B}}$
*) 60 x 60 mm + 55 x 55 mm window	



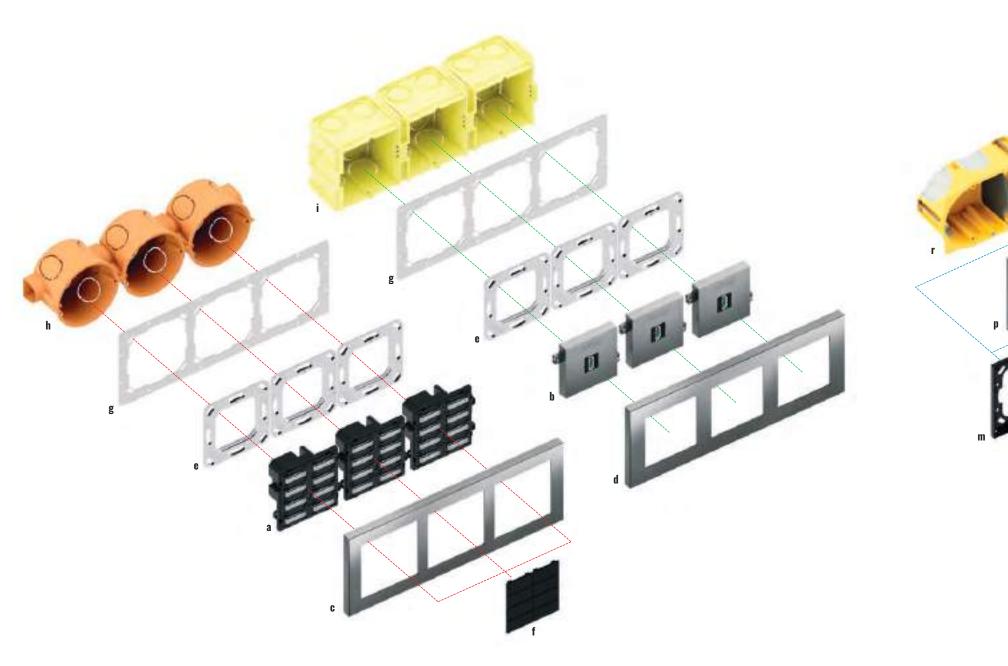

Triple installation with centre distance 71 mm (20venti series)

Description	Code
a) Pushbutton 20venti series	EK-E2E-TP
b) Keystone system (55 x 55 mm module)	EK-KS
c) Deep triple plate*	EK-D3S
d) Deep triple plate**	EK-D3P
e) Metal mounting support	EK-SMQ-71-1
f) Horizontal rectangular keys (8)	EK-T4R-20

Description	Code
g) Triple plate adapter - Deep version	EK-B71-1-NF
h) Single boxes for masonry walls	not delivered by Ekinex®
i) Single boxes for masonry walls	not delivered by Ekinex®
*) 60 x 60 mm window **) 55 x 55 mm window	


Double installation with centre distance 71 mm (71 series)							
Description	Code						
a) Pushbutton 71 series	EK-E13-TP o EK-E23-T						
b) Keystone system (55 x 55 mm module)	EK-KS						
c) Deep double plate	EK-D2G						
d) Double plate	EK-P2G						
e) Surface double plate	EK-S2G						
f) Square rocker (1)	EK-T1Q						
g) Rectangular vertical rockers (2)	EK-T2R						
h) Square rockers (4)	EK-T4Q						
i) Rectangular horizontal rockers (4)	EK-T4R						
I) Metal mounting support	EK-SMQ-71-1						

C

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
DIN-Rail mount modules	Visualisation		P Door Phone		Tools			General terms of sale	General index

Description	Code
m) Double adapter for frame-free installation	EK-A71E-1-NF
n) Adapter for double plate with a Form or Flank frame	EK-A71E
o) Double adapter for Surface double plate	EK-TAS-D
p) Flank version double frame	EK-FL2
q) Form version double frame	EK-F02
r) Double box for walls up to 35 mm	not delivered by Ekinex®
s) Single boxes for masonry walls	not delivered by Ekinex®
t) Single boxes for masonry walls	not delivered by Ekinex®
*) 60 x 60 mm + 55 x 55 mm window	



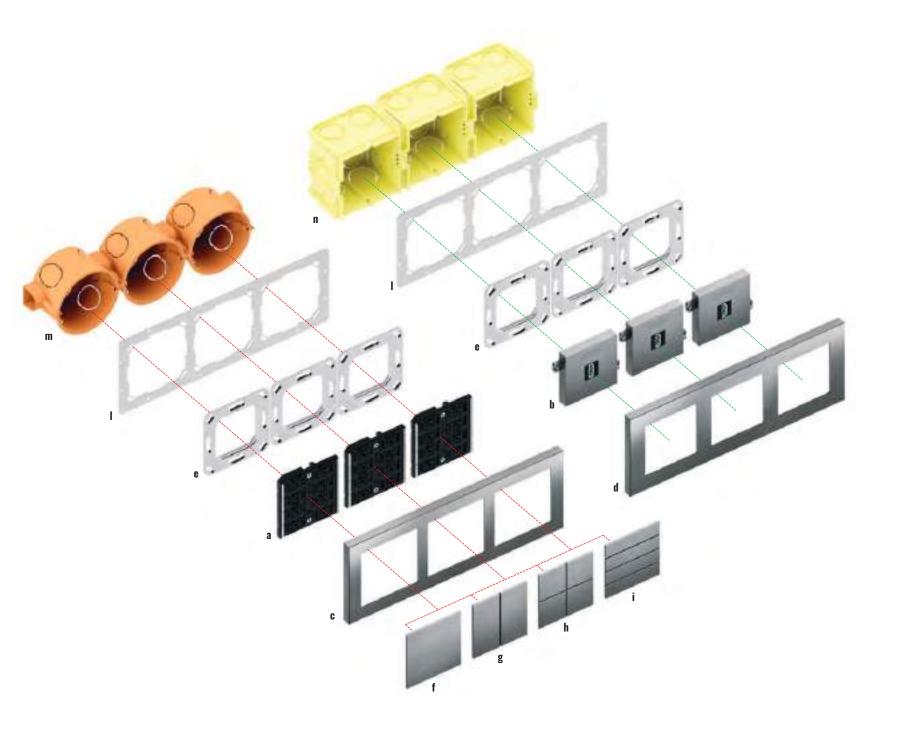



Keystone modules compatible with Ekinex wiring devices. Wide range of devices to integrate network systems, multimedia systems and antenna systems. The front covers can be declined in the various colours available, thanks to a special painting process that allows them to be chromatically matched to the other wall devices.

Triple installation with centre distance 71 mm (71 series)

Description	Code
a) Pushbutton 71 series	EK-E13-TP o EK-E23-TP
b) Keystone system (55 x 55 mm module)	EK-KS
c) Deep triple plate 71 series	EK-D3S
d) Deep triple plate 71 series	EK-D3P
e) Metal mounting support	EK-SMQ-71-1
f) Square rocker (1)	EK-T1Q
g) Rectangular vertical rockers (2)	EK-T2R

Description	Code
h) Square rockers (4)	EK-T4Q
i) Rectangular horizontal rockers (4)	EK-T4R
I) Triple plate adapter - Deep version*	EK-B71-1-NF
m) Single boxes for masonry walls	not delivered by Ekinex®
n) Single boxes for masonry walls	not delivered by Ekinex®
*) 60 x 60 mm window **) 55 x 55 mm window	




287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Keystone System

WALL-MOUNT DEVICES

Keystone modules are compatible with Ekinex wiring devices and offer the possibility of numerous customizations, able to meet the most different needs. A wide range of devices is available to integrate network, multimedia and antenna systems. The standard dimensions allow an easy installation. They are completed with a square, double or triple plate with window dimension 55 x 55 mm, able to accommodate one or more modules.

Covers are available in plastic material, in numerous color and finish variations. Plastic caps are available to cover unused spaces.



Keystone System WALL-MOUNT DEVICES

Description

Keystone modules compatible with Ekinex wiring devices. Wide range of devices to integrate network systems, multimedia systems and antenna systems.

Main features

- Usage: indoor
- IP Protection: IP20
- Material: Plastic

Technical data

- Dimensions (WxDxH): approx. 29.7 x 21.9 x 17.4 mm
- Operating temperature -10° to +60°.
- Packaging temperature -40° to +70° C
- Permissible humidity 10 to 90
- Certificates: CE & RoHS

Delivery

Two pair of screws for installation.

Accessories

The following accessories are available to complete and to be ordered separately:

- Square and double frame Form or Flank version
- Square, double and triple plate with 55 x 55 mm window
- a plastic adapter
- a metal support for installation onto round or square mounting box (fixing holes 60 mm apart)



HDMI (white or black colour)






SAT (white or black colour)

ETHERNET RJ45 (white or black colour)

ANTENNA (white or black colour)

Dimensions [mm]



Mounting with frame: 81 x 77 (L x H) Mounting without frame ('NF): 80 x 80 (L x H)

order information					
Code	Туре	Color	Code	Туре	Color
EK-KSC-1K	1 connector cover	Raw White	EK-KSC-1K	1 connector cover	Painted
EK-KSC-2K	2 connectors cover	Raw White	EK-KSC-2K	2 connectors cover	Painted
EK-KSM-HDMI-WH	HDMI female/female	White	EK-KSM-RJ45-WH	RJ45 connector cat.6	White
EK-KSM-HDMI-BL	connector	Black	EK-KSM-RJ45-BL	UTP	Black
EK-KSM-TVF-WH	TV-SAT coaxial socket	White	EK-KSM-TVM-WH	Coaxial TV socket IEC	White
EK-KSM-TVF-BL	F female connector	Black	EK-KSM-TVM-BL	male connector	Black
EK-KSM-PLUG-WH	Blind plug	White	EK-KSM-PLUG-BL	Blind plug	Black









Accessories

WALL-MOUNT DEVICES

Ekinex has developed a series of accessories for the mounting of its KNX wall and panel mounting products such as: frames, rockers and plates, adapter frames, mounting brackets, templates, bus cables and clamps.

Available colour solutions

	Form	Flank	'NF	Deep	Surface	Proxima	FF	71	20venti	Proxima
	Fra	mes		PI	ates			Ro	ckers	
Plastic	•	•	•	•	-	-	•	•	•	-
Metal	•	•	•	•	•	•	•	•	_	•
Metal HT	-	-	-	•	•	•	•	•	-	•
Fenix NTM®	-	-	•	•	•	-	•	•	-	-

For more information see page 248

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Rockers for pushbuttons Proxima series WALL-MOUNT DEVICES

Base-codes must be completed by adding extensions for material, colour and finishing



Description

Rockers for use as an actuation surface for the Proxima series pushbutton. Rockers are available in numerous colours and materials and are passive components.


Main features

- Metal alloy with metal finish or Metal HT
- Snap-on mounting on Proxima series Push-buttons

Order informatio

Code	Modularity Ø [mm]	For use with	Package
EK-TTP-1		pulsante 1 canali Series Proxima	1 pcs.
EK-TTP-2	round 11 mm	pulsante 2 canali Series Proxima	2 pcs.
EK-TTP-4		pulsante 4 canali Series Proxima	4 pcs.





(3 characters).

Order

Description

Rockers for use as operation surface for pushbuttons of 20venti series. Rockers are available in several colour and material variations and are passive components.

Versions

• rectangular with 30 x 15 mm modularity

Main features

- In plastic material
- Snap-on mounting
- Customizable with symbols and text backlit by RGB LED

Order information		
Code	Modularity * L x H [mm]	For use wi
EK-T4R-20	rectangular 30 x 15 symbol/text backlit RGB	
EK-T4R-20-MA09	rectangular 30 x 15 status led backlit RGB	- pushbutton
EK-T2B-20	rectangular 30 x 15 for adjustments RGB	series
EK-T8R-20-TR	rectangular 30 x 15 transparent	-

*) The modularity indicated also takes into account the distance between the rockers and between rockers and light-guides and, therefore, differs slightly from the actual size of the single rockers





287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index




Rockers for pushbuttons 20venti series WALL-MOUNT DEVICES

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters) plus symbols and text (3 characters).

Dimensions [mm]

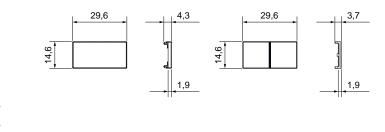

Package with 4 pcs. n 20venti 1 pcs.

8 pcs.



Rockers for 4-fold pushbuttons FF series WALL-MOUNT DEVICES



Description

Rockers for use as operation surface for 4-fold pushbuttons of FF series. They can perform two independent functions by acting on either its upper or lower zones (square and vertical rectangular versions) or on either its left or right zones (horizontal rectangular versions). Rockers are available in several colour and material variations and are passive components.

Versions

- square with 40 x 40 mm modularity
- horizontal rectangular with 80 x 20 mm modularity
- vertical rectangular with 40 x 80 mm modularity

Order information

Code	Modularity * L x H [mm]	For use with **	Package
EK-TQQ	square 40 x 40		4 pcs.
EK-TRV	vertical rectangular 40 x 80	4-fold pushbutton FF series	2 pcs.
EK-TRO	horizontal rectangular 80 x 20	-	4 pcs.

*) The modularity indicated also takes into account the distance between the rockers and between rockers and light guides and, therefore, differs slightly from the actual size of the single rockers **) The actual functioning as pushbutton with 2 or 4 channels depends on the configuration of the device parameters carried out with ETS



Main features

- In plastic material, aluminium, Metal HT or Fenix NTM®
- Snap-on mounting
- Customizable with symbols and text


Delivery

Delivery includes a tool for rockers removal.

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters) plus symbols and text (3 characters).

Dimensions [mm]





Description

Rockers for use as operation surface for 6-fold pushbuttons and Touch&See with 2-fold pushbutton of FF series. They can perform two independent functions by pressing on either its upper or lower zones. Rockers are available in several colour and material variations and are passive components.

Versions

• square with 40 x 40 mm modularity

Main features

- In plastic material, aluminium, Metal HT or Fenix NTM®
- Snap-on mounting
- Customizable with symbols and text

Order informatio

Code

Code	Modularity [mm]	For use with	
εν τοο	square 40 x 40 –	6-fold pushbutton of FF series	
EK-TQQ	Square 40 x 40 -	Touch&See of FF series	



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Rockers for 6-fold pushbuttons and Touch&See FF series

WALL-MOUNT DEVICES (PHASE OUT)


Delivery

Delivery includes a tool for rockers removal.

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters) plus symbols and text (3 characters).

Dimensions [mm]



Package 4 pcs.



Set rockers for use as operation surface for room thermostats of FF series. They can perform two independent functions by acting on either its upper or lower zones. Rockers are available in several colour and material variations and are passive components.

Versions

• square with 40 x 40 mm modularity

Main features

- In plastic material, aluminium, Metal HT or Fenix NTM®
- Snap-on mounting

Order information

EK-TQQ-...-EP2

Code

• Customized with symbols for room thermostat functions

square 40 x 40

Modularity [mm] For use with

room thermostats of FF series

39,5

Set 2 rockers for room thermostats FF series

WALL-MOUNT DEVICES

Delivery Delivery includes a tool for rockers removal.


Order

Package.

2 pcs.

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]







Description

Rockers for use as operation surface for pushbuttons of 71 series. They can perform two independent functions by acting on either its upper or lower zones (square and vertical rectangular versions) or on either its left or right zones (horizontal rectangular versions). Rockers are available in several colour and material variations and are passive components.

Versions

- square with 60 x 60 mm or 30 x 30 mm modularity
- rectangular with 30 x 60 mm or 60 x 15 mm modularity

Main features

- In plastic material, aluminium, Metal HT or Fenix NTM®
- Snap-on mounting
- Customizable with symbols and text

Order information

Code	Modularity * L x H [mm]	For use with **
EK-T1Q	square 60 x 60	
EK-T2R	vertical rectangular 30 x 60	
EK-T4Q	square 30 x 30	— pushbuttons of 71
EK-T4R	horizontal rectangular 60 x 15	

*) The modularity indicated also takes into account the distance between the rockers and between rockers and light-guides and, therefore, differs slightly from the actual size of the single rockers **) The actual functioning as pushbutton with 1, 2 or 4 channels depends on the configuration of the device parameters carried out with ETS





287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Rockers for 4-fold pushbuttons 71 series WALL-MOUNT DEVICES


Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters) plus symbols and text (3 characters).

Note

Finishing off a 71 series pushbutton with a square rocker with 60 x 60 mm modularity does not allow the use of the integrated brightness sensor.



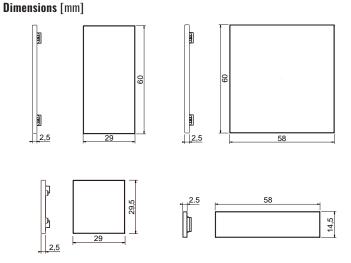



Front cover for Multisensor available in several colour and material variations.

Versions

• square with 60 x 60 mm modularity

Main features

- In plastic material, aluminium, Metal HT or Fenix NTM®
- Snap-on mounting

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]

Order information

Code	Modularity * L x H [mm]	For use with	Package
EK-T1QET2		Multisensor EK-ET3-TP	1
EK-T1QES2	- square 60 x 60	Multisensor EK-ES3-TP	– 1 pcs.

*) The modularity indicated also takes into account the distance between the front cover and lightguides and, therefore, differs slightly from the actual size of the cover



Rockers removal accessory

WALL-MOUNT DEVICES



Description

New rockers removal accessory for wall-mounted devices FF and 71 series.

Order information

Code	For use with	Package
EK-AST-1	FF/71 series rockers removal	1 pcs.





Hole cover (55x55 mm).

Order information

Code	Modularity L x H [mm]	Package
EK-A55	square 55 x 55	1 pcs.

Full front cover for Multisensor WALL-MOUNT DEVICES

Hole cover

WALL-MOUNT DEVICES









Description


Building site protection in transparent thermoformed plastic material for Ekinex[®] pushbuttons FF, 71, 20venti series. The use of the protection prevents soiling of the devices caused by painting. The reliefs in correspondence with each rocker allow the pushbutton to be operated even with the protection present.

Dimensions [mm] - FF series

Dimensions [mm] - 71 Deep series

Dimensions [mm] - 20venti Deep series

n:-



287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
	1	1				1	1		1


Thermoformed protection for Ekinex pushbuttons

WALL-MOUNT DEVICES




Order information

Code	For use with	Package	
EK-PTC-5-FF	devices of FF series	5 pcs.	
EK-PTC-5-20-DE	devices of 20venti Deep series	5 pcs.	
EK-PTC-5-71-DE	devices of 71 Deep series	5 pcs.	
EK-PTC-5-20-SU	devices of 20venti Surface series	5 pcs.	
EK-PTC-5-71-SU	devices of 71 Surface series	5 pcs.	





Dimensions [mm] - 71 Surface series




9.9


Dimensions [mm] - 20venti Surface series



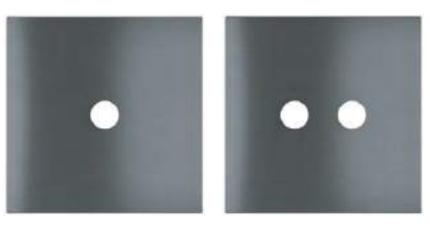

Square plate Proxima series WALL-MOUNT DEVICES (PUSHBUTTONS)





Description

Square magnetic plate for completing Ekinex Proxima series devices (wiring devices components and modules / keystone). Available in numerous colours and materials.

Main features

- Mounting on round flush-mounted boxes (centre-to-centre distance of fixing holes: 60 mm)
- Made of metal alloy with metal finish or Metal HT
- Magnetic mounting on adapter

Irder	information	
	mormation	

Code	For use with
EK-PQA-U	IT power socket
EK-PQA-T	Schuko, FR, IL power sockets
EK-PQA-P	UK power sockets, multi-standard, wiring devices mod
EK-PQA-K	keystone



Available in numerous colours and materials.

• Magnetic mounting on adapter

• Made of metal alloy with metal finish or Metal HT

For use with

pushbutton (1 rocker)

pushbutton (2 rockers)

pushbutton (4 rockers)

Square magnetic plate for completing Ekinex Proxima series devices (Push-buttons).

• Mounting on round flush-mounted boxes (centre-to-centre distance of fixing holes: 60 mm)

Description

Main features

Order informati

Code

EK-PQA-1-.

EK-PQA-2-.

EK-PQA-4-...


Order

Package

1 pcs.

The code must be completed with extensions relating to material, colour and finish (3 characters).

Dimensions [mm]

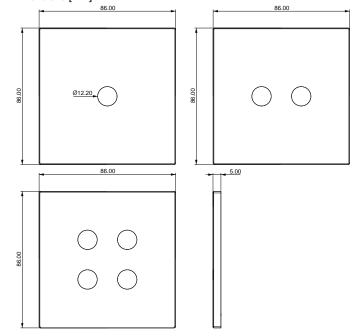

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index




Square plate Proxima series

WALL-MOUNT DEVICES (COMPONENTS AND MODULES FOR WIRING DEVICES / KEYSTONE)





Order


The code must be completed with extensions relating to material, colour and finish (3 characters).




Dimensions [mm]









Double magnetic plate for completing Ekinex Proxima series devices (4-rockers pushbuttons + components and modules for residential use). Available in numerous colours and materials.

Main features


- Mounting on flush-mounted boxes with a device centre distance of 71 mm
- Made of metal alloy with a metal or Metal HT finish
- Magnetic mounting on adapter


Order information


Code	For use with
EK-P2A-4U	button (4 rockers) + IT electrical socket
EK-P2A-4T	button (4 rockers) + Schuko, FR, IL Power sockets
EK-P2A-4P	button (4 rockers) + UK, Multistandard Power sockets, Wiring devices modules

Double plate Proxima series

WALL-MOUNT DEVICES (2-ROCKERS PUSHBUTTONS + COMPONENTS AND MODULES FOR WIRING DEVICES)

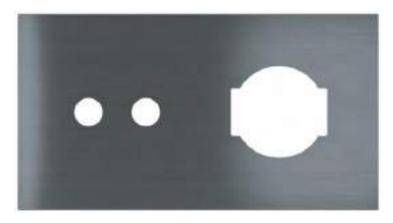

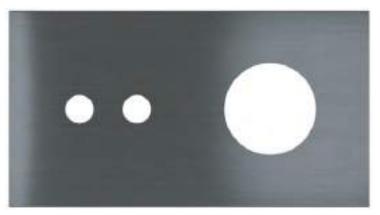

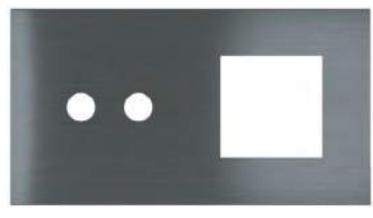

Description

Double magnetic plate for completing Ekinex Proxima series devices (2-rockers pushbuttons + components and modules for residential use). Available in numerous colours and materials.

Main features

- Mounting on flush-mounted boxes with a device centre distance of 71 mm
- Made of metal alloy with a metal or Metal HT finish
- Magnetic mounting on adapter


Order informati

Code	For use with	Package
COUC	TOT USE WITH	I durage
EK-P2A-2U	button (2 rockers) + IT electrical socket	
EK-P2A-2T	button (2 rockers) + Schuko, FR, IL Power sockets	1 pcs.
EK-P2A-2P	button (2 rockers) + UK, Multistandard Power sockets, Wiring devices modules	·

Order

The code must be completed with extensions relating to material, colour and finish (3 characters).

Dimensions [mm]

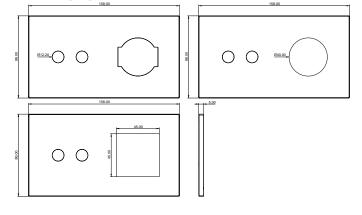


287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Double plate Proxima series

WALL-MOUNT DEVICES (4-ROCKERS PUSHBUTTONS + COMPONENTS AND MODULES FOR WIRING DEVICES)




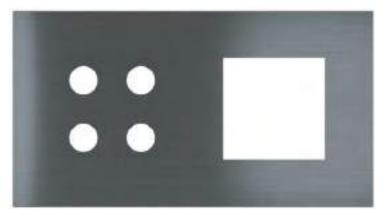


Order

The code must be completed with extensions relating to material, colour and finish (3 characters).

Dimensions [mm]

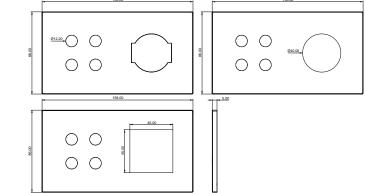



Package 1 pcs.

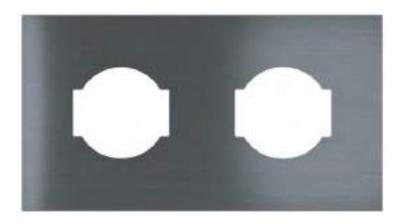

Double plate Proxima series

WALL-MOUNT DEVICES (COMPONENTS AND MODULES FOR WIRING DEVICES)

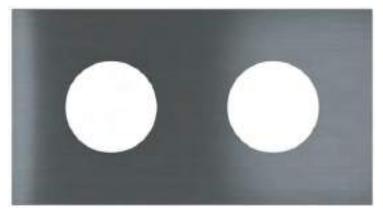

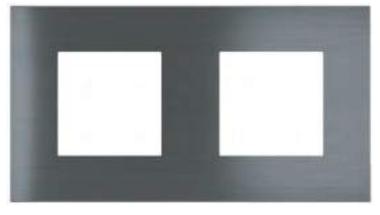

Description

Double magnetic plate for completing Ekinex Proxima series devices (wiring devices components and modules). Available in numerous colours and materials.

Main features


- Mounting on flush-mounted boxes with a device centre distance of 71 mm
- Made of metal alloy with a metal or Metal HT finish
- Magnetic mounting on adapter

Order informati		
Code	For use with	Package
EK-P2A-UU	IT power sockets	
EK-P2A-TT	Schuko, FR, IL power sockets	 1 pcs.
EK-P2A-PP	UK power sockets, Multistandard, Wiring devices modules	

Order

The code must be completed with extensions relating to material, colour and finish (3 characters).

Dimensions [mm]

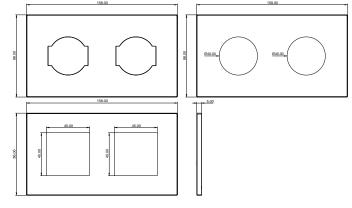



Description


The EK-SMP-71-1 moulded support is a key component of the Proxima series. Designed with solidity and versatility in mind, it is what makes the wide variety of configurations in the series possible.

The metal structure allows the magnetic plates to adhere, while the moulded polymer component allows the insertion of the numerous standard components available.

Main features

- Co-moulded metal and polymer support
- Suitable for Proxima series sockets and Push-buttons
- Suitable for single and double configurations (centre distance 71 mm)
- Suitable for 1 or 2 module wiring devices components



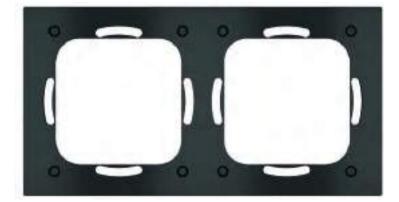

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
	1				1		1		1

Mounting bracket Proxima series

WALL-MOUNT DEVICES

Delivery

• The supply includes 2 screw kits for fixing the support to the box.

Mounting

• Mounting to the flush-mounted box using screws

Order informatio

Code	For use with	Package
EK-SMP-71-1	for mounting a device/plate from the Proxima series	1 pcs.

Additional support for compatibility with round flush-mount boxes Proxima series

WALL-MOUNT DEVICES

Description

The EK-SMP-Q-1 plastic spacer is required for installing Proxima series components inside special flush-mounted boxes. Check the planner for compatibility with your solution.

Main features


- ABS support
- Suitable for Proxima series installations
- Suitable for single configurations

Mounting

• Interlocking assembly between flush-mounting box and support EK-SMP-71-1.

Order information

Code	For use with	Package
EK-SMP-Q-1	for compatibility with round flush-mounted boxes	1
EK-SMP-D-1	for compatibility with round flush-mounted boxes with 2 positions	- 1 pcs.



Square frame of Form version for finishing Ekinex® devices of FF and 71 series. Available in several colours and materials.

Main features

- In plastic material or aluminium
- Snap-on mounting


Order informatio

Code	Dimensions L x H x P [mm]	For use with	Package
EK-FOQ	86 x 86 x 8	devices of FF and 71 series	1 pcs.

Order

Base-codes (EK-FOQ) must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]



Rectangular frame Form version

WALL-MOUNT DEVICES



Description

Square frame of Flank version for finishing Ekinex® devices of FF and 71 series. Available in several colours and materials.

Main features

- In plastic material or aluminium
- Snap-on mounting

Order information

Code	Dimensions L x H x P [mm]	For use with
EK-FLQ	94 x 80 x 8	Ekinex® devices of FF and



Description

Rectangular frame of Form version for finishing Ekinex® devices of FF and 71 series. Available in several colours and materials.

Main features

- In plastic material or aluminium
- Snap-on mounting


Order information


Code	Dimensions L x H x P [mm]	For use with	Package	
EK-FOR	126 x 86 x 8	devices of FF and 71 series	1 pcs.	

Order

Base-codes (EK-FOR) must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]



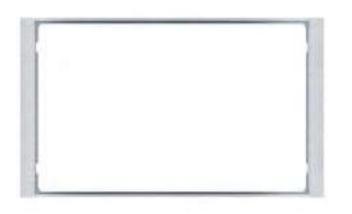

Description

Rectangular frame of Flank version for finishing Ekinex® devices of FF and 71 series. Available in several colours and materials.

Main features

- In aluminium
- Snap-on mounting

Order information

Code	Dimensions L x H x P [mm]	For use with
EK-FLR	135 x 80 x 8	Ekinex® devices of FF and

Square frame Form version

WALL-MOUNT DEVICES

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical contion	471 General terms of sale	475 General index
DIN-Rail mount modules	Visualisation			LIILIV	10015	Odies Kil	lechnical section	OCHEIGI LEITHS OF SOLE	General muck

Square frame Flank version


WALL-MOUNT DEVICES

Order

Base-codes (EK-FLQ) must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]





Rectangular frame Flank version


WALL-MOUNT DEVICES

Order

Base-codes (EK-FLR) must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]







Double frame of Form version for finishing Ekinex® devices of 71 series. Available in several colours and materials.

Main features

- In plastic material or aluminium
- Snap-on mounting

Order information

Code	Dimensions L x H x P [mm]	For use with	Package	
EK-F02	157 x 86 x 8	Ekinex® devices of 71 series	1 pcs.	


Double frame Form version

WALL-MOUNT DEVICES



Base-codes (EK-FO2) must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]



Double frame Flank version

WALL-MOUNT DEVICES



Description

Square plate for finishing Ekinex® devices of 71 series or market-standard flushmounted inserts. Available in several colours and materials. To be used in combination with a square frame of the Form or Flank version. The plate can be also mounted without frame in combination with an adapter of the 'NF version.

Main features

- In plastic material or aluminium or Fenix NTM®
- Snap-on mounting

Order inform	nation	
Code	Window L x H [mm]	For use with*
EK-PQP	45 x 45	standard flush-mounted inser
EK-PQG	55 x 55	or Ekinex® devices
EK-PQS	60 x 60	Ekinex [®] devices of 71 series
EK-PQN	50 x 50	motion sensor



Description Adapter for snap-on mounting of a square plate.

Main features

- Plastic material
- Mounting onto round or square mounting box with fixing holes 60 mm apart



Description

Double frame of Flank version for finishing Ekinex® devices of 71 series. Available in several colours and materials.

Main features

- In plastic material or aluminium
- Snap-on mounting


Order information

Code Dimensions L x H x P [mm]		For use with	Package	
EK-FL2	165 x 80 x 8	Ekinex® devices of 71 series	1 pcs.	

Order

Base-codes (EK-FL2) must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]




287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Square plate WALL-MOUNT DEVICES

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]




Package erts 1 pcs.

Adapter for square plate

Urder Information			
Code	For use with	Side profile	Package
EK-TAQE-1	square plate with a Form or Flank frame	black	
EK-TAQE-1-NF	aguara plata without frame ('NE varaian)	black	
EK-TAQE-1-NFW	square plate without frame ('NF version)	white	
EK-TAQ-1	square plate with a Form or Flank frame (products not supplied by Ekinex)	black	1 pcs.
EK-TAQ-1-NF	square plate without frame ('NF version)	black	
EK-TAQ-1-NFW	(products not supplied by Ekinex)	white	





Rectangular plate for finishing market-standard flush-mounted inserts. Available in several colours and materials. To be used in combination with a rectangular frame of the Form or Flank version. The plate can be also mounted without frame in combination with an adapter of the 'NF version.

Main features


- In plastic material or aluminium or Fenix NTM®
- Snap-on mounting


Order inform	Order information						
Code	Window L x H [mm]	For use with*	Package				
EK-PRG	68 x 45	standard flush-mounted inserts	1 noo				
EK-PRS	60 x 60	Ekinex® devices of 71 series	— 1 pcs.				

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]





Description

Adapter for snap-on mounting of a rectangular plate.

Main features

- Plastic material
- Mounting onto round or square mounting box with fixing holes 60 mm apart or onto rectangular mounting box with fixing holes 83,5 mm apart


Adapter for rectangular plate WALL-MOUNT DEVICES

Rectangular plate

WALL-MOUNT DEVICES

Order information

Code	For use with	Side profile	Package
EK-TAR-1	rectangular plate and Form or Flank frame	black	
EK-TAR-1-NF	rectangular plate without frame	black	1 pcs.
EK-TAR-1-NFW	('NF version)	white	




Description

Double plate for finishing standard flush-mounting inserts and/or Ekinex® devices of 71 series. Available in several colours and materials. To be used in combination with a double frame of the Form or Flank version. The plate can be also mounted without frame in combination with an adapter of the 'NF version.

Main features

- In plastic material or aluminium or Fenix NTM®
- Snap-on mounting

Code	Windows L x H [mm]	For use with*
EK-P2E*	45 x 45 (2)	
EK-P2F*	45 x 45 (1), 60 x 60 (1)	two Ekinex® devices installed 71 mm
EK-P2P	55 x 55 (2)	apart (devices of 71 series
EK-P2G	55 x 55 (1), 60 x 60 (1)	and/or flush-mounting inserts)
EK-P2S	60 x 60 (2)	
*) Not availab	le in plastic	



Description Adapter for snap-on mounting of a double plate.

Main features

- In plastic material
- For mounting onto round modular flush-mounting boxes (71 mm apart)

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index




Double plate WALL-MOUNT DEVICES

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]



Adapter for double plate


WALL-MOUNT DEVICES

Package

1 pcs.

Order informat

Code	For use with	Side profile	Package	
EK-A71E	double plate with a Form or Flank frame	black		
EK-A71E-1-NF	double plate of 71 series without frame	black		
EK-A71E-1-NFW	('NF version)	white		
EK-A71	double plate with a Form or Flank frame (at least one product not supplied by Ekinex)	black	1 pcs.	
EK-A71-1-NF	double plate of 71 series without frame	black		
	 ('NF version) (at least one product not supplied by Ekinex) 	white		
				_

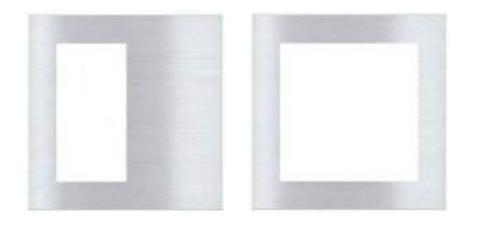

Deep version square plate for finishing Ekinex® devices of Signum, 20venti and 71 series or market-standard flush-mounted inserts. Available in several colours and materials.

Main features

- For use on round mounting box with fixing holes 60 mm apart
- In plastic material, aluminium, Metal HT or Fenix NTM®
- Snap-on mounting on adapter


Order information

Code	Window L x H [mm]	For use with	Package
EK-DQP	45 x 45	standard flush-mounted inserts	
EK-DQG	55 x 55	or Ekinex® devices	
EK-DQT	30 x 60	Ekinex® devices of 20venti series (4 rockers)	1
EK-DQS	60 x 60	Ekinex [®] devices of 20venti and 71 series	1 pcs.
EK-DQZ*	30 x 60	Ekinex® devices of Signum series	
EK-DQN	50 x 50	motion sensor	
*) Not availabl	e in plastic		

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]



Deep square plate

WALL-MOUNT DEVICES




Description

Deep version rectangular plate for finishing Ekinex® devices of 20venti and 71 series or market-standard flush-mounted inserts. Available in several colours and materials.

Main features

- Mounting onto rectangular 3 seater mounting box according to the Italian installation standard provided with fixing holes 83,5 mm apart
- In plastic material, aluminium, Metal HT or Fenix NTM®
- Snap-on mounting on adapter

Order inform	nation			
Code	Window L x H [mm]	For use with		
EK-DRG	68 x 45	standard flush-mounted ins		
EK-DRS	60 x 60	Ekinex® devices of 20venti and		



Description Adapter for snap-on mounting of a Deep square plate.

Main features


Plastic material

• Mounting onto round or square mounting box with fixing holes 60 mm apart

Adapter for Deep square plate WALL-MOUNT DEVICES

Order information

Code	For use with	Side profile	Package
EK-TAQE-1-NF	Deep square plate	black	1 pcs.



Description

Adapter for snap-on mounting of a Deep rectangular plate.

Main features

- Plastic material
- Mounting onto round or square mounting box with fixing hole or onto rectangular mounting box with fixing holes 83,5 mm

287 <u>357</u> <u>373</u> <u>421</u> <u>439</u> <u>451</u> <u>455</u> <u>461</u> <u>471</u> <u>475</u>									
DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General index	287	357	373	421 IP Door Phone	439 Lift TV	 0.1.1.1	T 1 1 1 1	471 General terms of sale	

Deep rectangular plate


WALL-MOUNT DEVICES

	Package
rts	1 noo
71 series	1 pcs.

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]





Adapter for Deep rectangular plate


WALL-MOUNT DEVICES

Order information

es 60 mm apart	
ı apart	

Code	For use with	Side profile	Package
EK-TAR-1-NF	Deep rectangular plate	black	1 pcs.

229

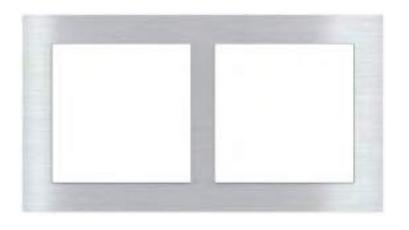

Deep version double plate for finishing standard flush-mounting inserts and/or Ekinex[®] devices of 20venti and 71 series. Available in several colours and materials.

Main features

- For mounting onto mounting boxes with fixing holes 71 mm apart
- In plastic material, aluminium, Metal HT or Fenix NTM®
- Snap-on mounting on adapter

Order information

Code	Windows L x H [mm]	For use with	Package
EK-D2E	45 x 45 (2)		
EK-D2F	45 x 45 (1), 60 x 60 (1)	two Ekinex® devices installed 71 mm apart (devices of 20venti and 71 series and/or flush-mounting inserts)	
EK-D2P	55 x 55 (2)		1 pcs.
EK-D2G	55 x 55 (1), 60 x 60 (1)		
EK-D2S	60 x 60 (2)		


Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Deep double plate

WALL-MOUNT DEVICES

Dimensions [mm]





Description

Adapter for snap-on mounting of a Deep double plate.

Main features


In plastic material

• For mounting onto round modular flush-mounting boxes (71 mm apart)

Adapter for Deep double plate WALL-MOUNT DEVICES

Order informatio

Code	For use with	Side profile	Package	
EK-A71E-1-NF	Deep double plate			
EK-A71-1-NF	double plate of 71 series without frame ('NF version) (at least one product not supplied by Ekinex)	black	1 pcs.	

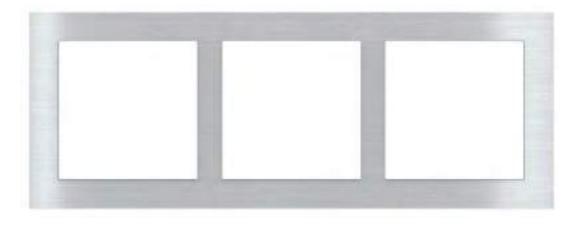

Description

Deep version triple plate for finishing standard flush-mounting inserts and/or Ekinex[®] devices of 20venti and 71 series. Available in several colours and materials.


Main features

- For mounting onto mounting boxes with fixing holes 71 mm apart
- In aluminium, Metal HT or Fenix NTM®
- Snap-on mounting on adapter
- Customisation of windows on aluminium or Fenix NTM® plates on request

Order information

Windows L x H [mm]	For use with
55 x 55 (3)	three Ekinex® devices installed
60 x 60 (1) 55 x 55 (2)	mm apart (devices of 20venti 71 series and/or flush-mounti
XXX (4,5,6) Custom window*	inserts)
	55 x 55 (3) 60 x 60 (1) 55 x 55 (2) XXX (4.5.6) Custom

(*) 45 x 45 mm - 55 x 55 mm - 60 x 60 mm

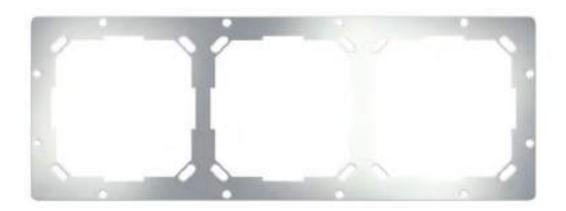

Description

Adapter for snap-on mounting of a Deep triple plate.

Main features

- In aluminium
- For mounting onto round modular flush-mounting boxes (71 mm apart)

287 357 373 421 439 451 455 461 471 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale	475 General index


Deep triple plate

WALL-MOUNT DEVICES

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]

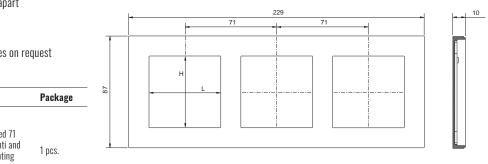


Adapter for Deep triple plate WALL-MOUNT DEVICES

Order informatio

Code		For use with	Side profile Packa	
	EK-B71-1-NF	Deep triple plate	black	1 pcs.





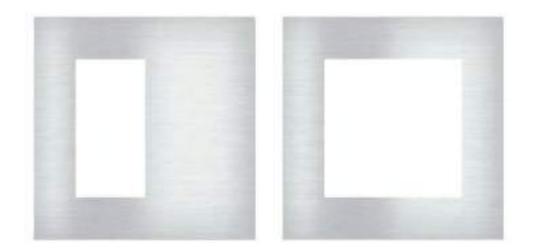

Surface version square plate for finishing Ekinex® devices of 20venti and 71 series or market-standard flush-mounted inserts. Available in several colours and materials.

Main features

- For use on round mounting box with fixing holes 60 mm apart
- In aluminium, Metal HT or Fenix NTM®
- Snap-on mounting on adapter

Order information

Code	Window L x H [mm]	For use with	Package
EK-SQP	45 x 45	standard flush-mounted inserts	
EK-SQG	55 x 55	or Ekinex® devices	
EK-SQT	30 x 60	Ekinex® devices of 20venti series (4 rockers)	1
EK-SQS	60 x 60	Ekinex® devices of 20venti and 71 series	1 pcs.
EK-SQZ	30 x 60	Ekinex® devices of Signum series	
EK-SQN	50 x 50	motion sensor	



Description

Adapter for mounting a square Surface plate.

Main features

- 1x plastic square Surface adapter frame
- 8x M3x6 countersunk flat head screws (EK-TAS-Q-W)
- 1x Surface square adjustment metal bracket with countersink (EK-TAS-Q-W)
- 4x guide inserts for Surface installation on walls up to 35 mm (EK-TAS-Q-N)
- 4x 44.5 mm long cavity wall anchor screws (EK-TAS-Q-N) 4x metal tabs (EK-TAS-Q-N)


Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Surface square plate

WALL-MOUNT DEVICES

Dimensions [mm]




Adapter for Surface square plate WALL-MOUNT DEVICES

• 4x M3x6 countersunk flat head screws with cross recess (EK-TAS-Q-N)

- 1x cardboard mounting template 86x86 mm (EK-TAS-Q-N)
- 2x 2.9x25 and 2.9x38 mm countersunk flat head cross recessed and self-tapping screws

Order information

Code	For use with	Side profile	Package	
EK-TAS-Q-W	for mounting a square Surface plate on masonry walls			
EK-TAS-Q-N	for mounting a square Surface plate on walls up to 35 mm thick (plasterboard, wood paneling, marble, etc.)	black	1 pcs.	

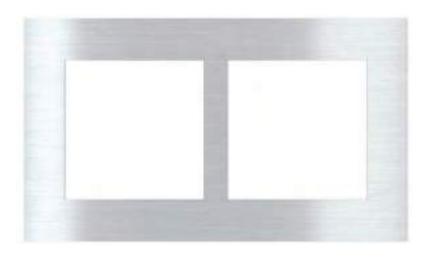

Description


Surface version double plate for finishing standard flush-mounting inserts and/or Ekinex[®] devices of 20venti and 71 series. Available in several colours and materials.

Main features

- For mounting onto mounting boxes with fixing holes 71 mm apart
- In aluminium, Metal HT or Fenix NTM®
 - Snap-on mounting on adapter

Order information

Code	Windows L x H [mm]	For use with
EK-S2E	45 x 45 (2)	
EK-S2F	45 x 45 (1), 60 x 60 (1)	two devices installed 71 mm
EK-S2P	55 x 55 (2)	(devices of 20venti and 71 s
EK-S2G	55 x 55 (1), 60 x 60 (1)	and/or flush-mounting inser
EK-S2S	60 x 60 (2)	

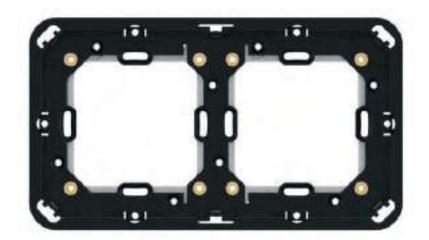

Description

Adapter for mounting of a Surface double plate.

Main features

- 1x Surface square plastic adapter frame
- 8x M3x6 countersunk flat head screws (EK-TAS-D-W)
- 2x square Surface adjustment metal bracket with countersink (EK-TAS-D-W)
- 6x guide inserts for Surface installation on walls up to 35 mm (EK-TAS-D-N)
- 6x 44.5 mm long cavity wall anchor screws (EK-TAS-D-N)

007 057 070 401 400 451 455 401 471 475	
287 357 373 421 439 451 455 461 471 475	287
DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General in	DIN-Rail mount modules

Surface double plate

WALL-MOUNT DEVICES

Package


1 pcs.

n apart l series erts)

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]



Adapter for Surface double plate WALL-MOUNT DEVICES

- 6x metal tabs (EK-TAS-D-N)
- 8x M3x6 countersunk flat head screws with cross recess (EK-TAS-D-N)
- 1x cardboard mounting template 156x86 mm (EK-TAS-D-N)
- 4x 2.9x25 and 2.9x38 mm countersunk flat head screws with cross recess and self-tapping

Order information Side profile Package Code For use with for mounting a double Surface plate on EK-TAS-D-W masonry walls 1 pcs. for mounting a double Surface plate on black EK-TAS-D-N walls up to 35 mm thick (plasterboard, wood paneling, marble, etc.) 233

EKINEX | TECHNICAL025EN






Template for Surface plates

WALL-MOUNT DEVICES



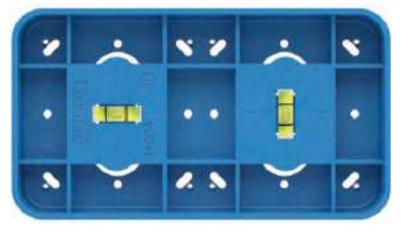

Description

Template for making holes during wall plastering in order to mount a Surface plate-adapter bundle.

Main features

- Plastic material
- With spirit level for perfect horizontal alignment
- Mounting onto round or square mounting box with fixing holes 60 mm apart
- Double template for flush-mounting boxes with centre distance 71 mm

Delivery

The template (EK-DDS-...) for mounting the Surface adapter-plate assembly must be ordered separately.

Order information

Code	Dimensions L x H x P [mm]	For use with	Package
EK-DSS-Q-W	87 x 87 x 10	Template for square plate	1 noo
EK-DSS-D-W	157 x 87 x 10	Template for double plate	1 pcs.

Adapter for Signum Surface square plate

WALL-MOUNT DEVICES


• 4x M3x6 countersunk flat head screws with cross recess (EK-TAS-V-N)

- 1x cardboard mounting template 86x86 mm (EK-TAS-V-N)
- 2x 2.9x25 and 2.9x38 mm countersunk flat head cross recessed and self-tapping screws

Order information

	Code	For use with	Side profile	Package		
	EK-TAS-V-W	EK-TAS-V-W for mounting a square Signum Surface plate on masonry walls				
-	EK-TAS-V-N	for mounting a square Signum Surface plate on walls up to 35 mm thick (plasterboard, wood paneling, marble, etc.)	black	1 pcs.		







Description

Square rubber mounting support for mounting devices or components not supplied by Ekinex.

Order informatio

Code	Dimensions L x H x P [mm]	For use with
EK-TFC-1	69.5 x 69.5 x 2	devices not supplied by l



Description

Adapter for mounting a square Signum Surface plate.

Main features

- 1x plastic square Signum Surface adapter frame
- 8x M3x6 countersunk flat head screws (EK-TAS-V-W)
- 1x Surface square adjustment metal bracket with countersink (EK-TAS-V-W)
- 4x guide inserts for Surface installation on walls up to 35 mm (EK-TAS-V-N)
- 4x 44.5 mm long cavity wall anchor screws (EK-TAS-V-N) • 4x metal tabs (EK-TAS-V-N)





287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General inde

Templates for installation of wiring devices components on 'NF/Deep applications WALL-MOUNT DEVICES

Description

Templates facilitating the placement (pre-assembly) of commercial wiring devices components on NF' and Deep applications. Mounting on 2-position box.


Main features

- Made of machined, unpainted aluminium
- With spirit level for perfect horizontal alignment
- Mounting on round or square flush-mounting box (hole spacing 60 mm)
- Double template for mounting on flush-mounting box with device centre distance 71 mm

Order information

Code	Dimensions L x H x P [mm]	For use with	Package
EK-DPD-Q	87 x 90 x 8.7	Template for square plate	1
EK-DPD-D	160 x 90 x 9.7	Template for double plate	1 pcs.

Square mounting support (for devices not supplied by Ekinex)

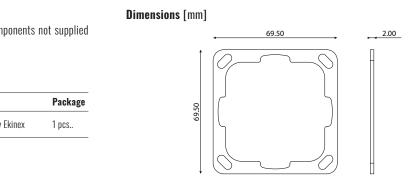




Square metallic support for mounting Ekinex® devices onto round or square mounting boxes with fixing holes 60 mm apart.


Order information

Code	Dimensions L x H x P [mm]	For use with	Package
EK-SMQ-1	72 x 70 x 5	thermostats and Touch&See FF series	
EK-SMQ-71-1	70 x 70 x 4,5	devices of 20venti or 71 series and 4-fold pushbutton of FF series	1 pcs.
EK-SMQ-71-S	70 x 70 x 4,5	devices of Signum	

Square mounting support WALL-MOUNT DEVICES

Dimensions [mm]



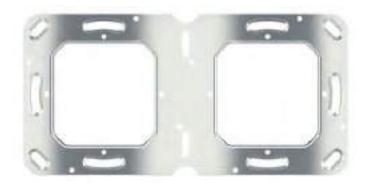

Description

2-place metal support for mounting a 20venti and 71 series device on a 2-place flush-mount box (fixing holes with 71 mm spacing). Fixing screws included.

Order information

Code	Dimensions L x H x P [mm]	For use with
EK-SM2-71-1	141 x 70 x 5	20venti and 71 series dev



Rectangular mounting support WALL-MOUNT DEVICES





Description

Template for horizontal or vertical double-mounting of two Ekinex® devices of FF series with square frame of the Form and Flank version. Made of zinc-plated metal sheet, 1 mm thick. Employ depends on wall type (brick or movable walls).

Order information


	Interior		
Code	Frames	For use with	Package
EK-DFO	Form	2 devices of FF series completed with square Form frames	Enco
EK-DFL	Flank	2 devices of FF series completed with square Flank frames	– 5 pcs.


Description Rectangular metallic support for mounting Ekinex® devices onto round or square mounting boxes with fixing holes 60 mm apart or onto rectangular, 3-seater mounting box with fixing holes 85 mm apart.

Order informatio

Code	Dimensions L x H x P [mm]	For use with	Package
EK-SMR-1	110 x 68 x 5	Touch&See with 2-fold pushbutton of FF series	1 noo
EK-SMR-71-1	93,5 x 70 x 4,5	devices of 20venti or 71 series and 4/6-fold pushbutton of FF series	1 pcs.

Dimensions [mm]






287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

2-place mounting support

WALL-MOUNT DEVICES

Dimensions [mm]

	Package
evices	1 pcs.







Template for side-by-side mounting of FF series with Form/Flank frames

WALL-MOUNT DEVICES



Dimensions [mm]









Solutions for the Swiss market

WALL-MOUNT DEVICES






- Double plate with 60 x 60 mm windows that allows the side-by-side installation of an Ekinex[®] device from 20venti or 71 series and a power socket (Feller) with 60 x 60 mm modularity or two power sockets (Feller) with 60 x 60 mm modularity with 68 mm spacing.
- Double plate with 60 x 60 mm windows that allows two Ekinex[®] devices from 20venti or 71 series to be mounted side by side with a distance between centres of 71 mm.
- Square plate with 60 x 60 mm windows allowing the mounting of a power socket (Feller) with 60 x 60 mm modularity. Installation is only possible if the corresponding support (EK-TAQ-1-CH) is used.
- Single and double metal mounting supports for horizontal/vertical installation


The plate can be mounted without frame ('NF or Deep) or with double frame Form version. The double plate with 60 x 60 mm modularity and 68 mm spacing is available in aluminium or Fenix NTM®. Installation can be done horizontally or vertically using the mounting supports.

Requirements for the flush mount box(es)

• Fixing holes in corner position




287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules Vi	/isualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

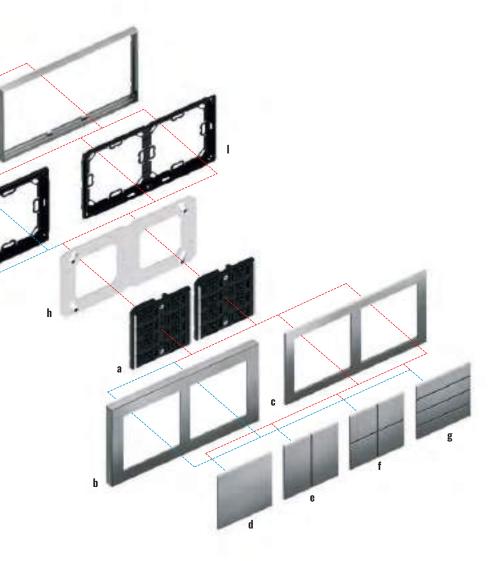

Description	Code
i) Double adapter for frame-free installation	EK-A71E-1-NF
I) Adapter for double plate with a Form or Flank frame	EK-A71E
m) Form version double frame	EK-F02
n) Double box for masonry walls (centre distance 60 mm)	not delivered by $Ekinex^{\mathbb{B}}$
*) 60 x 60 mm windows	
**) Available for horizontal or vertical mounting	





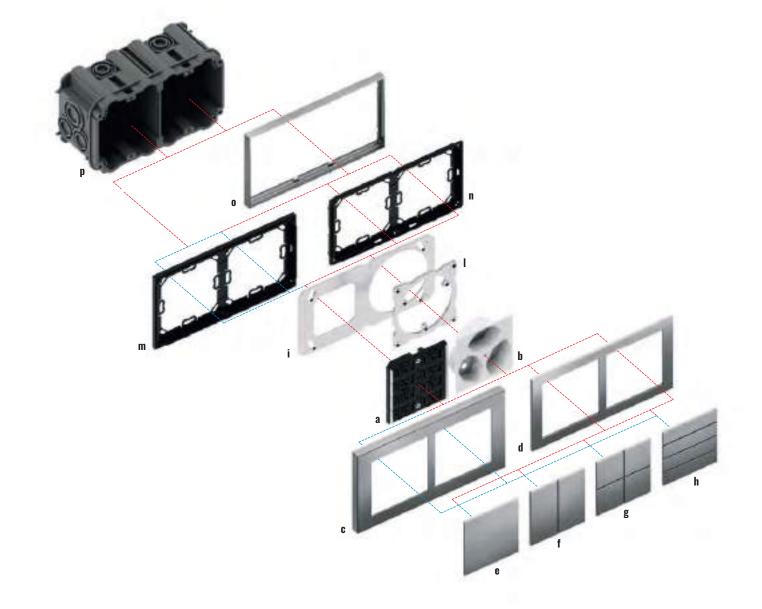

FK_F13_TP_ or FK_F23_TP_

Code

a) Pushbutton 71 series	EK-E13-TP or EK-E23-TP
b) Power socket 60 x 60 mm	not delivered by $Ekinex^\circledast$
c) Deep double plate*	EK-D2H
d) Double plate*	ЕК-Р2Н
e) Square rocker (1)	EK-T1Q
f) Rectangular vertical rockers (2)	EK-T2R
g) Square rockers (4)	EK-T4Q
h) Rectangular horizontal rockers (4)	EK-T4R
i) Metal mounting support**	EK-SM2-CHY

Double pushbutton installation 71 series + power socket (60 x 60 mm)

Description	Code
) Metal mounting support**	EK-SM1-CHT
n) Double adapter for frame-free installation	EK-A71-1-NF
) Adapter for double plate with a Form or Flank frame	EK-A71
) Form version double frame	EK-F02
) Double box for masonry walls (centre distance 60 mm)	not delivered by Ekinex®
r) 60 x 60 mm windows	
*) Available for horizontal or vertical mounting	


	0.		6
(a)	r (
20	an e		1
		6	J.

Double pushbutton installation 20venti series

Description	Code
a) Pushbutton 20venti series	EK-E2E
b) Deep double plate*	EK-D2S
c) Rectangular horizontal rockers	EK-T4F
d) Metal mounting support**	EK-SM:

Description

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

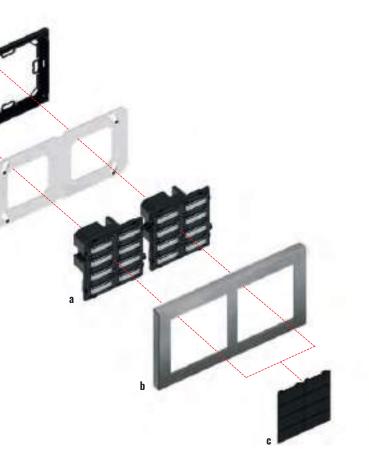


E-TP-8	
S	
R-20	
2-CHX	

Description	Code
e) Double adapter for frame-free installation	EK-A71E-1-NF
f) Double box for masonry walls (centre distance 60 mm)	not delivered by Ekinex®
*) 60 x 60 mm windows	
**) Available for horizontal or vertical mounting	







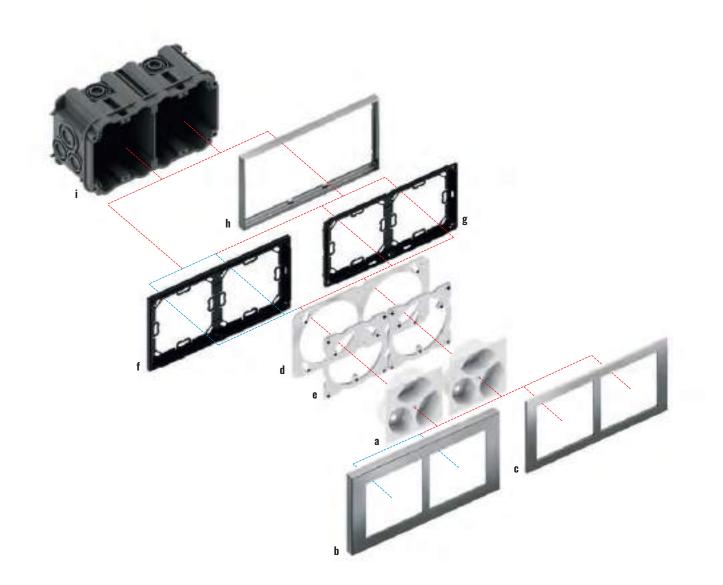

Double pushbutton installation 20venti series + power socke	t (60 x 60 mm)
---	----------------

bouble publication instantation zerona contes		
Description	Code	
a) Pushbutton 20venti series	EK-E2E-TP-8	
b) Power socket 60 x 60 mm	not delivered by $Ekinex^{\texttt{B}}$	
c) Deep double plate*	EK-D2H	
d) Rectangular horizontal rockers	EK-T4R-20	
e) Metal mounting support**	EK-SM2-CHY	

Description	Code
f) Metal mounting support**	EK-SM1-CHT
g) Double adapter for frame-free installation	EK-A71-1-NF
h) Double box for masonry walls (centre distance 60 mm)	not delivered by $Ekinex^{\texttt{B}}$
*) 60 x 60 mm windows	
**) Available for horizontal or vertical mounting	

D	power socke	And Street and	1-1: (00		
lininie	nower socke	те іпстаі	іатіоп і Бі	y hii	mmi


Description	Code
a) Power socket 60 x 60 mm	not delivered by E
b) Deep double plate*	EK-D2H
c) Double plate*	EK-P2H
d) Metal mounting support**	EK-SM2-CHZ
e) Metal mounting support**	EK-SM1-CHT
f) Double adapter for frame-free installation	EK-A71-1-NF

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules Vi	/isualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

kinex®	

Description	Code
g) Adapter for double plate with a Form or Flank frame	EK-A71
h) Form version double frame	EK-F02
i) Double box for masonry walls (centre distance 60 mm)	not delivered by Ekinex®
*) 60 x 60 mm windows	
**) Available for horizontal or vertical mounting	



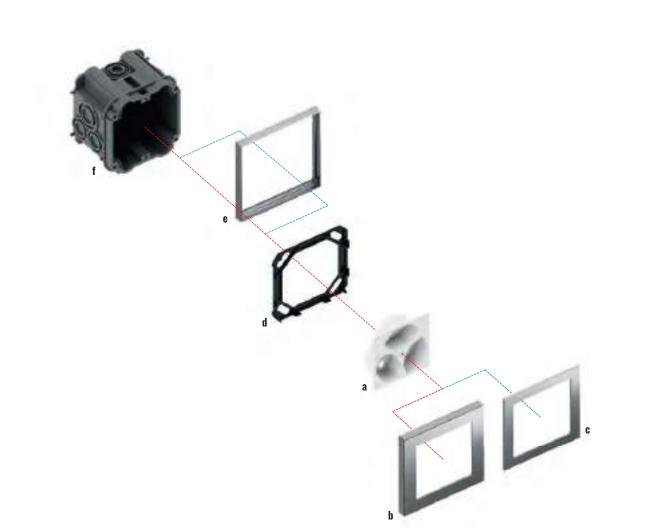


Power socket installation (60 x 60 mm)

Description	Code
a) Power socket 60 x 60 mm	not delivered by $Ekinex^\circledast$
b) Deep square plate*	EK-D2C
c) Square plate*	EK-P2C
d) Adapter for square plate	EK-TAQ-1-CH

Description	Code
e) Form version square frame	EK-FOQ
f) Double box for masonry walls (centre distance 60 mm)	not delivered by Ekinex®
*) 60 x 60 mm windows	



Single mounting supports Single replacement metal support for mounting of single or triple socket (Feller). Fixing screws included.






EK-SM1-CHS

EK-SM1-CHT

Dimensions [mm]

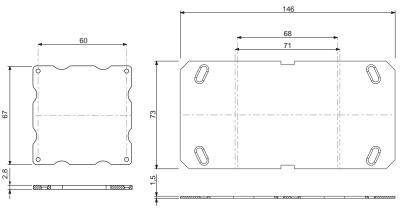

Order information


Co	de	Installation	Description			
EK	-SM1-CHS	ainala	Replacement metal support for (
EK	-SM1-CHT	single -	Replacement metal support for (
EK	-SM2-CHX		2 seats for Ekinex® 20venti or 7			
EK	-SM2-CHY	double horizontal vertical -	1 seat for Ekinex® 20venti or 71 1 seat for 1 single socket (Feller			
EK	-SM2-CHZ	Vortiour	2 seats for sockets (Feller 60 x			

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Mounting supports WALL-MOUNT DEVICES


Double mounting supports (horizontal/vertical)

Double metal support for mounting two power sockets (Feller), one Ekinex® device from 20venti or 71 series and one power sockets (Feller), two $\mathsf{Ekinex}^{\texttt{B}}$ devices from 20venti or 71 series. Fixing screws included.

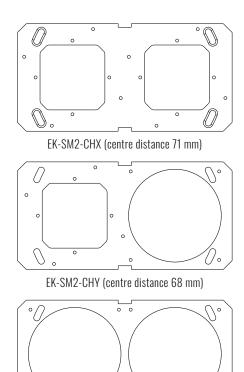

EK-SM2-CHZ (centre distance 68 mm)

- r (Feller 60 x 60 mm) single socket
- r (Feller 60 x 60 mm) triple socket
- 71 series devices
- 1 series device r 60 x 60 mm)
- x 60 mm)

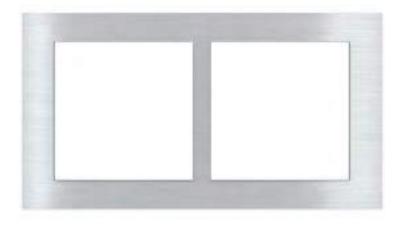

Double plate with 60 x 60 mm windows for mounting two power sockets (Feller) at

68 mm centre distance, an Ekinex® 20venti or 71 series device and a power socket

(Feller) and for mounting two Ekinex® 20venti or 71 series devices at 71 mm centre

Double plate with 68 or 71 mm centre distance window WALL-MOUNT DEVICES



Description Adapter for snap-on mounting of a square plate together with a power socket (Feller).

Main features

• In plastic material

distance. Round box components must be 60 x 60 mm in size.

Description

Main features

• In aluminium, Metal HT or Fenix NTM®

• Snap-on mounting on adapter


Order informati


Code	Windows L x H [mm]	lows L x H [mm] For use with	
EK-P2H ('NF)**		mounting with centre distance	
EK-D2H (Deep)*	60 x 60	68 mm	- 1 pcs.
EK-P2S ('NF)	00 X 00	mounting with centre distance	
EK-D2S (Deep)		71 mm	
For mounting P2H an *) Not available in Pl **) Not available in F	astic	er separately (see next page).	

Order

Base-codes must be completed by adding extensions for material, colour and finishing (3 characters).

Dimensions [mm]





Description Adapter for snap-on mounting of a double plate.

Main features In plastic material

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Adapter for square plate and power socket (Feller) WALL-MOUNT DEVICES

Order informa	ation		
Code	For use with	Side profile	Package
EK-TAQ-1-CH	square plate with Form or Flank frame or without frame ('NF or Deep version) and a power socket (Feller)	black	1 pcs.



Adapter for double plate

Order informati	on		
Code	For use with	Side profile	Package
EK-A71	double plate with a Form or Flank frame		
EK-A71-1-NF	double plate of 71 series without frame ('NF version)	black	1 pcs.



Materials and finishes

WALL-MOUNT DEVICES

SIGNUM - 20VENTI - 71 - FF

Metal HT

Plates* - Rockers

	-				-
CRO	Chrome	CBM	Black Metal	CHA	Champagne

Metal

Frames - Plates - Rockers

			-						-
GBQ	Aluminium	GBR	Nickel	GBS	Titanium	GBU	Carbon	GBC	Brass

$\mathsf{Fenix}\;\mathsf{NTM}^{\mathbb{R}}$

Plates - Rockers

FBM	White Malè	FBL Beige Luxor FCO Beaver Ottawa FGE Grey Efeso FGL Grey Londor	n
-			
FGB	Grey Bromine	FVC Green Commodore FCC Cocoa Orinoco FNI Black Ingo	

Plastic

Frames - Plates - Rockers

		the second s
GAR Pure White (RAL 9016) GAA	Warm White	GAE Intense Black (RAL 9005) GAG Silver

The finishes of our products are obtained through careful, high-quality processes. Therefore, slight colour variations between different production batches are normal and reflect the uniqueness of our production process. * Deep and Surface plates only

PROXIMA

Metal HT

Plates - Rocl									
	-								
CRO	Chrome	CBM	Black Metal	SHA	Champagne				
Metal Plates - Rocl	kers								
							1		-
LAR Pure	e White (RAL 9016)	LAE Inte	ense Black (RAL 9005)	SSB	Steel Brushed	SBV	Quantum Carbon	LBC	Brass
Metal (or Plates - Rocl	n <mark>request)</mark> _{kers}								
LAA	Warm White	LBL	Beige Luxor	GBD	Bronze Corked				
and the second	-			Contraction of the local division of the loc	100				

	- Rockers											
b				-		1	-					
RO	Chrome	C	BM	Black Metal	SHA		Champagne					
eta _{ites} -	 - Rockers											
AR.	Pure White (RAL 9016)		_AE Inter	1se Black (RAL 9005	5) SSB		Steel Brushed	SBV	Quantum Carbon	LBC	Brass	
eta _{ites} -	l (on request) - Rockers											
						1						
AA.	Warm White		BL	Beige Luxor	GBD		Bronze Corked					
1	-			-			-					

Plates - Rockers
CRO Chrome CBM Black Metal SHA Champagne
Metal Plates - Rockers
LAR Pure White (RAL 9016) LAE Intense Black (RAL 9005) SSB Steel Brushed SBV Quantum Carbon LBC Brass
Metal (on request) Plates - Rockers
LAA Warm White LBL Beige Luxor GBD Bronze Corked
No. of Concession, Name of Street, or other Differences of Str
GBH Dark Chocolate GBO Antique Brass SOC Old Copper

ERA (coming soon)



287 357 373 421 439 451 455 461 471 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General terms of sale	475 General index

Materials and finishes

Ekinex chooses Fenix NTM®

WALL-MOUNT DEVICES

A super opaque nanotech material, is an innovative interior design product, that combines elegant aesthetic solutions with state-of-theart technological performance.

Fenix NTM® is an innovative interior design product, that combines elegant aesthetic solutions with state-of-the-art technological performance. The external surface involves the use of nanotechnology and it is characterized by next generation acrylic resins, hardened and fixed with Electron Beam Curing process opening up new avenues in the field of interior design. With low light reflectivity, its surface is extremely opaque, anti-fingerprint and features a very pleasant soft touch.

More information:

ekinex.com/en/material-and-finishes/fenix-ntm.html

Soft touch

Hygienic



Thermal healing of

micro scratches

High resistance to acid

solvents and household

reagents

 $\langle | \rangle$

Low light reflectivity



6



to dry heat



Easy to clean



Resistance to impact

llmll

Mold-resistant





Excellent intensity and colour depth

Anti-fingerprint

Enhanced anti-bacterial

properties

Antistatic



Hydro-repellent

Rub resistance



Suitable for contact with food

Resistance to scratches

and abrasion



Dimensional stability even at high temperature changes



Self-supporting (only for 10 and 12 mm)

The plates for the Proxima series Push-buttons can be customised using the symbols in the library shown on the following pages. On request, customisation using symbols and text specified by the customer is also possible.

Square and double plate


The base code extension includes 3 characters for material, colour and finish and the letter 'P' indicating customisation using symbols or text.

Symbol

The symbol is reproduced in the centre below the round button, centred vertically and horizontally.


Text

The text is reproduced in the centre below the round button, centred vertically and horizontally on 1 or 2 lines and can contain a maximum of 12 characters (including spaces) per line.

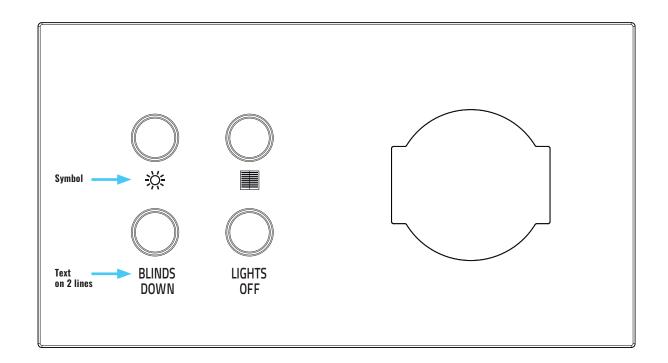

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Symbols for customising plates **Proxima series**

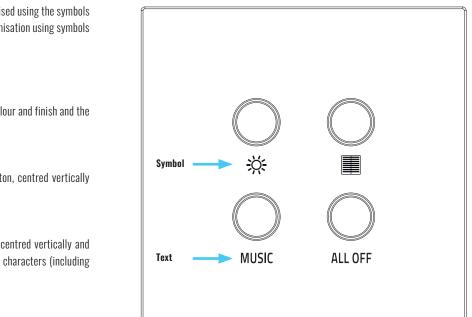



Rockers for devices of 20venti, FF and 71 series can be customized with symbols from the library on the following pages. Upon request, it is also possible to customize rockers with symbols and text provided by the customer.

Square rockers

The code extension includes 3 characters identifying material, colour and finishing and 3 more characters identifying symbols. Within the last 3-character group, the first character identifies a double symbol, while the second and third characters identify a single symbol.

Single symbol

The single symbol is reproduced in the central part of the square rocker, centred both horizontally and vertically. If the second and third characters of the extension-code equal "O", the rocker has no single symbol.

Double symbol

The double symbol is reproduced in the upper and lower part of the square rocker, both centred horizontally. If the first character in the extension-code equals "O", the rocker has no double symbol.

Vertical rectangular rockers

The code extension includes 3 characters identifying material, colour and finishing and 3 more characters identifying symbols. Within the last 3-character group, the first character identifies a double symbol, while the second and third characters identify a single symbol.

Single symbol

The single symbol is reproduced in the central part of the rectangular rocker, centred both horizontally and vertically. If the second and third characters of the extensioncode equal "O", the rocker has no single symbol.

Double symbol

The double symbol is reproduced in the upper and lower part of the rectangular rocker, both centred horizontally. If the first character in the extension-code equals "0", the rocker has no double symbol.

Horizontal rectangular rockers


The code extension includes 3 characters identifying material, colour and finishing and 3 more characters identifying symbols. Within the last 3-character group, the first character identifies a double symbol, while the second and third characters identify a single symbol.

Single symbol

The single symbol is reproduced in the central part of the rectangular rocker, centred both horizontally and vertically. If the second and third characters of the extensioncode equal "O", the rocker has no single symbol.

Double symbol


The double symbol is reproduced on the left and right sides of the rectangular rocker, vertically centred. If the first character in the extension-code equals "O", the rocker has no double symbol.

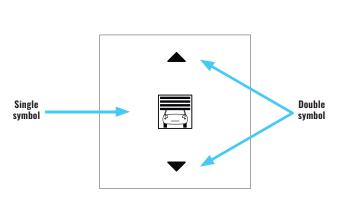


Symbols for

WALL-MOUNT DEVICES

rockers customization







Single symbols

Lighting 7 Ø LI01 Dimming LIO2 Floor lamp LIO3 Wall lamp \Rightarrow $\mathbf{\Theta}$

LIO10 Wall lamp


LIO11 Floor lamp On

Multimedia

LIO9 Lighting scene

[©≡]	u D	
MU01 Projector screen	MUO2 Loudspeaker	MU03 Loudspeaker 2
II	<	<
MU09 Pause	MU010 Rew	MU011 FFwd

Health and care



287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
							Γ]
							٢	1500 No symbol	
2	-	──────────────────────────────	<u></u>	Ľ	J	2		¥	

LIO4 Ceiling light





LI013 External light



LIO6 Staircase lamp



LIO7 Outdoor lighting







LIO16 Bulb light





MU05 Sound system













MU013 Wi-fi












HCO6 WC Man

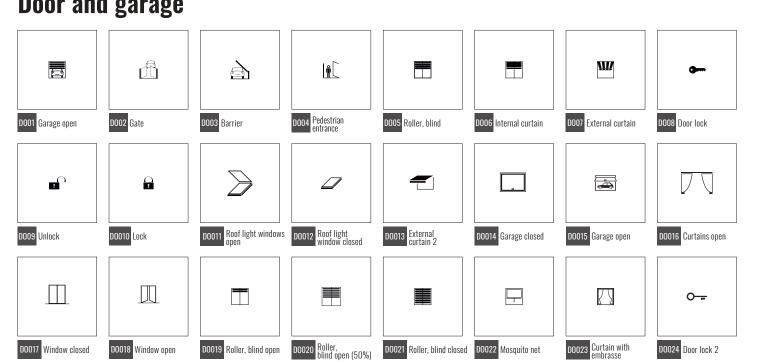


Climate




Scenarios

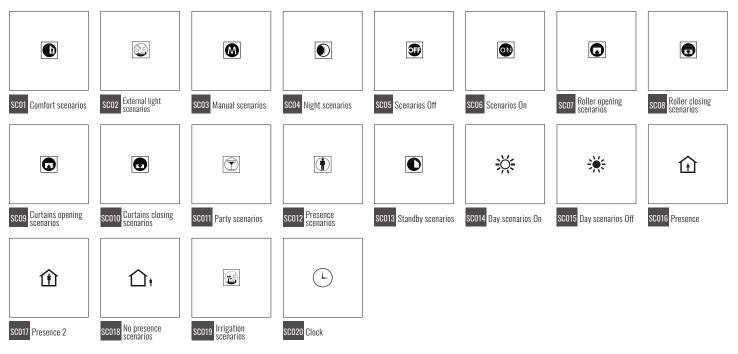


Markers




Door and garage

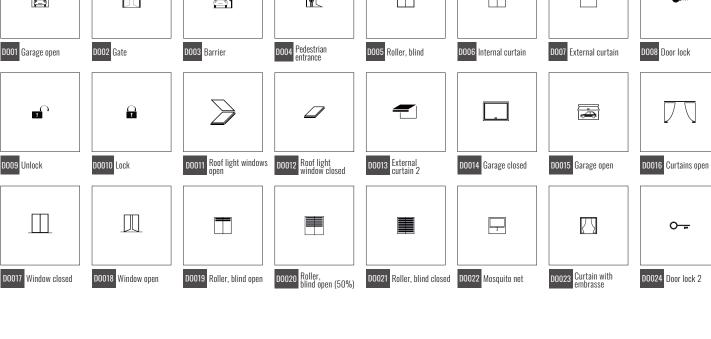


Hotel



Energy

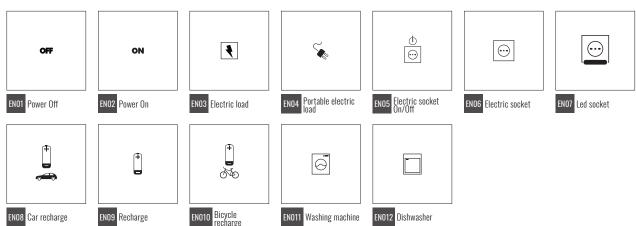

287 357 373 421 439 451 455 461 471 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale	475 General index

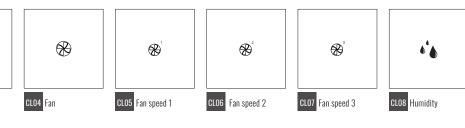






Status Led (20venti)



Note. For convenience, all the symbols in this page are shown as they appear on square rockers. The same symbols may also be requested for rectangular rockers. The symbols shown here can be replaced by customised symbols or text on request.

Double symbols

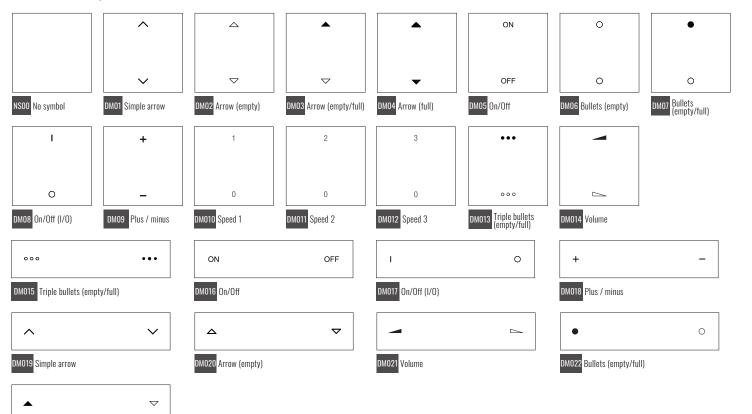

How to order a rocker

Rockers for pushbuttons Proxima series

WALL-MOUNT DEVICES

Rockers for pushbuttons Proxima series.


The ordering code of a rocker is formed by a fixed part (EK-TTPwhich represents modularity, material, colour and finishing.

Customization with text

WALL-MOUNT DEVICES

DM023 Arrow (empty/full)

Square rockers can be customized with text to be shown in the upper, central or lower areas. Texts must be specified at order time.

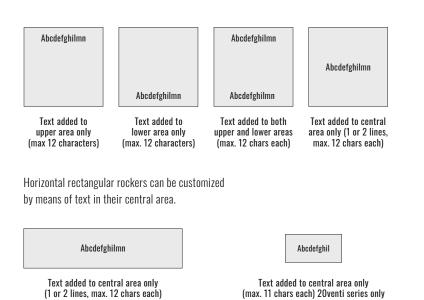

Vertical rectangular rockers can be customized with text to be shown in the upper, central or lower areas.

Abcdefghilmn	Text added to upper area (max. 12 chars each)
Abcdefghilmn	Text added to central area (1 or 2 lines, max. 12 chars each)
Abcdefghilmn	Text added to lower area (max. 12 chars each)

METAL HT Modularity Colour chrome black metal round

0

(1 () (1)	blabit motal	
(1 rocker Ø 11 mm)	champagne	_
0 0	chrome	-
round	black metal	chrome plated
(2 rockers Ø 11 mm)	champagne	
00	chrome	
o o round	black metal	
(4 rockers Ø 11 mm)	champagne	-

Finishing

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

METAL

	METAL			
	Modularity	Colour	Finishing	Code
		steel brushed		EK-TTP-1-SSB
		quantum carbon		EK-TTP-1-SBV
		brass	brushed	EK-TTP-1-LBC
		dark chocolate		EK-TTP-1-GBH
	0	antique brass		EK-TTP-1-GBO
	round	bianco puro RAL 9016		EK-TTP-1-LAR
olus a variable part	(1 rocker Ø 11 mm)	bianco caldo		EK-TTP-1-LAA
nus a variable part		nero opaco RAL 9005		EK-TTP-1-LAE
		beige luxor		EK-TTP-1-LBL
		bronze corked		EK-TTP-1-GBD
		old copper		EK-TTP-1-SOC
		steel brushed		EK-TTP-2-SSB
		quantum carbon		EK-TTP-2-SBV
		brass	brushed	EK-TTP-2-LBC
		dark chocolate		EK-TTP-2-GBH
		antique brass		EK-TTP-2-GBO
	○ ○ round (2 rockers Ø 11 mm)	bianco puro RAL 9016		EK-TTP-2-LAR
		bianco caldo		EK-TTP-2-LAA
		nero opaco RAL 9005		EK-TTP-2-LAE
		beige luxor		EK-TTP-2-LBL
		bronze corked		EK-TTP-2-GBD
		old copper		EK-TTP-2-SOC
		steel brushed		EK-TTP-4-SSB
Code		quantum carbon		EK-TTP-4-SBV
EK-TTP-1-CRO		brass	brushed	EK-TTP-4-LBC
EK-TTP-1-CBM		dark chocolate		EK-TTP-4-GBH
EK-TTP-1-SHA	0 0	antique brass		EK-TTP-4-GBO
EK-TTP-2-CRO	o o round	bianco puro RAL 9016		EK-TTP-4-LAR
EK-TTP-2-CBM	(4 rockers Ø 11 mm)	bianco caldo		EK-TTP-4-LAA
EK-TTP-2-SHA		nero opaco RAL 9005		EK-TTP-4-LAE
EK-TTP-4-CRO		beige luxor		EK-TTP-4-LBL
EK-TTP-4-CBM		bronze corked		EK-TTP-4-GBD
EK-TTP-4-SHA				

How to order a rocker

Rockers for pushbuttons 20venti series

WALL-MOUNT DEVICES

Rockers for 4-fold pushbutton 20venti series.

The ordering code of a rocker is formed by a fixed part (EK-T) plus a variable part which represents modularity, material, colour, finishing and customization codes as shown in symbol library.

PLASTIC MATERIAL

Modularity	Colour	Code
Π	white	EK-T4R-20-GAA
	pure white RAL 9016	EK-T4R-20-GAR
rectangular backlit text/symbols (4 rockers 30 x 15 mm)	intense black RAL 9005	EK-T4R-20-GAE
	silver	EK-T4R-20-GAG
□□ rectangular dimmer (1 rocker 30 x 15 mm)	white	EK-T2B-20-GAA
	pure white RAL 9016	EK-T2B-20-GAR
	intense black RAL 9005	EK-T2B-20-GAE
	silver	EK-T2B-20-GAG

METAL-EFFECT PAINTING

Modularity	Colour	Code
	aluminium	EK-T4R-20-GBQ
Ħ	nickel	EK-T4R-20-GBR
rectangular	titanium	EK-T4R-20-GBS
backlit text/symbols (4 rockers 30 x 15 mm)	carbon	EK-T4R-20-GBU
	brass	EK-T4R-20-GBB
	aluminium	EK-T2B-20-GBQ
m	nickel	EK-T2B-20-GBR
rectangular dimmer (1 rocker 30 x 15 mm)	titanium	EK-T2B-20-GBS
	carbon	EK-T2B-20-GBU
	brass	EK-T2B-20-GBB

FENIX NTM®-EFFECT PAINTING

Modularity	Colour	Code
	malè white	EK-T4R-20-FBM
	beige luxor	EK-T4R-20-FBL
	beaver ottawa	EK-T4R-20-FCO
	cocoa orinoco	EK-T4R-20-FCC
rectangular	grey efeso	EK-T4R-20-FGE
backlit text/symbols (4 rockers 30 x 15 mm)	grey london	EK-T4R-20-FGL
	grey bromine	EK-T4R-20-FGB
	green commodore	EK-T4R-20-FVC
	black ingo	EK-T4R-20-FNI
	malè white	EK-T2B-20-FBM
	beige luxor	EK-T2B-20-FBL
	beaver ottawa	EK-T2B-20-FCO
	cocoa orinoco	EK-T2B-20-FCC
rectangular dimmer	grey efeso	EK-T2B-20-FGE
(1 rocker 30 x 15 mm)	grey london	EK-T2B-20-FGL
	grey bromine	EK-T2B-20-FGB
	green commodore	EK-T2B-20-FVC
	black ingo	EK-T2B-20-FNI

Rockers for pushbuttons FF series

WALL-MOUNT DEVICES

Rockers for 4-fold pushbutton FF series.

The ordering code of a rocker is formed by a fixed part (EK-T) plus a variable part which represents modularity, material, colour, finishing and customization codes as shown in symbol library.

Modularity	Colour	Finishing
	white	
	pure white RAL 9016	
	intense black RAL 9005	
square	silver	
	white	
	pure white RAL 9016	
rectangular (vertical)	intense black RAL 9005	normal
	silver	
	white	
	pure white RAL 9016	
rectangular (horizontal)	intense black RAL 9005	
	silver	

METAL HT		
Modularity	Colour	Finishing
	chrome	
	black metal	_
square	champagne	_
	chrome	_
rectangular	black metal	chrome plated
(vertical)	champagne	_
	chrome	_
rectangular	black metal	
(horizontal)	champagne	_

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Code EK-TQQ-GAA

EK-TQQ-GAR

EK-TQQ-GAE EK-TQQ-GAG EK-TRV-GAA EK-TRV-GAR

EK-TRV-GAE EK-TRV-GAG EK-TRO-GAA EK-TRO-GAR

EK-TRO-GAE

EK-TRO-GAG

LU		

Aodularity	Colour	Finishing	Code
	aluminium		EK-TQQ-GBQ
	nickel		EK-TQQ-GBR
	titanium		EK-TQQ-GBS
	carbon		EK-TQQ-GBU
square	brass		EK-TQQ-GBB
	aluminium		EK-TRV-GBQ
	nickel		EK-TRV-GBR
	titanium	brushed	EK-TRV-GBS
ectangular vertical)	carbon		EK-TRV-GBU
,	brass		EK-TRV-GBB
	aluminium		EK-TRO-GBQ
	nickel		EK-TRO-GBR
rectangular (horizontal)	titanium		EK-TRO-GBS
	carbon		EK-TRO-GBU
,	brass		EK-TRO-GBB

FENIX NTM®

Modularity	Colour	Code	
	malè white	EK-TQQ-FBM	
	beige luxor	EK-TQQ-FBL	
	beaver ottawa	EK-TQQ-FCO	
	cocoa orinoco	EK-TQQ-FCC	
	grey efeso	EK-TQQ-FGE	
	grey london	EK-TQQ-FGL	
square	grey bromine	EK-TQQ-FGB	
	green commodore	EK-TQQ-FVC	
	black ingo	EK-TQQ-FNI	
	malè white	EK-TRV-FBM	
	beige luxor	EK-TRV-FBL	
	beaver ottawa	EK-TRV-FCO	
	cocoa orinoco	EK-TRV-FCC	
	grey efeso	EK-TRV-FGE	
rectangular vertical	grey london	EK-TRV-FGL	
	grey bromine	EK-TRV-FGB	
	green commodore	EK-TRV-FVC	
	black ingo	EK-TRV-FNI	
	malè white	EK-TRO-FBM	
	beige luxor	EK-TRO-FBL	
	beaver ottawa	EK-TRO-FCO	
	cocoa orinoco	EK-TRO-FCC	
	grey efeso	EK-TRO-FGE	
rectangular horizontal	grey london	EK-TRO-FGL	
	grey bromine	EK-TRO-FGB	
	green commodore	EK-TRO-FVC	
	black ingo	EK-TRO-FNI	

Code
EK-TQQ-CRO
EK-TQQ-CBM
EK-TQQ-CHA
EK-TRV-CRO
EK-TRV-CBM
EK-TRV-CHA
EK-TRO-CRO
EK-TRO-CBM
EK-TRO-CHA

Kit 2 rockers for room thermostats **FF** series

WALL-MOUNT DEVICES

PLASTIC MATERIAL

Modularity	Colour	Finishing	Code
square	white		EK-TQQ-GAA-EP2
	pure white RAL 9016	normal	EK-TQQ-GAR-EP2
	intense black RAL 9005		EK-TQQ-GAE-EP2
	silver		EK-TQQ-GAG-EP2

Note. The kit includes 2 rockers customized with symbols for the control of thermostats functions.

Mo

ALUMINIUM

Modularity	Colour	Finishing	Code
square	aluminium		EK-TQQ-GBQ-EP2
	nickel		EK-TQQ-GBR-EP2
	titanium	brushed	EK-TQQ-GBS-EP2
	carbon		EK-TQQ-GBU-EP2
	brass		EK-TQQ-GBB-EP2

Note. The kit includes 2 rockers customized with symbols for the control of thermostats functions.

METAL HT

Modularity	Colour	Finishing	Code
+	chrome		EK-TQQ-CRO-EP2
	black metal	chrome plated	EK-TQQ-CBM-EP2
square	champagne		EK-TQQ-CHA-EP2

Note. The kit includes 2 rockers customized with symbols for the control of thermostats functions.

FENIX NTM®

Modularity	Colour	Code
	malè white	EK-TQQ-FBM-EP2
	beige luxor	EK-TQQ-FBL-EP2
	beaver ottawa	EK-TQQ-FCO-EP2
÷	cocoa orinoco	EK-TQQ-FCC-EP2
	grey efeso	EK-TQQ-FGE-EP2
square	grey london	EK-TQQ-FGL-EP2
	grey bromine	EK-TQQ-FGB-EP2
	green commodore	EK-TQQ-FVC-EP2
	black ingo	EK-TQQ-FNI-EP2

Note. The kit includes 2 rockers customized with symbols for the control of thermostats functions.

Rockers for pushbuttons 71 series

WALL-MOUNT DEVICES

Rockers for 4-fold pushbutton 71 series.

The ordering code of a rocker is formed by a fixed part (EK-T) plus a variable part which represents modularity, material, colour, finishing and customization codes as shown in symbol library.

PLASTIC MATERIAL

Modularity	Colour	Finishing	Code
	white		EK-T1Q-GAA
	pure white RAL 9016		EK-T1Q-GAR
- square (1 rocker 60 x 60 mm) _	intense black RAL 9005		EK-T1Q-GAE
	silver		EK-T1Q-GAG
	white		EK-T2R-GAA
	pure white RAL 9016		EK-T2R-GAR
rectangular vertical	intense black RAL 9005		EK-T2R-GAE
mm) –	silver	normal	EK-T2R-GAG
	white	погтнаг	EK-T4Q-GAA
	pure white RAL 9016		EK-T4Q-GAR
square - (4 rockers	intense black RAL 9005		EK-T4Q-GAE
30 x 30 mm) -	silver		EK-T4Q-GAG
	white		EK-T4R-GAA
	pure white RAL 9016		EK-T4R-GAR
rectangular horizontal - (4 rockers	intense black RAL 9005		EK-T4R-GAE
60 x 15 mm) -	silver		EK-T4R-GAG

Modularity	Colour	Finishing	Code		Modularity	Colour	Code
	aluminium	_	EK-T1Q-GBQ			malè white	EK-T1Q-FBM
	nickel	_	EK-T1Q-GBR			beige luxor	EK-T1Q-FBL
quare	titanium	_	EK-T1Q-GBS			beaver ottawa	EK-T1Q-FCO
(1 rocker 60 x 60 — mm)	carbon	_	EK-T1Q-GBU			cocoa orinoco	EK-T1Q-FCC
	brass	_	EK-T1Q-GBB		square	grey efeso	EK-T1Q-FGE
	aluminium		EK-T2R-GBQ		(1 rocker 60 x 60 mm)	grey london	EK-T1Q-FGL
	nickel	_	EK-T2R-GBR			grey bromine	EK-T1Q-FGB
rectangular vertical	titanium	_	EK-T2R-GBS			green commodore	EK-T1Q-FVC
(2 rockers 30 x 60 mm)	carbon	_	EK-T2R-GBU			black ingo	EK-T1Q-FNI
	brass	- brushed	EK-T2R-GBB			malè white	EK-T2R-FBM
	aluminium	- DLAZUEA	EK-T4Q-GBQ			beige luxor	EK-T2R-FBL
	nickel	_	EK-T4Q-GBR			beaver ottawa	EK-T2R-FCO
square	titanium		EK-T4Q-GBS			cocoa orinoco	EK-T2R-FCC
(4 rockers 30 x 30 mm)	carbon		EK-T4Q-GBU			grey efeso	EK-T2R-FGE
	brass		EK-T4Q-GBB		rectangular vertical (2 rockers 30 x 60 mm)	grey london	EK-T2R-FGL
	aluminium		EK-T4R-GBQ			grey bromine	EK-T2R-FGB
	nickel		EK-T4R-GBR			green commodore	EK-T2R-FVC
rectangular horizontal	titanium		EK-T4R-GBS			black ingo	EK-T2R-FNI
(4 rockers 60 x 15 mm)	carbon		EK-T4R-GBU			malè white	EK-T4Q-FBM
	brass		EK-T4R-GBB			beige luxor	EK-T4Q-FBL
						beaver ottawa	EK-T4Q-FCO
						cocoa orinoco	EK-T4Q-FCC
					square	grey efeso	EK-T4Q-FGE
					(4 rockers 30 x 30 mm)	grey london	EK-T4Q-FGL
						grey bromine	EK-T4Q-FGB
METAL HT						green commodore	EK-T4Q-FVC
Modularity	Colour	Finish	ing	Code		black ingo	EK-T4Q-FNI
	chrome			EK-T1Q-CRO		malè white	EK-T4R-FBM
square	black metal			EK-T10-CBM		beige luxor	EK-T4R-FBL
(1 rocker 60 x 60						beaver ottawa	EK-T4R-FCO
mm)	champagne			EK-T1Q-CHA		cocoa orinoco	EK-T4R-FCC
	chrome			EK-T2R-CRO	rectangular horizontal	grey efeso	EK-T4R-FGE
				EK-T2R-CBM	(4 rockers 60 x 15 mm)	grey london	EK-T4R-FGL
rectangular vertical	black metal						
(2 rockers 30 x 60	black metal					grey bromine	EK-T4R-FGB
	black metal champagne	chrome	plated .	EK-T2R-CHA		grey bromine green commodore	EK-T4R-FGB EK-T4R-FVC
(2 rockers 30 x 60		chrome	e plated				

EK-T4Q-CHA EK-T4R-CRO EK-T4R-CBM EK-T4R-CHA

METAL

Modularity	Colour	Finishing
	chrome	
square (1 rocker 60 x 60 –	black metal	
mm)	champagne	_
rectangular vertical (2 rockers 30 x 60 mm)	chrome	
	black metal	_
	champagne	— chrome plated
	chrome	
square (4 rockers 30 x 30 –	black metal	_
mm)	champagne	_
	chrome	
rectangular horizontal (4 rockers 60 x 15	black metal	
mm)	champagne	

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules Visi	sualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

FENIX NTM®

How to order a front cover

Multisensors

WALL-MOUNT DEVICES

Front cover - Multisensors

The ordering code of a rocker is formed by a fixed part (EK-T) plus a variable part which represents modularity, material, colour, finishing and model.

PLASTIC MATERIAL

Modularity	Colour	Finishing	Code	
Front cover Multisensor (60 x 60 mm)	white		EK-T1Q-GAA-ET2	EK-T1Q-GAA-ES2
	pure white RAL 9016	normal	EK-T1Q-GAR-ET2	EK-T1Q-GAR-ES2
	intense black RAL 9005		EK-T1Q-GAE-ET2	EK-T1Q-GAE-ES2
	silver		EK-T1Q-GAG-ET2	EK-T1Q-GAG-ES2

METAL

Modularity	Colour	Finishing	Code	
Front cover Multisensor (60 x 60 mm)	aluminium		EK-T1Q-GBQ-ET2	EK-T1Q-GBQ-ES2
	nickel		EK-T1Q-GBR-ET2	EK-T1Q-GBR-ES2
	titanium	brushed	EK-T1Q-GBS-ET2	EK-T1Q-GBS-ES2
	carbon		EK-T1Q-GBU-ET2	EK-T1Q-GBU-ES2
	brass		EK-T1Q-GBB-ET2	EK-T1Q-GBB-ES2

METAL HT

Modularity	Colour	Finishing	Code	
Front cover Multisensor (60 x 60 mm)	chrome		EK-T1Q-CRO-ET2	EK-T1Q-CRO-ES2
	black metal	chrome plated	EK-T1Q-CBM-ET2	EK-T1Q-CBM-ES2
	champagne		EK-T1Q-CHA-ET2	EK-T1Q-CHA-ES2

FENIX NTM®

Modularity	Colour	Finishing	Code
	malè white	EK-T1Q-FBM-ET2	EK-T1Q-FBM-ES2
	beige luxor	EK-T1Q-FBL-ET2	EK-T1Q-FBL-ES2
	beaver ottawa	EK-T1Q-FCO-ET2	EK-T1Q-FCO-ES2
Front cover Multisensor (60 x 60 mm)	cocoa orinoco	EK-T1Q-FCC-ET2	EK-T1Q-FCC-ES2
	grey efeso	EK-T1Q-FGE-ET2	EK-T1Q-FGE-ES2
	grey london	EK-T1Q-FGL-ET2	EK-T1Q-FGL-ES2
	grey bromine	EK-T1Q-FGB-ET2	EK-T1Q-FGB-ES2
	green commodore	EK-T1Q-FVC-ET2	EK-T1Q-FVC-ES2
	black ingo	EK-T1Q-FNI-ET2	EK-T1Q-FNI-ES2

Keystone system

WALL-MOUNT DEVICES

Keystone cover.

The ordering code of a rocker is formed by a fixed part (EK-KSC) plus a variable part which represents modularity, material, colour and finishing.

PLASTIC MATERIAL

Modularity	Colour	Code	
Keystone cover (55 x 55 mm)	white	EK-KSC-1-GAA	EK-KSC-2-GAA
	pure white RAL 9016	EK-KSC-1-GAR	EK-KSC-2-GAR
	intense black RAL 9005	EK-KSC-1-GAE	EK-KSC-2-GAE
	silver	EK-KSC-1-GAG	EK-KSC-2-GAG

METAL-EFFECT PAINTING

Modularity	Colour	Code
	aluminium	EK-KSC-1-GBQ
	nickel	EK-KSC-1-GBR
Keystone cover	titanium	EK-KSC-1-GBS
(55 x 55 mm)	carbon	EK-KSC-1-GBU
	brass	EK-KSC-1-GBB

METAL HT

Modularity	Colour	Finishing	Code	
	chrome		EK-KSC-1-CRO	EK-KSC-2-CRO
Keystone cover (55 x 55 mm)	black metal	chrome plated	EK-KSC-1-CBM	EK-KSC-2-CBM
	champagne		EK-KSC-1-CHA	EK-KSC-2-CHA

FENIX NTM®-EFFECT PAINTING

Modularity	Colour	Code	
	malè white	EK-KSC-1-FBM	EK-KSC-2-FBM
	beige luxor	EK-KSC-1-FBL	EK-KSC-2-FBL
	beaver ottawa	EK-KSC-1-FCO	EK-KSC-2-FCO
	cocoa orinoco	EK-KSC-1-FCC	EK-KSC-2-FCC
Keystone cover	grey efeso	EK-KSC-1-FGE	EK-KSC-2-FGE
(55 x 55 mm)	grey london	EK-KSC-1-FGL	EK-KSC-2-FGL
	grey bromine	EK-KSC-1-FGB	EK-KSC-2-FGB
	green commodore	EK-KSC-1-FVC	EK-KSC-2-FVC
	black ingo	EK-KSC-1-FNI	EK-KSC-2-FNI

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Hole cover

WALL-MOUNT DEVICES

Hole cover.

The ordering code of a rocker is formed by a fixed part (EK-A55) plus a variable part which represents modularity, material, colour and finishing.

PLASTIC MATERIAL

Modularity	Colour	Code	
	white	EK-A55-GAA	
	pure white RAL 9016	EK-A55-GAR	
Hole cover (55 x 55 mm)	intense black RAL 9005	EK-A55-GAE	
	silver	EK-A55-GAG	

METAL-EFFECT PAINTING

Modularity	Colour	Code	
	aluminium	EK-A55-GBQ	
	nickel	EK-A55-GBR	
Hole cover	titanium	EK-A55-GBS	
(55 x 55 mm)	carbon	EK-A55-GBU	
	brass	EK-A55-GBB	

METAL HT

Modularity	Colour	Finishing	Code
	chrome		EK-A55-CRO
Hole cover	black metal	chrome plated	EK-A55-CBM
(55 x 55 mm)	champagne		EK-A55-CHA

FENIX NTM®-EFFECT PAINTING

Modularity	Colour	Code
	malè white	EK-A55-FBM
	beige luxor	EK-A55-FBL
	beaver ottawa	EK-A55-FCO
	cocoa orinoco	EK-A55-FCC
Hole cover	grey efeso	EK-A55-FGE
(55 x 55 mm)	grey london	EK-A55-FGL
	grey bromine	EK-A55-FGB
	green commodore	EK-A55-FVC
	black ingo	EK-A55-FNI

C-1-FBM	EK-KSC-2-FBM
C-1-FBL	EK-KSC-2-FBL
C-1-FCO	EK-KSC-2-FCO
C-1-FCC	EK-KSC-2-FCC
C-1-FGE	EK-KSC-2-FGE
C-1-FGL	EK-KSC-2-FGL

EK-KSC-2-GBQ

EK-KSC-2-GBR

EK-KSC-2-GBS

EK-KSC-2-GBU

EK-KSC-2-GBB

Power sockets

WALL-MOUNT DEVICES

PLASTIC MATERIAL

Version	Dimensions	Colour	Finishing	Code
		white		EK-PSC-IT-GAA
Italian		pure white RAL 9016	_	EK-PSC-IT-GAR
Italian	55 x 55 mm	intense black RAL 9005		EK-PSC-IT-GAE
		silver		EK-PSC-IT-GAG
		white		EK-PSC-UK-GAA
111/	55 x 55 mm	pure white RAL 9016		EK-PSC-UK-GAR
UK		intense black RAL 9005		EK-PSC-UK-GAE
		silver		EK-PSC-UK-GAG

METAL-EFFECT PAINTING

Version	Dimensions	Colour	Code
		aluminium	EK-PSC-IT-GBQ
		nickel	EK-PSC-IT-GBR
Italian		titanium	EK-PSC-IT-GBS
	55 x 55 mm	carbon	EK-PSC-IT-GBU
		brass	EK-PSC-IT-GBB
	55 x 55 mm	aluminium	EK-PSC-UK-GBQ
		nickel	EK-PSC-UK-GBR
UK		titanium	EK-PSC-UK-GBS
		carbon	EK-PSC-UK-GBU
		brass	EK-PSC-UK-GBB

METAL HT

Version	Dimensions	Colour	Code
		chrome	EK-PSC-IT-CRO
Italian		black metal	EK-PSC-IT-CBM
	55 x 55 mm	champagne	EK-PSC-IT-CHA
		chrome	EK-PSC-UK-CRO
UK	55 x 55 mm	black metal	EK-PSC-UK-CBM
		champagne	EK-PSC-UK-CHA

FENIX NTM®-EFFECT PAINTING

Version	Dimensions	Colour	Code			
		malè white	EK-PSC-IT-FBM			
		beige luxor	EK-PSC-IT-FBL			
		beaver ottawa	EK-PSC-IT-FCO			
		cocoa orinoco	EK-PSC-IT-FCC			
Italian		grey efeso	EK-PSC-IT-FGE			
	55 x 55 mm	grey london	EK-PSC-IT-FGL			
	5 5 x 55 mm	grey bromine	EK-PSC-IT-FGB			
		green commodore	EK-PSC-IT-FVC			
		black ingo	EK-PSC-IT-FNI			
		malè white	EK-PSC-UK-FBM			
		beige luxor	EK-PSC-UK-FBL			
		beaver ottawa	EK-PSC-UK-FCO			
		cocoa orinoco	EK-PSC-UK-FCC			
UK		grey efeso	EK-PSC-UK-FGE			
		grey london	EK-PSC-UK-FGL			
		grey bromine	EK-PSC-UK-FGB			
		green commodore	EK-PSC-UK-FVC			
		black ingo	EK-PSC-UK-FNI			

Power socket

The ordering code for the coloured cover of an power socket is formed by a fixed part (EK-PSC) and a variable part depending on the version (Italian or Schuko) and the colour. The ordering code for the power socket body only is EK-PWS-. (IT - DE - FR - UK).

PLASTIC MATERIAL

Version	Dimensions	Colour	Finishing	Code
		white		EK-PSC-DE-GAA
Schuko		pure white RAL 9016	_	EK-PSC-DE-GAR
2CUNKO	55 x 55 mm	intense black RAL 9005		EK-PSC-DE-GAE
		silver		EK-PSC-DE-GAG
		white	normal –	EK-PSC-FR-GAA
French		pure white RAL 9016		EK-PSC-FR-GAR
FIEIIGII	55 x 55 mm	intense black RAL 9005	· _	EK-PSC-FR-GAE
		silver		EK-PSC-FR-GAG

METAL-EFFECT PAINTING

Version	Dimensions	Colour	Code
Schuko		aluminium	EK-PSC-FR-GBQ
		nickel	EK-PSC-FR-GBR
	55 x 55 mm	titanium	EK-PSC-FR-GBS
		carbon	EK-PSC-FR-GBU
		brass	EK-PSC-FR-GBB
	55 x 55 mm	aluminium	EK-PSC-FR-GBQ
		nickel	EK-PSC-FR-GBR
French		titanium	EK-PSC-FR-GBS
		carbon	EK-PSC-FR-GBU
		brass	EK-PSC-FR-GBB

METAL HT

Version	Dimensions	Colour	Code
Schuko		chrome	EK-PSC-DE-CRO
	55 x 55 mm	black metal	EK-PSC-DE-CBM
		champagne	EK-PSC-DE-CHA
French	55 x 55 mm	chrome	EK-PSC-FR-CRO
		black metal	EK-PSC-FR-CBM
		champagne	EK-PSC-FR-CHA
French		chrome black metal	EK-PSC-FR-CRO EK-PSC-FR-CBM

FENIX NTM®-EFFECT PAINTING

Version	Dimensions	Colour	Code		
		malè white	EK-PSC-DE-FBM		
		beige luxor	EK-PSC-DE-FBL		
		beaver ottawa	EK-PSC-DE-FCO		
		cocoa orinoco	EK-PSC-DE-FCC		
Schuko		grey efeso	EK-PSC-DE-FGE		
	55 x 55 mm	grey london	EK-PSC-DE-FGL		
		grey bromine	EK-PSC-DE-FGB		
		green commodore	EK-PSC-DE-FVC		
		black ingo	EK-PSC-DE-FNI		
	55 x 55 mm	malè white	EK-PSC-FR-FBM		
		beige luxor	EK-PSC-FR-FBL		
		beaver ottawa	EK-PSC-FR-FCO		
		cocoa orinoco	EK-PSC-FR-FCC		
French		grey efeso	EK-PSC-FR-FGE		
		grey london	EK-PSC-FR-FGL		
		grey bromine	EK-PSC-FR-FGB		
		green commodore	EK-PSC-FR-FVC		
		black ingo	EK-PSC-FR-FNI		

Power sockets USB

WALL-MOUNT DEVICES

Version	Dimensions	Colour	Finishing
		white	
lk - l'	55 x 55 mm	pure white RAL 9016	
Italian		intense black RAL 9005	
		silver	
		white	normal
1117		pure white RAL 9016	
UK		intense black RAL 9005	
	55 x 55 mm	silver	

METAL-EFFECT PAINTING

Version	Dimensions	Colour
		aluminium
	900	nickel
Italian		titanium
	55 x 55 mm	carbon
		brass
		aluminium
	55 x 55 mm	nickel
UK		titanium
		carbon
		brass

METAL HT			
Version	Dimensions	Colour	
	100	chrome	
Italian		black metal	
	55 x 55 mm	champagne	
		chrome	
UK		black metal	
	55 x 55 mm	champagne	

FENIX NTM®-EFFECT PAINTING

Version	Dimensions	Colour
		malè white
		beige luxor
		beaver ottawa
	19-2	cocoa orinoco
Italian		grey efeso
	55 x 55 mm	grey london
		grey bromine
		green commodore
		black ingo
		malè white
		beige luxor
		beaver ottawa
		cocoa orinoco
UK		grey efeso
	55 x 55 mm	grey london
		grey bromine
		green commodore
		black ingo

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Power socket USB A/C

The ordering code for the coloured cover of an power socket is formed by a fixed part (EK-PSC) and a variable part depending on the version (Italian or Schuko) and the colour. The ordering code for the power socket USB body only is EK-PWS-..-USB (IT - DE - FR - UK).

PLASTIC MATERIAL

Version	Dimensions	Colour	Finishing	Code
		white		EK-PSC-DE-USB-GAA
Schuko		pure white RAL 9016	- - normal -	EK-PSC-DE-USB-GAR
SCHUKU	55 x 55 mm -	intense black RAL 9005		EK-PSC-DE-USB-GAE
		silver		EK-PSC-DE-USB-GAG
	55 x 55 mm -	white	IIUI IIIdi –	EK-PSC-FR-USB-GAA
French		pure white RAL 9016	-	EK-PSC-FR-USB-GAR
FIEIIGII		intense black RAL 9005		EK-PSC-FR-USB-GAE
		silver		EK-PSC-FR-USB-GAG

METAL-EFFECT PAINTING

Version	Dimensions	Colour	Code
		aluminium	EK-PSC-DE-USB-GBQ
	600	nickel	EK-PSC-DE-USB-GBR
Schuko	55 x 55 mm	titanium	EK-PSC-DE-USB-GBS
		carbon	EK-PSC-DE-USB-GBU
		brass	EK-PSC-DE-USB-GBB
	55 x 55 mm	aluminium	EK-PSC-FR-USB-GBQ
		nickel	EK-PSC-FR-USB-GBR
French		titanium	EK-PSC-FR-USB-GBS
		carbon	EK-PSC-FR-USB-GBU
		brass	EK-PSC-FR-USB-GBB

METAL HT			
Version	Dimensions	Colour	Code
	55 x 55 mm	chrome	EK-PSC-DE-USB-CRO
Schuko		black metal	EK-PSC-DE-USB-CBM
		champagne	EK-PSC-DE-USB-CHA
French		chrome	EK-PSC-FR-USB-CRO
		black metal	EK-PSC-FR-USB-CBM
	55 x 55 mm	champagne	EK-PSC-FR-USB-CHA

FENIX NTM®-EFFECT PAINTING

Version	Dimensions	Colour	Code
		malè white	EK-PSC-DE-USB-FBM
		beige luxor	EK-PSC-DE-USB-FBL
		beaver ottawa	EK-PSC-DE-USB-FCO
	(m)	cocoa orinoco	EK-PSC-DE-USB-FCC
Schuko	<u></u>	grey efeso	EK-PSC-DE-USB-FGE
	55 x 55 mm	grey london	EK-PSC-DE-USB-FGL
		grey bromine	EK-PSC-DE-USB-FGB
		green commodore	EK-PSC-DE-USB-FVC
		black ingo	EK-PSC-DE-USB-FNI
		malè white	EK-PSC-FR-USB-FBM
		beige luxor	EK-PSC-FR-USB-FBL
		beaver ottawa	EK-PSC-FR-USB-FCO
		cocoa orinoco	EK-PSC-FR-USB-FCC
French		grey efeso	EK-PSC-FR-USB-FGE
	55 x 55 mm	grey london	EK-PSC-FR-USB-FGL
		grey bromine	EK-PSC-FR-USB-FGB
		green commodore	EK-PSC-FR-USB-FVC
		black ingo	EK-PSC-FR-USB-FNI

Code EK-PSC-IT-USB-GAA EK-PSC-IT-USB-GAR EK-PSC-IT-USB-GAG EK-PSC-IT-USB-GAG EK-PSC-UK-USB-GAA EK-PSC-UK-USB-GAA EK-PSC-UK-USB-GAE EK-PSC-UK-USB-GAG

Code EK-PSC-IT-USB-GBQ EK-PSC-IT-USB-GBR EK-PSC-IT-USB-GBS EK-PSC-IT-USB-GBU EK-PSC-IT-USB-GBB EK-PSC-UK-USB-GBR EK-PSC-UK-USB-GBR EK-PSC-UK-USB-GBS EK-PSC-UK-USB-GBU EK-PSC-UK-USB-GBB

Code
EK-PSC-IT-USB-CRO
EK-PSC-IT-USB-CBM
EK-PSC-IT-USB-CHA
EK-PSC-UK-USB-CRO
EK-PSC-UK-USB-CBM
EK-PSC-UK-USB-CH

Code
EK-PSC-IT-USB-FBM
EK-PSC-IT-USB-FBL
EK-PSC-IT-USB-FCO
EK-PSC-IT-USB-FCC
EK-PSC-IT-USB-FGE
EK-PSC-IT-USB-FGL
EK-PSC-IT-USB-FGB
EK-PSC-IT-USB-FVC
EK-PSC-IT-USB-FNI
EK-PSC-UK-USB-FBM
EK-PSC-UK-USB-FBL
EK-PSC-UK-USB-FCO
EK-PSC-UK-USB-FCC
EK-PSC-UK-USB-FGE
EK-PSC-UK-USB-FGL
EK-PSC-UK-USB-FGB
EK-PSC-UK-USB-FVC
EK-PSC-UK-USB-FNI

How to order a frame

WALL-MOUNT DEVICES

Form and Flank frames for devices of FF and 71 series.

The ordering number of a frame includes a fixed part (EK-) and a variable part which depends on the series (Form or Flank), shape (square, rectangular or double), material, colour and finishing.

Series	Modularity	Colour	Finishing	Code
		white		EK-FOQ-GAA
		pure white RAL 9016		EK-FOQ-GAR
	square	intense black RAL 9005		EK-FOQ-GAE
	oquaro	silver		EK-FOQ-GAG
		white		EK-FOR-GAA
FF - 71	71	pure white RAL 9016		EK-FOR-GAR
FF - / I	rectangular	intense black RAL 9005	normal	EK-FOR-GAE
	lootangalar	silver		EK-FOR-GAG
		white		EK-FO2-GAA
		pure white RAL 9016		EK-FO2-GAR
	double	intense black RAL 9005		EK-FO2-GAB
	000510	silver		EK-FO2-GAD

METAL	
Series Modularity Colour Finishing Code)
aluminium EK-F0	DQ-GBQ
nickel EK-FG	OQ-GBR
titanium EK-F0	OQ-GBS
square carbon EK-FG	OQ-GBU
brass EK-FG	OQ-GBB
aluminium EK-F0	OR-GBQ
nickel EK-F0	OR-GBR
FF - 71 titanium brushed EK-FG	OR-GBS
rectangular carbon EK-FG	OR-GBU
brass EK-FG	OR-GBB
aluminium EK-F0	D2-GBQ
nickel EK-FG	02-GBR
titanium EK-FG	D2-GBS
double carbon EK-FG	02-GBU
brass EK-FG	02-GBB

How to order a plate

WALL-MOUNT DEVICES

Plates for IP65 waterproof cover

The order code consists of a fixed part (EK-DQW) and a variable part that depends on the material, colour and finish.

Туре	Modularity	Colour	Finishi	
		white		
		pure white RAL 9016		
		intense black RAL 9005		
		silver		
		brass		
		bronze corked		
		aluminium		
Waterproof cover		nickel		
	square	titanium		
			carbon	
		brass	brushed	
		steel brushed		
		quantum carbon		
		dark chocolate		
		antique brass		

Frame Flank version

Frame Form version

WALL-MOUNT DEVICES

WALL-MOUNT DEVICES

PLASTIC	PLASTIC MATERIAL							
Series	Modularity	Colour	Finishing	Code				
		white		EK-FLQ-GAA				
		pure white RAL 9016		EK-FLQ-GAR				
	square	intense black RAL 9005		EK-FLQ-GAE				
FF - 71	-4	silver	normal	EK-FLQ-GAG				
FF - / I		white	normal	EK-FL2-GAA				
		pure white RAL 9016		EK-FL2-GAR				
	double	intense black RAL 9005		EK-FL2-GAE				
		silver		EK-FL2-GAG				

METAL				
Series	Modularity	Colour	Finishing	Code
		aluminium		EK-FLQ-GBQ
		nickel	_	EK-FLQ-GBR
		titanium	_	EK-FLQ-GBS
	square	carbon	_	EK-FLQ-GBU
		brass	_	EK-FLQ-GBB
		aluminium	-	EK-FLR-GBQ
		nickel	_	EK-FLR-GBR
		titanium	brushed	EK-FLR-GBS
	rectangular	carbon	_	EK-FLR-GBU
		brass		EK-FLR-GBB
		aluminium	_	EK-FL2-GBQ
		nickel	_	EK-FL2-GBR
		titanium		EK-FL2-GBS
	double	carbon		EK-FL2-GBU
		brass	_	EK-FL2-GBB

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
	VISUAIISALIUII	Audio Multinooni		LIILIV	10013	Jaigs Kit	Teenningal section		UGIIGI dI IIIUGA

Square plate Waterproof cover IP65

FENIX NT	N® EFFEC1	PAINTED	METAL
----------	-----------	----------------	-------

Code	Туре	Modularity	Colour		Code
EK-DQW-GAA			malè white		EK-DQW-FBM
EK-DQW-GAR			beige luxor		EK-DQW-FBL
EK-DQW-GAE			beaver ottawa		EK-DQW-FCO
EK-DQW-GAG			cocoa orinoco		EK-DQW-FCC
EK-DQW-GBC	Waterproof cover		grey efeso		EK-DQW-FGE
EK-DQW-GBD	00101	square	grey london		EK-DQW-FGL
EK-DQW-GBQ			grey bromine		EK-DQW-FGB
EK-DQW-GBR			green commodore		EK-DQW-FVC
EK-DQW-GBS			black ingo		EK-DQW-FNI
EK-DQW-GBU					
EK-DQW-GBC	METAL HT				
EK-DQW-SSB	Туре	Modularity	Colour	Finishing	Code
EK-DQW-SBV			chrome		EK-DQW-CRO
EK-DQW-GBH	Waterproof cover		black metal	chrome plated	EK-DQW-CBM
EK-DQW-GBO	00701	square	champagne		EK-DQW-CHA

How to order a plate

WALL-MOUNT DEVICES

Square plates Proxima series

WALL-MOUNT DEVICES

Plates for devices and components for wiring devices Proxima.

The order code consists of a fixed part (EK-PQA) and a variable part that depends on the shape (square or double), the modularity of the window(s), the material, the colour and the finish.

Series	Window	Colour	Finishing	Code
		steel brushed		EK-PQA-1-SSB
		quantum carbon		EK-PQA-1-SBV
		brass	brushed	EK-PQA-1-LBC
		dark chocolate		EK-PQA-1-GBH
		antique brass		EK-PQA-1-GBC
	0	bianco puro RAL 9016		EK-PQA-1-LAR
		bianco caldo		EK-PQA-1-LAA
		nero opaco RAL 9005		EK-PQA-1-LAE
		beige luxor		EK-PQA-1-LBL
		bronze corked		EK-PQA-1-GBE
		old copper		EK-PQA-1-SOC
		steel brushed		EK-PQA-2-SSE
		quantum carbon		EK-PQA-2-SB
		brass	brushed	EK-PQA-2-LBO
		dark chocolate		EK-PQA-2-GB
	antique brass		EK-PQA-2-GB	
Proxima	Proxima	bianco puro RAL 9016		EK-PQA-2-LAF
		bianco caldo		EK-PQA-2-LAA
		nero opaco RAL 9005		EK-PQA-2-LAE
		beige luxor		EK-PQA-2-LBL
		bronze corked		EK-PQA-2-GB
		old copper		EK-PQA-2-SO
		steel brushed		EK-PQA-4-SSI
		quantum carbon		EK-PQA-4-SB
		brass	brushed	EK-PQA-4-LBO
		dark chocolate		EK-PQA-4-GB
00000	antique brass		EK-PQA-4-GB	
	bianco puro RAL 9016		EK-PQA-4-LAF	
		bianco caldo		EK-PQA-4-LAA
		nero opaco RAL 9005		EK-PQA-4-LAE
		beige luxor		EK-PQA-4-LBI
		bronze corked		EK-PQA-4-GBI
		old copper		EK-PQA-4-SO

METAL Series Window Finishing Colour steel brushed quantum carbon brass brushed dark chocolate antique brass bianco puro RAL 9016 \bigcup bianco caldo nero opaco RAL 9005 beige luxor bronze corked old copper steel brushed quantum carbon brass brushed dark chocolate antique brass ()bianco puro RAL 9016 bianco caldo nero opaco RAL 9005 beige luxor bronze corked old copper Proxima steel brushed quantum carbon brass brushed dark chocolate antique brass bianco puro RAL 9016 45 x 45 mm bianco caldo nero opaco RAL 9005 beige luxor bronze corked old copper steel brushed quantum carbon brass brushed dark chocolate antique brass bianco puro RAL 9016 bianco caldo nero opaco RAL 9005 beige luxor bronze corked old copper

METAL HT Series Window Finishing Code Colour EK-PQA-1-CRO chrome 0 black metal EK-PQA-1-CBM EK-PQA-1-SHA champagne EK-PQA-2-CRO chrome 00 EK-PQA-2-CBM Proxima black metal chrome plated champagne EK-PQA-2-SHA chrome EK-PQA-4-CRO 0 0 0 0 black metal EK-PQA-4-CBM EK-PQA-4-SHA champagne

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Square plates Proxima series

WALL-MOUNT DEVICES

METAL HT

	Code
	EK-PQA-U-SSB
	EK-PQA-U-SBV
	EK-PQA-U-LBC
	EK-PQA-U-GBH
	EK-PQA-U-GBO
	EK-PQA-U-LAR
	EK-PQA-U-LAA
	EK-PQA-U-LAE EK-PQA-U-LBL
	EK-PQA-U-GBD
	EK-PQA-U-SOC
	EK-PQA-T-SSB
	EK-PQA-T-SBV
	EK-PQA-T-LBC
	EK-PQA-T-GBH
	EK-PQA-T-GBO
	EK-PQA-T-LAR
	EK-PQA-T-LAA
	EK-PQA-T-LAE
	EK-PQA-T-LBL
	EK-PQA-T-GBD
	EK-PQA-T-SOC
	EK-PQA-P-SSB
	EK-PQA-P-SBV
	EK-PQA-P-LBC
	EK-PQA-P-GBH
	EK-PQA-P-GBO
	EK-PQA-P-LAR
	EK-PQA-P-LAA
	EK-PQA-P-LAE
	EK-PQA-P-LBL
	EK-PQA-P-GBD
	EK-PQA-P-SOC
	EK-PQA-K-SSB
	EK-PQA-K-SBV
	EK-PQA-K-LBC
	EK-PQA-K-GBH
	EK-PQA-K-GBO
	EK-PQA-K-LAR
	EK-PQA-K-LAA
	EK-PQA-K-LAE
	EK-PQA-K-LBL
	EK-PQA-K-GBD
	EK-PQA-K-SOC
_	

Series	Window	Colour	Finishing	Code
		chrome		EK-PQA-U-CRO
		black metal	-	EK-PQA-U-CBM
		champagne	-	EK-PQA-U-SHA
		chrome	-	EK-PQA-T-CRO
		black metal	-	EK-PQA-T-CBM
D .		champagne	- chrome plated - - -	EK-PQA-T-SHA
Proxima		chrome		EK-PQA-P-CRO
		black metal		EK-PQA-P-CBM
	45 x 45 mm	champagne		EK-PQA-P-SHA
		chrome		EK-PQA-K-CRO
		black metal		EK-PQA-K-CBM
		champagne	-	EK-PQA-K-SHA

Double plates Proxima series WALL-MOUNT DEVICES

Series	Window	Colour	Finishing	Code
		chrome		EK-P2A-2U-CRO
		black metal	_	EK-P2A-2U-CBM
		champagne	_	EK-P2A-2U-SHA
		chrome	_	EK-P2A-2T-CRO
	00)	black metal	_	EK-P2A-2T-CBM
		champagne	_	EK-P2A-2T-SHA
		chrome	_	EK-P2A-2P-CRO
	00	black metal	_	EK-P2A-2P-CBM
	45 x 45 mm	champagne	_	EK-P2A-2P-SHA
-		chrome	_	EK-P2A-4U-CRO
		black metal		EK-P2A-4U-CBN
		champagne		EK-P2A-4U-SHA
		chrome	_	EK-P2A-4T-CRO
Proxima		black metal	chrome plated	EK-P2A-4T-CBM
		champagne		EK-P2A-4T-SHA
		chrome	_	EK-P2A-4P-CRO
	00	black metal	_	EK-P2A-4P-CBM
	45 x 45 mm	champagne	_	EK-P2A-4P-SHA
		chrome	_	EK-P2A-UU-CRO
		black metal		EK-P2A-UU-CBN
		champagne		EK-P2A-UU-SHA
		chrome	_	EK-P2A-TT-CRO
		black metal	_	EK-P2A-TT-CBM
		champagne	_	EK-P2A-TT-SHA
		chrome	_	EK-P2A-PP-CRO
		black metal	_	EK-P2A-PP-CBM
	45 x 45 mm	champagne	_	EK-P2A-PP-SHA

Series	Window	Colour	Finishing	Code
		steel brushed		EK-P2A-2U-SSE
		quantum carbon		EK-P2A-2U-SB
		brass	brushed	EK-P2A-2U-LBC
		dark chocolate		EK-P2A-2U-GB
		antique brass		EK-P2A-2U-GB
	•• O	bianco puro		EK-P2A-2U-LAF
		bianco caldo		EK-P2A-2U-LAA
		nero opaco		EK-P2A-2U-LA
		beige luxor		EK-P2A-2U-LBL
		bronze corked		EK-P2A-2U-GB
		old copper		EK-P2A-2U-SO
		steel brushed		EK-P2A-2T-SSE
		quantum carbon		EK-P2A-2T-SB
		brass	brushed	EK-P2A-2T-LBC
		dark chocolate		EK-P2A-2T-GB
		antique brass		EK-P2A-2T-GB
Proxima	00)	bianco puro		EK-P2A-2T-LAF
		bianco caldo		EK-P2A-2T-LAA
		nero opaco		EK-P2A-2T-LAE
		beige luxor		EK-P2A-2T-LBL
		bronze corked		EK-P2A-2T-GB
		old copper		EK-P2A-2T-SO
		steel brushed		EK-P2A-2P-SSE
		quantum carbon		EK-P2A-2P-SB
		brass	brushed	EK-P2A-2P-LBO
		dark chocolate		EK-P2A-2P-GB
		antique brass		EK-P2A-2P-GB
	00	bianco puro		EK-P2A-2P-LAF
	45 x 45 mm	bianco caldo		EK-P2A-2P-LA
		nero opaco		EK-P2A-2P-LAE
		beige luxor		EK-P2A-2P-LBI
		bronze corked		EK-P2A-2P-GB
		old copper		EK-P2A-2P-SO

Series	Window	Colour	Finishing	Code	Series	Window	Colour	Finishing	Code
		steel brushed		EK-P2A-2U-SSB			steel brushed		EK-P2A-UU-SSE
		quantum carbon		EK-P2A-2U-SBV			quantum carbon		EK-P2A-UU-SB\
		brass	brushed	EK-P2A-2U-LBC			brass	brushed	EK-P2A-UU-LBC
		dark chocolate		EK-P2A-2U-GBH			dark chocolate		EK-P2A-UU-GBH
		antique brass		EK-P2A-2U-GBO			antique brass		EK-P2A-UU-GBC
		bianco puro		EK-P2A-2U-LAR			bianco puro		EK-P2A-UU-LAR
		bianco caldo		EK-P2A-2U-LAA			bianco caldo		EK-P2A-UU-LAA
		nero opaco		EK-P2A-2U-LAE			nero opaco		EK-P2A-UU-LAE
		beige luxor		EK-P2A-2U-LBL			beige luxor		EK-P2A-UU-LBL
		bronze corked		EK-P2A-2U-GBD			bronze corked		EK-P2A-UU-GBE
		old copper		EK-P2A-2U-SOC			old copper		EK-P2A-UU-SOC
		steel brushed		EK-P2A-2T-SSB			steel brushed		EK-P2A-TT-SSB
		quantum carbon		EK-P2A-2T-SBV			quantum carbon		EK-P2A-TT-SBV
		brass	brushed	EK-P2A-2T-LBC			brass	brushed	EK-P2A-TT-LBC
		dark chocolate		EK-P2A-2T-GBH			dark chocolate		EK-P2A-TT-GBH
		antique brass		EK-P2A-2T-GBO			antique brass		EK-P2A-TT-GBO
Proxima	00 ()	bianco puro	_	EK-P2A-2T-LAR	Proxima		bianco puro		EK-P2A-TT-LAR
		bianco caldo		EK-P2A-2T-LAA			bianco caldo		EK-P2A-TT-LAA
		nero opaco		EK-P2A-2T-LAE			nero opaco		EK-P2A-TT-LAE
		beige luxor		EK-P2A-2T-LBL			beige luxor		EK-P2A-TT-LBL
		bronze corked		EK-P2A-2T-GBD			bronze corked		EK-P2A-TT-GBD
		old copper		EK-P2A-2T-SOC			old copper		EK-P2A-TT-SOC
		steel brushed		EK-P2A-2P-SSB			steel brushed		EK-P2A-PP-SSB
		quantum carbon		EK-P2A-2P-SBV			quantum carbon		EK-P2A-PP-SBV
		brass	brushed	EK-P2A-2P-LBC			brass	brushed	EK-P2A-PP-LBC
		dark chocolate		EK-P2A-2P-GBH			dark chocolate		EK-P2A-PP-GBH
		antique brass		EK-P2A-2P-GBO			antique brass		EK-P2A-PP-GBO
	00	bianco puro		EK-P2A-2P-LAR			bianco puro		EK-P2A-PP-LAR
	45 x 45 mm	bianco caldo		EK-P2A-2P-LAA		45 x 45 mm (2)	bianco caldo		EK-P2A-PP-LAA
		nero opaco		EK-P2A-2P-LAE			nero opaco		EK-P2A-PP-LAE
		beige luxor		EK-P2A-2P-LBL			beige luxor		EK-P2A-PP-LBL
		bronze corked		EK-P2A-2P-GBD			bronze corked		EK-P2A-PP-GBD
		old copper		EK-P2A-2P-SOC			old copper		EK-P2A-PP-SOC

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

Square plate


WALL-MOUNT DEVICES

Plates for devices of 71 series and flush-mounting inserts.

The ordering code of a plate consists of a fixed part (EK-P) and a variable part depending on shape (square or rectangular), window size (small or large), material, colour and finishing.

Series	Window	Colour	Finishing	Code
		aluminium		EK-PQP-GBQ
		nickel		EK-PQP-GBR
		titanium		EK-PQP-GBS
	45 x 45 mm	carbon		EK-PQP-GBU
		brass		EK-PQP-GBB
		aluminium		EK-PQG-GBQ
		nickel	_	EK-PQG-GBR
FF - 71		titanium	_	EK-PQG-GBS
	55 x 55 mm	carbon	_	EK-PQG-GBU
		brass	— brushed	EK-PQG-GBB
		aluminium	Diusileu	EK-PQS-GBQ
		nickel	_	EK-PQS-GBR
		titanium	_	EK-PQS-GBS
	60 x 60 mm	carbon	_	EK-PQS-GBU
		brass	_	EK-PQS-GBB
		aluminium	_	EK-PQN-GBQ
		nickel		EK-PQN-GBR
Movement sensor		titanium		EK-PQN-GBS
3011301	50 x 50 mm	carbon		EK-PQN-GBU
		brass		EK-PQN-GBB

PLASTIC MATERIAL Series Window



FENIX NTM®

Series	Window	Colour	Code
		malè white	EK-PQP-FBM
		beige luxor	EK-PQP-FBL
		beaver ottawa	EK-PQP-FCO
		cocoa orinoco	EK-PQP-FCC
		grey efeso	EK-PQP-FGE
	45 x 45 mm	grey london	EK-PQP-FGL
		grey bromine	EK-PQP-FGB
		green commodore	EK-PQP-FVC
		black ingo	EK-PQP-FNI
-		malè white	EK-PQG-FBM
		beige luxor	EK-PQG-FBL
		beaver ottawa	EK-PQG-FCO
		cocoa orinoco	EK-PQG-FCC
F - 71		grey efeso	EK-PQG-FGE
	55 x 55 mm	grey london	EK-PQG-FGL
		grey bromine	EK-PQG-FGB
		green commodore	EK-PQG-FVC
		black ingo	EK-PQG-FNI
		malè white	EK-PQS-FBM
		beige luxor	EK-PQS-FBL
		beaver ottawa	EK-PQS-FCO
		cocoa orinoco	EK-PQS-FCC
		grey efeso	EK-PQS-FGE
	60 x 60 mm	grey london	EK-PQS-FGL
		grey bromine	EK-PQS-FGB
		green commodore	EK-PQS-FVC
		black ingo	EK-PQS-FNI
		malè white	EK-PQN-FBM
		beige luxor	EK-PQN-FBL
		beaver ottawa	EK-PQN-FCO
		cocoa orinoco	EK-PQN-FCC
lovement ensor		grey efeso	EK-PQN-FGE
011301	50 x 50 mm	grey london	EK-PQN-FGL
		grey bromine	EK-PQN-FGB
		green commodore	EK-PQN-FVC
		black ingo	EK-PQN-FNI

Series	Window	Colour	Finishing	Code
		white		EK-PQP-GAA
		pure white RAL 9016	-	EK-PQP-GAR
	45 x 45 mm	intense black RAL 9005	-	EK-PQP-GAE
	40 X 40 IIIII	silver	-	EK-PQP-GAG
		white	-	EK-PQG-GAA
FF - 71		pure white RAL 9016	- normal _	EK-PQG-GAR
	55 x 55 mm	intense black RAL 9005		EK-PQG-GAE
	22 X 22 IIIII	silver		EK-PQG-GAG
		white		EK-PQS-GAA
		pure white RAL 9016	-	EK-PQS-GAR
	60 x 60 mm	intense black RAL 9005	-	EK-PQS-GAE
		silver	_	EK-PQS-GAG
		white	-	EK-PQN-GAA
Movement sensor		intense black RAL 9005	-	EK-PQN-GAE
	50 x 50 mm	silver	-	EK-PQN-GAG

Series	Window	Colour	Code
		malè white	EK-PRG-FBM
		beige luxor	EK-PRG-FBL
		beaver ottawa	EK-PRG-FCO
		cocoa orinoco	EK-PRG-FCC
		grey efeso	EK-PRG-FGE
	68 x 45 mm	grey london	EK-PRG-FGL
		grey bromine	EK-PRG-FGB
		green commodore	EK-PRG-FVC
		black ingo	EK-PRG-FNI
		malè white	EK-PRS-FBM
		beige luxor	EK-PRS-FBL
		beaver ottawa	EK-PRS-FCO
		cocoa orinoco	EK-PRS-FCC
		grey efeso	EK-PRS-FGE
	60 x 60 mm	grey london	EK-PRS-FGL
		grey bromine	EK-PRS-FGB
		green commodore	EK-PRS-FVC
		black ingo	EK-PRS-FNI

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index


Rectangular plate

		METAL				
ishing	Code	Series	Window	Colour	Finishing	Code
	EK-PRG-GAA			aluminium		EK-PRG-GBQ
 mal	EK-PRG-GAR			nickel		EK-PRG-GBR
	EK-PRG-GAE		68 x 45 mm	titanium		EK-PRG-GBS
	EK-PRG-GAG			carbon	_	EK-PRG-GBU
	EK-PRS-GAA	FF - 71		brass	— brushed	EK-PRG-GBB
-	EK-PRS-GAR	FF - / I		aluminium	— Drusileu	EK-PRS-GBQ
-	EK-PRS-GAE			nickel		EK-PRS-GBR
	EK-PRS-GAG			titanium		EK-PRS-GBS
			60 x 60 mm	carbon		EK-PRS-GBU
				brass		EK-PRS-GBB


Double plate

WALL-MOUNT DEVICES

PLASTIC MATERIAL



eries	Window	Colour	Finishing	Code
		aluminium		EK-P2E-GBQ
		nickel		EK-P2E-GBR
		titanium		EK-P2E-GBS
	45 x 45 mm (2)	carbon		EK-P2E-GBU
		brass		EK-P2E-GBB
		aluminium		EK-P2F-GBQ
		nickel		EK-P2F-GBR
	45 x 45 mm (1)	titanium		EK-P2F-GBS
	60 x 60 mm (1)	carbon		EK-P2F-GBU
		brass		EK-P2F-GBB
		aluminium		EK-P2P-GBQ
		nickel		EK-P2P-GBR
		titanium		EK-P2P-GBS
	55 x 55 mm (2)	carbon		EK-P2P-GBU
71		brass		EK-P2P-GBB
71		aluminium	— brushed	EK-P2G-GBQ
		nickel		EK-P2G-GBR
		titanium		EK-P2G-GBS
	55 x 55 mm (1) 60 x 60 mm (1)	carbon		EK-P2G-GBU
		brass		EK-P2G-GBE
		aluminium		EK-P2S-GBQ
		nickel		EK-P2S-GBR
		titanium		EK-P2S-GBS
	60 x 60 mm (2)	carbon		EK-P2S-GBU
		brass		EK-P2S-GBB
		aluminium		EK-P2H-GBC
		nickel		EK-P2H-GBR
	60 x 60 mm (2)	titanium		EK-P2H-GBS
	swiss market	carbon		EK-P2H-GBL
		brass		EK-P2H-GBE

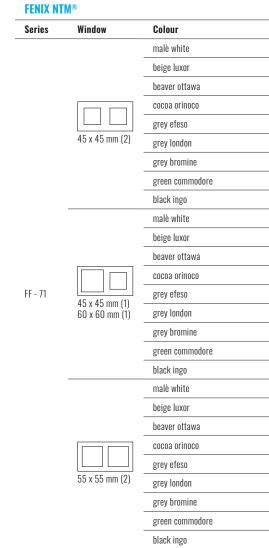

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
		1							

Double plate

Code	Series	Window	Colour	Code
EK-P2E-FBM			malè white	EK-P2G-FBM
EK-P2E-FBL			beige luxor	EK-P2G-FBL
EK-P2E-FCO			beaver ottawa	EK-P2G-FCO
EK-P2E-FCC			cocoa orinoco	EK-P2G-FCC
EK-P2E-FGE		55 x 55 mm (1)	grey efeso	EK-P2G-FGE
EK-P2E-FGL		60 x 60 mm (1)	grey london	EK-P2G-FGL
EK-P2E-FGB			grey bromine	EK-P2G-FGB
EK-P2E-FVC			green commodore	EK-P2G-FVC
EK-P2E-FNI			black ingo	EK-P2G-FNI
EK-P2F-FBM			malè white	EK-P2S-FBM
EK-P2F-FBL			beige luxor	EK-P2S-FBL
EK-P2F-FCO			beaver ottawa	EK-P2S-FCO
EK-P2F-FCC			cocoa orinoco	EK-P2S-FCC
EK-P2F-FGE	FF - 71		grey efeso	EK-P2S-FGE
EK-P2F-FGL		60 x 60 mm (2)	grey london	EK-P2S-FGL
EK-P2F-FGB			grey bromine	EK-P2S-FGB
EK-P2F-FVC			green commodore	EK-P2S-FVC
EK-P2F-FNI			black ingo	EK-P2S-FNI
EK-P2P-FBM			malè white	EK-P2H-FBM
EK-P2P-FBL			beige luxor	EK-P2H-FBL
EK-P2P-FCO			beaver ottawa	EK-P2H-FCO
EK-P2P-FCC			cocoa orinoco	EK-P2H-FCC
EK-P2P-FGE		60 x 60 mm (2)	grey efeso	EK-P2H-FGE
EK-P2P-FGL		swiss market	grey london	EK-P2H-FGL
EK-P2P-FGB			grey bromine	EK-P2H-FGB
EK-P2P-FVC			green commodore	EK-P2H-FVC
EK-P2P-FNI			black ingo	EK-P2H-FNI

How to order a Deep plate

WALL-MOUNT DEVICES


Deep plates for devices of Signum, 20venti and 71 series. The ordering code of a Deep plate consists of a fixed part (EK-D) and a variable part depending on shape (square or rectangular), window size (small or large), material, colour and finishing.

PLASTIC MATERIAL

Series	Window	Colour	Finishing	Code
		white		EK-DQT-GAA
20venti		pure white RAL 9016	-	EK-DQT-GAR
(4 rockers)	30 x 60 mm	intense black RAL 9005		EK-DQT-GAE
	30 X 60 IIIIII	silver	-	EK-DQT-GAG
		white	-	EK-DQP-GAA
		pure white RAL 9016	-	EK-DQP-GAR
	45 x 45 mm	intense black RAL 9005	-	EK-DQP-GAE
	45 X 45 mm	silver	-	EK-DQP-GAG
		white	-	EK-DQG-GAA
20venti FF		pure white RAL 9016	normal _	EK-DQG-GAR
rr 71		intense black RAL 9005		EK-DQG-GAE
	55 x 55 mm	silver	-	EK-DQG-GAG
		white	-	EK-DQS-GAA
		pure white RAL 9016	-	EK-DQS-GAR
		intense black RAL 9005	-	EK-DQS-GAE
	60 x 60 mm	silver	-	EK-DQS-GAG
		white	-	EK-DQN-GAA
Movement sensor		intense black RAL 9005	-	EK-DQN-GAE
3011301	50 x 50 mm	silver	-	EK-DQN-GAG

Deep square plate

WALL-MOUNT DEVICES

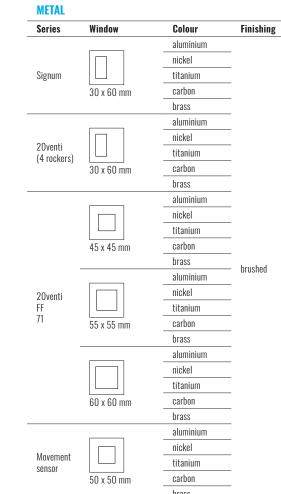


Series	Window	Colour	Finishing	Code	Series	Window	Colour	Code
		aluminium		EK-DQZ-GBQ			malè white	EK-DQZ-FBM
		nickel	_	EK-DQZ-GBR			beige luxor	EK-DQZ-FBL
Signum		titanium	-	EK-DQZ-GBS			beaver ottawa	EK-DQZ-FCO
	30 x 60 mm	carbon	_	EK-DQZ-GBU			cocoa orinoco	EK-DQZ-FCC
		brass	-	EK-DQZ-GBB	Signum		grey efeso	EK-DQZ-FGE
		aluminium	-	EK-DQT-GBQ		30 x 60 mm	grey london	EK-DQZ-FGL
		nickel	_	EK-DQT-GBR			grey bromine	EK-DQZ-FGB
20venti (4 rockers)		titanium	-	EK-DQT-GBS			green commodore	EK-DQZ-FVC
(11001013)	30 x 60 mm	carbon	-	EK-DQT-GBU			black ingo	EK-DQZ-FNI
		brass	_	EK-DQT-GBB			malè white	EK-DQT-FBM
		aluminium	_	EK-DQP-GBQ			beige luxor	EK-DQT-FBL
		nickel	-	EK-DQP-GBR			beaver ottawa	EK-DQT-FCO
		titanium	-	EK-DQP-GBS	00		cocoa orinoco	EK-DQT-FCC
	45 x 45 mm	carbon	-	EK-DQP-GBU	20venti (4 rockers)		grey efeso	EK-DQT-FGE
		brass	- brushod	EK-DQP-GBB	(1100/013)	30 x 60 mm	grey london	EK-DQT-FGL
		aluminium	– brushed	EK-DQG-GBQ			grey bromine	EK-DQT-FGB
20venti		nickel	_	EK-DQG-GBR			green commodore	EK-DQT-FVC
FF		titanium	_	EK-DQG-GBS	_		black ingo	EK-DQT-FNI
71	55 x 55 mm	carbon	_	EK-DQG-GBU			malè white	EK-DQP-FBM
		brass	_	EK-DQG-GBB			beige luxor	EK-DQP-FBL
		aluminium	_	EK-DQS-GBQ			beaver ottawa	EK-DQP-FCO
		nickel	_	EK-DQS-GBR			cocoa orinoco	EK-DQP-FCC
		titanium	_	EK-DQS-GBS			grey efeso	EK-DQP-FGE
	60 x 60 mm	carbon	_	EK-DQS-GBU		45 x 45 mm	grey london	EK-DQP-FGL
		brass	_	EK-DQS-GBB			grey bromine	EK-DQP-FGB
		aluminium	_	EK-DQN-GBQ			green commodore	EK-DQP-FVC
		nickel	_	EK-DQN-GBR			black ingo	EK-DQP-FNI
Movement		titanium	_	EK-DQN-GBS			malè white	EK-DQG-FBM
sensor	50 x 50 mm	carbon	_	EK-DQN-GBU			beige luxor	EK-DQG-FBL
		brass	_	EK-DQN-GBB			beaver ottawa	EK-DQG-FCO
					20venti		cocoa orinoco	EK-DQG-FCC
					FF		grey efeso	EK-DQG-FGE
					71	55 x 55 mm	grey london	EK-DQG-FGL
							grey bromine	EK-DQG-FGB
METAL HT							green commodore	EK-DQG-FVC
METAL HT Series	Window	Colour	Finishing	Code			green commodore black ingo	EK-DQG-FVC EK-DQG-FNI
		Colour chrome	Finishing	Code EK-DQZ-CRO				
Series			Finishing				black ingo malè white	EK-DQG-FNI
Series	Window	chrome black metal	Finishing -	EK-DQZ-CRO EK-DQZ-CBM			black ingo	EK-DQG-FNI EK-DQS-FBM
Series		chrome black metal champagne	Finishing - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA			black ingo malè white beige luxor	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL
Series Signum	Window	chrome black metal	Finishing - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO			black ingo malè white beige luxor beaver ottawa	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO
Series	Window 30 x 60 mm	chrome black metal champagne	Finishing - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC
Series Signum 20venti	Window	chrome black metal champagne chrome	Finishing - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE
Series Signum 20venti	Window 30 x 60 mm	chrome black metal champagne chrome black metal	Finishing - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGE
Series Signum 20venti	Window 30 x 60 mm	chrome black metal champagne chrome black metal champagne chrome	- - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGL EK-DQS-FGB
Series Signum 20venti	Window 30 x 60 mm 30 x 60 mm	chrome black metal champagne chrome black metal champagne chrome black metal	Finishing	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO EK-DQP-CBM		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGL EK-DQS-FGB EK-DQS-FVC
Series Signum 20venti	Window 30 x 60 mm	chrome black metal champagne chrome black metal champagne chrome	- - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore black ingo	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGB EK-DQS-FGB EK-DQS-FVC EK-DQS-FNI
Series Signum 20venti (4 rockers)	Window 30 x 60 mm 30 x 60 mm	chrome black metal champagne chrome black metal champagne chrome black metal	- - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO EK-DQP-CBM		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore black ingo malè white	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGL EK-DQS-FGB EK-DQS-FVC EK-DQS-FNI EK-DQS-FNI
Series Signum 20venti (4 rockers) 20venti FF	Window 30 x 60 mm 30 x 60 mm	chrome black metal champagne chrome black metal champagne chrome black metal champagne	- - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO EK-DQP-CBM EK-DQP-CHA		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore black ingo malè white beige luxor	EK-DQG-FNI EK-DQS-FBA EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGB EK-DQS-FGB EK-DQS-FVC EK-DQS-FNI EK-DQN-FBM EK-DQN-FBL
Series Signum 20venti (4 rockers) 20venti FF	Window 30 x 60 mm 30 x 60 mm 30 x 60 mm 45 x 45 mm	chrome black metal champagne chrome black metal champagne chrome black metal champagne champagne black metal champagne champagne champagne <t< td=""><td>- - - - -</td><td>EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO EK-DQP-CBM EK-DQP-CHA EK-DQG-CRO EK-DQG-CBM</td><td>Movement</td><td>60 x 60 mm</td><td>black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore black ingo malè white beige luxor beaver ottawa</td><td>EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGB EK-DQS-FVC EK-DQS-FNI EK-DQN-FBM EK-DQN-FBM EK-DQN-FBL EK-DQN-FCO</td></t<>	- - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO EK-DQP-CBM EK-DQP-CHA EK-DQG-CRO EK-DQG-CBM	Movement	60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore black ingo malè white beige luxor beaver ottawa	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGB EK-DQS-FVC EK-DQS-FNI EK-DQN-FBM EK-DQN-FBM EK-DQN-FBL EK-DQN-FCO
Series Signum 20venti (4 rockers) 20venti FF	Window 30 x 60 mm 30 x 60 mm	chrome black metal champagne chrome black metal champagne chrome black metal chrome black metal chrome black metal champagne champagne champagne champagne champagne champagne champagne champagne	- - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO EK-DQP-CBM EK-DQP-CHA EK-DQG-CRO EK-DQG-CHA	Movement sensor		black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FCC EK-DQS-FGE EK-DQS-FGB EK-DQS-FGB EK-DQS-FRGE EK-DQS-FRGE EK-DQS-FRGE EK-DQS-FRGE EK-DQS-FRI EK-DQN-FBL EK-DQN-FBL EK-DQN-FCC EK-DQN-FGE
Series Signum 20venti (4 rockers) 20venti FF	Window 30 x 60 mm 30 x 60 mm 30 x 60 mm 45 x 45 mm	chrome black metal champagne champagne chrome black metal chrome	- - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO EK-DQP-CBM EK-DQP-CHA EK-DQG-CRO EK-DQG-CRO EK-DQG-CRA		60 x 60 mm	black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FGE EK-DQS-FGE EK-DQS-FGE EK-DQS-FGE EK-DQS-FGE EK-DQS-FGE EK-DQS-FGE EK-DQS-FGB EK-DQS-FRO EK-DQS-FRO EK-DQS-FRO EK-DQS-FRO EK-DQN-FBL EK-DQN-FGC EK-DQN-FGC EK-DQN-FGE EK-DQN-FGE
Series Signum 20venti	Window 30 x 60 mm 30 x 60 mm 30 x 60 mm 45 x 45 mm	chrome black metal champagne chrome black metal champagne chrome black metal chrome black metal chrome black metal champagne champagne champagne champagne champagne champagne champagne champagne	- - - - -	EK-DQZ-CRO EK-DQZ-CBM EK-DQZ-CHA EK-DQT-CRO EK-DQT-CBM EK-DQT-CHA EK-DQP-CRO EK-DQP-CBM EK-DQP-CHA EK-DQG-CRO EK-DQG-CHA			black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso grey london grey bromine green commodore black ingo malè white beige luxor beaver ottawa cocoa orinoco grey efeso	EK-DQG-FNI EK-DQS-FBM EK-DQS-FBL EK-DQS-FCO EK-DQS-FCC EK-DQS-FCC EK-DQS-FGE EK-DQS-FGL EK-DQS-FGB EK-DQS-FKO EK-DQS-FKI EK-DQN-FBL EK-DQN-FBL EK-DQN-FCO EK-DQN-FCC

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Deep square plate WALL-MOUNT DEVICES

Deep rectangular plate WALL-MOUNT DEVICES

PLASTIC MATERIAL



Series	Window	Colour	Code
		malè white	EK-DRG-FBM
		beige luxor	EK-DRG-FBL
		beaver ottawa	EK-DRG-FCO
		cocoa orinoco	EK-DRG-FCC
		grey efeso	EK-DRG-FGE
	68 x 45 mm	grey london	EK-DRG-FGL
		grey bromine	EK-DRG-FGB
		green commodore	EK-DRG-FVC
20venti FF		black ingo	EK-DRG-FNI
71		malè white	EK-DRS-FBM
		beige luxor	EK-DRS-FBL
		beaver ottawa	EK-DRS-FCO
		cocoa orinoco	EK-DRS-FCC
		grey efeso	EK-DRS-FGE
	60 x 60 mm	grey london	EK-DRS-FGL
		grey bromine	EK-DRS-FGB
		green commodore	EK-DRS-FVC
		black ingo	EK-DRS-FNI

Series	Window	Colour	Finishing	Code	Series	Window	Colour	Finishing	Code
		white		EK-D2P-GAA			aluminium		EK-D2E-GBQ
		pure white RAL 9016		EK-D2P-GAR			nickel	_	EK-D2E-GBR
		intense black RAL 9005		EK-D2P-GAE			titanium	-	EK-D2E-GBS
	55 x 55 mm (2)	silver		EK-D2P-GAG		45 x 45 mm (2)	carbon	-	EK-D2E-GBU
-		white		EK-D2F-GAA			brass	-	EK-D2E-GBB
		pure white RAL 9016		EK-D2F-GAR			aluminium	-	EK-D2F-GBQ
	45 x 45 mm (1)	intense black RAL 9005		EK-D2F-GAE			nickel	-	EK-D2F-GBR
	60 x 60 mm (1)	silver		EK-D2F-GAG			titanium	-	EK-D2F-GBS
-		white		EK-D2G-GAA		45 x 45 mm (1) 60 x 60 mm (1)	carbon	-	EK-D2F-GBU
20venti FF		pure white RAL 9016	normal	EK-D2G-GAR		00 x 00 mm (1)	brass	-	EK-D2F-GBB
rr 71	55 x 55 mm (1)	intense black RAL 9005	normal	EK-D2G-GAE			aluminium	_	EK-D2P-GBQ
	60 x 60 mm (1)	silver		EK-D2G-GAG			nickel	-	EK-D2P-GBR
-		white		EK-D2S-GAA			titanium	-	EK-D2P-GBS
		pure white RAL 9016		EK-D2S-GAR		55 x 55 mm (2)	carbon	-	EK-D2P-GBU
	60 x 60 mm (2)	intense black RAL 9005		EK-D2S-GAE	FF - 71		brass	– – brushed	EK-D2P-GBB
	00 X 00 IIIII (2)	silver		EK-D2S-GAG	FF - / I		aluminium	- Drusileu	EK-D2G-GBQ
		white		EK-D2H-GAA			nickel	_	EK-D2G-GBR
		pure white RAL 9016		EK-D2H-GAR			titanium	_	EK-D2G-GBS
	60 x 60 mm (2)	intense black RAL 9005		EK-D2H-GAE		55 x 55 mm (1) 60 x 60 mm (1)	carbon	-	EK-D2G-GBU
	swiss market	silver		EK-D2H-GAG		00 x 00 mm (1)	brass	_	EK-D2G-GBB
							aluminium	_	EK-D2S-GBQ
							nickel	_	EK-D2S-GBR
							titanium	_	EK-D2S-GBS
						60 x 60 mm (2)	carbon		EK-D2S-GBU
							brass		EK-D2S-GBB
							aluminium	_	EK-D2H-GBQ
							nickel	_	EK-D2H-GBR
							titanium	_	EK-D2H-GBS
						60 x 60 mm (2) swiss market	carbon		EK-D2H-GBU

METAL

Series	Window	Colour	Finishing	Code
		aluminium		EK-DRG-GBQ
		nickel		EK-DRG-GBR
		titanium		EK-DRG-GBS
	68 x 45 mm	carbon		EK-DRG-GBU
20venti		brass		EK-DRG-GBB
FF 71		aluminium	— brushed	EK-DRS-GBQ
		nickel		EK-DRS-GBR
		titanium		EK-DRS-GBS
	60 x 60 mm	carbon	_	EK-DRS-GBU
		brass		EK-DRS-GBB

METAL HT

Series	Window	Colour	Finishing	Code
		chrome		EK-DRG-CRO
		black metal		EK-DRG-CBM
20venti	68 x 45 mm	champagne		EK-DRG-CHA
FF 71		chrome	 chrome plated 	EK-DRS-CRO
		black metal	_	EK-DRS-CBM
	60 x 60 mm	champagne		EK-DRS-CHA

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Deep double plate WALL-MOUNT DEVICES

Deep double plate WALL-MOUNT DEVICES

METAL HT

Series	Window	Colour	Finishing	Code
		chrome		EK-D2E-CRO
		black metal		EK-D2E-CBM
	45 x 45 mm (2)	champagne		EK-D2E-CHA
		chrome		EK-D2F-CRO
		black metal		EK-D2F-CBM
	45 x 45 mm (1) 60 x 60 mm (1)	champagne		EK-D2F-CHA
		chrome		EK-D2P-CRO
		black metal	chrome plated -	EK-D2P-CBM
20venti	55 x 55 mm (2)	champagne		EK-D2P-CHA
FF 71		chrome		EK-D2G-CRO
		black metal		EK-D2G-CBM
	55 x 55 mm (1) 60 x 60 mm (1)	champagne		EK-D2G-CHA
		chrome		EK-D2S-CRO
		black metal		EK-D2S-CBM
	60 x 60 mm (2)	champagne		EK-D2S-CHA
		chrome		EK-D2H-CRO
		black metal		EK-D2H-CBM
	60 x 60 mm (2) swiss market	champagne		EK-D2H-CHA

FENIX NTM® Series

20venti FF 71

Vindow	Colour	Code
	malè white	EK-D2E-FBM
	beige luxor	EK-D2E-FBL
	beaver ottawa	EK-D2E-FCO
	cocoa orinoco	EK-D2E-FCC
	grey efeso	EK-D2E-FGE
5 x 45 mm (2)	grey london	EK-D2E-FGL
	grey bromine	EK-D2E-FGB
	green commodore	EK-D2E-FVC
	black ingo	EK-D2E-FNI
	malè white	EK-D2F-FBM
	beige luxor	EK-D2F-FBL
	beaver ottawa	EK-D2F-FCO
	cocoa orinoco	EK-D2F-FCC
	grey efeso	EK-D2F-FGE
x 45 mm (1) x 60 mm (1)	grey london	EK-D2F-FGL
	grey bromine	EK-D2F-FGB
	green commodore	EK-D2F-FVC
	black ingo	EK-D2F-FNI
	malè white	EK-D2P-FBM
	beige luxor	EK-D2P-FBL
	beaver ottawa	EK-D2P-FCO
	cocoa orinoco	EK-D2P-FCC
	grey efeso	EK-D2P-FGE
x 55 mm (2)	grey london	EK-D2P-FGL
	grey bromine	EK-D2P-FGB
	green commodore	EK-D2P-FVC
	black ingo	EK-D2P-FNI
	malè white	EK-D2G-FBM
	beige luxor	EK-D2G-FBL
	beaver ottawa	EK-D2G-FCO
	cocoa orinoco	EK-D2G-FCC
	grey efeso	EK-D2G-FGE
x 55 mm (1) x 60 mm (1)	grey london	EK-D2G-FGL
	grey bromine	EK-D2G-FGB
	green commodore	EK-D2G-FVC
	black ingo	EK-D2G-FNI
	malè white	EK-D2S-FBM
	beige luxor	EK-D2S-FBL
	beaver ottawa	EK-D2S-FCO
	cocoa orinoco	EK-D2S-FCC
	grey efeso	EK-D2S-FGE
x 60 mm (2)	grey london	EK-D2S-FGL
	grey bromine	EK-D2S-FGB
	green commodore	EK-D2S-FVC
	black ingo	EK-D2S-FNI
	malè white	EK-D2H-FBM
	beige luxor	EK-D2H-FBL
1	beaver ottawa	EK-D2H-FCO
	cocoa orinoco	EK-D2H-FCC
	grey efeso	EK-D2H-FGE
x 60 mm (2) iss market	grey london	EK-D2H-FGL
	grey bromine	EK-D2H-FGB
	grey bronnine	
	green commodore	EK-D2H-FVC

ALUMINIUM Series Window Colour Finishi aluminium nickel titanium 55 x 55 mm (3) carbon 20venti FF 71 brass brushed aluminium nickel titanium 60 x 60 mm (1) 55 x 55 mm (2) carbon brass

METAL HT Series Window Colour Finishi chrome black metal 55 x 55 mm (3) 20venti FF 71 champagne chrome chrome black metal 60 x 60 mm (1) 55 x 55 mm (2) champagne

287 357 373 421 439 451 455 461 471 471 475									
UIN-Kail mount modules Visualisation Audio Multiroom IP Door Phone Lift IV Tools Sales kit Technical section General terms of sale General index	287 DIN-Rail mount modules	35/	421 IP Door Phone	439 Lift TV	451 Tools	Coloo Lit	461 Technical section	Conoral tarms of sale	475 General index

Deep triple plate WALL-MOUNT DEVICES

		FENIX NT	M.®		
hing	Code	Series	Window	Colour	Code
	EK-D3P-GBQ			malè white	EK-D3P-FBN
	EK-D3P-GBR			beige luxor	EK-D3P-FBL
	EK-D3P-GBS			beaver ottawa	EK-D3P-FC0
	EK-D3P-GBU			cocoa orinoco	EK-D3P-FCC
ed ·	EK-D3P-GBB			grey efeso	EK-D3P-FGE
eu ·	EK-D3G-GBQ		55 x 55 mm (3)	grey london	EK-D3P-FGL
	EK-D3G-GBR			grey bromine	EK-D3P-FGB
	EK-D3G-GBS			green commodore	EK-D3P-FVC
	EK-D3G-GBU	20venti FF		black ingo	EK-D3P-FNI
	EK-D3G-GBB	71		malè white	EK-D3G-FBM
				beige luxor	EK-D3G-FBL
				beaver ottawa	EK-D3G-FCC
				cocoa orinoco	EK-D3G-FCC
				grey efeso	EK-D3G-FGE
ing	Code		60 x 60 mm (1) 55 x 55 mm (2)	grey london	EK-D3G-FGL
	EK-D3P-CRO		00 x 00 mm (L)	grey bromine	EK-D3G-FGE
	EK-D3P-GKU			green commodore	EK-D3G-FV0
	EK-D3P-CBM			black ingo	EK-D3G-FNI
	EK-D3P-CHA				
e plated ·	EK-D3G-CRO				
	EK-D3G-CBM				

EK-D3G-CHA

How to order a Surface plate

WALL-MOUNT DEVICES

Surface plates for devices of 20venti, 71 series and flush-mounting inserts. The ordering code of a Surface plate consists of a fixed part (EK-S) and a variable part depending on shape (square or rectangular), window size (small or large), material, colour and finishing.

Surface square plate

WALL-MOUNT DEVICES

METAL

Series	Window	Colour	Finishing	Code
		aluminium		EK-SQZ-GBQ
Signum		nickel		EK-SQZ-GBR
		titanium	_	EK-SQZ-GBS
	30 x 60 mm	carbon		EK-SQZ-GBU
		brass		EK-SQZ-GBB
		aluminium	_	EK-SQT-GBQ
		nickel		EK-SQT-GBR
'Oventi 4 rockers)		titanium	_	EK-SQT-GBS
	30 x 60 mm	carbon		EK-SQT-GBU
		brass	_	EK-SQT-GBB
		aluminium	_	EK-SQP-GBQ
		nickel		EK-SQP-GBR
		titanium	_	EK-SQP-GBS
	45 x 45 mm	carbon		EK-SQP-GBU
		brass		EK-SQP-GBB
		aluminium	— brushed	EK-SQG-GBQ
0		nickel	_	EK-SQG-GBR
20venti F		titanium	_	EK-SQG-GBS
1	55 x 55 mm	carbon		EK-SQG-GBU
		brass		EK-SQG-GBB
		aluminium		EK-SQS-GBQ
		nickel	_	EK-SQS-GBR
		titanium		EK-SQS-GBS
	60 x 60 mm	carbon	_	EK-SQS-GBU
		brass	_	EK-SQS-GBB
		aluminium	_	EK-SQN-GBQ
		nickel	_	EK-SQN-GBR
lovement ensor		titanium	_	EK-SQN-GBS
	50 x 50 mm	carbon	_	EK-SQN-GBU
		brass		EK-SQN-GBB

Series	Window	Colour	Finishing	Code
		chrome		EK-SQZ-CRO
Signum		black metal		EK-SQZ-CBM
	30 x 60 mm	champagne	_	EK-SQZ-CHA
20venti (4 rockers)		chrome	—	EK-SQT-CRO
		black metal		EK-SQT-CBM
	30 x 60 mm	champagne	_	EK-SQT-CHA
		chrome	_	EK-SQP-CRO
		black metal	chrome plated	EK-SQP-CBN
	45 x 45 mm	champagne	_	EK-SQP-CHA
20venti		chrome	_	EK-SQG-CRO
FF 71		black metal	_	EK-SQG-CBN
	55 x 55 mm	champagne		EK-SQG-CHA
		chrome	_	EK-SQS-CRO
		black metal		EK-SQS-CBN
	60 x 60 mm	champagne		EK-SQS-CHA

Series	Window	Colour	Code	Series	Window	Colour	Code
		malè white	EK-SQZ-FBM			malè white	EK-SQP-FBN
		beige luxor	EK-SQZ-FBL			beige luxor	EK-SQP-FBL
		beaver ottawa	EK-SQZ-FCO			beaver ottawa	EK-SQP-FCC
		cocoa orinoco	EK-SQZ-FCC			cocoa orinoco	EK-SQP-FCC
Signum		grey efeso	EK-SQZ-FGE			grey efeso	EK-SQP-FGE
	30 x 60 mm	grey london	EK-SQZ-FGL		45 x 45 mm	grey london	EK-SQP-FGL
		grey bromine	EK-SQZ-FGB			grey bromine	EK-SQP-FGE
		green commodore	EK-SQZ-FVC			green commodore	EK-SQP-FVC
		black ingo	EK-SQZ-FNI			black ingo	EK-SQP-FNI
		malè white	EK-SQT-FBM			malè white	EK-SQG-FBM
		beige luxor	EK-SQT-FBL			beige luxor	EK-SQG-FBL
		beaver ottawa	EK-SQT-FCO			beaver ottawa	EK-SQG-FCC
		cocoa orinoco	EK-SQT-FCC	20venti		cocoa orinoco	EK-SQG-FC0
20venti (4 rockers)		grey efeso	EK-SQT-FGE	FF		grey efeso	EK-SQG-FGE
(11000010)	30 x 60 mm	grey london	EK-SQT-FGL	71	55 x 55 mm	grey london	EK-SQG-FGI
		grey bromine	EK-SQT-FGB			grey bromine	EK-SQG-FGE
		green commodore	EK-SQT-FVC			green commodore	EK-SQG-FVC
		black ingo	EK-SQT-FNI			black ingo	EK-SQG-FNI
						malè white	EK-SQS-FBN
						beige luxor	EK-SQS-FBL
						beaver ottawa	EK-SQS-FCC
						cocoa orinoco	EK-SQS-FCC
						grey efeso	EK-SQS-FGE
					60 x 60 mm	grey london	EK-SQS-FGL
						grey bromine	EK-SQS-FGE
						green commodore	EK-SQS-FVC
						black ingo	EK-SQS-FNI
						malè white	EK-SQN-FBM
						beige luxor	EK-SQN-FBL
						beaver ottawa	EK-SQN-FCC
						cocoa orinoco	EK-SQN-FCC
				Movement sensor		grey efeso	EK-SQN-FGE
				001001	50 x 50 mm	grey london	EK-SQN-FGL
						grey bromine	EK-SQN-FGE

		1							1
287	357	373	421	439	451	455	461	471	475
	Viewelieetien		ID Deer Dhene				- · · · · ·		
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	lools	Sales kit	lechnical section	General terms of sale	General index
									1

Surface square plate

EK-S2P-FGE

EK-S2P-FGL


EK-S2P-FGB

EK-S2P-FVC

EK-S2P-FNI

Surface double plate

WALL-MOUNT DEVICES

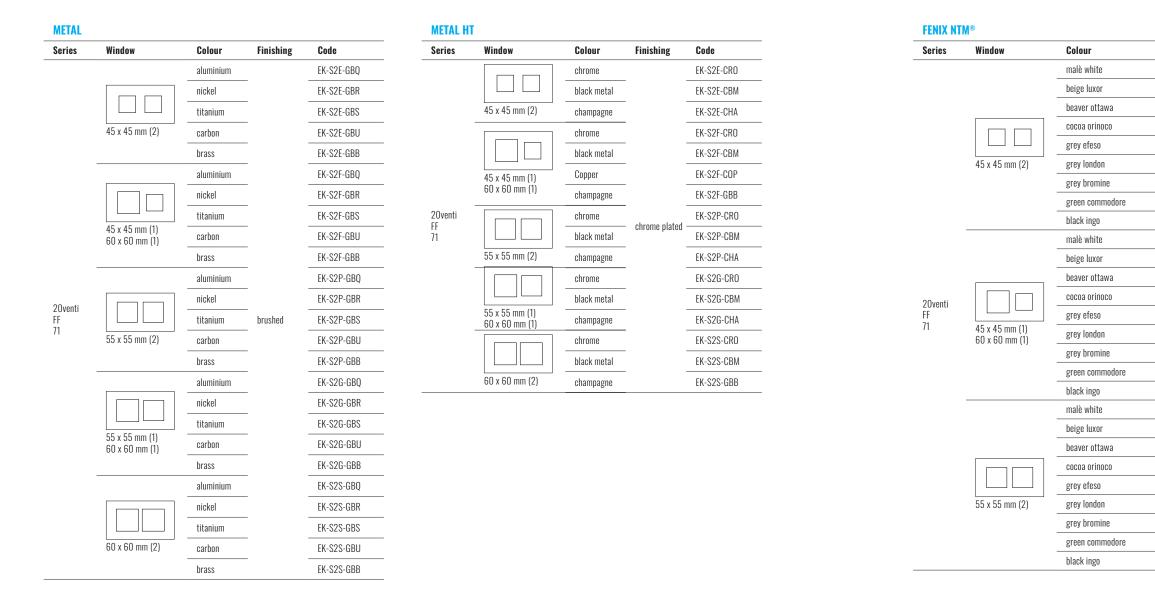

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Surface double plate

Code	FENIX NT Series	Window	Colour	Code
EK-S2E-FBM			malè white	EK-S2G-FBM
K-S2E-FBL			beige luxor	EK-S2G-FBL
EK-S2E-FCO			beaver ottawa	EK-S2G-FCO
EK-S2E-FCC			cocoa orinoco	EK-S2G-FCC
EK-S2E-FGE			grey efeso	EK-S2G-FGE
EK-S2E-FGL		55 x 55 mm (1) 60 x 60 mm (1)	grey london	EK-S2G-FGL
EK-S2E-FGB		00 x 00 mm (1)	grey bromine	EK-S2G-FGB
EK-S2E-FVC			green commodore	EK-S2G-FVC
EK-S2E-FNI			black ingo	EK-S2G-FNI
EK-S2F-FBM			malè white	EK-S2S-FBM
EK-S2F-FBL			beige luxor	EK-S2S-FBL
EK-S2F-FCO			beaver ottawa	EK-S2S-FCO
EK-S2F-FCC			cocoa orinoco	EK-S2S-FCC
EK-S2F-FGE			grey efeso	EK-S2S-FGE
EK-S2F-FGL		60 x 60 mm (2)	grey london	EK-S2S-FGL
EK-S2F-FGB			grey bromine	EK-S2S-FGB
EK-S2F-FVC			green commodore	EK-S2S-FVC
EK-S2F-FNI			black ingo	EK-S2S-FNI
EK-S2P-FBM				
EK-S2P-FBL				
EK-S2P-FCO				
EK-S2P-FCC				



DIN-RAIL MOUNT MODULES

Power supplies	291
System devices	294
Universal interface	299
Inputs	305
Actuators	307
I/O Modules	315
Dimmer	317
Thermal regulation	329
Gateway	337
Metering	349
Accessories	354



Power supply units

DIN-RAIL MOUNT MODULES

	EK-AB1-TP 640 mA bus power supply	EK-AM1-TP 1280 mA bus power supply	EK-AH1-TP KNX bus power supply 640 mA with 30 Vdc auxiliary output
	1000 B	1	
Max. number of KNX devices that can be connected on KNX bus supply line	64	256	64
Reset of the connected bus line through pushbutton	•	•	•
LED for output voltage on KNX bus	•	•	•
LED for overload / short circuit on KNX bus	•	•	•
Integrated decoupling choke	•	•	•
Power supply 230 Vac	•	•	-
Power supply 180 - 264 Vac, 176 - 280 Vdc	-	•	-
Power supply 180 - 264 Vac, 254 - 370 Vdc	-	-	•
Output for auxiliary power supply 30 Vdc	-	•	•
Mounting on standard 35 mm rail (EN 60715)	•	•	•

System devices

DIN-RAIL MOUNT MODULES

	EK-TM1-TP Time / astronomical digital switch	EK-BD1-TP USB interface	EK-BA1-TP Line / area coupler	EK-IE1-SEC-TP IP secure interface	EK-IF1-SEC-TP IP secure router
		ILE-S	t.	· ALLAN	-
Suppress device configuration on the sub line	-	-	•	•	•
Enable or disable filtering of group messages and suppress device oriented messages	-	-	•	•	•
Trace the traffic on the sub line and reduced number of retransmissions	-	-	•	•	•
Function pushbutton	•	-	•	•	•
Status LED for KNX bus line	-	•	•	•	•
Status LED for Ethernet	-	-	-	•	•
Mounting on standard 35 mm rail (EN 60715)	•	•	•	•	•
Plug in program	٠	-	•	•	•
Programming pushbutton	-	•	-	•	•
Connection of a PC or laptop to the KNX bus system	-	-	-	•	•
Secure features	-	-	-	•	•
Time programming (daily, weekly, monthly or yearly) or astronomical	•	-	-	-	-
Control of 9 channels on bus	٠	-	-	-	-
Channel 1 can be replicated on the relay on board	٠	-	-	-	-
LCD-display	•	-	-	-	-
Backup battery	•	-	-	-	-
Connection of an optional GPS module	٠	-	-	-	-



Description

The Ekinex® EK-AH1-TP power supply produces and monitors the 30 Vdc voltage required to operate the KNX bus system. A coil built into the device provides decoupling between the power supply and the bus line. The output has overvoltage, overcurrent and short-circuit protection. EK-AH1-TP has an additional 30 Vdc output that can be used for auxiliary power supply to other SELV safety extra-low voltage devices. The total current made available by the two outputs (KNX bus line and auxiliary power supply) cannot exceed 640 mA. The device can support short interruptions of the line voltage.

Main features

- Plastic housing
- Connection to bus line via KNX terminal
- Auxiliary power connection via dedicated screw terminals
- Power connection via screw terminals
- IP 20 degree of protection (device installed) • Climatic classification 3K5 and mechanical classification 3M2 (according to EN
- 50491-2)
- Pollution degree 2 (according to IEC 60664-1)
- Safety class II
- Mounting on 35 mm profile rail (according to EN 60715)
- Device from 3 modular units (1 UM = 18 mm)
- Weight 195 g

Order

information	

Code	Package
EK-AH1-TP	1 pz.

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General inde

KNX bus power supply 640 mA with 30 Vdc auxiliary output


POWER SUPPLY UNITS

Technical data

- Supply voltage 200-230 Vac, 50/60 Hz
- Power consumption 20 W
- Losses < 3 W
- Voltage on bus line: 30 Vdc +/-5 % SELV
- Voltage on auxiliary output: 30 Vdc
- Rated current: 640 mA
- Buffer time: 200 ms

Delivery

The supply includes a terminal for connection to the bus line.



Dimensions [mm]





The Ekinex® EK-AM1-TP power supply produces and monitors the 30 Vdc voltage required for operation of the KNX bus system. A coil integrated in the device decouples the power supply from the bus line. The output has overload and shortcircuit protection. It has an additional 30 Vdc output that can be used for auxiliary supply of other SELV devices. The total current provided by the two outputs (KNX bus line and auxiliary power supply) cannot exceed 1280 mA. The device is capable of supporting short mains voltage interruptions (max. 200 ms).

Main features

- Plastic housing
- Connection to bus line via KNX terminal
- Auxiliary power connection via dedicated screw terminals
- Power supply connection via screw terminals
- Degree of protection IP 20 (device installed)
- Climatic classification 3K5 and mechanical classification 3M2 (according to EN 50491-2)
- Pollution degree 2 (according to IEC 60664-1)
- Safety class I
- Mounting on 35 mm profile rail (according to EN 60715)
- Device with 4 modular units (1 UM = 18 mm)
- Weight 320 g


Technical data

- Supply voltage 230 Vac, 50/60 Hz
- Power consumption 39 W
- Losses < 3 W
- Voltage on bus line: 30 Vdc +1/-2 Vdc SELV
- Voltage on auxiliary output: 30 Vdc
- Nominal current: 1280 mA
- Buffer time: 200 ms

Delivery

Delivery includes one terminal blocks for connection to the bus.

Dimensions [mm]



1280 mA bus power supply

POWER SUPPLY UNITS

66 0000 1.4 1424 00:00 633 224

Description

The EK-TM1-TP electronic digital time switch is a KNX device for the management over time of the electrical devices. It allows time programming (periodicity: daily, weekly or annual) or astronomical programming. The device can pilot 9 different channels on KNX bus. The relay on the device replicates the channel 1 programming. Each channel can be associated with a different programming (time or astronomical). It is possible to connect via bus the EK-GPS-1 module (to be ordered separately), that captures the time and the position through the satellite system, ensuring a greater accuracy over time. The backup battery keeps the settings even in case of power failure and can be replaced through the cover (sealable).

Main features

- Plastic casing
- LCD with backlight (active only with AC power supply)
- Password lockable keyboard
- 450 storable programs (900 events) divisible on 9 channels
- Daily/weekly/monthly/yearly + astronomical programming
- On/off, pulse, holiday, random, night (astronomical) programmes
- Programming resolution 1 minute
- Actions type 1B
- Automatic update of daylight saving time (configurable)
- Connection to bus line with KNX terminal block
- Screw terminal blocks for connecting 230 Vac, output and GPS module
- Lithium backup battery: 3V, CR14250 type (5-years life, replaceable)
- Reinforced insulation between accessible parts (front) and all the other terminals
- Protection degree IP20 (device installed)
- Mounting on 35 mm standard DIN-rail (according to EN 60715)
- 3 modular units (1 UM = 18 mm)

Order information	
Code	Package
EK-TM1-TP	1 noo
EK-GPS-1	1 pcs.

Order information	
Code	Package
EK-AM1-TP	1 pcs.

For more information see the technical documentation, download from www.ekinex.com



287357373421439451455461471475IN-Rail mount modulesVisualisationAudio MultiroomIP Door PhoneLift TVToolsSales kitTechnical sectionGeneral terms of sale									
	 35/	3/3	421	439	451	455	401	471 General terms of sale	4/5



Time / astronomical digital switch SYSTEM DEVICES

Technical data

- Power supply: 115 ÷ 230 Vac (-15% ÷ +10%) 50/60 Hz
- Power consumption: 7 VA (2.6 W)


<u>Output</u>


• 1 monostable switching relay 16(10) A at 250 Vac

Deliverv

Delivery includes a terminal block for connection to the bus. The optional module EK-GPS-1 has to be ordered separately.

Dimensions [mm]









For more information see the technical documentation, download from www.ekinex.com



EK-TM1-TP

EK-GPS-1

293



The Ekinex[®] USB interface EK-BD1-TP allows a bidirectional data connection between a PC and a KNX bus system. The device handles the addressing, parameter setting, display, protocol management and diagnosis of KNX bus devices. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail.

Main features

- Plastic casing
- LEDs indicators for data transmission on USB and KNX bus status
- Connection to bus line with KNX terminal block
- Connection to PC with USB type B connector
- Installation on 35 mm rail (according to EN 60715)
- 2 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 100 g


Technical data

- Power supply (bus side): 30 Vdc SELV, current consumption: max. 10 mA
- Power supply (PC side): from USB, current consumption: max. 20 mA

Delivery

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]



USB interface

SYSTEM DEVICES



Description

The Ekinex[®] line / area coupler EK-BA1-TP can be used as a line coupler to connect a secondary line to a main line, as an area coupler to connect a main line to a backbone line or as a repeater. The device assures galvanic insulation between the two connected lines and filters the traffic based on installation position or on filter tables in case of group-oriented communications. The frontal LEDs indicate the status of each bus line and facilitate the tracing of communication problems due to bus load or to re-transmission on both lines. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- LEDs indicators for status of KNX bus lines
- Pushbutton for activating special functions
- Connection to bus lines with KNX terminal blocks
- Installation on 35 mm rail (according to EN 60715)
- 2 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 100 g

Technical data

- 30 Vdc power supply by KNX bus
- Current consumption (from main bus line) ca.10 mA

Π	rd	er	int	fn	rm	a	tin	n

Code	Package
EK-BD1-TP	1 pcs.

Configuration and commissionin

Not necessary: the application program **APEKBD1TP##.vd4** (download from www.ekinex.com) is available for an ETS project.



Order information					
Code	Package				
EK-BA1-TP	1 pcs.				



ń

For more information see the technical documentation, download from www.ekinex.com



287 N-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

Line / area coupler

SYSTEM DEVICES


Functions

- Suppress device configuration on the sub line
- Enable or disable filtering of group messages
- Suppress device oriented messages
- Trace the traffic on the sub line
- Reduced number of retransmissions

Delivery

Delivery includes two terminal blocks for connection to the bus lines.

Dimensions [mm]



Configuration and commissioning

By means of ETS5 software or later versions Application program **APEKBA1TP##.vd4** (download from www.ekinex.com)





Documentation





The Ekinex® EK-IE1-SEC-TP IP interface realises a bidirectional data connection between a PC or laptop and a KNX bus system via a LAN network. The IP interface supports the tunnelling protocol and allows addressing, parameter setting, visualisation, protocolling and diagnosis of KNX bus devices via ETS. The device has an integrated KNX bus communication module and is designed for mounting on a 35 mm profile rail. The power supply is supplied via the KNX bus. As a secure interface, the device prevents unauthorised access to the system.

Main features

- Plastic housing
- Programming button and LED on the front panel
- LEDs for status and data traffic indication on bus line and Ethernet network
- Buttons for activating special functions
- Connection to bus line via KNX terminal
- Connection to Ethernet network via RJ45 connector
- Mounting on 35 mm profile rail (in accordance with EN 60715)
- Device from 1 modular unit (1 UM = 18 mm)
- IP20 degree of protection (device installed)
- Support of KNX secure technology, can be activated via ETS[®].

Technical data

- Power supplied via KNX bus (21-30 Vdc)
- Current consumption 20 mA from KNX bus
- Up to 8 KNXnet/IP connections simultaneously
- Operating temperature: 5 ... + 45°C
- Relative humidity: 5-93% non-condensing

Deliverv

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]





Description

The Ekinex® EK-IF1-SEC-TP IP router realises a bi-directional data connection between a PC or laptop and a KNX bus system via a LAN. The IP interface supports the tunnelling protocol and allows addressing, parameter setting, visualisation, protocolling and diagnosis of KNX bus devices via ETS. A line/area coupler function is also integrated in the IP router; telegrams can be exchanged between KNX TP bus lines via the device via a backbone over TCP/IP. The device has an integrated KNX bus communication module and is designed for 35 mm profile rail mounting. The power supply is supplied via the KNX bus.

Main features

- Plastic housing
- Programming button and LED on the front
- LEDs for status and data traffic signalling on bus line and Ethernet network
- Buttons for activating special functions
- · Connection to bus line via KNX terminal • Connection to Ethernet network via RJ45 connector
- Mounting on 35 mm profile rail (in accordance with EN 60715)
- Device from 1 modular unit (1 UM = 18 mm)
- IP20 degree of protection (device installed)
- Support of KNX secure technology, can be activated via ETS^\circledast
- KNX line/area coupler functionality

Order informatio

Code	Package
EK-IE1-SEC-TP	1 pcs.

Configuration and comn

By means of FTS5 software or later versions Application programs APEKIE1SECTP##.knxprod (download from www.ekinex.com)



Order information	
Code	Package
EK-IF1-SEC-TP	1 pcs.



Ö

For more information see the technical documentation, download from www.ekinex.com

IP secure interface

SYSTEM DEVICES

287	357	373	421	439	451	455	461	471	475
N-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

IP secure router

SYSTEM DEVICES


Technical data

- Power supplied via KNX bus (21-30 Vdc)
- Current consumption 20 mA from KNX bus
- Up to 8 KNXnet/IP connections simultaneously
- Extended filter table for main groups 0..31
- Operating temperature: 5 ... + 45°C
- Relative humidity: 5-93% non condensing

Delivery

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]



Configuration and com

°0-By means of ETS5 software or later versions Application programs APEKIF1SECTP##.knxprod (download from www.ekinex.com)





Power supply Switching 230Vac

POWER SUPPLY UNITS	EK-PSUD12 Power supply Switching 230Vac - 12V	EK-PSUD24 Power supply Switching 230Vac - 24V	
	15-40	11-11	
AC input 100-240Vac Full Range and DC input 110 – 350Vdc	•	•	
Efficiency greater than 85%	٠	•	
No-load consumption <0.5W	٠	•	
Adjustable output voltage	٠	•	
Natural convection ventilation	٠	•	
Overload, over-temperature and short-circuit protection	٠	•	
Input protection with internal fuse	٠	•	
Can be installed on a 35mm DIN rail (EN 60715)	٠	•	
Max. 2 units can be connected in series	٠	•	
Parallel connection (power increase)	٠	•	
UL94V-0 fire-resistant plastic enclosure	٠	•	
Output voltage = 12 Vdc	•	-	
Dutput current (at 230Vac) = 2A	٠	-	
Output current (at 110Vac) = 2A	٠	-	
Output voltage adjustment = 12-14 Vdc	٠	-	
Output voltage = 24 Vdc	-	•	
Output current (at 230Vac) = 1A	-	•	
Dutput current (at 110Vac) = 1A	-	•	
Output voltage adjustment = 24-28 Vdc	-	•	

Universal interfaces

RAIL AND FLUSH-MOUNTING DEVICES	EK-LM2-TP 4 IN	EK-CC2-TP 2 IN / 2 OUT	EK-CD2-TP 4 in / 4 out	EK-CG2-TP 4 IN conf. AI for NTC probes or DI / 4 OUT	EK-CE2-TP 4 IN conf. / 2 OUT relay 5A	EK-CF2-TP for load monitoring and control
			1		•	1
Input channels [DI]	4	2	4	-	3	-
Channels configurable as input [D1] or output [D0] for low-consumption LEDs		-	-	4	-	-
Input channels configurable as [AI] for NTC probes or [DI]		-	-	4	1	-
Input channels for current transformers EK-TA		-	-	-	-	3
Output channels for low-consumption LEDs	-	2	4	4	-	-
Output channels relay (5A)		-	-	-	2	-
ON/OFF command of single or grouped loads	-	٠	٠	•	•	-
Dimming command of lighting devices	-	٠	٠	•	•	-
Actuator command of shutters, blinds, venetians, etc.	-	٠	٠	•	•	-
Detection of the status of the indication contacts	•	٠	٠	•	•	-
Sending and storing of scenes	-	٠	٠	•	•	-
Logic functions (AND, OR or XOR), 4 channels	٠	٠	٠	•	•	•
Room thermostat function		-	-	•	•	-
Pulse and actuator counting		٠	•	•	٠	_
Mounting on 35 mm standard DIN rail (EN 60715) through support EK-SMG-35	•	•	•	•	٠	•



Description

The EK-PSUDxx device is a switching power supply with 100 to 240 Vac and 50 to 60 Hz input, or 110 to 350 Vdc input, capable of delivering an adjustable output voltage of 23.3 to 28 Vdc. Suitable for installation in electrical panels on a 35 mm profile rail (according to EN 60715), it is also equipped with thermal, overload and short-circuit protection and supplied in a UL94V-0 fire-resistant plastic case with 2 modular units (1 UM = 18 mm).

Connections

- Screw terminals for mains input
- Screw terminals for load outputs
- Screw terminals for output voltage adjustment

Main features

- Output voltage adjustment in the range 23.3 ÷ 28 Vdc using an adjustable trimmer with Phillips screwdriver.
- Particularly suitable for powering Delégo EK-DEL-... modules designed for the supervision and control of KNX standard home automation systems.

Ori	ler information		
Co	de	Voltage	Packag
EK-	PSUD12	230VAC 12VDC 2A	1
EK-	PSUD24	230VAC 24VDC 1A	1 pcs.

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index


Power supply Switching 230Vac

POWER SUPPLY UNITS

Technical data

- Input voltage: 100 to 240 Vac and 50 to 60 Hz, or 110 to 350 Vdc
- Nominal current at input voltage 115 / 230Vac: 0.20 / 0.22 A
- Input protection with fuse
- Output current @115 Vac: 0.5 A
- Hold-up time: 15 ms @230Vac, 7ms @115Vac
- Ripple < 50 mV rms
- Electronic protections: thermal, overload, short circuit
- Power dissipation: 4 W @230Vac
- Operating temperature: -10 ... +60 °C
- Non-condensing relative humidity: 0 ... 95%
- Number of modular units: 2
- UL94V-O fire-retardant plastic housing
- Connections with screw terminal block, max cable 2.5 mm2
- Protection class: IP20
- Dimensions (WxHxD): 35.5 x 90 x 60 mm
- Weight: 110g
- Standards: classification according to CEI EN 64-8 PELV / SELV, CEI EN 60950-1, CEI EN 61000-6-1, CEI EN 61000-6-3, CEI EN 55011, CEI EN 55014

Dimensions [mm]







For more information see the technical documentation, download from www.ekinex.com



age



Configurable logical module

UNIVERSAL INTERFACES



Description

The configurable logical module Ekinex® EK-LM2-TP is a KNX S-mode device that can be used to perform logic and data processing functions on data exchanged on the KNX bus. The device is suitable for mounting in wall box or on 35 mm rail (EN 60715) with the support EK-SMG-35 included in the delivery. To be used in KNX installations for home and building automation. The device is powered by the KNX bus line with a SELV voltage 30 Vdc and does not require auxiliary power.

Main features

- Plastic housing
- Wall installation in flush mounting box or, with a mounting support, on 35 mm rail (according to EN 60715)
- Protection degree IP20 (installed device)
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Pollution degree 2 (according to IEC 60664-1)
- Weight 20 g

Functions

The device implements independent blocks of the below listed types:

- Logic: Combines a number of boolean inputs according to logic operations.
- Arithmetic: Performs mathematical computations on one or more input values.
- **Range:** Performs a scaling of the input value to a different range of values. or a boundary limit.
- Mapping: Translates a set of input values (up to 8 points) to a different set of output values.
- **Conversion:** Converts a KNX communication object to another one with a different KNX data type (DPT).
- Timer: Implements a one-shot (monostable) or free running (stable) timer, with configurable on- and off-delay times.
- **Compare:** Returns the result of a comparison (equal, larger, smaller etc.) between two input values
- Multiplexer: Copies the value of one input object to either 1 of N output objects, or to all objects selected in the output set.

Order information

Code	Version	Package
EK-LM2-TP	4 IN	1 pcs.

Each function can be configured in different ways by means of parameters in the ETS application. There are several independent instances available for each type of block, therefore the device can be used to fulfill many requirements or to solve a large number of contingencies in the same installation. An additional terminal block allows the connection of up to 4 dry contacts for simple external inputs.

Power supply

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 10 mA


Delivery

Delivery includes a terminal block for connection to the bus.

Accessories

Support for mounting on a standard 35 mm DIN-rail (code EK-SMG-35) and spring for snapping on the back of Ekinex® wall-mount devices (code EK-MAR-...) to be ordered separately.

Dimensions [mm]



Application program **APEKLM2TP##.knxprod** (download from www.ekinex.com))

By means of ETS5 software or later versions



not communicating on the KNX bus) or any binary signals from other devices, in order to control KNX bus functions;

- control outputs for low consumption LEDs.

output module. The device is equipped with:

The voltage for polling the inputs is supplied within the device. The device integrates a KNX bus communication module and is realized for flush-mounting or for mounting on a standard 35 mm DIN-rail. The device is powered by the KNX bus and does not require auxiliary power supply.

Main features

Description

- Plastic casing
- Programming pushbutton and LED on the case
- Connection to bus line with KNX terminal block
- Screw terminal blocks for connecting inputs and outputs
- IP20 protection degree (installed device)
- Weight 20 g

Power supply

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 10 mA

Order information	
Code	Version
EK-CC2-TP	2 IN / 2 OUT
EK-CD2-TP	4 IN / 4 OUT



287 357 373 421 IN-Rail mount modules Visualisation Audio Multiroom IP Door Phone	439	451	455	461	471	475
	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General inde



Universal interface 2 (4) IN, 2 (4) OUT UNIVERSAL INTERFACES

The Ekinex® universal interface is a KNX device which can be used as input and/or

- inputs to connect the KNX bus to switches, pushbuttons or classic sensors (normally


Delivery


Delivery includes a terminal block for connection to the bus.

Accessories

Support for mounting on a standard 35 mm DIN-rail (code EK-SMG-35) and spring for snapping on the back of Ekinex[®] wall-mount devices (code EK-MAR-...) to be ordered separately.

Dimensions [mm]





Package

— 1 pcs.

Configuration and commissio





For more information see the technical documentation download from www.ekinex.con





FK-CC2-TP

FK-CD2-TF



Universal interface 4 configurable IN, 4 OUT UNIVERSAL INTERFACES



Description

The Ekinex® EK-CG2-TP pushbutton interface is a KNX device which can be used as input and/or output module. The device is equipped with 4 configurable inputs and 4 control outputs for low consumption LEDs.

Inputs can be independently configured to connect the KNX bus to:

- switches, pushbuttons, classic sensors (normally not communicating on the KNX bus) or any binary signals from other devices, in order to control KNX bus functions; - passive temperature sensors (NTC 10 k Ω at 25°C). The environment air mass temperature value, measured by those sensors, can be sent onto the bus or be used to control a room or zone temperature through the integrated thermostat function. The voltage for polling the inputs is supplied within the device. The device integrates a KNX bus communication module and is realized for flush-mounting or for mounting on a standard 35 mm DIN-rail. The device is powered by the KNX bus and does not require auxiliary power supply.

Main features

Plastic casing

- Programming pushbutton and LED on the case
- Connection to bus line with KNX terminal block
- Screw terminal blocks for connecting inputs and outputs
- IP20 protection degree (installed device)
- Weight 20 g

Power supply

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 10 mA


Delivery

Delivery includes a terminal block for connection to the bus. The NTC temperature sensors (page 231) for those channels configured as [AI] must be ordered separately.

Accessories

Support for mounting on a standard 35 mm DIN-rail (code EK-SMG-35) and spring for snapping on the back of Ekinex® wall-mount devices (code EK-MAR-...) to be ordered separately.

Dimensions [mm]





Description

The Ekinex® universal interface EK-CE2-TP is a KNX device which can be used as input and/or output module. The device is equipped with:

- 4 inputs to connect the KNX bus to switches, pushbuttons or classic sensors (normally not communicating on the KNX bus) or any binary signals from other devices, in order to control KNX bus functions. In addition, one input is configurable as analogue to connect a NTC temperature sensor (10 k Ω a 25 °C); - 2 5A relay outputs to be used as electrical load control (independent) or paired for shutter and blind actuator control.

The voltage for polling the inputs is supplied within the device. The device integrates a KNX bus communication module and is realized for flush-mounting or for mounting on a standard 35 mm DIN-rail. The device is powered by the KNX bus and does not require auxiliary power supply.

Main features

- Plastic casing
- Programming pushbutton and LED on the case
- Connection to bus line with KNX terminal block
- Screw terminal blocks for connecting inputs and outputs • IP20 protection degree (installed device)
- Weight 35 g

Power supply

- 30 Vdc power supply by KNX bus
- Current consumption from bus < 10 mA

Order information Code Package EK-CE2-TP 1 pcs.

Order informati

Code	Version	Package
EK-CG2-TP	4 IN / 4 OUT	1 pcs.

Configuration and com

°0 By means of FTS5 software or later versions Application program APEKCG2TP##.knxprod (download from www.ekinex.com)





For more information see the technical documentation, nload from www.ekinex.com



287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General inde

Universal interface 4 IN, 2 OUT (relay 5A) UNIVERSAL INTERFACES


Delivery


Delivery includes a terminal block for connection to the bus. The NTC temperature sensors (page 231) for those channels configured as [AI] must be ordered separately.

Accessories

Support for mounting on a standard 35 mm DIN-rail (code EK-SMG-35) and spring for snapping on the back of Ekinex® wall-mount devices (code EK-MAR-...) to be ordered separately.

Dimensions [mm]





Configuration and comm °0

By means of ETS5 software or later versions Application program **APEKCE2TP##.knxprod** (download from www.ekinex.com))







Order information

EK-SMG-35-1

EK-SMG-35-5

DIN-rail.

Code

Support for DIN-rail mounting ACCESSORIES FOR UNIVERSAL INTERFACES

Inputs DIN-RAIL MOUNT MODULES

ON / OFF switching of individual loads or groups of loads
Dimming control for lighting devices
Operating control for shutters and roller blinds
Detecting the status of signaling contacts
Recalling and saving of scenes
Pushbutton for toggling between manual and automatic operation
Pushbuttons for forced operation of the inputs
Counting of impulses and switching cycles
Mounting on standard 35 mm rail (EN 60715)
Connection of potential-free contacts or NTC passive temperature sense



Description

Spring for snapping universal interfaces (except EK-CB2-TP) on the back of $\mathsf{Ekinex}^\circledast$ wall-mount devices.

Support for mounting universal interfaces (except EK-CB2-TP) on a standard 35 mm

Package

1 pcs.

5 pcs.

Order informatio

Code	Package
EK-MAR-1	1 pcs.
EK-MAR-5	5 pcs.



Spring for snapping on wall-mount devices ACCESSORIES FOR UNIVERSAL INTERFACES



Operating control for shutters and roller blinds
Detecting the status of signaling contacts
Recalling and saving of scenes
Pushbutton for toggling between manual and automatic o
Pushbuttons for forced operation of the inputs
Counting of impulses and switching cycles
Mounting on standard 35 mm rail (EN 60715)
Connection of notantial free contacts or NTC passive tor

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰ ۰		EK-CA1-TP 8-fold analogue/binary input
		Manual Party of Control of Contro
• • • • • • •		
• • • • • • •		•
• • • •		•
•		•
•		•
•		•
		•
• •		•
	nsors	•

EK-FA1-TP

4-fold

binary output

....

-

-

.

8-fold analogue/binary input

INPUTS

NR month	

Description

The Ekinex® EK-CA1-TP binary input has 8 independent input channels for connecting to the KNX bus commands and sensors of traditional type, having potential-free contacts or NTC passive temperature sensor. Thanks to the binary input, it is possible to command and control bus functions with standard switches, pushbuttons or sensors (not natively communicating with the KNX bus) or binary signals made available by other devices. The query voltage of input channels is produced within the device. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and does not require auxiliary power supply.

Main features

- Plastic casing
- ON/OFF switching of single loads or group of loads
- Detecting the state of signaling contacts (from safety devices, alarms, etc.)
- Recalling and saving of scenes
- Sending on the bus of values (temperature, brightness, etc.)
- Switching to forced functioning (lock)
- Counting of impulses and switching cycles
- Dimming of lighting devices
- Operating of shutters and roller blinds
- Measuring of the air mass temperature with a ntc passive temperature sensor (ntc 10 k ω at 25 °c) with possibility of sending the value on the bus
- 2 Points (on / off) or proportional (pwm or continuous) room temperature regulation
- 4 Logic functions (and, or, xoR) with 4 logic objects in input each
- Frontal programming pushbutton and LED
- Membrane keyboard with LED's for status indication
- Pushbutton for switching operating mode (normal / programming)
- Connection to bus line with KNX terminal block
- Connection of inputs with screw terminals
- Installation on 35 mm rail (according to EN 60715)

Order information

Code	Package
EK-CA1-TP	1 pcs.

- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 145 g

Technical data

Power supply

- Voltage 30 Vdc by KNX bus
- Current consumption from bus < 13 mA
- Power on bus 320 mW


<u>Inputs</u>

- Number: 8
- Query voltage: < 11 V
- Query current: < 5 mA

Delivery

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]



Configuration and commissionin

download from www.ekinex.com

°Q. By means of ETS5 software or later versions Application program **APEKCA1TP##.knxprod** (download from www.ekinex.com)

For more information see the technical documentation,





	and the second
ON / OFF switching of individual loads or groups of loads	٠
Configurable as normally open or normally closed switch	•
Logical gates and forced mode for each channel	•
Manual control by membrane pushbuttons	-
Manual control by levers (also without bus voltage)	•
Status feedback of output channels through the position of the levers	٠
Status feedback of output channels through LEDs	-
Switching pushbutton manual / automatic mode	-
Block function for each channel	-
Auxiliary power supply	-
Time scheduling: switching delay for on and off, staircase lighting function	•
Management of scenarios	•
Operating hours counter configurable via bus	•
Shutters / blinds operation mode	-

Automatic control for protection against direct sunlight Automatic control for protection against

weather conditions (rain, wind, frost)

Mounting on standard 35 mm rail (EN 60715)



287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



EK-FF1-TP EK-FE1-TP EK-FG1-TP EK-FI1-TP EK-FB1-TP Universal actuator 16 KNX outputs 8-fold 16-fold versal actuato 8-fold binary output / 4-fold blind actuator 8 KNX outputs binary output / 8-fold binary output blind actuator ÆVO series ÆVO series ----------Constant Station ----PROPERTY AND INCOME. --------• • • • -. . . . ---. --. . -. . • • . . -• • . . -• • -. • . . • . . • . . . • . -. -.



ÆVO built to last - Unbeatable reliability and durability for a worry-free tomorrow. The universal actuator EK-FG1-TP from the ÆVO series allows you to control up to 8 groups of electrical loads, such as lights and valves, or to control up to 8 motorised drives, such as Venetian blinds and 3-way valves, independently and in any combination; for this purpose, the device has outputs equipped with potentialfree relay contacts. The device's bistable relays ensure that the set control status is maintained even if the bus is de-energised.

The device is equipped with buttons for manual control and LEDs for status indication; a button allows switching between automatic and manual operation. The device has an integrated KNX bus communication module and is designed for mounting on a 35 mm profile rail. Power is supplied via the KNX bus and no auxiliary power supply is required.

Main features

Plastic housing

- Buttons and LEDs for control and status indication of the outputs on the front panel
- Button and LED for programming or manual/automatic operation on the front panel
- Bus line connection via KNX terminal
- Connection of loads via screw terminals with cable cross-section up to 4 mm2
- Connection of different phases on adjacent outputs
- 4 modular units (1 UM = 18 mm)
- Technical data
- Power supply
- Voltage 30 Vdc via KNX bus

Universal actuator 8 KNX outputs ÆVO series ACTUATORS

Technical data

Power supply • Voltage 30 Vdc via KNX bus


Outputs

- Number: 8 (bistable relays)
- Voltage 230V AC
- Current: 16 A

Delivery

The delivery includes a terminal for connection to the bus line.

Dimensions [mm]





Description

ÆVO built to last - Unbeatable reliability and durability for a worry-free tomorrow. The universal actuator EK-FI1-TP from the ÆVO series allows you to control up to 16 groups of electrical loads, such as lights and valves, or to control up to 8 motorised drives, such as Venetian blinds and 3-way valves, independently and in any combination; for this purpose, the device has outputs equipped with potentialfree relay contacts. The device's bistable relays ensure that the set control status is maintained even if the bus is de-energised.

The device is equipped with buttons for manual control and LEDs for status indication; a button allows switching between automatic and manual operation. The device has an integrated KNX bus communication module and is designed for mounting on a 35 mm profile rail. Power is supplied via the KNX bus and no auxiliary power supply is required.

Main features

- Plastic housing
- Buttons and LEDs for control and status indication of the outputs on the front panel
- Button and LED for programming or manual/automatic operation on the front panel
- Bus line connection via KNX terminal
- Connection of loads via screw terminals with cable cross-section up to 4 mm2
- Connection of different phases on adjacent outputs
- 4 modular units (1 UM = 18 mm)
- Technical data
- Power supply
- Voltage 30 Vdc via KNX bus

Order informati

Code	Package
EK-FG1-TP	1 pcs.

Configuration and con

Ö By means of ETS5 software or later versions Application program APEKFG1TP##.knxprod (download from www.ekinex.com)



Order information					
Code	Package				
EK-FI1-TP	1 pcs.				



For more information see the technical documentation, nload from www.ekinex.com



287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Universal actuator 16 KNX outputs ÆVO series ACTUATORS

Technical data

Power supply

• Voltage 30 Vdc via KNX bus


<u>Outputs</u>


- Number: 16 (bistable relays)
- Voltage 230V AC
- Current: 16 A

Delivery

The delivery includes a terminal for connection to the bus line.

Dimensions [mm]





Configuration and con 00

By means of ETS5 software or later versions Application program APEKFI1TP##.knxprod (download from www.ekinex.com)









The Ekinex $^{\mbox{\tiny (B)}}$ EK-FA1-TP binary output allows to command 4 groups of loads independently; to this purpose, the device has outputs fitted with potential-free relays, . The device's latching relays guarantee the upkeep of command status even in the case of bus power failures. The front levers indicate the status of each output channel and, in case of emergency, allow manual command (by means of a tool) of the loads. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and does not require auxiliary power supply.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- Connection to bus line with KNX terminal block
- Connection of outputs with screw terminals
- Overvoltage class III (according to EN 60664-1)
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Pollution degree 2 (according to IEC 60664-1)
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 205 g

4-fold binary output

ACTUATORS

Technical data

Power supply

- 30 Vdc voltage by KNX bus
- Current consumption from bus < 12 mA
- Power from bus 360 mW


<u>Outputs</u>

- 4 latch relays
- Nominal voltage (U_n): 100-230Vac, 50/60Hz
- Nominal current (I_): max 10 A (both @100Vac and @230Vac)
- Switched power: 1000W @100Vac 2200 W @230Vac

Deliverv

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]



Code	Package
EK-FA1-TP	1 pcs.

°0-By means of ETS5 software or later versions Application program APEKFA1TP##.knxprod (download from www.ekinex.com)

Configuration and commission







Description

The Ekinex $^{\scriptscriptstyle (\! 8\!)}$ EK-FB1-TP binary output allows to command 8 groups of loads independently; to this purpose, the device has outputs fitted with potential-free relays. The device's latching relays guarantee the upkeep of command status even in the case of bus power failures. The front levers indicate the status of each output channel and, in case of emergency, allow manual command (by means of a tool) of the loads. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and does not require auxiliary power supply

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- Connection to bus line with KNX terminal block
- Connection of outputs with screw terminals
- Overvoltage class III (according to EN 60664-1)
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Pollution degree 2 (according to IEC 60664-1)
- Installation on 35 mm rail (according to EN 60715)
- 8 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 385 g

Order information Code Package EK-FB1-TP 1 pcs.

For more information see the technical documentation,

download from www.ekinex.com

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules Vis	isualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

8-fold binary output

ACTUATORS



Technical data

Power supply

- 30 Vdc voltage by KNX bus
- Current consumption from bus < 12 mA
- Power from bus 360 mW


<u>Outputs</u>

- 4 latch relays
- Nominal voltage (U_n): 100-230Vac, 50/60Hz
- Nominal current (I_): max 10 A (both @100Vac and @230Vac)
- Switched power: 1000W @100Vac 2200 W @230Vac

Deliverv

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]



Configuration and commission °Q-

By means of ETS5 software or later versions Application program APEKFB1TP##.knxprod (download from www.ekinex.com)









The Ekinex® EK-FE1-TP binary output / blind actuator allows to command 8 groups of loads or control 4 drives for motorised blinds independently. The device is fitted with membrane pushbuttons for manual command (even in the absence of bus power) and LED's for status indication; a pushbutton allows to switch between automatic and manual operation modes. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and requires an additional 230 Vac power supply to operate.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- Membrane keyboard with LED's for status indication
- Pushbutton for switching operating mode (normal / programming)
- Connection to bus line with KNX terminal block
- Connection of outputs and 230 Vac power supply with screw terminals
- Overvoltage class III (according to EN 60664-1)
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Pollution degree 2 (according to IEC 60664-1)
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 315 g

8-fold binary output/ 4-fold blind actuator ACTUATORS

Technical data

Power supply

- Voltage auxiliary 100-230 Vac 50/60 Hz
- Voltage control section 30 Vdc by KNX bus
- Current consumption from bus < 10 mA
- Power on bus < 240 mW


Outputs

- Number: 8 or 4 independent channels (depending on device use)
- Nominal voltage (U_): 100-230 Vac 50/60Hz
- Nominal current (I_a): max 16 (10) A (both @100Vac and @230Vac)
- Max. switched power: max 4000 VA @250Vac

Deliverv

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]





Description

The Ekinex® EK-FF1-TP binary output / blind actuator allows to command 16 groups of loads or control 8 drives for motorised blinds independently. The device is fitted with membrane pushbuttons for manual command (even in the absence of bus power) and LED's for status indication; a pushbutton allows to switch between automatic and manual operation modes. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and requires an additional 230 Vac power supply to operate.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- Membrane keyboard with LED's for status indication
- Pushbutton for switching operating mode (normal / programming)
- Connection to bus line with KNX terminal block
- Connection of outputs and 230 Vac power supply with screw terminals
- Overvoltage class III (according to EN 60664-1)
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Pollution degree 2 (according to IEC 60664-1)
- Installation on 35 mm rail (according to EN 60715)
- 8 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 595 g

Order informatio

Code	Package
EK-FE1-TP	1 pcs.

Configuration and commission

,**O**-By means of ETS5 software or later versions Application program APEKFE1TP##.knxprod (download from www.ekinex.com)



Order information			
Code	Package		
EK-FF1-TP	1 pcs.		



For more information see the technical documentation, nload from **www.ekinex.com**



287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



16-fold binary output/ 8-fold blind actuator ACTUATORS

Technical data

Power supply

- Voltage auxiliary 100-230 Vac 50/60 Hz
- Voltage control section 30 Vdc by KNX bus
- Current consumption from bus < 10 mA
- Power on bus < 240 mW


Outputs


- Number: 16 or 8 independent channels (depending on device use)
- Nominal voltage (U_): 100-230 Vac 50/60Hz
- Nominal current (I,): max 16 (10) A (both @100Vac and @230Vac)
- Max. switched power: max 4000 VA @250Vac

Deliverv

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]







Configuration and commissio

By means of ETS5 software or later versions Application program **APEKFF1TP##.knxprod** (download from www.ekinex.com)







I/O modules

DIN-RAIL MOUNT MODULES

	EK-HU1-TP Input/output module for office applications	EK-H01-TP Input/output module for hotel applications
		States Annual
30 Vdc power supply from bus	•	•
Auxiliary power supply 230 Vac 50/60 Hz	•	•
- Analogue Inputs	1	1
Freely programmable inputs as analogue or binary inputs	1	1
Binary inputs	3	9
Relay outputs 5 (3) A	2	4
Relay outputs 5 (3) A, for fan control	3	3
Relay outputs 16 (10) A, for heating and cooling valve control	-	2
Relay outputs for electric lock control	1	1
Relay outputs 16 (10) A	-	6
O-10 Vdc output	1	1
Membrane keypad for manual control of outputs	•	•
Function for ON/OFF lighting control	1	6
Function for roller shutters / awnings control	1	2
Function for electric strike control	-	•
Temperature control function	•	•
Switch-off scenarios and courtesy lights function	-	•
Logical functions	•	•



Description

The Ekinex® EK-HU1-TP module allows to manage all functions of an office or a openspace zone: lighting, temperature control, shades and input/output indications. The device is equipped with membrane keys for manual control and status indication LEDs; a pushbutton allows to switch mode from automatic to manual and vice versa. The device integrates a KNX bus communication module and is intended for mounting on a 35 mm standard DIN-rail. It is supplied by the KNX bus; in order to be operational it also requires a 230 Vac voltage.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- Membrane keypad with LED indication of the input status
- Pushbutton for automatic/manual mode switch
- Connection to bus line with KNX terminal block
- Screw terminal blocks for connecting inputs, outputs and 230 Vac power supply
- 3K5 climatic and 3M2 mechanic classification (according to EN 50491-2)
- Overvoltage class III (according to EN 60664-1)
- Pollution level 2 (according to IEC 60664-1)
- Mounting on 35 mm standard DIN-rail (according to EN 60715)
- 8 modular units (1 UM = 18 mm)
- Protection degree IP20 (device installed)
- Weight 595 g

Technical data

- Power supply
- Load power supply 230 Vac 50/60 Hz; electrical lock 12-24 V
- Power supply (electronics) 30 Vdc via KNX bus
- Current consumption by bus < 10 mA
- Power on bus < 240 mW

Order information

Code	Package
EK-HU1-TP	1 pcs.

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Input/output module for office applications I/O MODULES (PHASE OUT)

<u>Inputs</u>

- 1 analogue for NTC temperature sensor (thermostat function)
- 4 digital


<u>Outputs</u>


- 10 digital of which:
- 3 general purpose
- 2 (paired) for blind or shade control
- 5 fancoil: 3 for fan speed (3 speeds) and 2 for controlling electrothermal actuators on hot/cold valves
- 1 analogue O-10V for fan speed control

Delivery

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]





Configuration and commissionin

°**O**-By means of ETS5 software or later versions Application program: APEKHU1TP##.knxprod (## = version, downloadable from www.ekinex.com)









The Ekinex® EK-HO1-TP module allows to manage all functions of a hotel room: lighting, temperature control, shades and input/output indications. The device is equipped with membrane keys for manual control and status indication LEDs; a pushbutton allows to switch mode from automatic to manual and vice versa. The device integrates a KNX bus communication module and is intended for mounting on a 35 mm standard DIN-rail. It is supplied by the KNX bus; in order to be operational it also requires a 230 Vac voltage.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- Membrane keypad with LED indication of the input status
- Pushbutton for automatic/manual mode switch
- Connection to bus line with KNX terminal block
- Screw terminal blocks for connecting inputs, outputs and 230 Vac power supply
- 3K5 climatic and 3M2 mechanic classification (according to EN 50491-2)
- Overvoltage class III (according to EN 60664-1)
- Pollution level 2 (according to IEC 60664-1)
- Mounting on 35 mm standard DIN-rail (according to EN 60715)
- 8 modular units (1 UM = 18 mm)
- Protection degree IP20 (device installed)
- Weight 595 g

Technical data

Power supply

- Load power supply 230 Vac 50/60 Hz; electrical lock 12-24 V
- Power supply (electronics) 30 Vdc via KNX bus
- Current consumption by bus < 10 mA
- Power on bus < 240 mW

Input/output module for hotel applications

I/O MODULES

<u>Inputs</u>

- 1 analogue for NTC temperature sensor (thermostat function)
- 1 configurable as analogue or digital
- 10 digital of which:
- 4 general purpose
- 2 door or window opening contact
- 1 pushbutton with pulling call for assistance/emergency
- 1 badge contact
- 2 pushbuttons «Do not disturb» e «Please make room»


<u>Outputs</u>

- 15 digital of which:
- 3 general purpose
- 3 for indications: «guest in the room», «room assigned», busy room or emergency»
- 2 (paired) for blind or shade control
- 1 for courtesy light control
- 5 for fancoil: 3 for fan speed (3 speeds) and 2 for controlling electrothermal
- actuators on hot/cold valves
- 1 digital room contactor and auxiliaries
- 1 powered at 12/24 Vac for controlling an electric lock
- 1 analogue O-10 V for fan speed control

Delivery

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]

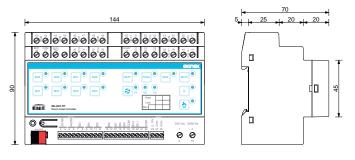

SETS

Configuration and commissioning



download from www.ekinex.com

Dimmers

DIN-RAIL MOUNT MODULES

EK-GD	2.
KNX	_
90-230	V

	EK-GD2-TP-1-HV KNX Dimmer 90-230V~50/60Hz	EK-GD1-TP-4-HV KNX Dimmer 90-230V~50/60Hz 4-channels	EK-GD1-TP-4-HV-N KNX dimmer 90-230V~50/60Hz 4 channels with common neutral	EK-GC1-TP 4-fold RGBW LED dimmer	EK-GF1-TP 4-fold 0-10 V actuator
		Second Second			
ON/OFF switching of single or groups of lighting device	•	•	•	•	•
Brightness regulation and adjusting the light intensity	•	•	•	•	•
Logical gates and forced mode for each channel	•	•	•	•	•
Manual control by membrane pushbuttons	-	(1)	(1)	•	•
Status feedback of output channels through LEDs	(1)	(1)	(1)	•	•
Block function for each channel	•	•	•	٠	•
Without auxiliary power supply	•	•	•	•	•
Time scheduling: switching delay for on and off, staircase lighting function	•	•	•	•	•
Integration in scenarios	•	•	•	•	•
Operating hours counter configurable via bus	•	•	•	•	•
Fade adjustable ramps	•	•	•	•	•
RGB / HSV operating mode	-	-	-	٠	•
Mounting on standard 35 mm rail (EN 60715)	(2)	•	•	•	٠

(1) Only for load tests / (2) With appropriate accessory



Code	Package
EK-H01-TP	1 pcs.

316	

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



KNX bus device with single-channel phase cut dimmer function for light loads, with supply voltage 90-230 Vac at 50/60 Hz. Use in KNX standard home and building automation systems.

Main features

- Operating temperature: -20 °C ... + 40 °C
- Storage temperature: 40 °C ... + 60 °C
- Transport temperature: 40 °C ... + 60 °C
- Max. rated casing temperature (tc): 80 °C
- Relative humidity: 91% non-condensing
- Degree of protection: IPOO
- Power and load wiring: 1.5 mm2 (single cable) 2.5 mm2 (stranded cable), 16 to 13 AWG
- Max. torgue 0.5 Nm for screw terminals
- KNX bus wiring: 0.26 to 0.5 mm2 23 to 20 AWG
- Peeling: 5.0 6.0 mm / Plastic casing
- Luminaire for flush-mounting or panel mounting (with supplied accessory)
- Weight: 37 g / Dimensions (LxHxW): 53 x 61 x 29 mm

Functions

- ON/OFF control and dimming of individual or grouped luminaires
- Fade time on and off, minimum and maximum brightness level, linear or logarithmic dimming curve settable from ETS
- Soft or instantaneous switching on and off, with settable delay
- Configuration of behaviour after power reset, bus ON/OFF, unloading via ETS
- Channels can be set by the ETS as independent, in parallel or with copy function from another channel
- Locking function, forced operation, staircase light, scenes, night, counter and logic functions for each channel, settable via ETS
- Alarm for short circuit, open load and power failure
- Auxiliary output function with status indication via KNX
- Manual operation with membrane buttons and for local ON/OFF testing of channels 1-2-3-4 also in the absence of the KNX bus: short press of the button switches the load on/off, pressing for at least 2 seconds makes the load flash every 1 s approx.

Order informati

Code	Channels	Packaging
EK-GD2-TP-1-HV	1	1 pcs.

For more information see the technical documentation, download from www.ekinex.com

Technical data

- <u>Inputs</u>
- Supply voltage: 90 230 Vac 50/60 Hz
- Max. input current: 1 A
- Outputs
- Supply voltage: 90 230 Vac 50/60 Hz
- Output power: 110 W @110 Vac, 220 W @220 Vac, 230 W @230 Vac
- Minimum load power: 1 W
- Max. output current: 1 A
- Dimming
- Trailing edge dimming mode with open load control (OPEN CIRCUIT) and short circuit on load (SHORT CIRCUIT)

KNX Dimmer 90-230V~50/60Hz


DIMMFR

• Dimming range: 1-100%.

Notes

Loads that can be used with the dimmer can be: incandescent lamps, mains voltage halogen lamps, mains voltage dimmable LED lamps, mains voltage dimmable LED strips, switching power supplies for dimmable LEDs in phase cut. The dimmer cuts phase in trailing edge mode.

Dimensions [mm]



00

By means of ETS5 software or later versions Application program APEKGD2TP1HV##.knxprod wnload from www.ekinex.com)





Description

KNX bus device with 4-channel phase cut dimmer function for light loads, with supply voltage 90-230 Vac at 50/60 Hz. For use in KNX-standard home and building automation systems. Suitable for simplifying the connection of loads.

Main features

- Operating temperature: 20 °C ... + 40 °C
- Storage temperature: 40 °C ... + 60 °C
- Transport temperature: 40 °C ... + 60 °C
- Max. nominal enclosure temperature (tc): 80 °C
- Relative humidity: 91% non-condensing
- Degree of protection: IPOO (IP20 in junction box or switchboard)
- Power supply and load wiring: 1.5 mm2 (single cable) 2.5 mm2 (stranded cable), 16 to 13 AWG
- KNX bus wiring: 0.26 to 0.5 mm2 23 to 20 AWG
- Stripping: 5.0 6.0 mm
- Plastic housing
- 4 UM panel-mounted luminaire
- Weight: 200 g
- Dimensions (LxHxW): 71 x 91 x 62 mm

Functions

- ON/OFF control and dimming of individual or grouped luminaires
- On and off fade time, minimum and maximum brightness level, linear or logarithmic dimming curve settable via ETS
- Soft or instantaneous switch-on and switch-off, with settable delay
- Configuration of behaviour after power reset, bus ON/OFF, unloading via ETS • Channels can be set by ETS as independent, in parallel or with copy function from
- another channel
- Status indication of outputs via LEDs
- Blocking, forced operation, staircase light, scene, night, counter and logic functions for each channel, settable via ETS
- Auxiliary output function with status indication via KNXManual control with membrane buttons and for local ON/OFF testing of channels 1234 also in the absence of the KNX

Order information

Code	Packaging
EK-GD1-TP-4-HV-N	1 pz.

KNX dimmer 90-230V~50/60Hz 4 channels with common neutral DIMMFR

bus: short press of the button activates/deactivates the load, pressing for at least 2 seconds causes the load to flash every 1 s

Technical data

- Tensione di alimentazione: 90-230 Vac 50/60 Hz
- Corrente max. in ingresso: 2 A

Outputs

- Supply voltage: 90-230 Vac 50/60 Hz
- Output power per channel: 110 W @110 Vac, 220 W @220 Vac, 230 W @230 Vac
- Minimum load power: 1 W per channel
- Maximum current per output: 1 A per channel (parallelisable)
- Maximum total current: 2 A
- Terminals: screw terminals (max. 4 mm2)


<u>Dimming</u>

- Dimming modes: Trailing Edge, Leading Edge (also selectable via ETS) and Al Edge (optimised for 230 Vac LED strips)
- Dimming range: 1-100%.



Dimensions [mm]





iguration and con

By means of ETS5 software or later versions Application program APEKGD2TP1HV##.knxprod (download from www.ekinex.com)







KNX bus device with 4-channel phase cut dimmer function for light loads, with supply voltage 90 230 Vac at 50/60 Hz. Use in KNX standard home and building automation systems.

Main features

- Operating temperature: 20 °C ... + 40 °C
- Storage temperature: 40 °C ... + 60 °C
- Transport temperature: 40 °C ... + 60 °C
- Max. rated casing temperature (tc): 80 °C
- Relative humidity: 91% non-condensing
- Degree of protection: IPOO (IP20 in junction box or switch cabinet)
- Power and load wiring: 1.5 mm2 (single cable) 2.5 mm2 (stranded cable), 16 to 13 AWG
- KNX bus wiring: 0.26 to 0.5 mm2 23 to 20 AWG
- Peeling: 5.0 6.0 mm
- Plastic casing
- 4 UM panel-mounted luminaire
- Weight: 200 g
- Dimensions (LxHxW): 71 x 91 x 62 mm

Functionality

- ON/OFF control and dimming of individual or grouped luminaires
- Fade time on and off, minimum and maximum brightness level, linear or logarithmic dimming curve settable via ETS
- Soft or instantaneous switching on and off, with settable delay
- Configuration of behaviour after power reset, bus ON/OFF, unloading via ETS
- Channels can be set by the ETS as independent, in parallel or with copy function from another channel
- Status indication of outputs via LEDs
- Locking function, forced operation, staircase light, scenes, night, counter and logic functions for each channel, settable via ETS
- Alarm for short circuit, open load and power failure

Order information

Code	Package
EK-GD1-TP-4-HV	1 pcs.

00

By means of ETS5 software or later versions Application program APEKGD1TP4HV##.knxprod (download from www.ekinex.com)

KNX Dimmer 90-230V~50/60Hz **4-channels**

DIMMFR

Auxiliary output function with status indication via KNX

• Manual operation with membrane buttons and for local ON/OFF testing of channels 1234 even in the absence of the KNX bus: short press of the button switches the load on/off, pressing for at least 2 seconds causes the load to flash every 1 s approx.

Technical data

Inputs

- Supply voltage: 90 230 Vac 50/60 Hz
- Max. input current: 4 A

Outputs

- Supply voltage: 90 230 Vac 50/60 Hz
- Output power per channel: 110 W @110 Vac, 220 W @220 Vac, 230 W @230 Vac
- Minimum load power: 1 W per channel
- Max. output current: 1 A per channel


Dimming

- Trailing edge dimming mode with open load control (OPEN CIRCUIT) and short circuit on load (SHORT CIRCUIT)
- Dimming range: 1100%.

Note

Loads that can be used with the dimmer can be: incandescent lamps, mains voltage halogen lamps, mains voltage dimmable LED lamps, mains voltage dimmable LED strips, switching power supplies for dimmable LEDs in phase cut. The dimmer cuts phase in trailing edge mode.

Dimensions [mm]





For more information see the technical documentation download from www.ekinex.com





Description

The Ekinex® EK-GC1-TP 4-fold RGBW LED dimmer allows to regulate independently the light intensity emitted by 4 LED strips at 12/24 Vdc or, alternatively, to regulate the light intensity and the colour emitted by a RGB or RGBW LED strip. The device is suitable for use with LED strips powered at constant voltage. The selection of the colour can be made optionally in HSV or RGB mode. Scenarios, predefined sequences, sequence repetition and random functions are available; the dimming speed and the holding time are programmable. The device is fitted with membrane pushbuttons for manual command and LEDs for status indication; a pushbutton allows the switching between automatic or manual operation modes. The device integrates a KNX bus communication module and is realised for mounting on a standard 35 mm DIN-rail. The device is powered by the KNX bus and requires an additional 12...30 Vdc to supply the controlled loads.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- · Membrane keyboard with LEDs for status indication of outputs
- Pushbutton for switching operating mode (normal / programming) • CH pushbutton for individual or simultaneous channels control
- HSV / RGB pushbutton colour control mode
- Auxiliary dry contact to disconnect load power supply during standby
- Connection to bus line with KNX terminal block
- Connection of outputs and 12-30 Vdc power supply with screw terminals
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)

Order information

Code	
EK-GC1-TP	

287 IN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
				1			I		1

4-fold RGBW LED dimmer

DIMMERS

Technical data

Power supply

- Voltage (strip LED): max 30 Vdc, 16 A
- Voltage (control): 30 Vdc by KNX bus

<u>Outputs</u>


• Number: 4


• Load current for each channel: 4 A

Delivery

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]





Package 1 pcs.

Configuration and commission











The Ekinex® 4-fold 0-10 V actuator EK-GF1-TP can be used as 0-10 V control output device or, alternatively, for controlling dimmerable LED power supply units. When used for LED controlling, the selection of the colour can be made optionally in HSV or RGB mode. Scenarios, predefined sequences, sequence repetition and random functions are available; the dimming speed and the holding time are programmable. The device is fitted with membrane pushbuttons for manual command and LEDs for status indication; a pushbutton allows the switching between automatic or manual operation modes. The device integrates a KNX bus communication module and is realised for mounting on a standard 35 mm DIN-rail. The device is powered by the KNX bus.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- Membrane keyboard with LEDs for status indication of outputs
- Pushbutton for switching operating mode (normal / programming)
- CH pushbutton for individual or simultaneous channels control
- HSV / RGB pushbutton colour control mode
- Connection to bus line with KNX terminal block
- Connection of outputs with screw terminals
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)

Technical data

Power supply

- Voltage (control): 30 Vdc by KNX bus
- Rated output stage supply voltage: 100-230Vac, 50/60Hz max 5W

4-fold 0-10 V actuator

DIMMERS

<u>Outputs</u>


Number: 4

- Range: 0-10 V or 1-10V
- Max. current for each channel: 50 mA

Delivery

Delivery includes a terminal block for connection to the bus and a terminal block for connection to the auxiliary power supply.

Dimensions [mm]



Order information

Code	Package
EK-GF1-TP	1 pcs.

Configuration and commission

°**O**-By means of ETS5 software or later versions Application program APEKGF1TP##.knxprod (download from www.ekinex.com)

download from www.ekinex.com

For more information see the technical documentation,





Code	Channels
EK-GD2-1-HV	1



Description

The single-channel phase cut dimmer EK-GD2-1-HV allows the brightness control of LED and halogen sources with a voltage of 90-230 Vac 50/60Hz for up to 220W.

Main features

- Plastic housing
- Device for free installation in junction boxes or wall
- Mounting on 35 mm profile rail (by means of code holder included)
- IP10 degree of protection (device installed)

Functions

- Dimming up to complete switch-off (dim-to-dark)
- Minimum brightness level: 1%
- Optimised output curve

Connections

• Screw terminals for control, supply and loads

287 357 373 421 439 451 455 461 471 475 IN-Rail mount modules Visualisation Audio Multicoom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General index									
	287 IN-Rail mount modules	357	421 IP Door Phone	439 Lift TV	451 Tools	455	461 Technical section	471 General terms of sale	475 General index

Dimmer 90-230V~ 50/60Hz

DIMMERS


Technical data

- Single-channel dimmer with phase-cut output
- Supply range: 90-230 Vac 50/60Hz
- Maximum output power 230W
- Control inputs: non-isolated N.O. pushbutton
- Maximum resistive load 1A.
- Conductor diameter 12-30 AWG (0.05-2.5 mmq)
- Storage temperature Min: -40°C Max: 60°C

Note

For electronic loads and/or LEDs consider maximum power halved from nominal value.

Dimensions [mm]









DALI Dimmers

DIN RAIL MOUNT MODULES

	EK-GD2-DL-1-LV DALI Dimmer 12 /48 Vdc	EK-GD2-DL-2-LV DALI Dimmer 12 /48 Vdc 2 channels	EK-GD2-DL-1-HV Dali Dimmer 90-230V~50/60Hz	EK-GD1-DL-4-LV Dali Dimmer 12/48V dc 4 channels	EK-GD1-DL-4-HV Dali Dimmer 90-230V~50/60Hz 4 channels
	Barrie Contraction	A TON			
Memory function	٠	•	•	•	•
Brightness adjustment until complete switch-off	•	•	•	•	•
Local control input	•	-	-	-	-
PWM modulation with settable frequency (300 / 600 / 1200 Hz)	-	-	-	•	-
Settable dimming curve: linear / logarithmic	•	•	•	•	•
Smooth switching on and off	•	•	٠	٠	•
Optimised output curve	•	•	•	٠	•
Screw terminals for DALI bus, control, power supply and LED source	•	•	•	•	•
Device power supply: 10.8 Vdc (min) 52.8 Vdc (max)	•	•	-	•	-
Device power supply: 90-230 Vac 50/60 Hz	-	-	•	-	•



Description

The DALI-2 1-channel dimmer EK-GD2-DL-1-LV allows the brightness control of low voltage LED sources from 12 to 48Vdc by means of PWM dimming. DALI-2 bus input reference IEC 62386. The 2-channel DALI-2 dimmer EK-GD2-DL-2-LV allows the control of brightness and colour temperature of low-voltage LED sources from 12 to 48Vdc by means of PWM dimming. Dynamic white temperature control TW DALI DT8, 2 independent channels (2 DALI addresses) or a single DALI DT6 channel. Functions can be set by means of a selector switch. Bus input DALI-2 reference IEC 62386.

Main features

- Plastic housing
- Free-standing device for installation in junction boxes or walls
- Mounting on 35 mm profile rail (using special bracket code included)
- IP10 degree of protection (device installed)

Functions

- Memory function settable by DALI
- Dimming up to complete switch-off (dim-to-dark)
- Minimum brightness level: 0.1%
- PWM modulation flicker free (2000 Hz)
- DALI-settable dimming curve: linear or logarithmic
- Switch-on and switch-off times settable by DALI
- Optimised output curve

Order information		
Code	Channels	Packaging
EK-GD2-DL-1-LV	1	1 noo
EK-GD2-DL-2-LV	2	—— 1 pcs.

287	357	373	421	439	451	455	461	471	475
IIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

DALI Dimmer 12/48 Vdc

DALI DIMMERS




Connections

- Screw terminals for DALI bus, control, power supply and LED source
- Max. connection length between dimmer-driver and control < 10 m

Technical data

- Device power supply: 10.8 Vdc (min)... 52.8 Vdc (max)
- Max. power: 240W
- Control: BUS DALI or local button











The single-channel phase cut dimmer EK-GD2-DL-1-HV allows the brightness control of LED and halogen sources with a voltage of 90-230 Vac 50/60Hz for up to 220Watts. Input Bus DALI-2 reference IEC 62386 standard.

Main features

- Plastic housing
- Device for free installation in junction boxes or wall
- Mounting on 35 mm profile rail (by means of code holder included)
- IP10 degree of protection (device installed)

Functions

- Dimming up to complete switch-off (dim-to-dark)
- Minimum brightness level: 1%
- Optimised output curve

Connections

• Screw terminals for DALI bus, control, power supply and LED source

DALI Dimmer 90-230V~ 50/60Hz

DALI DIMMERS




Technical data

- Single-channel dimmer with phase-cut output
- Supply range: 90-230 Vac 50/60Hz
- Maximum output power 230W
- Control inputs: DALI bus
- Maximum resistive load 1A.
- For electronic and/or LED loads the power is halved
- Conductor diameter 12-30 AWG (0.05-2.5 mmq)
- Storage temperature Min: -40°C Max: 60°C

Note

For electronic loads and/or electronic LEDs consider maximum power halved from nominal value.

Dimensions [mm]





Description

The 4-channel DALI-2 dimmer allows control of brightness, temperature and RGBW colour of low-voltage LED sources. Power supply from 12 to 48Vdc, PWM dimming. Compliant with the new FLICKER-FREE standard. Input Bus DALI-2 reference IEC 62386 standard.

Main features

- Plastic housing
- Device with 4 modular units
- IP20 degree of protection (device installed)

Functions

- Memory function
- Brightness adjustment until complete switch-off (dim-to-dark)
- Minimum brightness level: 0.1% (1% in push)
- PWM modulation with settable frequency (300/600/1200/2000Hz)
- Settable dimming curve: linear / quadratic / exponential
- Smooth switching on and off
- Optimised output curve

0	rd	er	info	rm	atio	n

Code	Channels	Packaging
EK-GD2-DL-1-HV	1	1 pcs.



For more information see the technical documentation, download from www.ekinex.com



Order information
Code

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

DALI Dimmer 12/48Vdc 4 channels

DALI DIMMERS




Connections


- Dip-switch for setting operating mode, frequency dimming connections
- Spring terminals for easy application

Technical data

- Device power supply: 10.8 Vdc (min)... 52.8 Vdc (max)
- Power consumption (at 40°C): 480 Watts total
- Dali absorption 1.53mA

Dimensions [mm]















The 4-channel DALI-2 dimmer allows brightness control of LED and halogen sources with voltage 90-230 Vac 50/60Hz for up to 200Watts on 4 channels each. Input Bus DALI-2 reference IEC 62386 standard.

Main features

- Plastic housing
- Device with 4 modular units
- Mounting on 35 mm profile rail (according to EN 60715)
- IP20 degree of protection (device installed)

Functions

- Memory function, fade time, minimum and maximum level settable via DALI software
- Dimming up to complete switch-off (dim-to-dark)
- Minimum brightness level: 0.1%
- Dimming curve: linear / logarithmic settable by DALI
- Electronic short-circuit and overload protection

DALI Dimmer 90-230V~ 50/60Hz 4 channels DALI DIMMERS



	EK-AI6-TP-XXX VRF control interface with KNX communication	EK-HA1-TP Fan-coil actuator / controller 3-speed fan control	EK-HB1-TP Fan-coil actuator / controller 0-10 V fan control	EK-HC1-TP Fan-coil actuator / controller full version	EK-HE1-TP 8-fold actuator / controller for electrothermal valve drives	EK-HH1-TP Mixing actuator
	. 1	Annotate Annotate Annotate	the story	Annesitation of the second sec		
Power 30 Vdc from KNX bus	•	•	•	•	•	•
Auxiliary power supply 230 Vac 50/60 Hz	-	•	•	•	•	•
Analogue input (passive temperature sensors 10 k $_{\Omega}$ NTC at 25°C)	-	•	•	•	-	•
Digital input (potential-free)	•	•	•	•	-	•
Output relays	-	•	•	•	-	•
Output triac relays	-	-	-	-	•	•
Output O-10V (high impedence signal control)	-	-	•	•	-	•
Membrane keyboard for manual/automatic control with status indication LEDs	-	-	-	•	-	•
LCD-display	-	-	-	-	-	•
2-pipe hydraulic distribution systems applications	•	•	•	•	•	-
4-pipe hydraulic distribution systems applications	•	-	-	•	•	-
Actuator	-	•	•	•	•	-
Internal controller	-	•	•	•	•	•
Air flow terminal: ventilation	-	•	•	•	-	-
Air flow terminal: convector	-	•	•	•	-	-
Air flow terminal: fan-coil	-	•	•	•	-	-
VRF/VRV	•	-	-	-	-	-
Air flow terminal: fan-coil + 2° electrical stage	-	-	-	•	-	-
Underfloor and ceiling systems distribution	-	-	-	-	•	•
Underfloor and ceiling mixing valve systems	-	-	-	-	-	•
Mounting on standard 35 mm rail (EN 60715)	-	•	٠	•	•	•

Dimensions [mm] 7. 4.3 69 DALI EK-GD1-DL-4-HV Dimmer Dali 90-230¹ Out: 4x1 A Max Out: 2 A CE 🗵

For electronic loads and/or electronic LEDs consider maximum power halved from

Order information			
Code	Channels	Packaging	
EK-GD1-DL-4-HV	4	1 pcs.	

Connections

Technical data

Note

nominal value.

Spring terminals for easy application

• 4-channel dimmer with phase cut output • Power supply range: 90-230 Vac 50/60Hz

• Maximum power output 200W per channel

• Storage temperature Min: -40°C Max: 60°C

• Conductor diameter 12-30 AWG (0.05-2.5 mmq)

• For electronic loads and/or electronic LEDs the power is halved

For more information see the technical documentation. download from www.ekinex.com



287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Thermoregulation

DIN-RAIL MOUNT MODULES



Ekinex solves the KNX integration of air conditioning with certified protocols. Ekinex's VRF KNX control interface is a device that provides two-way communication with Inverter/VRF units through protocols developed and validated in collaboration with air conditioning manufacturers. Integration between the KNX building automation system and the VRV/VRF air conditioning unit is plug and play, no adapter or external power source is required, and bidirectional data exchange occurs with confirmed actions and statuses and error detection.

Main features

- Checking the different parameters of the unit
- Error detection during communication
- Signaling LEDs
- Connection to bus line via KNX terminal
- 3 configurable digital inputs
- Power supply via KNX bus

Connections

- KNX port with standard connector
- Terminal for connection to direct expansion indoor unit
- Terminal for additional digital inputs

Delivery


Delivery includes a terminal for connection to the KNX bus line, a terminal for connecting additional digital inputs, and a cable for connection to the Inverter/VRF indoor unit.

- Ord	or in	forma	tion
010	61 11	IUIIIIa	LIUII

Code	Package	
EK-AI6-TP-DAO (DAIKIN RESIDENTIAL)	1 pz.	
EK-AIG-TP-DA1 (DAIKIN VRV)	1 pz.	
EK-AIG-TP-MEL (MITSUBISHI ELECTRIC)	1 pz.	
EK-AI6-TP-SA2 (SAMSUNG NASA)	1 pz.	
EK-AIG-TP-PAO (PANASONIC RESIDENTIAL)	1 pz.	
EK-AI6-TP-PAN (PANASONIC PACI-ECOI)	1 pz.	
EK-AIG-TP-TOS (TOSHIBA)	1 pz.	
EK-AI6-TP-LGE (LG)	1 pz.	

VRF control interface with KNX communication THERMOREGUI ATION







Description

The Ekinex® EK-HA1-TP fancoil actuator / controller allows to control a fan coil unit for the air conditioning of a room. The device can perform the function of simple actuator in combination with a KNX room thermostat or that of actuator / controller with acquisition of the temperature value by a KNX room sensor or a probe connected to an analogue input. The device is suitable for 2-pipe hydraulic distribution systems with ON / OFF control of one electrothermal shut-off valve actuator and a 3-speed fan. The outputs not used to control the fan coil unit can be configured as binary output channels for different functions. The device is equipped with 2 inputs freely configurable as analogue or digital. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and requires an additional 230 Vac power supply to operate.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- Connection to bus line with KNX terminal block
- Connection of inputs, outputs and 230 Vac power supply with screw terminals
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Overvoltage class III (according to EN 60664-1)
- Pollution degree 2 (according to IEC 60664-1)
- 35 mm rail mounting (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 175 g

Order information	
Code	Package
EK-HA1-TP	1 pcs.

For more information see the technical documentation download from www.ekinex.com

By means of ETS5 software or later versions Application program APEKHA1TP##.knxprod

download from www.ekinex.com)



287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Fancoil actuator / controller 3-speed fan control

THERMOREGUI ATION

Technical data

Power supply

- Voltage (loads) 230 Vac 50/60 Hz
- Voltage (electronics) 30 Vdc by KNX bus

<u>Inputs</u>

• 2 freely configurable for passive temperature sensors (10 k Ω NTC at 25°C) or as potential-free binary inputs


Outputs

- 3 interlocked relay outputs to control a 3-speed fan (or configurable as binary outputs for different applications)
- 1 relay SPST (single pole, single throw) to control an ON / OFF valve (in 2-pipe hydraulic distribution systems)

Delivery

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]



Configuration and com

°**0**-By means of ETS5 software or later versions Application program **APEKHA1TP##.knxprod** (download from www.ekinex.com









The Ekinex® EK-HB1-TP fancoil actuator / controller allows to control a fan coil unit for the air conditioning of a room. The device can perform the function of simple actuator in combination with a KNX room thermostat or that of actuator / controller with acquisition of the temperature value by a KNX room sensor or a probe connected to an analogue input. The device is suitable for 2-pipe hydraulic distribution systems with ON / OFF control of one electrothermal shut-off valve actuator and a fan with brushless motor. The outputs not used to control the fan coil unit can be configured as binary output channels for different functions. The device is equipped with 2 inputs freely configurable as analogue or digital. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and requires an additional 230 Vac power supply to operate.

Main features

Plastic casing

- Frontal programming pushbutton and LED
- Connection to bus line with KNX terminal block
- Connection of inputs, outputs and 230 Vac power supply with screw terminals
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Overvoltage class III (according to EN 60664-1)
- Pollution degree 2 (according to IEC 60664-1)
- 35 mm rail mounting (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 175 g

Fancoil actuator / controller 0-10 V fan control

THERMOREGUI ATION



Description

The Ekinex® EK-HC1-TP fancoil actuator / controller allows to control a fan coil unit for the air conditioning of a room. The device can perform the function of simple actuator in combination with a KNX room thermostat or that of actuator / controller with acquisition of the temperature value by a KNX room sensor or a probe connected to an analogue input. The device is suitable for 2 or 4-pipe hydraulic distribution systems with ON / OFF control of one or two electrothermal shut-off valve actuators and a 3-speed fan or a brushless motor driven fan. The outputs not used to control the fan coil unit can be configured as binary output channels for different functions. The device is equipped with 3 inputs freely configurable as analogue or digital. The device is fitted with membrane pushbuttons for manual command and LED's for status indication; a pushbutton allows to switch between automatic and manual operation modes. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and requires an additional 230 Vac power supply to operate.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- · Membrane keyboard with LED's for status indication
- Pushbutton for switching operating mode (normal / programming)
- Connection to bus line with KNX terminal block
- Connection of inputs, outputs and 230 Vac power supply with screw terminals
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Overvoltage class III (according to EN 60664-1)
- Pollution degree 2 (according to IEC 60664-1)
- 35 mm rail mounting (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 205 g

Order informatio

Code	Package
EK-HB1-TP	1 pcs.

Configuration and com

Technical data

• Voltage (loads) 230 Vac 50/60 Hz

or as potential-free binary inputs

hydraulic distribution systems)

• Voltage (electronics) 30 Vdc by KNX bus

• 2 freely configurable for passive temperature sensors (10 k Ω NTC at 25°C)

• 1 relay SPST (single pole, single throw) to control an ON / OFF valve (in 2-pipe

5 25 20 20

Í 🛛

• 1 to control a brushless motor driven fan with 0-10 V signal

Delivery includes a terminal block for connection to the bus.

اہ واق واق وا

Power supply

Inputs

Outputs

Deliverv

Dimensions [mm]

0 By means of ETS5 software or later versions Application program **APEKHB1TP##.knxprod** download from www.ekinex.com)



For more information see the technical documentation. download from www.ekinex.com



Arder informatio

Code	Package
EK-HC1-TP	1 pcs.

287 357 373 421 439 451 455 461 471 475 IN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General index							
	1.11. 11. 1.1	3/3	421 IP Door Phone	439	 455	461	 4/5

Fancoil actuator / controller full version THERMOREGUI ATION

Technical data

Power supply

- Voltage (loads) 230 Vac 50/60 Hz
- Voltage (electronics) 30 Vdc by KNX bus

<u>Inputs</u>

 3 freely configurable for passive temperature sensors (10 kΩ NTC at 25°C) or as potential-free binary inputs


Outputs

- 1 to control a brushless motor driven fan with O-10 V signal
- 3 interlocked relay outputs to control a 3-speed fan (or configurable as binary outputs for different applications)
- 2 relay SPST (single pole, single throw) to control two ON / OFF valves (in 2 or 4-pipe hydraulic distribution systems)

Deliverv

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]





By means of ETS5 software or later versions Application program **APEKHC1TP##.knxprod** (download from www.ekinex.com









The Ekinex® EK-HE1-TP actuator / controller allows to control electrothermal actuators or servomotors in hydronic systems for room heating and / or cooling. The device can perform the function of simple actuator in combination with one or more KNX room thermostats or that of actuator / controller with acquisition of the temperature value by one or more KNX sensors. The device is suitable for 2 or 4-pipe hydraulic distribution systems with ON / OFF control of electrothermal shut-off valve actuators. The device is fitted with membrane pushbuttons for manual command and LED's for status indication; a pushbutton allows to switch between automatic and manual operation modes. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and requires an additional 230 Vac power supply to operate.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- · Membrane keyboard with LED's for status indication
- Pushbutton for switching operating mode (normal / programming)
- Connection to bus line with KNX terminal block
- Connection of outputs and 230 Vac power supply with screw terminals
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Overvoltage class III (according to EN 60664-1)
- Pollution degree 2 (according to IEC 60664-1)
- 35 mm rail mounting (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 160 g

8-fold actuator / controller for electrothermal valve drives THERMOREGUI ATION

Technical data

Power supply

- Voltage (loads) 230 Vac 50/60 Hz
- Voltage (electronics) 30 Vdc by KNX bus


<u>Outputs</u>

• 8 TRIAC relays to control ON / OFF zone valve drives

Delivery

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]



Order informati

Code	Package
EK-HE1-TP	1 pcs.



Configuration and com



For more information see the technical documentation download from www.ekinex.com





Description

The Ekinex® EK-HH1-TP mixing actuator allows the control of 3 floating points or 0-10 V servo-motor for mixing valves. The flow temperature of the conveying fluid can be set at a fixed point, with external climatic compensation and with external climatic compensation plus internal conditions recalibration. The regulation modes are selectable separately for heating and cooling. The device is particularly suitable for underfloor or ceiling heating and cooling radiant panels applications in combination with Ekinex® room thermostats with integrated temperature and humidity sensor. A 0-10 V output allows the remote setting of a heat pump temperature setpoint value. The start-up function enables a radiant floors drying concrete phase according to EN 1264 standard. The membrane keyboard allows the manual command and includes LED's for status indication; the LCD-display allows displaying / setting of the main working parameters. The device integrates a KNX bus communication module and is realized for mounting on a standard 35 mm DIN-rail. The device is supplied by the KNX bus and requires an additional 230 Vac power supply to operate.

Main features

- Plastic casing
- Frontal programming pushbutton and LED
- · Membrane keyboard with LED's for status indication
- Pushbutton for switching operating mode (normal / programming)
- Connection to bus line with KNX terminal block
- Connection of inputs, outputs and 230 Vac power supply with screw terminals
- Classification climatic 3K5 and mechanical 3M2 (according to EN 50491-2)
- Overvoltage class III (according to EN 60664-1)
- Pollution degree 2 (according to IEC 60664-1)
- 35 mm rail mounting (according to EN 60715)
- 8 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 380 g

Arder information

Code	Package
EK-HH1-TP	1 pcs.

287 357 373 421 439 451 455 461 471 475 N-Bail mount modules Visualisation Audio Multinon IP Door Phone Lift TV Tools Sales kit Technical social General terms of sale General index								
	287 N-Rail mount modules	337		Lift TV	451 Tools		471 General terms of sale	475 General index



Mixing actuator THERMOREGULATION

Technical data

Power supply

- Voltage (loads) 230 Vac 50/60 Hz
- Voltage (electronics) 30 Vdc by KNX bus

Inputs

- 3 analogical exclusively for connection of NTC temperature sensors 10 k Ω at 25°C
- 2 configurable as analogical (exclusively for NTC temperature sensors 10 k Ω at 25°C) or digital (potential free)


<u>Outputs</u>


- 1 for control of a 3 point floating servomotor, 1 A, 250 Vac
- 1 for control of a servomotor with 0-10 V signal connection of high impedance input
- 3 for additional functions, relays 10(5) A, 250 Vac

Deliverv

Delivery includes a terminal block for connection to the bus.

Dimensions [mm]





Configuration and comm

0-By means of ETS5 software or later versions Application program **APEKHH1TP##.knxprod** (download from www.ekinex.com









NTC 10 $k\Omega$ temperature sensors

TEMPERATURE CONTROL

11000	ru	ntra	nn
Desc			

Temperature sensors with NTC (Negative Temperature Coefficient, 10 k\Omega \pm 1% a 25 °C, B = 3435) sensitive element for temperature measurement, to be used in combination with Ekinex® KNX devices equipped with an analogue input (or configurable as [AI]) for temperature measurement.

Characteristics and Technical data

Outdoor version (EK-STE-10K-3435)

- Sensitive element with high IP protection degree casing
- Cable gland (connecting cable not included in delivery)
- Working conditions:
- operating temperature: -40°C...+100°C
- relative humidity: 0...100%

Immersion version (EK-STI-10K-3435)

- Sensitive element with INOX cylinder casing
- Two-wire connecting cable (length 1,5 m)
- Operating temperature: -40°C...+105°C

Contact version (EK-STC-10K-3435)

Brass toecap

Order information

EK-STE-10K-3435

EK-STI-10K-3435

EK-STC-10K-3435

EK-STL-10K-3435

Code

- Two-wire connecting cable (length 1,5 m)
- Operating temperature: -40°C...+100°C

Air mass version (EK-STL-10K-3435)

• Sensor printed directly on the connecting cable

Version


outdoor

contact


air mass


immersion

- Two-wire connecting cable (length 1,5 m)
- Operating temperature: -50°C...+105°C









Configuration and commission Ö

Dimensions [mm]

The configuration is necessary for the $\mathsf{Ekinex}^{\circledast}\mathsf{KNX}$ device connected to the temperature sensor.

EK-STE

EK-STI

Package

1 pcs.

Ő






.	Contract And
	EK-STL

	EK-BH1-TP-485 Gateway Modbus RS485-KNX	EK-BH1-TP-TCP Gateway Modbus TCP/IP-KNX
Auxiliary power supply	•	•
Electrically insulated RS485 serial communication port	•	-
1-way DIP switch to activate the line terminator (120 Ohm)	٠	-
Modbus master RTU (Remote Terminal Unit) communication	•	•
BACnet slave communication	-	-
BACnet communication	-	-
PROFINET slave communication	-	-
BACnet records exchange	-	-
PROFINET records exchange	-	-
DMX master communication	-	-
250 kbaud communication speed	-	-
From 1200 to 115200 baud communication speed	•	-
from 3000 to 38400 baud communication speed	-	-
Ethernet (IEEE 802.3) communication port, RJ45 connector	-	٠
M-Bus communication port	-	-
Device addressing from 1 to 250	-	-
Device addressing from 0 to 250	•	•
Device addressing from 0 to 512	-	-
Register exchange of Coil, Input, and Input Register Holding Register type	•	•
Reading and writing of single and multiple registers	•	•
1 byte register writing on a maximum of 512 DMX devices	-	-
Volatile support memory with "image Modbus" of 1440 byte	•	•
Volatile support memory with"image BACnet" of 1440 byte	-	-
Volatile support memory with "image M-Bus" of 1440 byte	-	-
Volatile support memory with "image PROFINET " of 1440 byte KNX TP (twisted pair) 9600 baud	-	-
communication port	•	•
Volatile support memory with "image KNX" of 1440 byte	•	•
Additional plug-in program	•	•
Mounting on standard 35 mm rail (EN 60715)	•	•
DALI communication protocol	-	-
Ballast addressing to 64 devices	-	-
Ballast addressing to 128 devices	-	-

336



287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Gateway DIN-RAIL MOUNT MODULES

	EK-BH1-TP-485 Gateway Modbus RS485-KNX	EK-BH1-TP-TCP Gateway Modbus TCP/IP-KNX	EK-BJ1-TP-IP Gateway BACnet IP-KNX	Gateway	EK-BK1-TP Gateway DMX-KNX	EK-BM1-TP-xx Gateway M-Bus-KNX	EK-BN1-TP Gateway PROFINET-KNX	EK-BG1-TP <mark>Gateway</mark> DALI-KNX	EK-BF1-TP-D1 Gateway DALI-KNX 1 channel	EK-BF1-TP-D2 Gateway DALI-KNX 2 channels
	I	Ô		ē	Ĉ			-	Ŧ	
	•	•	•	•	•	•	•	-	-	-
	•		-	-	•	-	-	-	-	-
	•	•	-	-	-	-	-	-	-	-
	-	-	•	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	•	-	-	-
	-	-	•	-	-	-	•	-	-	-
	-	-	-	-	•	-	-	-	-	-
	-	-	-	-	•	-	-	-	-	-
	•	-	-	•	-	-	-	-	-	-
on	-	-	-	-	-	•	-	-	-	-
	-	•	•	-	-	-	•	•	-	-
	-	-	-	-	-	•	-	-	-	-
	-	-	-	-	-	•	-	-	-	-
	•	•	-	-	-	-	-	-	-	-
	-	-	•	•	•	-	-	-	•	-
	•	•	-	-	-	-	-	-	-	-
f	•	•	-	-	-	-	-	-	-	-
I	-	-	-	-	٠	-	-	-	-	-
	•	•	-	-	-	-	-	-	-	-
	-	-	•	•	-	-	-	-	-	-
	-	-	-	-	-	•	-	-	-	-
	-	-	-	-	-	-	•	-	-	-
	•	•	•	•	•	•	•	•	-	-
	•	•	•	•	•	•	•	•	-	-
	•	•	•	•	•	•	•		•	•
	•	•	•	•	•	•	•	•	•	•
	-	-	-	-	-	-	-	•	•	•
	-	-	-	-	-	-	-	•	•	-
	-	-	-	-	-	-	-	•	-	•



The Ekinex® Modbus RS485 - KNX Gateway performs a protocol conversion between a serial RS485 Modbus RTU and a KNX TP network. The device works as Modbus master. The device integrates a KNX bus communication module and it is suitable for mounting on a 35 mm DIN rail; it requires an auxiliary power supply.

Main features

- Plastic casing
- Connection to bus line with KNX terminal block
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 145 g

Technical data

- Power supply: 8...24 Vac or 12...35 Vdc
- Absorption at 24 Vdc: 3,5 VA

Communication

KNX side

- KNX TP (Twisted Pair) communication port electrically isolated from power supply
- 1440-byte volatile support "KNX image" memory buffer

Modbus RS485 side

- RS485 serial communication port, electrically isolated from power supply, 120 ohm termination resistance pluggable by a 1-way micro-switch
- Modbus master RTU (Remote Terminal Unit) communication
- Selectable baud rate from 1200 to 115200 baud
- Device addressing from 0 to 250
- Coil, Input, Holding Register e Input Register data exchange
- Single and multiple register reading/writing
- 1440-byte volatile support "Modbus image" memory buffer

Configuration

• Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E

Gateway Modbus RS485 - KNX

GATEWAYS


Delivery

The delivery includes the device and terminal blocks to connect to the KNX bus.

Other information

Modbus® is an open source, standard communication protocol suitable for master / slave data exchange between smart devices in various applications, such as industrial production, infrastructure, transportation and energy management.

Dimensions [mm]



Configuration and co

By means of software tool CGEKBH1TP485.exe (download from www.ekinex.com)



Order information	
Code	Application

Application	Package	For r
protocol conversion KNX - Modbus RTU	1 pcs.	dow

more information see the technical documentation, vnload from www.ekinex.com



000 and and and and

Description

The Ekinex® Modbus TCP/IP - KNX Gateway performs a protocol conversion between a Modbus RTU over TCP / IP and a KNX TP network. The device works as Modbus master. The device integrates a KNX bus communication module and it is suitable for mounting on a 35 mm DIN rail; it requires an auxiliary power supply.

Main features

- Plastic casing
- Connection to bus line with KNX terminal block
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 145 g

Technical data

- Power supply: 8...24 Vac or 12...35 Vdc
- Absorption at 24 Vdc: 3,5 VA

Communication

KNX side

- KNX TP (Twisted Pair) communication port electrically isolated from power supply
- 1440-byte volatile support "KNX image" memory buffer

Modbus TCP/IP side

- Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E.Communication Modbus master RTU (Remote Terminal Unit)
- Device addressing from 0 to 250
- Coil, Input, Holding Register e Input Register data exchange
- Single and multiple register reading/writing
- 1440-byte volatile support "Modbus image" memory buffer

Arder information

Code	Application
EK-BH1-TP-TCP	protocol conversion KNX - Modbus RTU

EK-BH1-TP-485

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Gateway Modbus TCP/IP - KNX GATEWAYS

Configuration

• Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E.


Delivery


The delivery includes the device and terminal blocks to connect to the KNX bus.

Other information

Modbus® is an open source, standard communication protocol suitable for master/ slave data exchange between smart devices in various applications, such as industrial production, infrastructure, transportation and energy management.

Dimensions [mm]





Configuration and co

By means of software tool CGEKBH1TPTCP.exe (download from www.ekinex.com)



Package 1 pcs.







The Ekinex® BACnet - KNX Gateway performs a protocol conversion between a BACnet and a KNX TP network. Two versions are available: BACnet MS/TP (masterslave / token-passed) over serial RS485 network and BACnet IP over Ethernet. The device integrates a KNX bus communication module and it is suitable for mounting on a 35 mm DIN rail; it requires an auxiliary power supply.

Main features

- Plastic casing
- Connection to bus line with KNX terminal block
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 145 g

Technical data

- Power supply: 8...24 Vac or 12...35 Vdc
- Absorption at 24 Vdc: 3.5 VA

Communication

KNX side

- KNX TP (Twisted Pair) communication port electrically isolated from power supply
- 1440-byte volatile support "KNX image" memory buffer

BACnet (MS/TP version) side

- RS485 serial communication port, electrically isolated from power supply, 120 ohm termination resistance pluggable by a 1-way micro-switch
- BACnet communication
- Selectable baud rate from 1200 to 115200 baud
- BACnet objects exchange
- 1440-byte volatile support "BACNet image" memory buffer

BACnet side (IP version)

• Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E.Communication BACnet slave

Gateway BACnet - KNX

GATEWAYS

- BACnet objects exchange
- 1440-byte volatile support "BACNet image" memory buffer

Configuration

• Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E.


Deliverv

The delivery includes the device and terminal blocks to connect to the KNX bus.

Other information

BACnet® is an ASHRAE (American Society of Heating, Refrigerating and Air-Conditioning Engineers) trademark.

Dimensions [mm]



Configuration and co 00

By means of software tool CGEKBJ1TP.exe (download from www.ekinex.com)



Order information

Code	Version	Application	Package
EK-BJ1-TP-IP	IP over Ethernet	protocol conversion	1 pcs.
EK-BJ1-TP-MSTP	MS / TP over RS485	KNX - BACnet	1 pcs.

For more information see the technical documentation download from www.ekinex.com





Description

The Ekinex® DMX - KNX Gateway performs a protocol conversion between a serial RS485 DMX and a KNX TP network. The device works as DMX master. The device integrates a KNX bus communication module and it is suitable for mounting on a 35 mm DIN rail; it requires an auxiliary power supply.

Main features

- Plastic casing
- Connection to bus line with KNX terminal block
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 145 g

Technical data

- Power supply: 8...24 Vac or 12...35 Vdc
- Absorption at 24 Vdc: 3,5 VA

Communication

KNX side

- KNX TP (Twisted Pair) communication port electrically isolated from power supply
- 1440-byte volatile support "KNX image" memory buffer

DMX side

- RS485 serial communication port, electrically isolated from power supply, 120 ohm termination resistance pluggable by a 1-way micro-switch
- DMX master communication
- Baud rate 250 kbaud
- Device addressing from 0 to 512
- 1-byte register writing on max 512 DMX devices

Order information

Code	Application
EK-BK1-TP	protocol conversion KNX - DMX512

287 IN-Rail mount modules	357 Visuelisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Teolo	455 Soloo kit	461 Technical costion	471 Constal terms of calo	475 Constal index
IN-Kall mount mounes	Visualisation	Audio Multiroom	IF DUUL FIIUIIC	LIILIV	lools	Sales kit	lechnical section	General terms of sale	General index

Gateway DMX - KNX GATEWAYS

Configuration

• Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E


Delivery


The delivery includes the device and terminal blocks to connect to the KNX bus.

Other information

DMX512 is a standard for asynchronous serial transmission of digital data between controllers, devices and accessories for the light industry, approved by ANSI (American National Standards Institute) and supported by ESTA (Entertainment Services and Technology Association).

Dimensions [mm]





Configuration and co

°0-By means of software tool **CGEKBK1TP.exe** (download from www.ekinex.com)



Package 1 pcs.







The Ekinex[®] M-Bus - KNX Gateway performs a protocol conversion between an M-Bus and a KNX TP network. The device acts as M-Bus master. Versions for networks with a maximum number of 20, 40, 80 and 160 connected M-Bus slave devices are available. The device integrates a KNX bus communication module and it is suitable for mounting on a 35 mm DIN rail; it requires an auxiliary power supply.

Main features

- Plastic casing
- Connection to bus line with KNX terminal block
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 145 g

Technical data

- Power supply: from M-Bus network
- Absorption at 24 Vdc: 3,5 VA (without load);
- 4, 5, 8 or 14 VA (resp. with 20, 40, 80 or 160 M-Bus devices)

Communication

<u>KNX side</u>

- KNX TP (Twisted Pair) communication port electrically isolated from power supply
- Baud rate 9600 baud
- 1440-byte volatile support "KNX image" memory buffer

<u>M-Bus side</u>

- M-Bus communication port (wired version, two-pole cable)
- Selectable baud rate from 300 to 9600 baud
- Device addressing from 1 to 250
- Variable reading through M-Bus slave device mapping
- 1440-byte volatile support "M-Bus image" memory buffer

Order information

Code	Version	Package
EK-BM1-TP-20	max 20 slave devices	1 pcs.
EK-BM1-TP-40	max 40 slave devices	1 pcs.
EK-BM1-TP-80	max 80 slave devices	1 pcs.
EK-BM1-TP-160	max 160 slave devices	1 pcs.

Configuration

• Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E

Gateway M-Bus - KNX

GATEWAYS


Delivery

The delivery includes the device and terminal blocks to connect to the KNX bus.

Other information

M-Bus (Meter-Bus) is a standard protocol for remote reading of data acquired from thermal energy, electricity, gas and water meters. M-Bus is fully compliant with EN 13757: Communication Systems for remote meter reading, parts 2 (Physical and connection layer) and 3 (Application layer).

Dimensions [mm]



By means of software to 100





Documentatio

For more information see the technical documentation, download from www.ekinex.com





Description

The Ekinex® PROFINET - KNX Gateway performs a protocol conversion between a PROFINET and a KNX TP network. The device acts as slave of PROFINET communication. The device integrates a KNX bus communication module and it is suitable for mounting on a 35 mm DIN rail; it requires an auxiliary power supply.

Main features

- Plastic casing
- Connection to bus line with KNX terminal block
- Installation on 35 mm rail (according to EN 60715)
- 4 modular units (1 MU = 18 mm)
- IP20 protection degree (installed device)
- Weight 145 g

Technical data

- Power supply: 8...24 Vac or 12...35 Vdc
- Absorption at 24 Vdc: 3,5 VA

Communication

KNX side

- KNX TP (Twisted Pair) communication port electrically isolated from power supply
- 1440-byte volatile support "KNX image" memory buffer

<u>PROFINET side</u>

- Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E.Communication PROFINET slave
- PROFINET data exchange
- 1440-byte volatile support "PROFINET image" memory buffer

Order information

Code	Application
EK-BN1-TP	protocol conversion KNX - PROFINET

287 357 373	421 439	451	455	461	471	475
IN-Rail mount modules Visualisation Audio Multiroom	IP Door Phone Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Gateway PROFINET - KNX GATEWAYS

Configuration

• Ethernet communication port (IEEE 802.3), RJ45 connector, minimum cable category: 5E.

Delivery

The delivery includes the device and terminal blocks to connect to the KNX bus.

Other information

PROFINET (Process Field Net) is an open source, Ethernet based (IEEE 802.xx) standard communication protocol, suitable for data exchange between field devices in industrial and process automation applications. The standard is supported by PROFIBUS & PROFINET International (PI) association.

Dimensions [mm]

Configuration and commissioning

By means of software tool CGEKBN1TP.exe (download from www.ekinex.com)



Documentation

For more information see the technical documentation, download from **www.ekinex.com**





Package



343

Voice control interface - KNX

GATEWAY



Description

Device with interface function between a KNX network (TP, twisted pair) and home speakers equipped with Amazon Alexa or Google Assistant. The interface, connected to Ekinex cloud services, is suitable for the control by voice commands of light, climate and motorization of a modern KNX standard building. The product is designed for installation on DIN profile rail and occupies 2 modules. The 12-24 Vdc power supply is external (power supply not included in the supply). The product with hardware based on embedded operating system, has a KNX TP node (twisted pair) and can therefore be connected directly to the bus network of KNX devices. The external connectivity is realized through the Ethernet port that connects the device directly to the home router.


The integrated web server provides access to the configuration environment and provides the following functions:

- Interface network settings
- Registration and subscription to Ekinex cloud services
- Automatic import of the ETS project and merging with previous imports
- Configuration of voice control accessories (max 150 accessories): lighting (on/off, dimmed and RGB), motorizations (open/close stop and position) and climate
- Configuration of action sequences on the KNX bus, which can be called up as scenarios by voice assistants
- Configuration of the IFTTT (If This Than That) cloud platform for the creation of association rules between events on the KNX bus and compatible services (e.g. sending e-mail)
- On the Amazon Alexa and Google Assistant apps, the Ekinex skill and action are available respectively for the complete configuration of the service.

Main features

- 12-24 Vdc power supply (absorption 240 mA at 12 Vdc) by means of a special plug-in terminal supplied. Power supply not included
- KNX TP bus (twisted pair) via red-black terminal provided
- 1 Ethernet port via cat. 5 or higher cable and standard RJ45 connector
- 2 frontal LEDs: POWER LED for signalling the presence of power supply; SERVICE LED for signalling particular operations in progress.
- 1 RESET button housed under the front cover on the back of the vertical card
- 1 RS485 port: not used
- 1 USB 2.0 port: not used

Dimensions [mm]





Description

Modular device with simplified programming unit function and IP interface for Control4 automation systems. Allows EKINEX-compatible devices to be programmed within the Composer Pro software without the use of ETS.

Main features

- Flexible integration of EKINEX and CONTROL4 products in the same installation.
- Simplified wiring for installers.
- Enhancement of the Control4 offering with design-oriented products.
- The same devices can be used by KNX professionals (with ETS) and by non-experts directly in Composer Pro.
- Maximum reliability thanks to the KNX standard-based solution.
- A winning offer for all markets, adapting to the different needs, styles and expectations of installers and end users.

Technical data

- Power supply 12/24 Vdc
- Power consumption 3W (240mA at 12V)
- Ethernet LAN connection port
- Plastic housing
- Version for mounting on 35 mm profile rail (according to EN 60715)
- IP20 protection rating (according to EN 60529) Insulation class II (according to EN 60335-1)
- Weight 70 g
- Modular device 2 UM (1 UM = 18 mm)
- Dimensions 36 x 94 x 71 mm (W x H x D)

0-1	information.
urner	information

Code	Application	Package
EK-BW1-TP	Voice control	1 pcs.

Configuration and co

Through internet browser configurable both locally and remotely via cloud access.



For more information see the technical documentation download from www.ekinex.com




Order information

Code	Application
EK-BR1-TP-01	KNX and/or Control4 interface

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Konnect4 - KNX GATEWAY

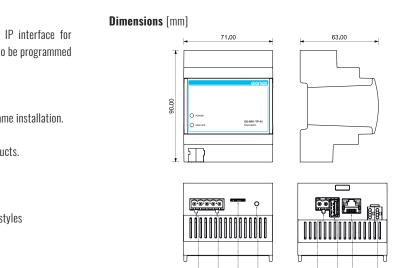



For more information see the technical documentation, download from www.ekinex.com



345





Ekinex® Gateways EK-BF1-TP-D1 is a device used to control electronic control gear (ECG) with a DALI interface (according to EN 62386) via the KNX installation bus. The device converts switching and dimming commands from the connected KNX system into DALI telegrams and status information from the DALI bus into KNX telegrams.

Connections

- KNX port with standard connector
- Screw terminals for DALI bus

Technical data

- Device power supply: 110-240 Vac or DC
- KNX bus power supply

Supply

The scope of delivery includes a terminal for connection to the KNX bus line and a 1.2 x 2 cm heat shrink tubing for additional insulation of the bus cable.

Other information

DALI® (Digital Addressable Lighting Interface) is a worldwide standard for interfacing lighting control solutions whose data transmission protocol is contained in IEC 62386. DALI is a registered trademark of ZVEI (Zentralverband Elektrotechnik- und Elektronikindustrie e.V.).


With firmware version 0.2.5 or higher, the device is certified according to EN 62386-101 and -103 ed2 (DALI2) and therefore authorised to carry the DALI-2 logo.

Main features

Besides the pure gateway function, the EK-BF1-TP-D1 also offers numerous additional functions:

- Addressing of up to 16 DALI groups or 63 individual ECGs
- Flexible DALI commissioning concept with ETS5
- Light colour control using type 8 ECG devices
- Light colour control according to different ECG subtypes
- Hourly programming for group and ECG control by value and/or colour
- Different operating modes such as permanent mode, night mode or staircase mode
- Integrated operating hours counter for each group and ECG with alarm when maximum duration is reached
- Individual fault recognition with objects for each lamp / ECG
- Complex failure analysis at group/device level with calculation of the number of failures and failure rate
- Fault threshold monitoring with individually configurable threshold values
- Scene module for extensive scene programming and dimming possibilities
- Quick replacement' function for easy replacement of individual defective ECGs
- Manual control of group and broadcast telegrams via control buttons on the device
- Fault status signalling via LED on the device

Dimensions [mm]









For more information see the technical documentation download from www.ekinex.com





Description

Ekinex® Gateways EK-BF1-TP-D2 is a device used to control electronic control gear (ECG) with a DALI interface (according to EN 62386) via the KNX installation bus. The device converts switching and dimming commands from the connected KNX system into DALI telegrams and status information from the DALI bus into KNX telegrams.

Connections

- · KNX port with standard connector
- Screw terminals for DALI bus

Technical data

- Device power supply: 110-240 Vac or DC
- KNX bus power supply

Supply

The scope of delivery includes a terminal for connection to the KNX bus line and a 1.2 x 2 cm heat shrink tubing for additional insulation of the bus cable.

Other information

DALI® (Digital Addressable Lighting Interface) is a worldwide standard for interfacing lighting control solutions whose data transmission protocol is contained in IEC 62386. DALI is a registered trademark of ZVEI (Zentralverband Elektrotechnik- und Elektronikindustrie e.V.).

With firmware version 0.2.5 or higher, the device is certified according to EN 62386-101 and -103 ed2 (DALI2) and therefore authorised to carry the DALI-2 logo.

Order information						
Code	Application					
EK-BF1-TP-DP2	devices used to control electronic control gear (ECG) a DALI interface (according to EN 62386) via the KN installation bus					

Gateway KNX / DALI 1 canale

GATEWAY

287 IN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
	riodanoación				10010	ouroo nic	roomiour cootion		donoral maon

Gateway KNX / DALI 2 canali GATEWAY


Besides the pure gateway function, the EK-BF1-TP-D2 also offers numerous additional functions:

- Addressing of up to 2x16 DALI groups or 2x63 individual electronic ballasts
- Flexible DALI commissioning concept with ETS5

Main features

- Light colour control using type 8 ECG devices
- Light colour control according to different ECG subtypes
- Hourly programming for group and ECG control by value and/or colour
- Different operating modes such as permanent mode, night mode or staircase mode
- Integrated operating hours counter for each group and ECG with alarm when maximum duration is reached
- Individual fault recognition with objects for each lamp / ECG
- Complex failure analysis at group/device level with calculation of the number of failures and failure rate
- Fault threshold monitoring with individually configurable threshold values
- Scene module for extensive scene programming and dimming possibilities
- Quick replacement' function for easy replacement of individual defective ECGs
- Manual control of group and broadcast telegrams via control buttons on the device
- Fault status signalling via LED on the device

Dimensions [mm]



Configuration and commis

ETS application v.5 and 6 for configuring the KNX functions of the device. DCA App as special interface for configuring DALI segments.

For more information see the technical documentation. download from **www.ekinex.com**







Ó



Metering

DIN-RAIL MOUNT MODULES

	EK-MS1-TP-20D KNX three-phase secondary electricity meter	EK-MS2-TP-TA KNX single-phase secondary electricity meter	EK-ME1-75D-TP Three-phase MID electricity meter 75A	EK-ME1-5TA-TP Three-phase MID electricity meter 5A
		ALC: NO.		
Three-phase energy meter	•	-	•	٠
Single-phase energy meter	•	٠	٠	•
Direct connection	•	-	٠	-
Fully bi-directional four quadrants measurements for all energies and powers	•	•	•	•
Main electrical parameters measured and displayed for a cost-effective consumption analysis	٠	•	•	•
For 3 wire networks with balanced or unbalanced load	•	-	•	•
Class B according to EN 50470-3	-	-	•	•
Tariff Input	-	-	•	•
2 SO outputs for energy pulse emission	-	-	•	•
LCD-Display	•	-	•	٠
Sealable cover to prevent tampering	-	-	•	٠
MID Certificate	-	-	•	•
KNX protocol	•	•	•	٠
Mounting on standard 35 mm rail (EN 60715)	•	•	•	٠



Description

The EK-MS1-TP-20D device has 3 independent measurement channels with direct insertion and is suitable for measuring a maximum of 3 independent single-phase power lines (230 Vac, 50-60 Hz), or 1 three-phase power line (400 Vac, 50-60 Hz). The mounting is on a 35 mm DIN rail with dimensions of 4 modular units (L = 144mm). It is also equipped with a display (graphic OLED, 128x32 px) and a query button. By pressing and holding the query button, it is possible to consult the instantaneous values of the measured electrical quantities (total active power, imported and exported active energy, voltage, current and power factor), the errors detected by the measuring system and other information on the product (FW and ETS versions, serial number of the KNX node).

Features

- OLED display for displaying measured and diagnostic information
- Bidirectional measurement of electrical parameters for single-phase and three phase circuits
- · Connection of measuring circuits with direct connection via screw terminals with cable cross-section up to 4mm2
- Accuracy better than 2%
- Connection to bus line via KNX terminal
 - 4 UM modular plastic housing (1 UM = 18 mm)

Technical data

- Rated voltage Un: 3x230/400 V AC (+/- 20%)
- Rated frequency fn: 50 Hz
- Direct connection current Imax 20 A
- Current consumption from bus < 10 mA

Order information

Code	Application
EK-MS1-TP-20D	KNX three-phase secondary electricity meter

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

KNX three-phase secondary electricity meter

62.5


METERING

Dimensions [mm]

71.5

00100100000

KN2





Configuration and commission Ö

By means of ETS5 software or later versions Application program **APEKME1EMUTP##.knxprod** download from www.ekinex.com)



Ø





The EK-MS2-TP-TA device has 2 independent measurement channels via external current transformers (CT) and is suitable for measuring single-phase power lines (230 Vac, 50-60 Hz). The flush-mounted box mounting is made in a compact case with the possibility of mounting on a 35 mm DIN rail (EN 60715) using a special adapter included in the supply.

Features

- Bidirectional measurement of electrical parameters for single-phase circuits
- Connection of measuring circuits to current transformers via screw terminals
- Accuracy better than 2%
- Connection to bus line via KNX terminal
- Up to 2 independent measuring circuits available
- Plastic housing

Technical data

- Supply voltage: 230 V AC
- Rated frequency fn: 50 Hz
- Current transformers from Imax 5 A up to Imax 120 A (not included in delivery)
- Current consumption from bus < 10 mA

KNX single-phase secondary electricity meter





Description

Current transformer (CT) to be used in combination with the ekinex submeter EK-MS2-TP-TA.

Features

- Plastic housing
- Ferrite core
- 1.5 m connecting cable with free terminals
- Openable for easy installation

Technical data

- For indoor use
- Applicable cable specifications: 10mm for EK-MST-5A, EK-MST-20A, EK-MST-60A, 16mm for EK-MST-120A
- Nylon housing, UL94-VO classification
- Black and white double wire
- Class 05
- Voltage level: 0.4/0.66/0.72kV
- Withstand voltage level: 2kV/1mA/1min
- Rated frequency: 50/60Hz
- Operating temperature: -40...+55°C
- Weight: 48...93g

Versions

- EK-MST-5A: Primary 0-5A / ratio 1000 to secondary (5A-5mA)
- EK-MST-20A: Primary 0-20A / ratio 1000 to secondary (20A-20mA)
- EK-MST-60A: Primary 0-60A / ratio 3000 to secondary (60A-20mA)
- EK-MST-120A: Primary 0-120A / ratio 3000 to secondary (120A-40mA)

n	 	1	 -	
U			па	tion

Code	Application
EK-MST-5A	Power transformer for secondary electricity meter Primary 0-5A / ratio 1000 to secondary (5A-5mA)
EK-MST-20A	Power transformer for secondary electricity meter Primary 0-20A / ratio 1000 to secondary (20A-20
EK-MST-60A	Power transformer for secondary electricity meter Primary 0-60A / ratio 3000 to secondary (60A-20
EK-MST-120A	Power transformer for secondary electricity meter Primary 0-120A / ratio 3000 to secondary (120A-

Order information

Code	Application	Package
EK-MS2-TP-TA	KNX single-phase secondary electricity meter	1

Configuration and commission

Dimensions [mm]

00 By means of ETS5 software or later versions Application program APEKME1EMUTP##.knxprod (download from www.ekinex.com)

For more information see the technical documentation, download from www.ekinex.com



28.55 52.80 ekinex) ek**i∩e**x KNX (E

287	357	373	421	439	451	455	461	471	475
IN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Power transformer for secondary electricity meter


METERING

Connections

The current transformer is equipped with a two-conductor connection cable of 1.0 m length with free terminals. The cable can not be extended.


Dimensions [mm]


EK-MST-5A / EK-MST-20A / EK-MST-60A





• EK-MST-120A











Three-phase MID energy meter for active and reactive energy measurement with bidirectional metering for imported and exported energy, current (A), voltage (V), active power (kW), reactive power (kVAr), power factor and other electrical parameters. Direct connection up to 75 A. The device has an integrated communication module to the KNX bus.

The meter has four SO pulse outputs for the transmission of imported and exported active and reactive energy data, which can alternatively be used for load control functions or for threshold monitoring of a maximum value. The device enables two- or four-rate system management with switching of the active rate via a 230 Vac signal. Protection against manipulation is provided by sealable terminal covers. The device is designed for DIN rail mounting according to EN 60715 inside switchboards and control cabinets.

Functions

- Display: graphic 60x30 mm LCD backlit
- Optical interface DO: according to EN 62056-21
- Communication interface: KNX TP
- KNX configuration: via ETS software
- Metrological LED: 10 pulses / Wh
- Pulse output: Opto Power MOSFET SO for heavy-duty applications, 5-230 Vac or Vdc, max 90 mA
- Pulse setting (frequency, length)
- Accuracy class: B (1%)
- Environmental class: mechanic: M1, electromagnetic: E1
- Safety class: 2
- Marks: KNX, CE, MID (B+D)
- Device housing: modular 5 MU (1 MU = 18 mm)
- Degree of protection: IP51 (housing), IP20 (terminals)
- Dimensions (LxHxD): 90 x 90 x 67 mm

Order information

Code	Device	Package
EK-ME1-75D-TP	Three-phase MID electricity meter 75A	1

Configuration and commissioning

By means of ETS5 software or later versions Application program **APEKME1EMUTP##.knxprod** (download from www.ekinex.com)

Documenta

ri

For more information see the technical documentation, download from **www.ekinex.com**



METERING



Description

Three-phase MID energy meter for active and reactive energy measurement with bi-directional metering for imported and exported energy, current (A), voltage (V), active power (kW), reactive power (kVAr), power factor and other electrical parameters. Connection via current transformers (CT). The device has an integrated communication module to the KNX bus.

The meter has four SO pulse outputs for the transmission of imported and exported active and reactive energy data, which can alternatively be used for load control functions or for threshold monitoring of a maximum value. The device enables twoor four-tariff system management with switching of the active rate via a 230 Vac signal. Protection against manipulation is provided by sealable terminal covers. The device is designed for DIN rail mounting according to EN 60715 inside switchboards and control cabinets.

Functions

- Display: graphic 60x30 mm LCD backlit
- Optical interface DO: according to EN 62056-21
- Communication interface: KNX TP
- KNX configuration: via ETS software
- Metrological LED: 10 pulses / Wh
- Pulse output: Opto Power MOSFET SO for heavy-duty applications, 5-230 Vac or Vdc, max 90 mA
- Pulse setting (frequency, length)
- Accuracy class: B (1%)
- Environmental class: mechanic: M1, electromagnetic: E1
- Safety class: 2
- Marks: KNX, CE, MID (B+D)
- Device housing: modular 5 MU (1 MU = 18 mm)
- Degree of protection: IP51 (housing), IP20 (terminals)
 Dimensions (LxHxD): 90 x 90 x 67 mm

Order information

Code	Device
EK-ME1-5TA-TP	Three-phase MID electricity meter 5A

Three-phase MID electricity meter 75A


Technical data

- <u>Power supply</u>
 Rated voltage Un: 3x230 / 400V (+/- 20%)
- Rated vortage on: 3x2307 400V (742070)
 Rated frequency fn: 50 Hz, 60 Hz on request

<u>Voltage</u>

• Direct connection: (lst, Imin, ltr, Iref, Imax) 0.02 A / 0.25 A / 0.5 A / 5 A / 75 A (5(75))

Dimensions [mm]



287	357	373	421	439	451	455	461	471	475
N-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Three-phase MID electricity meter 5A

Technical data

<u>Power supply</u>


- Rated voltage Un: 3x230 / 400V (+/- 20%)
- Rated frequency fn: 50 Hz, 60 Hz a richiesta

<u>Voltage</u>

Current transformer /5A and /1A:

- /5A (Ist, Imin, Itr, Iref, Imax) 0.01 A / 0.05 A / 0.25 A / 5 A / 6 A (5(6))
- /1A (Ist, Imin, Itr, Iref, Imax) 0.002 A / 0.01 A / 0.05 A / 1 A / 1.2 A (1(1.2))







Configuration and commissioning

By means of ETS5 software or later versions Application program **APEKME1EMUTP##.knxprod** (download from www.ekinex.com)









Terminal block for the connection of KNX bus lines or SELV auxiliary power supply. It allows the connection of max. 4 pairs of wires. To be used also as distribution terminal in wall boxes.

Colour coding

- EK-MNR-TP: red = + (positive), black = (negative)
- EK-MGB-TP: yellow = + (positive), white = (negative)

Main features

- 4 plug-in seats for each polarity
- Fast spring connection
- Suitable for solid wire diameter 0,6÷0,8 mm
- Mechanical coding for terminal block housing on devices
- Wire strip length (advised) 5-6 mm

Order information

Code	Colour coding	Use	Package
EK-MNR-TP	red/black	bus connection	50
EK-MGB-TP	yellow/white	SELV connection	50

Technical data

- Nominal voltage 100 V
- Nominal current 6 A

Delivery


Package of 50 pieces.

Note

A terminal block for the connection of KNX bus line (EK-MNR-TP) is supplied with every

Ekinex® device. A terminal block for the connection of SELV auxiliary power supply is supplied along with EK-AG1-TP power supply and Touch&See unit.

Dimensions [mm]





Terminal blocks

ACCESSORIES



Description

The bus cable LSHF (Low Smoke Halogen Free) is a twisted pair cable for the connection of KNX bus devices and the derivation of KNX bus lines. It is available with a single pair of wires with a diameter of 0.8 mm. Screen in aluminium foil. For use in dry interior.

Main features

- Cable for KNX based applications (TP)
- Single pair of wires Ø 0,8 mm
- Black/red wires for KNX bus line connection
- Yellow/white wires for auxiliary SELV or spare power supply

Order information

Code	Туре	Use	
EK-112-TP	1 x 2 x 0,8	bus connection	
EK-114-TP	2 x 2 x 0,8	bus connection and spare pair	
	EK-112-TP	EK-112-TP 1 x 2 x 0,8	EK-112-TP 1 x 2 x 0,8 bus connection

287	357	373	421	439	451	455	461	471	475
N-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Technical data

Nominal voltage: 50 V

Test voltage: 4 kV

Delivery

100 m bundle covered with cellophane.

Package [m] 100 100



FK-114-TP

355



VISUALISATION

	~
ex Delégo: the system	361
ewed graphic interface	362
plified configuration and maintenance	365
plete versatility	366
1 features - Licenses	367
go server	368
go panel	370

E S

and the second s







	287	357	373	421	439	451	455	461	471	
ces	DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	

Ekinex Delégo: the system

VISUALISATION

Delégo is a system for the visualisation and control of a KNX home automation system. Developed with web-oriented technologies, it has a uniform interface with high graphical impact on every platform, both desktop (PC) and mobile (Apple iOS and Android devices), with both local and remote connection. The system consists of a compact server (based on Linux operating system) to be installed in an electrical box: the device connects directly to the KNX bus via twisted pair; the connection to the home router is made via the Ethernet port on your local network (LAN).

The user can interact with the system either by means of mobile devices, or with one or more fixed stations, by means of Delégo panel a touch-panel with elegant and minimal design, for wall installation, connected via Ethernet port on its local network (LAN). The Delégo visualisation system is characterized by a simple and at the same time extremely complete configuration, thanks to the direct import of the ETS project file. The functional definition of the various imported domotic objects and the correspondence with a rich and customizable set of controls (widgets) for the user, is also very straightforward.

The renewed interface is simple and intuitive and allows the user to interact with the home automation system of his smarthome through the use of different devices, with absolute uniformity of use. The app allows you to remotely control lights, climate, automatisms, audio/video equipment, shutters and more with a simple touch, from a single device and from anywhere in the building reached by the Wi-Fi network, or remotely via web connection.



Renewed graphic interface

VISUALISATION

The redesigned visual interface can be accessed either via an app for smartphone and tablet (supported operating systems: Apple iOS and Android) or from a desktop PC workstation. All the devices can be interfaced with the server previously configured so that all the functions of the automation system can be controlled and viewed. The app, accessible from mobile devices (smartphones and tablets) or fixed devices (Delégo panel), is structured for the logical vision of the building, by areas or services. The visualisation with desktop PC also allows the visualization with synoptic: the plan of the space can be associated, following the physical location, with the set of available services.

VISUALIZATION BY AREAS

The app will display a list of configured areas, each identified by an image inserted in the web configurator during the commissioning phase;

In each area set through the web configurator (for example: living room, bedroom, kitchen) the user can choose whether to turn on or off the lights, or to change the settings of the room thermostat and other settings for each of the available features: Simple navigation between the different areas configured with a touch of the display.


VISUALIZATION BY SERVICES

The visualization of each area can be filtered through a toolbar that allows you to easily select the individual function available:

Lighting Air conditioning Shading and motorized automations Scenarios


The app can be extended with the functions provided by the compatible video surveillance, intrusion detection and audio/video systems integrated in the Delégo server.



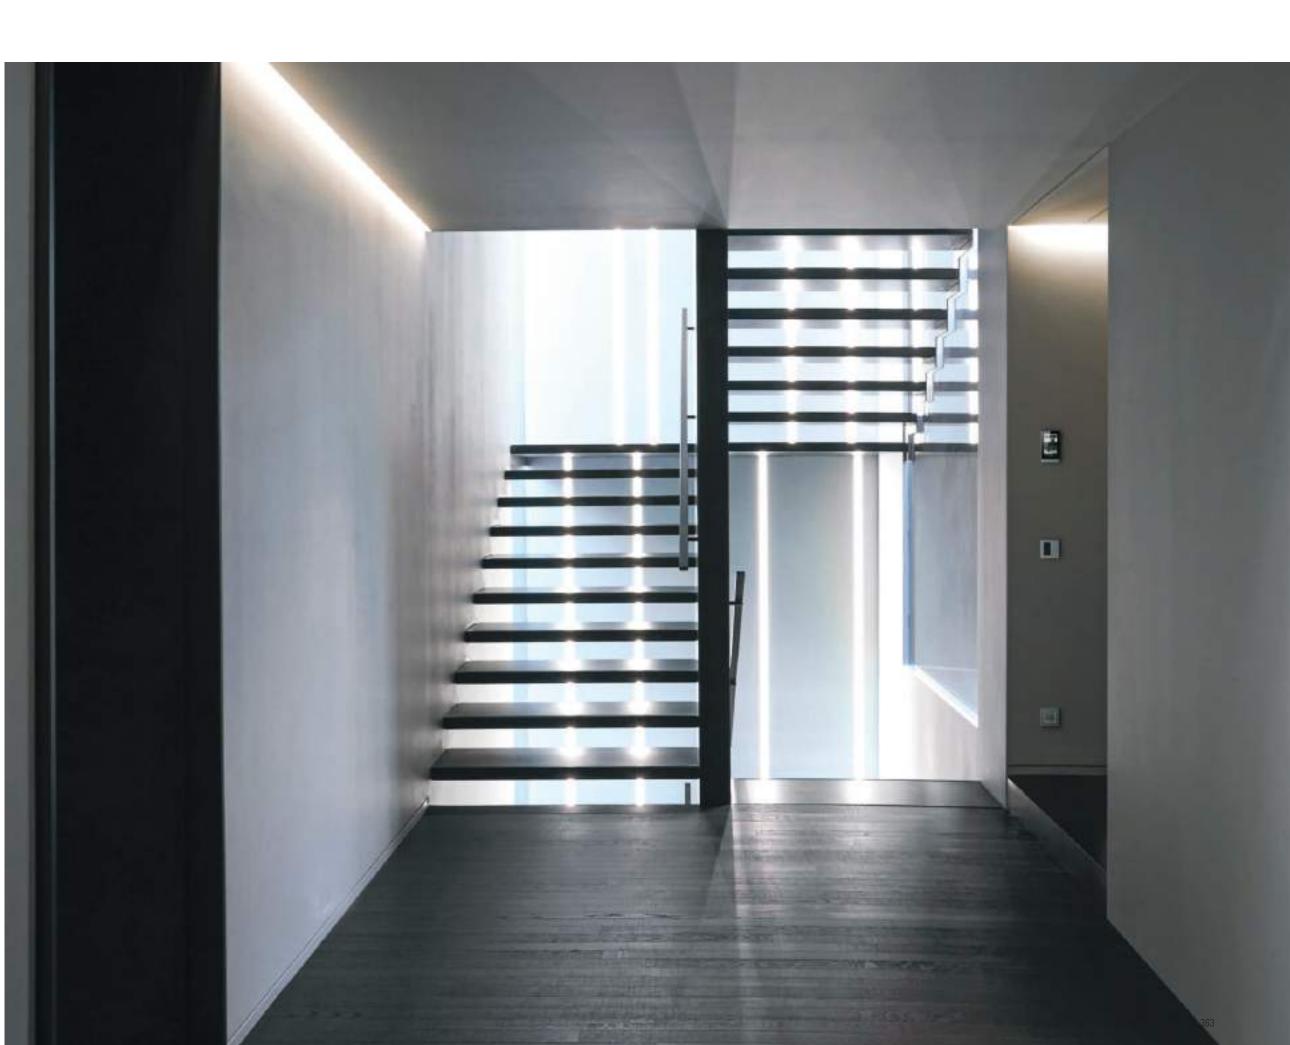

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index



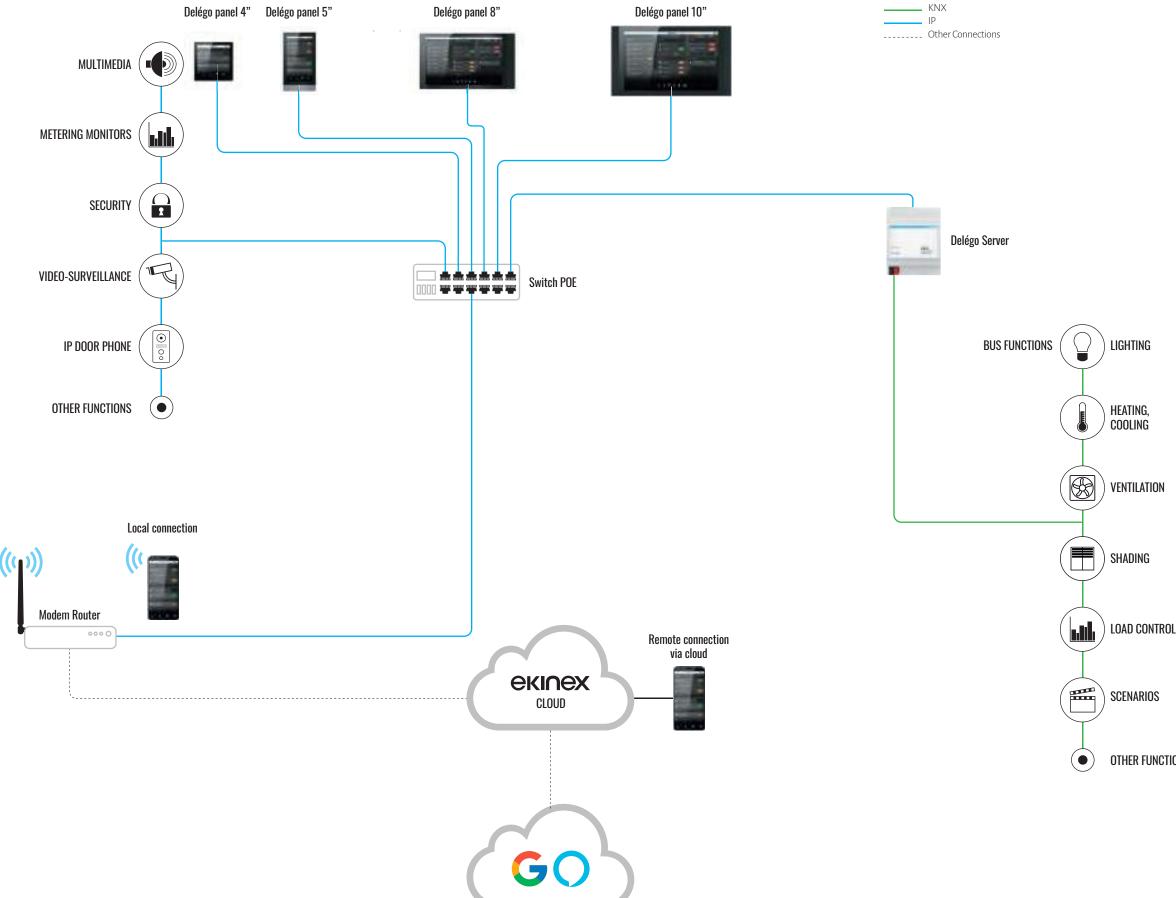

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
		I I					I		1

Simplified configuration and maintenance

VISUALISATION


Thanks to the web interface it is possible to program the system online and offline (without Delégo server connected), and thanks to the ETS' project file import tool, it is possible to quickly integrate all the group addresses used. The system also supports the incremental upgrade of the installation via subsequent imports.

The graphics of the widgets adapt automatically according to the KNX communication objects connected in the project. The remote connection of the Delégo server can be made either via port forwarding or via native cloud connection. Maintenance and support can thus be carried out quickly and with reduced running costs.

OTHER FUNCTIONS

Complete versatility

VISUALISATION

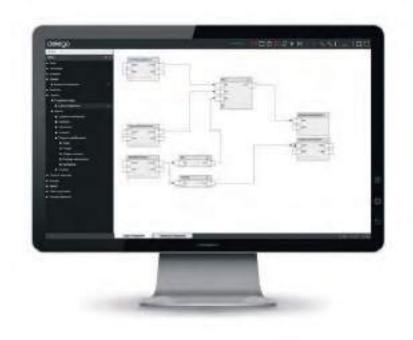

Multiplatform

Delégo server can be managed by PC, MAC, Touch-PC, smartphone and tablet through a common Internet browser or with a free dedicated app (available for Apple devices and Android).

Customizable

the graphics and automatic functions of Delégo server can be easily modified according to your needs, accessing the web pages with your PC of administration.

Quick to configure

Delégo server proposes a set of ready-to-use functions typically used in the home automation supervisors and allows you to quickly import the structure of your own ETS building (KNX installation).

Multi-protocol

Delégo server can be connected directly to both the KNX bus in the twisted version pair, both to Modbus on RS485 network and via TCP/IP protocol via Ethernet port. Thanks to the multi-protocol management it is possible to connect intrusion detection systems, thermoregulation, multimedia systems and video surveillance.

Easy to install

Thanks to the size of only 2 modules on DIN rail, Delégo server can be easily installed directly into the electrical cabinet. The communication ports to the LAN, KNX bus and other technological subsystems do not require any additional external interfaces.

Reliable

The Delégo server is based on a Linux operating system that guarantees reliability and stability. of the platform for continuous use, as well as providing a high degree of safety on the net.

Also offline

It is possible to build the visualisation project even without being connected to the webserver, working in "offline" mode directly on your PC or MAC.

100% Made in Italy

Hardware and software are designed, manufactured, assembled and tested entirely in Italy, to guarantee the highest quality of the product and after-sales service competent and helpful.

KNX RS-485 / TCP / UDP configurat Modbus RTU/TCP
Web / HTMLS (All operating syste Dedicated app (iOS I Android)
Unlimited without additional licer
Up to 20 (scalable on request)
Lighting Heating / air conditioning Motorized doors and windows Irrigation Thermal power plant I thermoregy Technical alarms Consumption and energy manage Load control Weather control IP Cameras / IP Door phones Intrusion detection Audio/Video broadcasting
Microsoft Windows Apple Apple Mac OSX Androi Linux

VISUALIZATION

Layout	Graphics scalable by resolution Automatic recognition of mobil Full support for touch and mult
Navigation	Personalized graphic pages Multi-level environment naviga Navigation by functions Summary popups for the most Always accessible and custom
Customization	Scenarios, Calendar schedules
Notifications and messages	Notifications on screen, Email,
Cloud Services	Remote Accessibility, Weather

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Main features

VISUALISATION

SETUP AND CONFIGURATION

Configuration mode	Online Offline via free downloadable tool
Environment of configuration	Integrated search engine Navigation tree for access to all functions Drag & drop Multi-tab for multiple simultaneous configuration functions
Setup and maintenance	Network Date and time Backup / stay configuration via browser Language selection Graphic Themes Selection and Layout Customization Software update via browser
Environments / graphic pages	Grid layout and graphic map Customizable background images Custom Object Sorting/Placement
Advanced Functions	Scenarios with timings Logics Comparison of values and levels Mathematical operations Custom functions via scripting
Planning and calendar	Unlimited number of daily profiles for each object Weekly and annual profiles Configuration accessible by end user
Energy Management	Support for KNX network analyzers, ModBus Integrated load control function Graphical visualization of consumption and production Real-time load absorption display Automatic comparisons and consumption indicators
Voice Control	Amazon Alexa - Google Assistant
Users and security	Unlimited number of users Unlimited access Secure SSL access via internet

rable

vstems)

enses

egulation

gement

le iOS roid

on bile devices ulti-touch devices

ration

st complex functions mizable menu

, Push notifications

er Services, IFTTT





Delégo server is the Ekinex visualisation system for KNX-based installations. It allows management of the functions in the building via Delégo Panels and through the Delégo APP, available free of charge on Apple and Google stores. Control can be done both locally and remotely via connection to the Ekinex Cloud. The graphics are customizable, suitable for any context and application, and optimized for viewing on both smartphones and tablets. Configuration of KNX functions is simplified and fast. The server offers the possibility of creating scenarios, time sequences, logics, conditions, mathematical operations, and time schedules through simple and intuitive graphical tools; it also allows the reporting of events and alarms as push notifications or via e-mail. Configuration is done via web pages directly by connecting to the server and requires no programming skills for customization. The server natively handles KNX, Modbus and Mbus protocols without the need for additional licenses.

- Local connection of Delégo Panels via Ethernet or Wi-Fi network
- Local connection of smartphones and tablets via WiFi network
- Remote connection of smartphones and tablets via direct connection of the server device to the Internet (with port forwarding) or via connection to the Ekinex cloud.
- Secure connection via TLS/SSL encryption
- Integration with Amazon's Alexa and Google Assistant voice assistants
- Option to display graphical maps of the installation


• Built-in web server for system configuration: automatic ETS project import,room configuration, logic processing functions (combinational functions, timings, mathematics, astronomical clock, ...)


Technical data

•	Dimensions:	71x90x63 mm (LxHxP)
		4UM DIN (1 UM=18mm)
•	Power supply:	POE or alternatively 12-24VDC
•	Power consumption:	240 mA at 24V
•	Processor:	Quad-core
•	RAM:	1Gb
•	Connections	LAN (RJ45) POE
		2 pin RS485 (Terminal provided)
		3 pin RS232 (Terminal provided)
		USB 2.0
		Micro SD Slot
•	LED	Power
		Service/Reset


- Degree of protection: IP 20 II (according to EN 60335-1) Insulation Class:
- **Operating Temperature:** +0°C ... +40°C
- Storage Temperature: -10°C ... +70°C

Dimensions [mm]









Delégo server

VISUALISATION

For more information see the technical documentation.

download from www.ekinex.com




		and the second sec
	and the second se	
	DELÉGO MINI	DELÉGO SERVER
CODE	EK-DEL-SRV01-M	EK-DEL-SRV01
(NX DATAPOINTS	I	
(NX Datapoints	200	1500
(NX Datapoints Upgrade with EK-DEL-UPG01 or EK-DEL-UPG02	NO	YES
ACCEDO (ACCESS CONTROL SYSTEM)		
Rooms	4	4
locesses	4	4
Jpgrade 4 rooms + 2 accesses	YES with Voucher (max 16 rooms)	YES with Voucher
JSER INTERFACE		
TS Import	YES	YES
Aps	YES	YES
Rooms	YES	YES
nterface customisation	YES	YES
Charts and reporting	YES	YES
CLOUD SERVICES		
Sloud Connectivity for remote access	YES	YES
/oice Assistants	YES	YES
Veather services	YES	YES
Notifications on Cloud	YES	YES
INTEGRATIONS	10	
Andbus	YES	YES
Mus	YES	YES
Sentio Audio Multiroom System	YES	YES
SIP Server Voip for DICO	YES	YES
Philips HUE	YES	YES
Sonos	5 bridges	5 bridges
AQTT Client and Server	30 zones	30 zones
(NX Alarm Systems (example: Telenote)		
Security systems integration (Tecnoalarm, Elmo, Bentel, Paradox, Axel)	YES	YES YES with Voucher
SIP Server Voip (2N, Doorbird)	YES with Voucher	
	YES with Voucher	YES with Voucher
FUNCTIONS Single Widget PIN Code Protection	VEO	VEO
	YES	YES
UA Logic Module	YES	YES
ights	YES	YES
RGBW Lights	YES	YES
Heating/Cooling	YES	YES
Shades	YES	YES
rrigation	YES	YES
Alarms	YES	YES
Sircadian cycle	YES	YES
elegram Notifications	YES	YES
mail Notifications	YES	YES
Push Notifications	YES	YES
chedules	YES	YES
inergy Load Management	YES	YES
Astronomic Clock	YES	YES
Scenes and Timers	YES	YES
Presence Simulation	NO	YES
Simulazione di presenza	NO	YES
Scripting	NO	YES

357	373	421	439	451	455	461	471	475
alisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



The touch-panels of the Delégo series are a must-have instrument for the management of the modern connected building. Through these you can control all the automation functions of the premises: lights, roller shutters, burglar alarm, climate control, building management, etc. energy saving and multimedia system. Delégo touch-panels are available in two cuts, from 5" to 10" capacitive display, with black frame. The elegance of the minimalist design, the exceptional graphic of the HD display and the outstanding performances, make Delégo panel ideal for home, office, businesses, and any other area of installation. Possibility of customization through aluminium frame (5" version only).

Dimensions [mm]



5" Basic

Delégo panel

VISUALISATION

Delégo panel Premium

Code	EK-DEL-5PAN-P
Power supply	Power Over Ethernet (PoE)
Connectivity	LAN 100baseT
Display	LCD HD IPS TFT
Colours	16.7 million colours (true colour)
Resolution	1080 x 1920 px
Touch screen	capacitive with multi-touch & gesture support
Speakers	high definition audio with built-in amplifier, 4W
Integrated microphone	high resolution with echo cancelling
Operating system	Android 11
Certifications	CE / FCC class B / FCC part 15 / RoHS / WEEE
Dimensions (W x H x D) mm	132 x 81 x 14
Orientation	portrait
Plastic frame	black
External frame	aluminium
Compatible flush-mounting box	2M flush mounting box (e.g. BTicino mod. 502E); round box diameter 60 mm (e.g. Gewiss mod. 24232); 3M flush mounting box vertical mounting (e.g. BTicino mod. 503E)

	4" Smart	8" Smart	10" Smart			
Code	EK-DEL-4PAN-S	EK-DEL-8PAN-S	EK-DEL-10PAN-S			
Power supply		Power Over Ethernet (PoE)				
Connectivity		LAN 100baseT				
Wi-Fi		IEEE802.11 b/g/n				
Bluetooth	Bluetooth 4.2		Bluetooth 5.0			
Display		LCD HD IPS TFT				
Colours		16.7 million colours (true colour)				
Resolution	480 x 480 px	480 x 480 px 1280 x 800 px				
Touch screen	C	apacitive with multi-touch & gesture support				
Speakers	single 8 Ω / 1.5W	4 speak	xers 4 Ω / 2W			
Integrated microphone	double microphone -42dB	double mid	crophone -26dB			
Operating system	Android 10	Android 12				
SIP Server	NO		SI			
Certifications	С	E / FCC class B / FCC part 15 / RoHS / WEEE				
Dimensions (W x H x D) mm	86.4 x 86.4 x 11.8	216.2 x 124.4 x 11.8	278.5 x 165.1 x 11.8			
Orientation	portrait	lai	ndscape			
Plastic frame		black				
Compatible flush-mounted box	2M flush-mounting box (e.g. BTicino mod. 502E); 65x45 mm diameter round box (e.g. Gewiss mod. GW24234PM)	meter round box round box diameter 60 mm (e.g. Gewiss mod. 24				

Documentatio

Delégo panel Smart

For more information see the technical documentation, download from **www.ekinex.com**

Delégo	panel	Basic
--------	-------	-------

Code	EK-DEL-5PAN			
Power supply	Power Over Ethernet (PoE)			
Connectivity	LAN 100baseT			
Display	LCD HD IPS TFT			
Colours	16.7 million colours (true colour)			
Resolution	720 x 1280 px			
fouch screen	capacitive with multi-touch & gesture support			
Speakers	high definition audio with built-in amplifier, 1W			
ntegrated microphone	high resolution			
Dperating system	Android 6			
Certifications	CE / FCC class B / FCC part 15 / RoHS / WEEE			
Dimensions (W x H x D) mm	132 x 81 x 14			
Drientation	portrait			
Plastic frame	black			
External frame	aluminium			
Compatible flush-mounting box 2M flush mounting box (e.g. BTicino mod. 502E round box diameter 60 mm (e.g. Gewiss mod. 242 3M flush mounting box vertical mounting (e.g. BTicino m				

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

5" Premium





Strea Spea Spea

MULTIROOM AUDIO SYSTEM

aming Amplifier	386
akers	391
akers by Laboratorio Audio	393









Sentio MULTIROOM AUDIO SYSTEM

and an

a 11 5

Listen to your favourite music in any room in your home. Sentio brings the magic of sound to every room, transforming your listening experience into emotion.

1

Speakers Ekinex by Laboratorio audio



Q series

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index








KNX

Ethernet

10

S



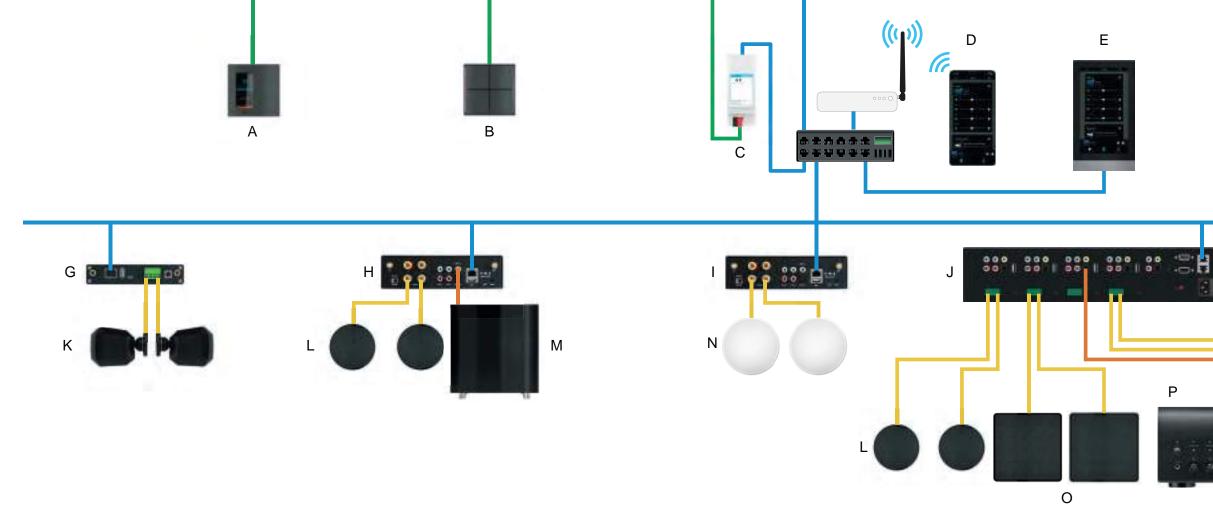

Multiple connection of streamer amplifiers and loudspeakers in an Ekinex home automation system


In an Ekinex nome automation system	
Description	Code
a) Signum virtual button	EK-EV3-TP
b) FF series wall-mount device	EK-ED2-TP
c) Delégo Server	EK-DEL-SRV-BAS-200-TP
d) Sentio App for mobile devices	
e) Delégo 5" panel	EK-DEL-5PAN O EK-DEL-5PAN-P
f) Amazon Alexa - Google Home voice command support	
g) 30W streamer amplifier	EK-30S-AU
h) Streamer amplifier 50Wx2	EK-50S-AU
i) Streamer amplifier 80Wx2	EK-80S-AU
j) 50Wx8 streamer amplifier	EK-50Q-AU

Description	Code			
k) IP66 wall-mount speakers	EK-SP30B2-AU 0 EK-SP30W2-AL			
I) T series speakers	EK-T			
m) Subwoofers	EK-K O EK-Q5 O EK-Q6			
n) 2-way in-ceiling speakers	EK-SP525-AU			
o) R series speakers	EK-R			
p) External amplifier box (not supplied by Ekinex)				
q) Q series speakers	EK-Q			
r) Omni/Iride series speakers	EK-OMNI O EK-IRIDE			
s) BUS power supply	EK-AB1-TP			

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index










Ethernet

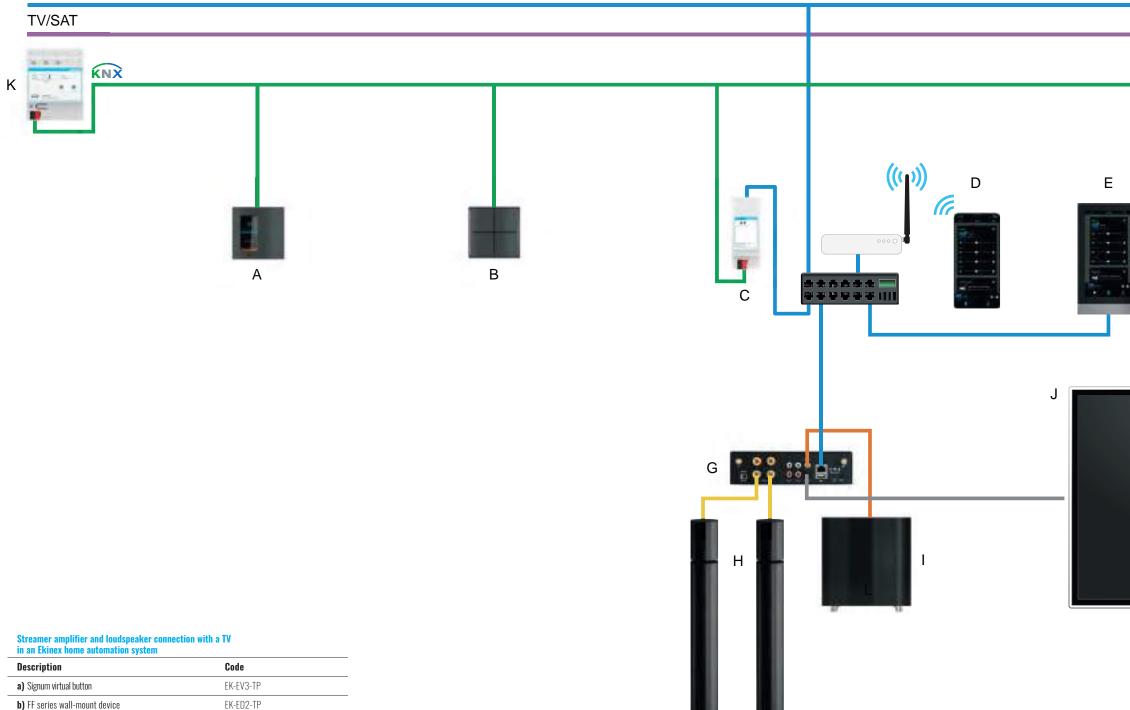

Description	Code			
a) Signum virtual button	EK-EV3-TP			
b) FF series wall-mount device	EK-ED2-TP			
c) Delégo Server	EK-DEL-SRV-BAS-200-TP			
d) App Sentio/Delégo for mobile devices				
e) Delégo panel 5"	EK-DEL-5PAN o EK-DEL-5PAN-P			
f) Amazon Alexa - Google Home voice command support				
g) Streamer amplifier 50Wx2	EK-50S-AU			
h) Omni/Iride series speakers	EK-OMNI o EK-IRIDE			
i) Subwoofer	EK-K o EK-Q5 o EK-Q6			
j) TV (not supplied by Ekinex)				

EK-AB1-TP

k) BUS power supply

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index


F Conf



tion to

J

н

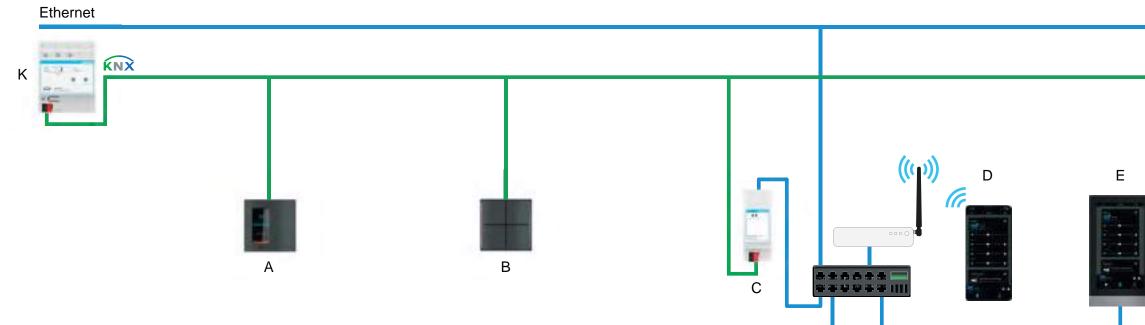


G

1

Streamer amplifier and speaker connection with an external 100V amplifier
in an Ekinex home automation system

in an Ekinex home automation system	
Description	Code
a) Signum virtual button	EK-EV3-TP
b) FF series wall-mount device	EK-ED2-TP
c) Delégo Server	EK-DEL-SRV-BAS-200-TP
d) Sentio App for mobile devices	
e) Delégo 5" panel	EK-DEL-5PAN o EK-DEL-5PAN-P
f) Amazon Alexa - Google Home voice command support	
g) Streamer amplifier 50Wx2	EK-50S-AU
h) 100V external amplifier (not supplied by Ekinex)	EK-T
i) T series speakers	ЕК-Т
j) Q series speakers	ЕК-Q
k) BUS Power Supply	EK-AB1-TP

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

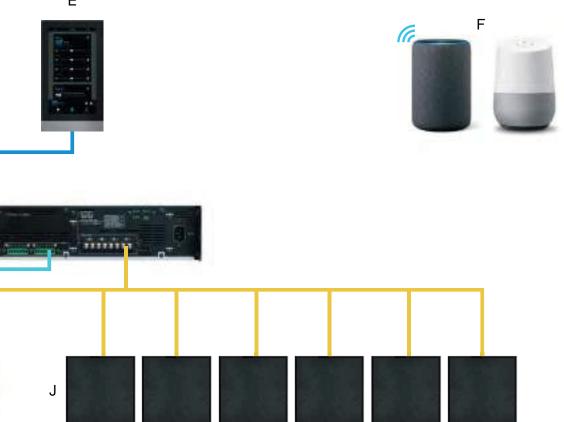







A passion for design and music, materials, shapes, acoustic qualities and technology, this is the profile of Sentio. Streamer amplifiers, speakers, subwoofers available in different shapes and colours that can also be customised on request.



287	357	373	421 ID Dear Phone	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	lools	Sales kit	lechnical section	General terms of sale	General index

Sentio MULTIROOM AUDIO SYSTEM

The Ekinex multi-room audio system is based on one or more amplifiers that receive the audio stream and transmit it directly to the speakers. Integration modes within the system (near or far from the speakers, playback of TV audio, etc.), single zone or multi-zone mode, and playback of different streaming music sources. Sentio offers easy-to-use audio streaming and speaker solutions with powerful, reliable and easy-to-integrate features. The range of speakers is completed with Ekinex models by Laboratorio Audio, a unique Italian company that has been involved in the high-end audio sector for 20 years.

Laboratorio Audio manufactures all the devices in-house, creating unique objects that will stand the test of time. Selected materials, craftsmanship, maniacal attention to detail, and pushed technology all contribute decisively to the birth of these speakers of pure avant-garde design, passing through an audio revolution to arrive at an absolutely innovative realisation.







EK-30S-AU is a Ethernet, WiFi and Bluetooth 5.0 stereo amplifier. Connecting EK-30S-AU to your current home audio system will enable you to stream music from your smart device, USB, NAS or online streaming services such as Spotify and many more using our free to download SENTIO APP, Airplay or DLNA apps. By adding multiple units to your home audio system, you can setup a ethernet or wireless multiroom whole house audio system, it will give you new and great experience to enjoy your favorite music.

Main features

- Streaming music via network without distance limitation or Bluetooth5.0 up to 15 meters.
- Bluetooth for true high resolution music.
- Spotify connect, AirÈplay, Qplay, UPnP streaming protocols supported.
- Support streaming source from online services, smart device memory, USB pen drive, NAS, Bluetooth and line in.
- Multiroom and multizone streaming enabled by mutiple units connected in same network.
- All music sources can be restreamed in sync to other models from us.
- Airplay, Spotify Connect, Oplay, DLNA, UPnP protocol compatible.
- High quality music streaming support, sample rate decoding up to 24bit, 192kHz.
- Spotify, Tidal, Amazon Music, Tuneln, Internet Radio, lots of online streaming services integrated to use in the app.
- Free iOS and Android app available.
- Free global online update for new features.
- Full function remote controller to use without mobile device. Line input for more possible external audio input.
- EO adjustment via app or remote controller.
- Preset playlist available for quick access, shortcut buttons on remote controller for quick access.

Package

1 pcs.

• iTunes working with PC streaming.

Order information

Code

EK-30S-AU

Technical data

- Wireless network: IEEE802.11 b/g/n 2.4G
- Ethernet: Single 10/100M RJ45
- Bluetooth: 5.0
- USB Host: Play USB music
- Micro USB: Connect PC as external DAC
- Power Input: 18V/4A
- Audio Input: 3.5mm Line in
- Frequency response: 20Hz to 20kHz
- Speaker Power: $2x35W@4\Omega$ load at 18V, $2x18W@8\Omega$ load at 18V

Streamer Amplifier 30W

MULTIROOM AUDIO SYSTEM

- THD+N: 0,03% a 1kHz
- Speaker Impedance: 4-8ohms
- Music Format: FLAC/MP3/AAC/AAC+/ALAC/APE/WAV
- Decoding: Up to 24bit/192kHz
- Protocols: AirPlay, DLNA, UPnP, Spotify Connect
- Dimensions: 131,8 mm*85,5 mm*27 mm (5.18in*3.37in*1.06in)
- Weight: 0,35 kg (0,77 lb)

Delivery

Delivery includes a remote control for controlling the main functions



Configuration and co

Installation, electrical connection, configuration and commissioning of the device can only be carried out by qualified personnel. Opening the housing of the device causes the immediate end of the warranty period.

ocumentation

For more information see the technical documentation. download from **www.ekinex.com**







Description

EK-50S-AU is a WiFi and Bluetooth 5.0 stereo amplifier. Adding EK-50S-AU to your current stereo system will enable you to stream music from your smart device, USB, NAS or streaming services, such as Spotify, Tidal, Deezer, Qobuz, Amazon Music and others by 4STREAM App, AirPlay2, Bluetooth or other DLNA apps. Adding more units to your home audio system can set up a wireless multiroom or multizone whole house audio system, it will give you totally new and great experience to play and enjoy your music.

Main features

- 50Wx2CH@4ohm, 30Wx2CH@8ohm full digital amplifier.
- Streaming music via network without distance limitation or Bluetooth5.0 up to 15 meters.
- Bluetooth for true high resolution music.
- Spotify connect, Tidal connect, Airplay2, Oplay, DLNA, UPnP streaming protocols supported. • Support streaming audio source from online services, mobile phones & pads, USB
- disk drive, NAS, Bluetooth, Line input and Optical input. • Multiroom and multizone streaming enabled by mutiple units connected in same
- network.
- All music sources can be restreamed in sync to other models from us.
- High quality music streaming support, sample rate decoding up to 24bit, 192kHz.
- Sportify, Deezer, Tidal, Qobuz, Amazon Music, Napster, Pandora, Internet Radio, iHeartRadio, Tuneln, QQMusic, lots of online streaming services integrated to use in the app.
- Free iOS and Android app available.
- Free global online update for new features.
- Full functional remote controller to use without mobile devices.
- · Line input and Optical input for more external audio input.
- EQ adjustment via app or remote controller.
- · Preset playlist is availble and short buttons on remote controller for one button play.
- iTunes working with PC streaming.

Arder informatio

Code	Package
EK-50S-AU	1 pcs.

287 357	373	421	439	451	455	461	471	475
DIN-Rail mount modules Visualisation Audi	Idio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Streamer amplifier 50Wx2

MULTIROOM AUDIO SYSTEM

Technical data

- Wireless network: IEEE802.11 b/g/n 2.4G/5G
- LAN: 10/100M RJ45
- Bluetooth: 5.0
- USB Host: Play USB Music
- USB Type-C: Connect to PC
- Power Input: 24V/4,16A
- Audio Input: Line in (RCA), Optical in, USB Host, USB Type-C (USB DAC)
- Audio Output: Speaker out, Line out (RCA), Subwoofer out (for active subwoofer)
- Speaker Power: 4 ohm 50Wx2 8 ohm 30Wx2
- Speaker Impedance: 4-8 ohm
- Audio Format: MP3/AAC/AAC+/ALAC/APE/WAV/FLAC
- Audio Decoding: Up to 24bit/192KHz
- Dimension: 185 x 155 x 50 mm

Deliverv

Delivery includes a remote control for controlling the main functions





Installation, electrical connection, configuration and commissioning of the device can only be carried out by qualified personnel. Opening the housing of the device causes the immediate end of the warranty period.



For more information see the technical documentation. download from **www.ekinex.com**







EK-80S-AU is a WiFi and Bluetooth 5.0 stereo amplifier. Adding EK-80S-AU to your current stereo system will enable you to stream music from your smart device, USB, NAS or streaming services, such as Spotify, Tidal, Deezer, Qobuz, Amazon Music and others by 4STREAM App, AirPlay2, Bluetooth or other DLNA apps. Adding more units to your home audio system can set up a wireless multiroom or multizone whole house audio system, it will give you totally new and great experience to play and enjoy your music.

Main features

- 80Wx2CH@4ohm, 50Wx2CH@8ohm full digital amplifier.
- Streaming music via network without distance limitation or Bluetooth5.0 up to 15 meters.
- Bluetooth for true high resolution music.
- Spotify connect, Tidal connect, Airplay2, Qplay, DLNA, UPnP streaming protocols supported.
- Support streaming audio source from online services, mobile phones & pads, USB disk drive, NAS, Bluetooth, Line input and Optical input.
- Multiroom and multizone streaming enabled by mutiple units connected in same network.
- All music sources can be restreamed in sync to other models from us.
- High quality music streaming support, sample rate decoding up to 24bit, 192kHz.
- Sportify, Deezer, Tidal, Qobuz, Amazon Music, Napster, Pandora, Internet Radio, iHeartRadio, Tuneln, QQMusic, lots of online streaming services integrated to use in the app.
- Free iOS and Android app available.
- Free global online update for new features.
- Full functional remote controller to use without mobile devices.
- Line input and Optical input for more external audio input.
- EQ adjustment via app or remote controller.
- Preset playlist is availble and short buttons on remote controller for one button play.
- iTunes working with PC streaming.

Order informat

Code	Package
EK-80S-AU	1 pcs.

Technical data

- Wireless network: IEEE802.11 b/g/n 2.4G/5G
- LAN: 10/100M RJ45
- Bluetooth: 5.0
- USB Host: Play USB Music
- USB Type-C: Connect to PC
- Power Input: 24V/4,16A
- Audio Input: Line in (RCA), Optical in, USB Host, USB Type-C (USB DAC)
- Audio Output: Speaker out, Line out (RCA), Subwoofer out (for active subwoofer)

Streamer amplifier 80Wx2

MULTIROOM AUDIO SYSTEM

- Speaker Power: 4ohm 80Wx2 8ohm 50Wx2
- Speaker Impedance: 4-8 ohm
- Audio Format: MP3/AAC/AAC+/ALAC/APE/WAV/FLAC
- Audio Decoding: Up to 24bit/192KHz
- Dimension: 185 x 155 x 50 mm

Delivery

Delivery includes a remote control for controlling the main functions



1

Description

EK-50Q-AU is a multi-room system that enables you to enjoy your favorite music anywhere in your home. EK-500-AU contains 4 audio amplifiers for you to connect to 4 set of stereo speakers. Each zone also contains analogue and digital audio outputs for you to use as audio source. You can easily play music from online music services, your phone storage, NAS and other sources by using the 4Stream app on your iOS or Android device.

Main features

- **Amplification:** Each zone can provide 50Wx2@8ohms (stereo mode) or 100W@4ohms (bridge mode).
- Multi-room audio function: Play different songs in different rooms or same song in every room.
- Easy network setup: Connect to your home network and it is ready to use.
- Rich I/O interface: Each zone has separate digital input/output and analogue input/ output. There is also a master source input that all zones can used at the same time.

Installation, electrical connection, configuration and commissioning of the device can only be carried out by qualified personnel. Opening the housing of the device causes the immediate end of the warranty period.

ocumentatio

For more information see the technical documentation. download from www.ekinex.com



Arder information

Code	Package
EK-50Q-AU	1 pcs.



287 357 373 421 439 451 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools	455 461 471 475 Sales kit Technical section General terms of sale General index





Streaming amplifier 50Wx8

MULTIROOM AUDIO SYSTEM

System Requirements

- High Speed Internet Connection: EK-50Q-AU needs internet connection to stream music from online music services and to get online firmware updates. You may experience performance issues with slower internet connections.
- Wireless Router: In order to use EK-50Q-AU, you will need to have a working Wi-Fi network in your home, since the control APP on your mobile device need to be in the same network as the streamer.

Delivery

Delivery includes a remote control for controlling the main functions





Installation, electrical connection, configuration and commissioning of the device can only be carried out by qualified personnel. Opening the housing of the device causes the immediate end of the warranty period.



ocumentation

For more information see the technical documentation. download from www.ekinex.com







SENTIO APP CONFIGURATION Adding devices

The Sentio app allows new audio zones to be added to the system very easily, through a wizard accessible directly from the main screen.



SENTIO APP CONFIGURATION Source selection

It is possible at any time to quickly change the music source for a zone, or a group of zones, by pressing the SOURCE symbol in the toolbar at the bottom. Music can be played from a local source connected to the device, or from a streaming service accessible via a Wi-Fi network.



SENTIO APP CONFIGURATION Zone player

By pressing on the name of a zone, in addition to the basic controls already available on the main screen, it is possible to have full control over playback, switching to the next track, or adjusting the scrolling mode between the contents of the current playlist (random play or repeat).



SENTIO APP CONFIGURATION Zone groupship

By pressing the grouping symbol on a zone, you can easily connect other devices to play the same music source simultaneously in several rooms. By repeating the same operation, it is possible to change the composition of the zone group, or return to independent operation of each device.



SENTIO APP CONFIGURATION Zone management

The app's main screen allows you to control all the zones of the sound system at a glance. By selecting a zone, you can know what content is playing, adjust the volume, and easily control playback.



SENTIO APP CONFIGURATION Equaliser

The Equaliser screen allows you to adjust the amplitude of the different sound frequencies in an audio signal. It is possible to modify the frequency response of an audio system to suit the listener's preferences or the acoustic characteristics of the room.



Description

The Ekinex Home Audio Speaker EK-SP30.2-AU offers a unique combination of sleek ascetic design and high performance sound quality, Its small footprint allows for easy system integration without compromising on sound quality or performance IP66 Weather Resistant rating allows for Indoor/Outdoor applications making it one of the most versatile Home/Commercial Audio speakers available.

Main features

- When the speakers are installed on the walls, ensure the wall structure is reliable and that the speakers are firmly attached.
- Install the speaker in a location that can structurally support the weight of the speaker and its mounting hardware. otherwise it may result in the unit falling down and causing personal injury.
- Do not use nails, adhesives or other unauthorized devices long-term use and vibrations may cause it to fall easily.
- Do not touch or bump the woofer and tweeter. If these are damaged, the sound will be distorted.
- Lower the volume of the device and source unit when changing the input source. (i.e. To tune fm / cd).
- Turn off the device and source unit when installing or removing cables.

FRAME FINISHES



Order information

Code	Colour	Pack
EK-SP30B2-AU	BLACK (RAL9011)	2 pcs.
EK-SP30W2-AU	WHITE (RAL9016)	2 pcs.


287 357 373 421 439 451 455	461 471 475
DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Tech	chnical section General terms of sale General index

Wall-mounted speaker IP66 (pair)- black/white MULTIROOM AUDIO SYSTEM

Specifications

- Recommended amplification: 40 Watts
- Frequency response: 120Hz 20KHz
- SPL 1W/1m: 88 dB
- Impedance: 8 ohm
- Frequency range: Extended
- Woofer: 2.5" (64mm)
- Woofer cone material: Paper
- Grille material: Fabric
- Dispersion angle: 120°
- Mounting system: Rotation/tilt bracket (included)
- Housing material: Reinforced ABS plastic
- IP weather rating: IP66
- Height: 94 mm
- Depth: 108 mm • Width: 82 mm
- Product net weight (kg): 0,48
- Colour: RAL9011 (BL)

FABRIC FINISHES





For more information see the technical documentation download from www.ekin**ex.com**





EK-SP30B2-AU EK-SP30W2-AU

391






The EK-SP525-AU Loudspeaker offers excellent sound quality with transparent highs, clear and clean vocals, and deep bass. It is also very easy to install, ideal for commercial use and home theater systems.

Main features

- Recommended amplification: 60 Watts
- Frequency Response: 70Hz 20KHz
- SPL 1W/1m: 89 dB
- Impedance: 8 ohm
- Frequency range: Extended
- Tweeter: Orientable 1.5" aluminium
- Woofer: 5.25" Glass Fibre Adjustable
- Woofer cone material: Glass Fibre
- Grille material: Paintable Metal
- Dispersion angle: 120°
- Mounting system: Plasterboard Recessed
- Grille diameter: 205 mm
- Hole diameter: 175 mm
- Depth: 110 mm
- Colour: RAL9016 (W)

FABRIC FINISHES



Order information Code Pack EK-SP525-AU 1 pcs.

For more information see the technical documentation, download from www.ekin**ex.com**



2-way full-range

MULTIROOM AUDIO SYSTEM

in-ceiling speaker

Description

Small, modern, minimalist, with acoustic and technological content of high quality. A nice project.

Q10

Wall version or in-wall version, Q10 is the smallest speaker manufactured. This is not a reason to understimate it, and in fact it boasts a warm a compact sound. It suits a variety of uses both outdoor and indoor.

015

Almost invisible, Q15 can be in-wall, book-shelves/to be leant, or on wall. The aesthetic result meets the expectations of the most rigorous needs. Sound and design are the best marks of this small objet, bringing sound to any rooms without being noticed, but it can involve the listeners so much.

Ductiv	Covies	s Installation		Variant			Frame Colour			Fabric Colour			Description	Dimension		
Prelix	Prefix Series Inst		Istallation	HT	ST	R	100V	LN	LB	ASA	ASN	BI	NE	SA	Description	WxHxD (mm)
	Q10	CG	Plasterboard	-	-	-	-	-	-	-	-	•	•	•	Plasterboard built-in Speaker, 50W, 80-16KHz	100x100x53
		CG	Plasterboard	•	•	•	•	-	-	-	-	•	•	•	Plasterboard built-in speaker, 50W, 60-21KHz	150x150x70
	015	М	Masonry	•	•		•	-	-	-	-	•	•	•	Masonry built-in speaker, 50W, 65-20KHz	150x150x70
EK	Q15	W	Wall	-	-	-	-	•	•	•	•	•	•	•	Wall mount speaker, 50W, 60-21KHz	150x150x70
		К	Surface	-	-	-	-	•	•	•	•	•	•	•	Surface mount speaker, 50W, 50-21KHz	150x150x74
Q20		W	Wall	-	-	-	-	•	•	•	•	•	•	•	Wall mount speaker, 65W, 50-21KHz	200x200x61
	Ų20	K	Surface	-	-	-	-	•	•	•	•	•	•	•	Surface mount speaker, 65W, 50-21KHz	200x200x61

(HT) High performance version - (ST) Stereo version - (R) Lowered version - (100V) 100V transformer version

FRAME FINISHES



Encoding example

EK	Q15	W	LB
Prefix	Series	Installation	Frame Colo

287 357 3	421	439	451	455	461	471	475
DIN-Rail mount modules Visualisation Audio M	tiroom IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Speaker Q series


MULTIROOM AUDIO SYSTEM Ekinex by laboratorioaudio

Q20

Q20 has been designed to be used in every type of furniture and environment, it can be wall, book-shelves, or to be leant version, or bipolar "flag mode" version, suitable to sound offices, museums, bars, etc.

Purist design, very good minimalist finishing (polished or anodized aluminium, bright black or bright white painted).

FABRIC FINISHES







For more information see the technical documentation, download from www.ekin**ex.com**





To relive the fantastic design of the '60s with contemporary technological solutions. Deriving from the consolidated series Q20, it differs from it having softer lines with rounded edges, reminding of the beautiful '60s, while maintaining excellent performance. Available in the same finishings as the Q20. Series R20K: designed to impress and satisfy an expert audience, using advanced technology, with a refined and sober design. They reproduce the entire audio range, up to lower frequencies, with a soundstage and a deep sound image without compromises.

Drofin	Covies	l	tallation		Frame Colour Fabric Colour Description		Description	Dimension			
Prefix	Series	IIIS		LN	LB	ASA	ASN	BI	NE	Description	WxHxD (mm)
ΓV	000	W	Wall	•	•	•	•	•	•	Wall mount speaker, 65W, 50-21KHz	200x200x65
ΕK	R20	К	Surface	•	• • •		•	•	Surface mount speaker, 80W, 45-21KHz	200x200x200	

Duration	Series	Installation		Variant Frame Colour		I	abric Colou	r	Description	Dimension		
Prefix				100V	LB	LA	ASA	BI	NE	SA	– Description –	ØxP (mm)
	T13	W	Wall	•	•	•	•	•	•	-	Wall/Ceiling mount speaker, 50W, 80-20KHz	130x132
EK	T13S	W	Wall	-	•	•	•	•	•	-	Wall/Ceiling mount speaker, 50W, 80-20KHz	130x89
	T18	CG	Plasterboard	•	-	-	-	•	•	•	Plasterboard built-in speaker, 50W, 60-21KHz	180x70

(100V) 100V transformer version

Description

mounted version in model T18CG for plasterboard.


FRAME FINISHES



Encoding ex	ample			
EK	R20	К	LB	BI
Prefix	Series	Installation	Frame Colour	Fabric Colour

FABRIC FINISHES

entatio



For more information see the technical documentation, download from www.ekin**ex.com**



Speaker R series

MULTIROOM AUDIO SYSTEM

Ekinex by laboratorioaudio

FRAME FINISHES



Encoding ex	ample		
EK	T13	W	LB
Prefix	Series	Installation	Frame Colo

394

287 357	373	421	439	451	455	461	471	475
DIN-Rail mount modules Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index




Speaker T series

MULTIROOM AUDIO SYSTEM Ekinex by laboratorio**audio**

Designed in various versions, to meet the need for soundproofing rooms from the ceiling while maintaining a remarkable aesthetic cleanliness. Minimalist in appearance but geBlackus in sound, the T13 in models 13, 13S is made in satin and mirror polished aluminium, or in lacquered finishes. It is also available in a wall-

FABRIC FINISHES





Documentation

For more information see the technical documentation, download from www.ekin**ex.com**





Speaker Omni/Iride

MULTIROOM AUDIO SYSTEM Ekinex by laboratorio**audio**



Description

Small, compact, simply minimal, these are our instruments to reproduce the lowest frequencies. They can sound great environment, thanks to their double volume tuned system and passive radiators, and can reach great acoustic volumes, by articulating to the lowest octaves of the audio range.

Description

Original and efficacious, it reproduces high quality sound all around at 360°. It has different fixing solutions basing on where it is used, indoor or outdoor. Outside it can voice a circular area with minimum radius of about 10mt, in normal conditions, and in the version IRIDE, it is equipped with a LED lighting device. Designed by Claudio Niorettini, it is available in RAL colours or polished aluminium.

Ductiv	Dustin Cavias		stallation	Variant	Variant Frame Colour		Description	Dimension
Prefix	Series		stanation	100V	LB	LA	Description	ØxH (mm)
FK	OMNI	К	Masonry	•	•	•	Surface mount speaker, 75W, 55-20KHz	130x1000
EK	IRIDE	K	Masonry	•	•	•	Surface mount speaker + LED lighting, 75W, 55-20KHz	130x1000

(100V) 100V transformer version

Dustin	Contine	l.	atallation	Frame Colour Fabric Co		Colour	Description	Dimension	
Prefix	Series Installation LN LB BI NE		Description	WxHxD (mm)					
	K27SUB	К	Surface	•	•	-	-	Amplified floor-standing subwoofer 150W, 38-100Hz	270x270x290
EK	K35SUB	К	Surface	•	•	-	-	Amplified floor-standing subwoofer 150W, 28-100Hz	350x350x370
EN	Q5.5SUB	М	Masonry	-	-	•	•	Built-in subwoofer (brick), passive, 100W, 40-150Hz	303x303x125
	Q6.6SUB	М	Masonry	-	-	•	•	Built-in subwoofer (brick), passive, 130W, 35-120Hz	303x303x125

FRAME FINISHES



Encoding example

EK	OMNI	К	LB
Prefix	Series	Installation	Frame Colour

Bocumentatio

For more information see the technical documentation, download from www.ekin**ex.com**



FRAME FINISHES

LB White Lacquer	LN Black Lacquer

Encoding example

EK	K27SUB	К		
Prefix	Series	Installation		

287 357	373	421	439	451	455	461	471	475
DIN-Rail mount modules Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Sub

MULTIROOM AUDIO SYSTEM Ekinex by laboratorio**audio**



FABRIC FINISHES






Documentation

Frame Colour

LB





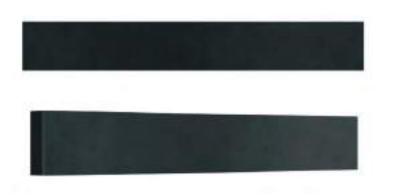

The Modulor line comprises floor-standing or wall-mounted speakers with a minimalist design. Streamlined and meticulously detailed, they are available in 105 cm, 80 cm and 65 cm modules, lacquered only 6.6 cm thick and 15 cm wide. Laboratorio Audio's Modulor speakers offer a stage reconstruction that is absolutely faithful to the musical recording, with a level of sound reproduction of the highest order that is able to give emotions equal to those of live performances. Modulor speakers are also available in three-channel and subwoofer versions in various sizes and can be customised in any RAL colour on request.

Code	Numbers	Deted newer (W)	Frequency (Uz)	Consinity (dD)	Col	our	Description	Dimension WxHxD (mm)
Cone	of ways	Rated power (W)	Frequency (Hz)	Sensivity (dB)	LN	LB	Description	Dimension wxxxD (mm)
EK-M35W	2	65W	70-21KHZ	87 dB	•	•	2-way wall-mount speaker	150x350x66
EK-M65W	2	125W	50-21KHZ	88 dB	•	•	2-way wall-mount speaker	150x650x66
EK-M105W	2	125W	40-21KHZ	88 dB	•	•	2-way wall-mount speaker	150x1050x66
EK-M123W	2	125W	40-21KHZ	88 dB	•	•	2-way wall-mount speaker	150x1230x66
EK-M145W	2	125W	40-21KHZ	88 dB	•	•	2-way wall-mount speaker	150x1450x66
EK-M65W-ST	2 x 2 canali	125W x 2	50-21KHZ	88 dB	•	•	2-way wall-mount speaker for 2 stereo channels	150x650x66
EK-M105W-ST	2 x 2 canali	125W x 2	40-21KHZ	88 dB	•	•	2-way wall-mount speaker for 2 stereo channels	150x1050x66
EK-M123W-ST	2 x 2 canali	125W x 2	40-21KHZ	88 dB	•	•	2-way wall-mount speaker for 2 stereo channels	150x1230x66
EK-M145W-ST	2 x 2 canali	125W x 2	40-21KHZ	88 dB	•	•	2-way wall-mount speaker for 2 stereo channels	150x1450x66
EK-M105W-TRI	2 x 3 canali	125W x 3	40-21KHZ	88 dB	•	•	2-way wall-mount speaker for 3 channels	150x1050x66
EK-M123W-TRI	2 x 3 canali	125W x 3	40-21KHZ	88 dB	•	•	2-way wall-mount speaker for 3 channels	150x1230x66
EK-M145W-TRI	2 x 3 canali	125W x 3	40-21KHZ	88 dB	•	•	2-way wall-mount speaker for 3 channels	150x1450x66
EK-M160W-TRI	2 x 3 canali	125W x 3	40-21KHZ	88 dB	•	•	2-way wall-mount speaker for 3 channels	150x1600x66
EK-M172W-TRI	2 x 3 canali	125W x 3	40-21KHZ	88 dB	•	•	2-way wall-mount speaker for 3 channels	150x1720x66
EK-M105W-SUB	1 subwoofer	100W	40-200HZ	87 dB	•	•	Passive subwoofer	150x1050x66
EK-M123W-SUB	1 subwoofer	100W	40-200HZ	87 dB	•	•	Passive subwoofer	150x1230x66

FRAME FINISHES



entatio

For more information see the technical documentation, download from www.ekin**ex.com**



Arder information

Code	Application
EK-BR1-TP	KNX Integration and Sentio Multiroom Audio System

Speaker Modulor

MULTIROOM AUDIO SYSTEM Ekinex by laboratorioaudio



Description

The KNX-Sentio Gateway allows one or more multi-room audio devices from the SENTIO range to be integrated with KNX technology, acting as an interface to other KNX devices. The $\mathsf{KNX}\text{-}\mathsf{Sentio}$ Gateway automatically detects the zones of the audio system in the network, and allows for each of them, a set of KNX group addresses to receive status information on the bus and send the following commands:

Main features

- Volume adjustment (both via percentage and increase/decrease commands)
- Highs and lows (both via percentage and increase/decrease commands)
- Play/Pause
- Mute
- Previous/next track advancement
- Setting Repeat and/or Random Play
- Preset / source selection (either by direct selection or by previous / next scrolling)

Information about the artist and the track being played is also sent on the KNX bus. The KNX-Sentio Gateway is particularly suitable for operating the Sentio system from Signum control panels, via their audio control page.

Technical data


- 12-24 Vdc power supply (absorption 240 mA at 12 Vdc) by means of a special plug-in terminal supplied. Power supply not included
- KNX TP bus (twisted pair) via red-black terminal provided
- 1 Ethernet port via cat. 5 or higher cable and standard RJ45 connector
- 2 frontal LEDs: POWER LED for signalling the presence of power supply; SERVICE LED for signalling particular operations in progress.
- 1 RESET button housed under the front cover on the back of the vertical card
- 1 RS485 port: not used
- 1 USB 2.0 port: not used

287 357	373	421	439	451	455	461	471	475
DIN-Rail mount modules Visualisatio	Audio Multiroon	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

KNX-Sentio Gateway

MULTIROOM AUDIO SYSTEM

Dimensions [mm]



12-24 USB RS

Package 1 pcs.



For more information see the technical documentation, download from www.ekinex.com



399



INVISIBLE PLAYER

istic energy transmitters	410
/ER 1 amplifier	414
essories	415







Invisible Player transforms the walls of your home or office into powerful sound diffusers. Thanks to its revolutionary acoustic technology, every surface becomes an instrument that vibrates and spreads music, creating an enveloping and unique sound experience.

No longer just speakers: it is your environment that plays, creating spaces that interact with you in surprising ways. Let yourself be enveloped by sound like never before and discover a new way of experiencing audio.






Connection 1 mono channel on 4 Ω . Single transmitter applied power: 200 W

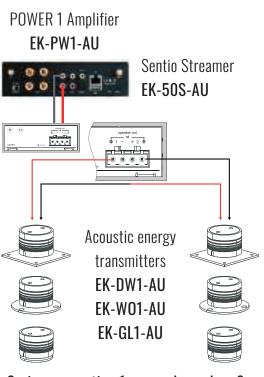


Series connection 1 mono channel on 8 Ω . Single transmitter applied power: 80 W


Invisible Player connection diagram (DRYWALL, WOOD, GLASS) with Sentio Streamer

RCA Cables
 Audio Cables






Connection 1 mono channel on 4 Ω . Single transmitter applied power: 200 W

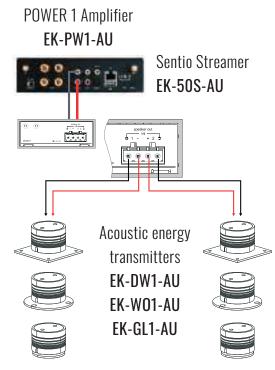

Connection 2-channel stereo on 4 Ω . Single transmitter applied power: 80 W




Series connection 1 mono channel on 8 Ω . Single transmitter applied power: 80 W

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	455 Sales kit	471 General terms of sale	475 General index
	5								


Invisible Player connection diagram (DRYWALL, WOOD, GLASS)



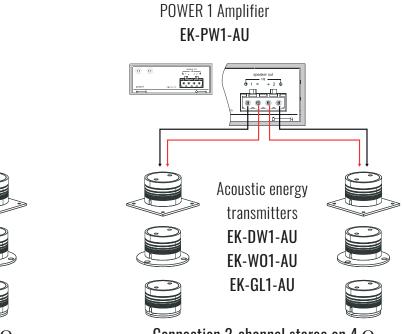

Connection 2-channel stereo on 4 Ω . Single transmitter applied power: 80 W


Connection Diagram Invisible Player (TWIN)

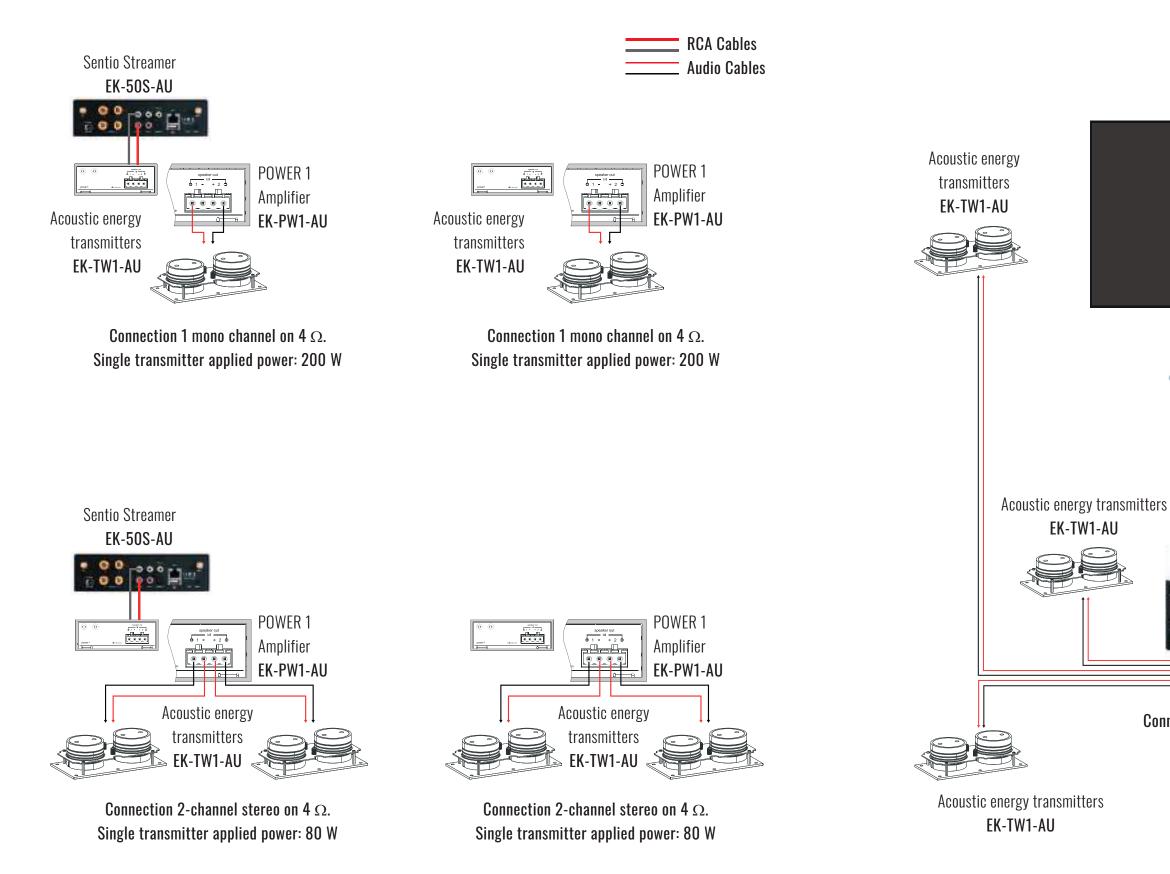


287 357 373 421 439 451 455 455 471 475 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Sales kit General terms of sale General index								
	357	3/3	421	400	451	455	 a	4/5

Home Cinema Connection Diagram Invisible Player (TWIN)

Audio Cables

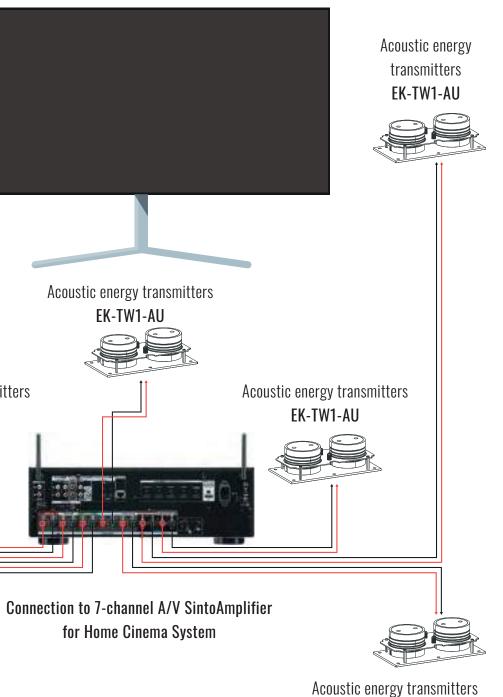


EK-TW1-AU

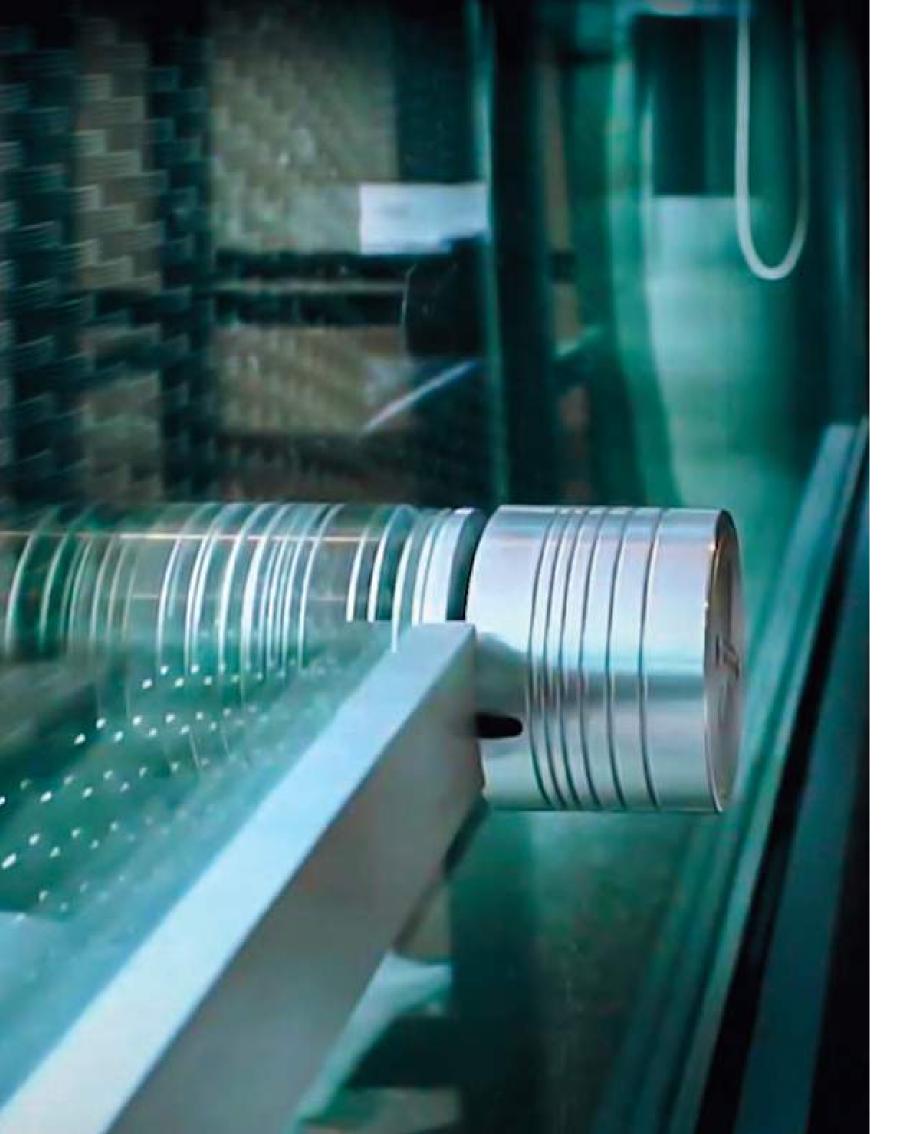



In the graph on the bottom left, we can observe the sensitivity of the human ear to different frequencies when the volume is low: the highest and lowest tones are less perceptible, while the middle frequencies are more easily heard.

To the right is the curve that inspired the frequency response of the Acoustic energy transmitters. This innovative system acts as a 'physiological volume compensator', automatically adapting the sound to ensure balanced and natural listening at any volume level, making every acoustic detail perfectly perceptible and improving listening comfort.

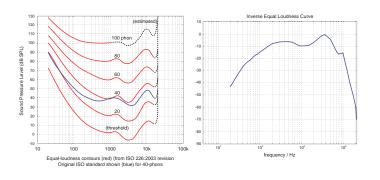

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	455 Sales kit	471 General terms of sale	475 General index
	1								1

A new way of experiencing and perceiving sound INVISIBLE PLAYER

Invisible Player redefines the sound experience by transforming surfaces made of plasterboard, wood, Plexiglas, glass, e-bond, metal and many other materials into extraordinary acoustic speakers. Thanks to advanced technology, **it creates a flat, directive and homogenous sound wave**, covering a wide frequency spectrum (40 to 16,000 Hz depending on the material), with limited angular dispersion. The result? **A sound that remains perfectly in phase in every corner of the room**, offering a listening experience that is uniform and perfectly tuned to the sensitivity of the human ear.

Unlike conventional audio systems, where the sound changes drastically depending on the listener's position, Invisible Player **guarantees constant volume and clear sound wherever you are**. Whether you are close to the sound source or at the opposite end of the room, the quality remains impeccable, eliminating those annoying inconveniences of excessive volume or unclear sound.

Perfect for complex environments such as offices, museums, meeting rooms, churches and shops, Invisible Player delivers smooth, intelligible sound, even at low power, **guaranteeing superior listening comfort**. Its versatility also makes it ideal for unexpected applications: it can be integrated into furniture such as kitchens, wardrobes, armchairs, mirrors, saunas and even swimming pools, transforming the objects themselves into sound speakers.




Invisible DRYWALL is a top-quality acoustic energy transmitter designed to deliver outstanding performance and invisible sound transmission. Made from premium materials such as AW 6082 aluminum, chosen for its balance of precision, wear resistance through anodizing, and excellent heat dissipation, it ensures durability and reliability. Four internal nylon and steel suspensions ensure stability and flexibility over time, while triple thermal and electrical protection inside prevents failures, increasing operational safety. Optimized for installation on walls or plasterboard ceilings up to 16mm thick, Invisible DRYWALL covers up to 80 square meters per single transmitter. For installations on vertical walls, the EK-VFX-AU accessory (purchased separately) provides fixation and durability while maintaining the necessary elasticity.

The completely invisible installation matches perfectly with the EK-PW1-AU amplifier, specifically designed to maximize system performance.

Main features


- Impedance: 4 Ω
- Frequency response: 40 14,000 hz nominal
- Maximum power: 120 w
- Maximum power RMS: 40 w
- Height: 46 mm
- Diameter: 57 mm
- Square contact plate: 80 mm per side
- Weight: 330 g
- Color: Light bronze

Dimensions [mm]



Invisible DRYWALL

INVISIBLE PLAYER



Description

Invisible WOOD is an acoustic energy transmitter made from the highest quality materials. The AW 6082 aluminum body provides the best compromise between precision machining, anodization to prevent degradation over time, and effective heat dissipation. The four internal suspensions, made of nylon and steel, contribute to its durability and strength, while the triple internal protection, both thermal and electrical, prevents failures.

Invisible WOOD is designed and optimized for excellent performance on wood surfaces with thicknesses between 18 mm and 25 mm, depending on the type of wood. However, it is not suitable for ground- or wall-anchored surfaces, such as parquet or solid glued siding. A small back gap, even a few millimeters, is required for proper operation.

Invisible WOOD can also be installed on other materials such as E-bond, T-bond, plexiglass, lexan and fiberglass, with a maximum thickness of 12 mm. For optimal performance, we recommend pairing it with the EK-PW1-AU amplifier, designed specifically for its characteristics.

Main features

- Impedance: 4 Ω
- Frequency response: 40 14,000 hz nominal
- Maximum power: 120 w
- Maximum power RMS: 40 w
- Height: 46 mm
- Diameter: 57 mm
- Contact plate diameter: 83 mm
- Weight: 310 g
- Color: Orange

Order information Code Application Pack EK-DW1-AU KNX Integration and Sentio Multiroom Audio System 1 pz.

Configuration and co O

For proper installation, plan to use special adhesive EK-3M77-AU.





Order information

Code	Application
EK-W01-AU	KNX Integration and Sentio Multiroom Audio System

287 357 373 421 439 451 455 455 471 475 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Sales kit General terms of sale General terms of sale									
	201	35/	3/3	421		400	455	4/1	475 General index

0

0

Invisible WOOD

INVISIBLE PLAYER

Dimensions [mm]



tion and co

For proper installation, plan to use special adhesive EK-3M77-AU.

For more information see the technical documentation, download from www.ekinex.com







Invisible GLASS is an acoustic energy transmitter made from the highest quality materials, designed to deliver excellent audio performance on glass surfaces. The AW 6082 aluminum body provides the perfect balance of precision workmanship, anodization for durability, and optimal heat dissipation. Internal nylon and steel suspensions, combined with triple thermal and electrical protection, ensure long life and protection against failure. Invisible GLASS is specially designed to transmit sound through glass walls, making store or business windows capable of emitting music or promotional messages both inside and outside the premises. In addition to glass, Invisible GLASS can be installed on non-porous materials such as E-bond, T-bond, plexiglass, lexan and fiberglass, with a maximum thickness of 12 mm. For a perfect installation, the EK-CGL-AU Coverglass accessory (not included) is available, which allows Invisible GLASS to be fixed at the right distance from the edge of the display case and hide the cable elegantly and discreetly. For maximum performance, we recommend combining Invisible GLASS with the specially designed EK-PW1-AU amplifier.

Main features

- Impedance: 4 Ω
- Frequency response: 40 14,000 hz nominal
- Maximum power: 120 w
- Maximum power RMS: 40 w
- Height: 46 mm
- Diameter: 57 mm
- Contact plate diameter: 55 mm
- Weight: 290 g
- Color: Gray

Dimensions [mm]





Invisible GLASS INVISIBLE PLAYER



Description

Invisible TWIN represents the cutting edge of our acoustic energy transmitters. Designed to improve response in both low and high frequencies, it provides increased power, dynamics and sonic accuracy. Also ideal for audio-video systems, with a nominal impedance of 8Ω , Invisible TWIN facilitates the operation of commercial AV receivers by reducing operating temperatures and improving efficiency. Made of the highest quality materials, the base is 3 mm thick AISI 304 stainless steel, while the bodies of the two transmitters are AW 6082 aluminum, known for its balance of workability and strength, thanks in part to anodizing that prevents degradation over time and improves heat dissipation. The eight internal nylon and steel suspensions, together with dual thermal and electrical protections, ensure long service life and reliability.

Invisible TWIN takes advantage of the characteristics of a wide range of materials to which it can be applied, such as plasterboard, wood, glass, e-bond, plexiglass, fiberglass and carbon fiber, aluminum, and many others. It can reproduce audio signals either omnidirectionally or directionally, depending on the installation (more information on our website).

The two integrated transmitters are different but complementary, optimized to provide a superior audio experience. Listening tests, conducted with inwall plasterboard back-boxes (available soon as accessories), showed amazing performance, outperforming conventional listening systems.

Invisible TWIN offers a frequency response extending from 40 Hz up to 15,000 Hz, ensuring exceptional sound quality tested at every stage of the production process. The completely invisible installation matches perfectly with the EK-PW1-AU amplifier, specifically designed to maximize system performance.

Order inform	lation		~
Code	Application	Pack	
EK-GL1-AU	KNX Integration and Sentio Multiroom Audio System	1 pz.	

For proper installation, plan to use special adhesive EK-3M77-AU.





Order information

Code	Application
EK-TW1-AU	KNX Integration and Sentio Multiroom Audio System

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	455 Sales kit	471 General terms of sale	475 General index


Invisible TWIN

INVISIBLE PLAYER

Main features

- Impedance: 8 Ω
- Frequency response: 40 15,000 hz nominal
- Maximum power: 240 w
- Maximum power RMS: 80 w
- Height: 46 mm
- Contact plate diameter: 160 x 80 mm
- Weight: 880 g
- Color: Red and Gray

Dimensions [mm]

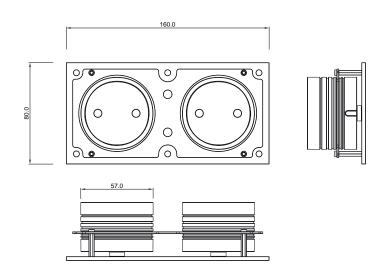

Configuration and co



For proper installation, plan to use special adhesive EK-3M77-AU.

For more information see the technical documentation, download from **www.ekinex.con**



Amplificatore POWER 1 INVISIBLE PLAYER



Description


Power 1 is an extremely versatile and powerful amplifier designed to deliver high performance. With an output of 200 watts RMS on 4Ω in mono mode or 80 watts RMS on 4Ω on two channels in stereo mode, it is ideal for handling 1, 2, 4 or 8 Invisible Player acoustic energy transmitters.


Equipped with both low-level and high-level inputs, Power 1 provides maximum flexibility of use. With a high-pass and low-pass filter, it eliminates unwanted frequencies below or above 50Hz, optimizing sound quality. It is specifically optimized for use with acoustic energy transmitters, ensuring flawless performance. The amplifier comes with the power supply, which is essential for system performance by operating on both AC (90-260V) and DC (120-370V).

Main features

- Power supply: 10÷16 volts
- Absorption: 10 A
- Frequency response: 20 20 000 Hz nominal
- Power 2ch @ 4Ω : 80 W x 2
- 2ch @ 2Ω power: 100W x 2
- Power 1 channel @ 4Ω : 200 W
- Filter: PB and PA 50 Hz
- Height: 30 mm
- Width: 80 mm
- Length: 70 mm
- Weight: 0.31 kg
- Colour: anodised silver







Order information					
Code	Application	Pack			
EK-PW1-AU	KNX Integration and Sentio Multiroom Audio System	1 pz.			



For more information see the technical documentation, download from www.ekinex.com





Description

The Invisible Player Vertfix double bracket is the ideal accessory to ensure perfect stability of the Invisible Drywall acoustic energy transmitter inside plasterboard walls. Made of durable brushed AISI 304 stainless steel, Vertfix is designed to maintain elasticity and resistance to oxidation over time. Even the included screws follow this philosophy, built to last.



Description

Kola 3M77 is a high-performance adhesive signed 3M, specifically for firmly and securely fixing Invisible Drywall acoustic transmitters in both vertical walls and plasterboard ceilings. Once bonded, wait 24 hours for a final fix, ready to unleash the full sound potential.

287	357	373	421	439	451	455	455	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Sales kit	General terms of sale	General index



Vertfix **INVISIBLE PLAYER**

Ordor	inf	formation
Uluci		UIIIauuu

Code	Application	Pack
EK-VFX-AU	KNX Integration and Sentio Multiroom Audio System	1 pz.



For more information see the technical documentation, download from www.ekinex.com





	formatio

Code EK

K-3M77-AU	KNX Integration and Sentio Multiroom Audio System	
		1



For more information see the technical documentation, download from www.ekinex.com

Application



Pack

1 pz.





Elegance meets functionality with Invisible Player Coverglass. This EN 6082 anodized aluminum cable tray, created to perfectly match the Invisible Glass acoustic energy transmitter, not only houses and conceals connecting cables, but also distances them with sophistication, giving your installation a clean, professional look. With Coverglass, your installation becomes a work of art.

U U	raer	INTO	rmat

Code	Application	Pack
EK-CGL-AU	KNX Integration and Sentio Multiroom Audio System	1 pz.

For more information see the technical documentation, download from www.ekinex.com



Coverglass

INVISIBLE PLAYER



Glassfix **INVISIBLE PLAYER**



Description

With Coverfix, the 3M double-sided adhesive specially designed for the application of Coverglass trunking, every installation becomes flawless. Thanks to its advanced formula, Coverfix provides a discreet yet extremely reliable attachment, allowing your Trsamettitore Invisible Player to blend harmoniously into its surroundings. The real star remains the sound, while Coverfix works silently behind the scenes, maintaining elegance and functionality. Invisible to the eye, but essential to perfection.



Description

When precision and discretion are key, enter Glassfix, the 3M double-sided adhesive designed specifically for your Invisible Glass acoustic energy transmitter. Small but powerful, Glassfix provides a secure and durable attachment without compromising the elegance of the design.

Thanks to 3M's advanced technology, your Invisible Glass blends seamlessly into any environment while maintaining a clean, minimalist aesthetic. With Glassfix, installation becomes simple and flawless, leaving room only for the distraction-free sound experience.

Order information				
Code	Application	Pack		
EK-GFX-AU	KNX Integration and Sentio Multiroom Audio System	1 pz.		



For more information see the technical documentation, download from www.ekinex.com



Description

Made entirely of red copper (BC), it ensures optimal conduction without compromising performance. Double insulation and LSZH (Low Smoke Zero Halogen) sheathing make it safe and environmentally friendly, minimizing the production of toxic fumes in case of fire.

287	357	373	421	439	451	455	455	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Sales kit	General terms of sale	General index





	Code	Application
-	EK-CFX-AU	KNX Integration and Sentio Multiroom Audio System
-		
	Documentatio	_
	Documentatio	

For more information see the technical documentation, download from www.ekinex.com

Order informa



Pack

1 pz.

Double insulated cable 2x1,5mm2 INVISIBI F PLAYFR



Order information

Code	Application	Hank
EK-CV215-AU	KNX Integration and Sentio Multiroom Audio System	100 m



For more information see the technical documentation, download from www.ekinex.com





Double insulated cable 2x2,5mm2

INVISIBLE PLAYER



Description

Made entirely of red copper (BC), it ensures optimal conduction without compromising performance. Double insulation and LSZH (Low Smoke Zero Halogen) sheathing make it safe and environmentally friendly, minimizing the production of toxic fumes in case of fire.

_				
0	0.14	info	rma	tion
UIU	HCI I			LIUII

Code	Application	Hank
EK-CV225-AU	KNX Integration and Sentio Multiroom Audio System	100 m

For more information see the technical documentation, download from www.ekinex.com





Invisible Player DEMO

INVISIBLE PLAYER

Description

Invisible Player Demo is the ideal tool for installers and authorized dealers who want to demonstrate the extraordinary potential of invisible audio products in a practical and immediate way. Stylish and sturdy, this shockproof case houses everything needed for spectacular demonstrations: from the Invisible Wood acoustic energy transmitter, perfect for testing on wood, glass and composite materials, to the Invisible Drywall transmitter, specifically for drywall. Together with the powerful Power BT amplifier with Bluetooth module, power supply and pre-wired cables, you have everything you need to turn any surface into a speaker.

Demonstrating is simple: connect a device (smartphone, tablet or PC) to Power BT's Bluetooth module, recognizable as an "idea," with no password required. Once paired, you pick up the Invisible Wood transmitter and, with music playing at low volume, place it on the surface to be sonorized. The magic is accomplished: sound explodes powerfully, transforming what is invisible into an extraordinary sound experience.

Order information

Code	de Application				
EK-DK1-AU	KNX Integration and Sentio Multiroom Audio System	1 pz.			

Technical Data

Material	ABS	
Height	150 mm	
Width	340 mm	
Depth	295 mm	
Color	Black	

Functions / Features

Bit1	
Power supply	10÷16 volts
Power consumption	0.5 A
Frequency response	20 - 20.000 hz nominal
Technology	Bluetooth A2DP ready
Pairing ID	Wallplayer
Height	30 mm
Width	80 mm
Length	51 mm
Weight	0,25 kg
Color	Anodized Silver

Power supply	
Power supply	90/260 VAC – 120/370 VD
Output Volts	12 volts DC
Output Ampere	11,5 A
Height	48 mm
Width	110 mm
Length	220 mm
Weight	0,66 kg
Color	Black

Invisible Drywall	
Impedance	4 Ω
Frequency response *	40 - 14.000 hz nominal
Maximum power	120 w
Maximum power - RMS	40 w
Height with saucer mounted	46 mm
Diameter	57 mm
Square contact plate	80 mm per side
Weight	0,33 kg
Color	Light bronze

Configuration and comm 0

To avoid affecting the result, hold Invisible Wood down with your fingertips as best you can from the support plate and not from the cylinder.

287	357	373	421	439	451	455	455	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Sales kit	General terms of sale	General index

Invisible Player DEMO

INVISIBLE PLAYER

Invisible Wood	
Impedance	4 Ω
Frequency response *	40 - 14.000 hz nominal
Maximum power	120 w
Maximum power - RMS	40 w
Height with saucer mounted	46 mm
Diameter	57 mm
Contact plate diameter	83 mm
Weight	0,31 kg
Color	Orange
Power1 amplifier	
Power supply	10÷16 volts
Absorption	10:00 AM
Frequency response	20 - 20.000 hz nominal
Power 2 ch @ 4 Ω	80 w x 2
Power 2 ch @ 2 Ω	100 w x 2
Power 1 ch @ 4 Ω	200 w
Filter	PB and PA 50 hz
Height	30 mm
Width	80 mm
Length	70 mm
Weight	0,31 kg
Color	Anodized Silver

DC



For more information see the technical documentation, download from www.ekinex.com



419



IP DOOR PHONE








IP DOOR PHONE Connection Scheme




Dico IP DOOR PHONE With a sleek design and extreme ease of use, the Dico IP Door phone leverages a wide range of cutting-edge technologies for intelligent building access and home control.







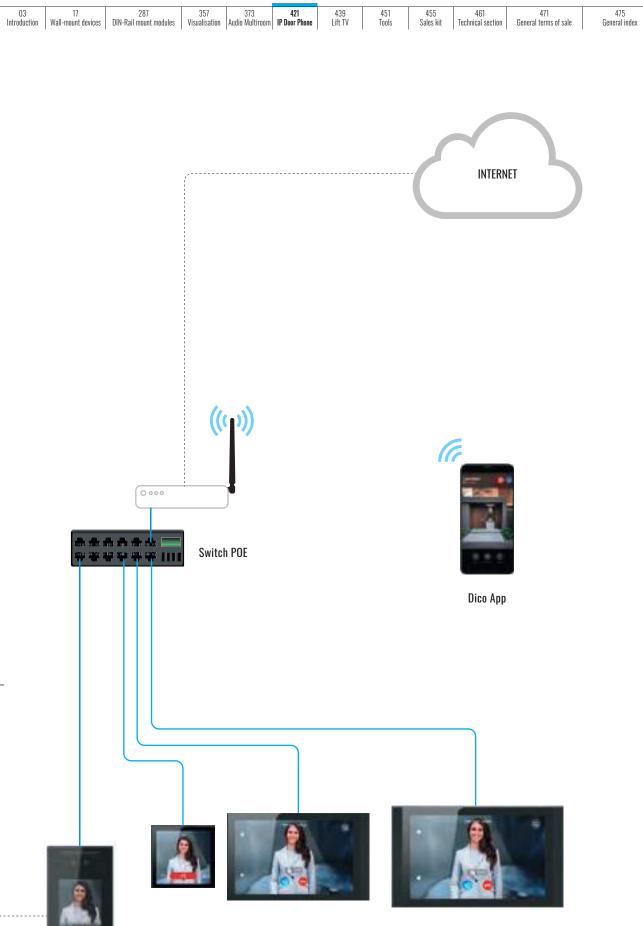


Delégo Panel 4"

Delégo Panel 8"

Delégo Panel 10"

*For opening the lock, the relay on board the video door phone can be used, or for added security, the Security Relay can be used (separate accessory code)



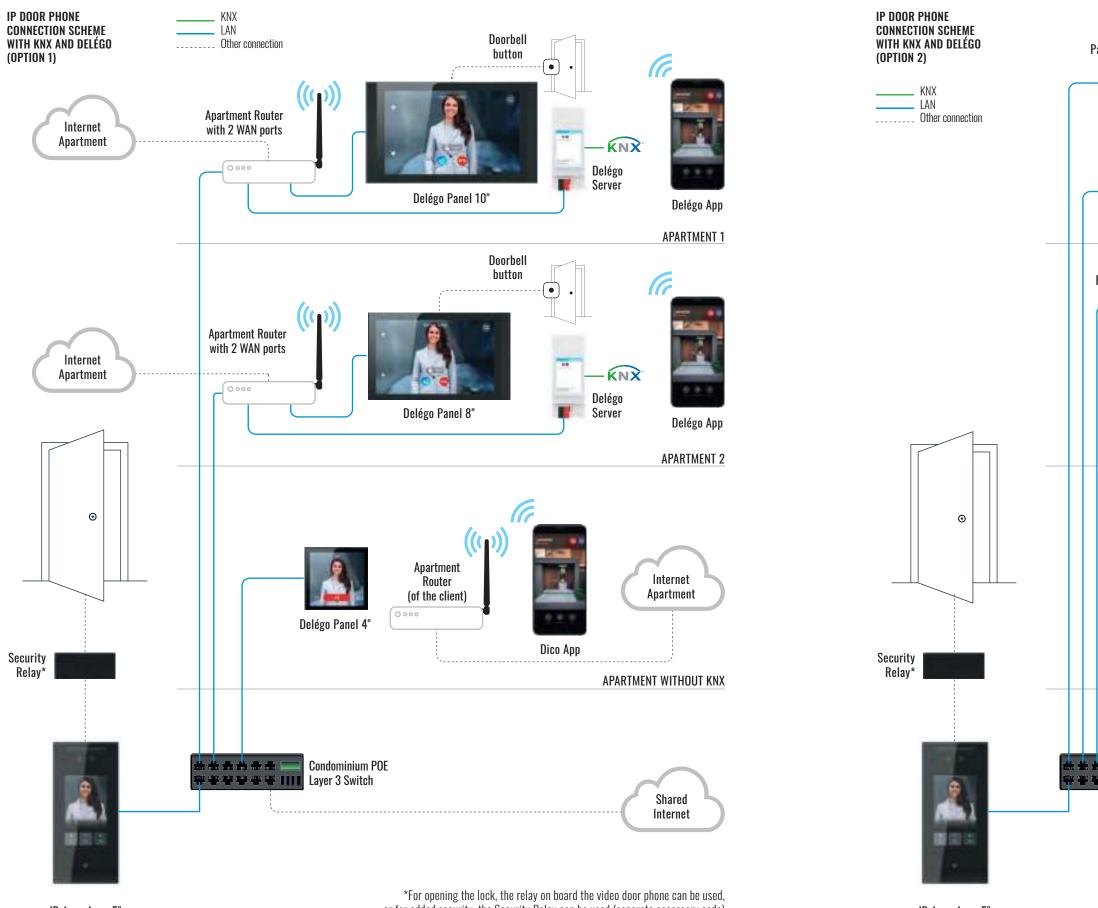


IP door phone 5"

or for added security, the Security Relay can be used (separate accessory code)

IP door phone 5"


287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

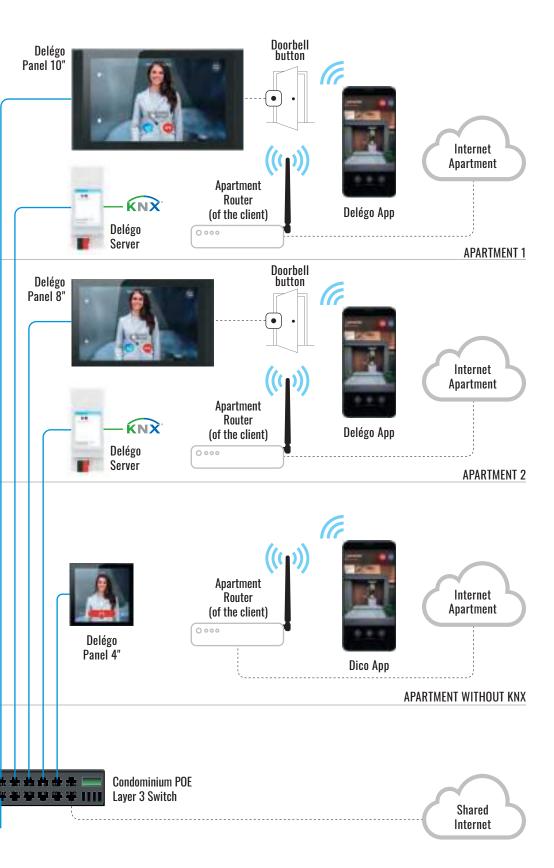

*For opening the lock, the relay on board the video door phone can be used, or for added security, the Security Relay can be used (separate accessory code)





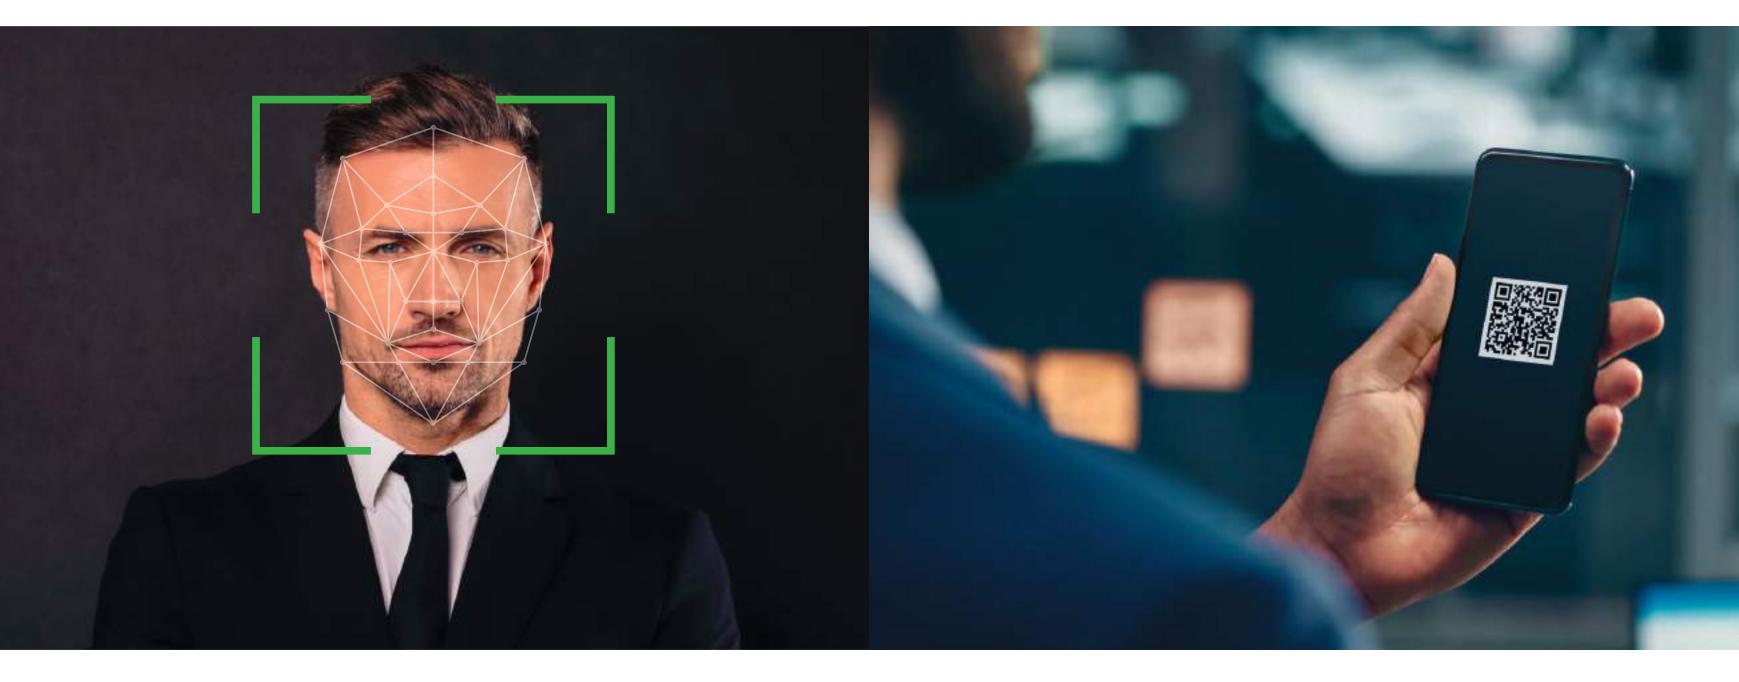

MULTIPLE ACCESS CONTROL MANAGEMENT

Facial Recognition

DICO integrates a powerful facial recognition system, based on biometric data stored within the device (no cloud calls). Biometric profiles are anonymised in full compliance with privacy and GDPR directives. Faces can be stored by uploading a simple photo to the local configuration web interface, or through a learning procedure.

When a face is recognised, DICO can close its integrated relay, and also send a request to Delégo to perform other operations such as KNX auxiliary commands or scenarios.

MULTIPLE ACCESS CONTROL MANAGEMENT


QR code reading

DICO can also enable access via a previously generated and authorised QR code. In this way, it is possible to conveniently grant access for a certain period to occasional guests, without the need to store their biometric data and/or share their code numbers.

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index





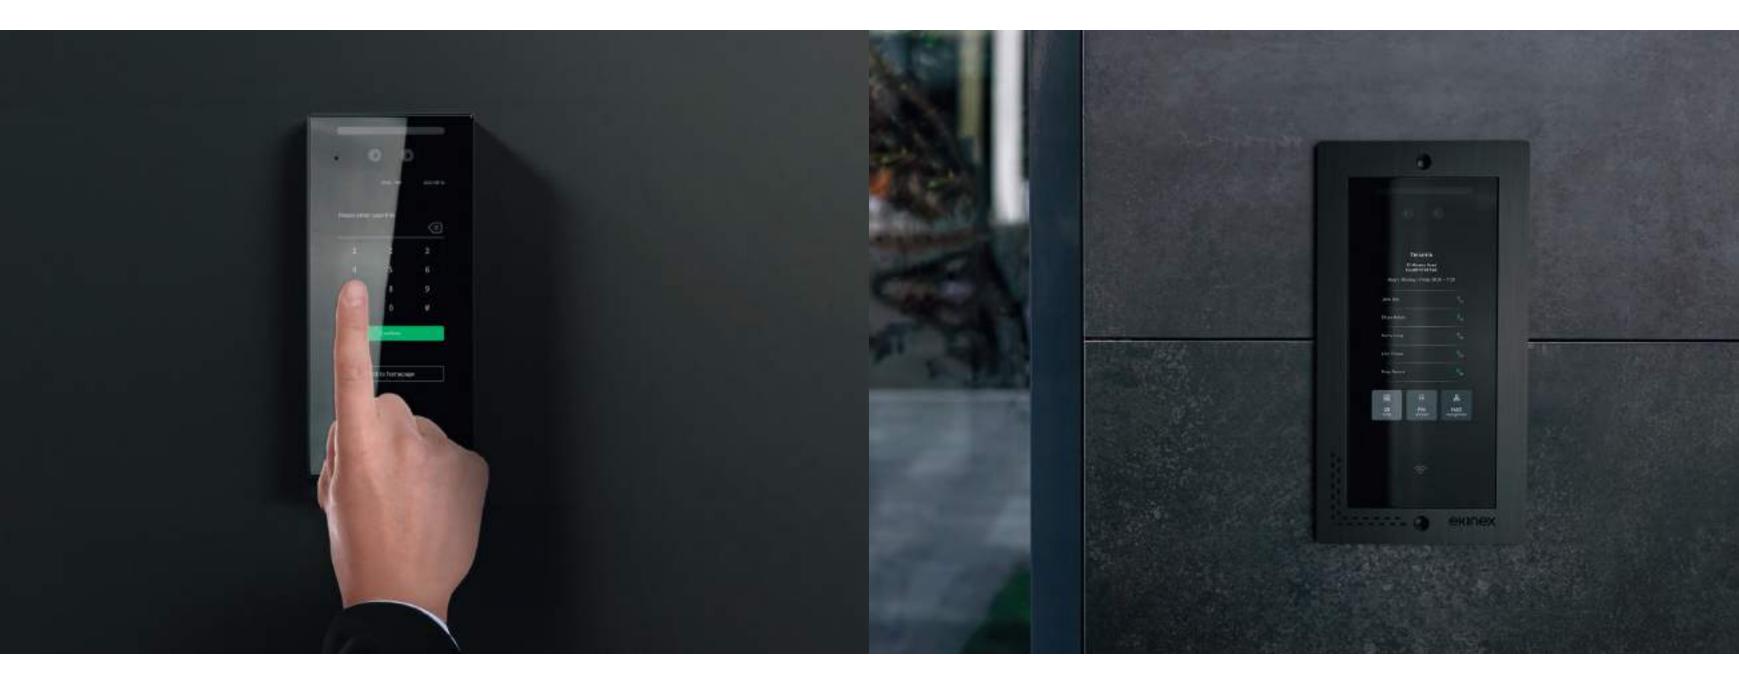

MULTIPLE ACCESS CONTROL MANAGEMENT

Virtual Keyboard

DICO allows access to controlled accesses by entering a numerical PIN code, directly on the display. In the future, it may be integrated into the MyWay access control system on Delégo.

MULTIPLE ACCESS CONTROL MANAGEMENT

Multi-apartment and multi-tenant management


The Dico video door entry system lends itself perfectly to multi-apartment residential building management, even of large size, as well as tertiary and multitenant installations. The graphic interface can be customised to display: The direct list of tenants (in flat mode), typically used in apartment buildings. The list of companies, with a sub-page dedicated to the interiors of each company, typically used in multi-tenant buildings.

The optional screen saver mode can display e.g. a static logo, individual company logos in rotation, or the building address.

287 357 373 421 439 451 455 461 471 475 DIN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General terms of sale General index						
	357	3/3			471 General terms of sale	4/5





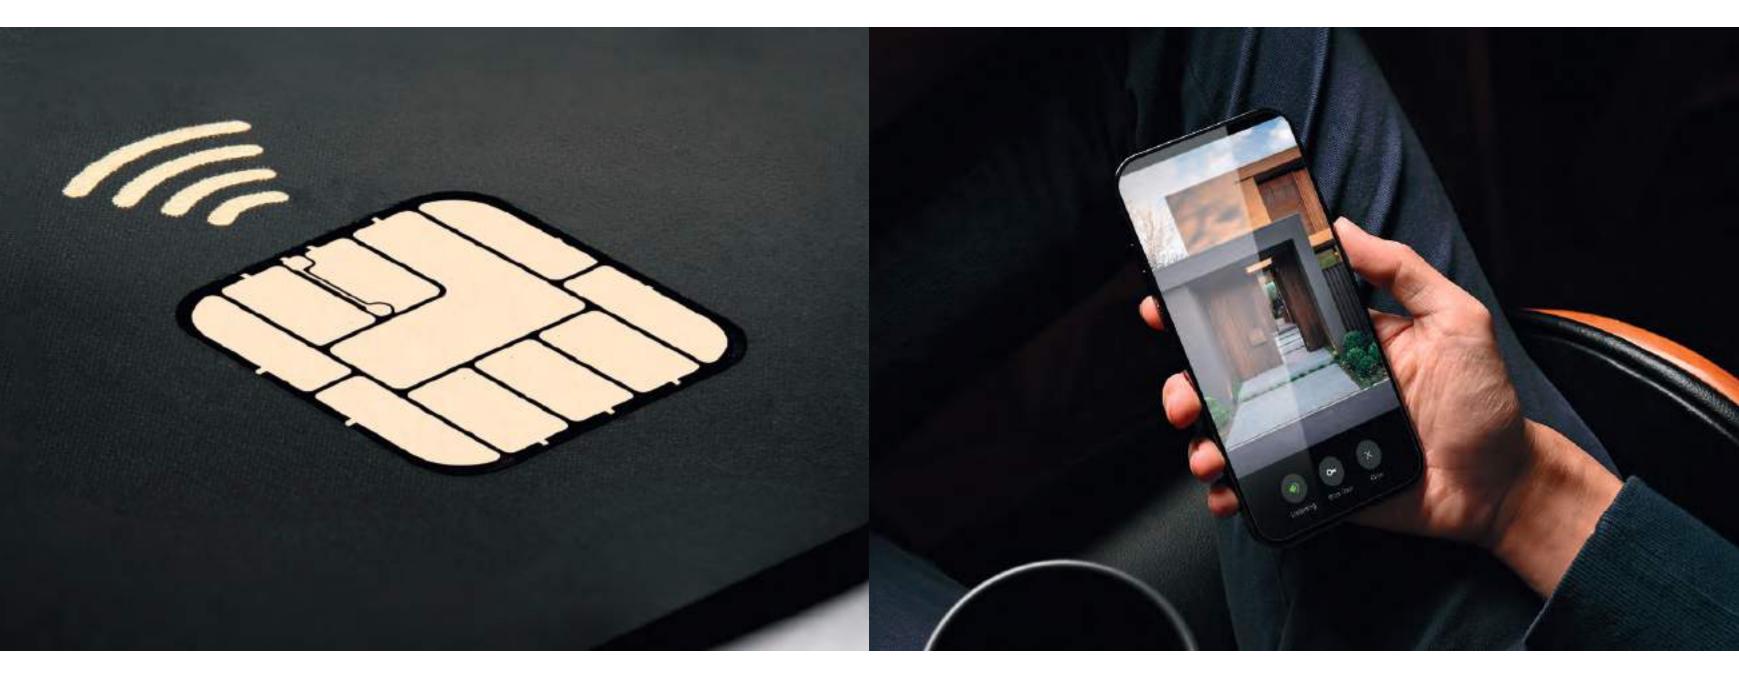

MULTIPLE ACCESS CONTROL MANAGEMENT

NFC technology


DICO can also enable access via RFID cards or 13.56 MHz proximity cards. In the future, this function may be integrated into the MyWay access control system on Delégo.

MULTIPLE ACCESS CONTROL MANAGEMENT

Using via App

The DICO app can be used both by installers, to configure a system equipped with one or more video door phones and to establish the rules for forwarding calls to the different flats, and by end users, to receive calls when they are not inside the building, and to monitor their video door phones remotely, including consulting the call and access history.

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

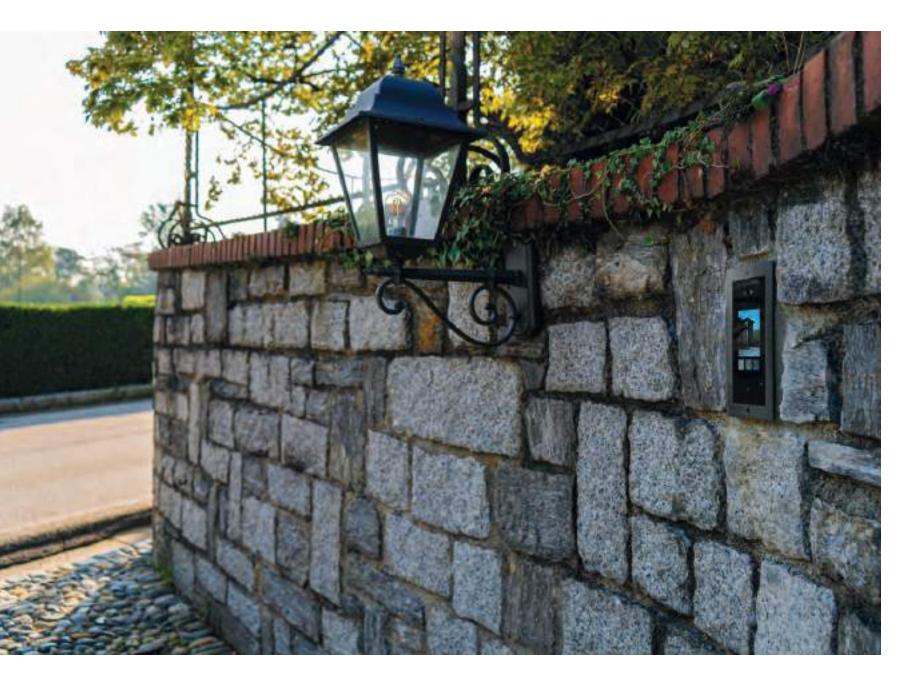

Dico **IP DOOR PHONE**

The Dico IP door phone is a secure and affordable commercial-grade device for both intercom and for access control.

Dico is an IP outdoor door phone based on the SIP standard, which is fully integrated with the Delégo visualisation system and can operate completely autonomously within the customer's home network. It is a fully touch product, with no physical buttons, and thanks to integration with the Ekinex cloud and the Delégo app, it is possible to receive video calls wherever you are (feature available in Q1 2024).

Many functions in one device; Dico is not just a simple video IP Door phone. It manages a multiple access control system through facial recognition, virtual keypad, QR code reading, and NFC technology. The innovative touch screen compared to market standards (physical pushbuttons) also allows for extremely high configuration flexibility and can be wall-mounted or flush-mounted using the special cover with mounting box.

With the latest deep learning algorithm and dual camera motion detection technology, EK-5DP-VI can be used for residential and commercial applications to realize intelligent access control.



Description

IP Door phone offering excellent intercom-type communication and flexible access control methods such as facial recognition based on artificial intelligence and controllable by the mobile app. It can be used in commercial and community applications to implement smart, fast, secure and reliable access control by integrating with various third-party devices such as attendance and visitor management systems.

Technical data

- 5" IPS LCD touch screen display
- 1280 x 720 pixel resolution
- 2M pixel dual-lens camera, WDR
- Input/output relays: 1 / 1
- Ethernet port RJ45, 10/100Mbps adaptive
- Power Supply 802.3af Power-over-Ethernet
- 12 Vdc power supply (if not using PoE)
- Max. current consumption 380 mA
- Tamper (tamper) supported

Recommended cable length depending on section for installation with 12V - 1.5 A power supply:

- ≤ 30m for section 20 AWG
- ≤ 20m for section 22 AWG
- ≤ 15m for section 23 AWG

Recommended cable length depending on section for installation with 12V - 1.0 A power supply:

- ≤ 20m for section 20 AWG
- ≤ 10m for section 22 AWG

Environmental operating conditions:

Wall-mounted or recessed installation with optional box and frame EK-5IW-VI available for purchase from Ekinex. EK-5RC-VI rain cover available upon request.

Urder information					
Code	Use				
EK-5DP-VI	IP Door phone 5"				
EK-5IW-VI	Box and frame for flush mounting				
EK-5RC-VI	Rain cover				

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index







Dico IP DOOR PHONE

Functions / Features

- Protection IP65
- Relative humidity of the installation environment: 10~90% non-condensing
- Operating temperature: -20°C to +55°C
- Dimensions (WxHxD): 192 x 88 x 27,5 mm
- Weight (assembled product): 600 g
- Flexible authentication: mobile app, facial recognition, NFC, QR codes, PIN codes, IC card (contactless smart card)
- 1 output relay for door opener
- Visible light facial recognition
- Dual cameras with anti-spoofing algorithm against photo and video forgery
- Storage of up to 20.000 images and 20.000 cards
- Facial recognition speed of less than 0,2 seconds/user
- Facial recognition accuracy rate of more than 99,7%
- Allows audio and video communication with an IP phone, Delégo App or Delégo Panel
- Multiple verification methods including: face, PIN, NFC, RFID cards and OR codes
- Configuration via web browser
- Touch screen user interface with simplified navigation
- Excellent voice intelligibility in any situation, even noisy ones
- Easy installation requiring only power, internet and door opener
- Space-saving 5" design perfect for narrow door frames







1 pcs.

For more information see the technical documentation, download from **www.ekinex.com**







Dico Security Relay

IP DOOR PHONE

Description

The Dico Security Relay provides secure door control via encrypted communication when combined with other Ekinex devices. The module with ultra-compact form, easily placed in most standard installation boxes, is installed on the secure side of the door. If anyone attempts to dismount or vandalize the station, SR1 cuts the connection to the door strike and the door remains securely locked.

Functions / Features

- Environment: Indoor
- Casing: Plastic
- Dimensions: 31x56x24mm
- Mounting: Fits in standard installation boxes
- Working Humidity: 10 ~ 90%
- Working Temperature: 20°C ~ +60°C
- Relay Out: 1
- RS485: 1
- Input: 1
- Button: 1, for pairing
- Indicator: 2
- Power In: 1,12V/100mA (Min.)

Dimensions [mm]







Order information

Code	Use	Packaging
EK-SR1-VI	Controllo sicuro della porta tramite comunicazione criptata se abbinato ad altri dispositivi Ekinex	1 pcs.



For more information see the technical documentation, download from **www.ekinex.com**















We love to watch our favourite series, sporting events, the news as soon as we wake up, but we only want to see TV when needed. That is why we have created a series of Made in Italy lifts that help you to better arrange your space, giving you the opportunity to hide the TV when it is not in use. **Product range**

Revélo Lift TV



Under Bed Lift TV

357 373	421	439	451	455	461	471	475
Sualisation Audio Mult	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Up & Down Lift TV

Up & Down Lift TV - XL



03 17 Introduction Wall-mount devices DIN



Would you hide a beautiful view to make room for a TV? The room gains in space, usability and order, and you don't miss out on the view of your favourite scenery.

287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index

Revélo LIFT TV

The need for better space management, combined with the minimalist design of a certain type of furniture, are two aspects that cannot be overlooked. The presence of elements such as TVs or monitors can be intrusive within a room. This gives rise to the need to conceal these devices when they are not in use.

Under Bed Lift TV. In your room, a space under the bed is enough to make the TV disappear after viewing. But not only that. Lack of fitted walls or unalterable furniture can make it difficult or aesthetically disharmonious to install a TV. Furthermore, thanks to the very high definition of 4K and 8K panels, only 170 cm is needed for optimal viewing from a 48" TV. Why mount it on a wall?

Up & Down Lift TV. The perfect combination of aesthetics, versatility and space functionality. The Up & Down line of retractable TV lifts integrates inside your furniture, adapting to any type of residential, hotel, naval or tertiary environment. Available in two versions (standard and XL) to accommodate monitors and TVs up to 65".





The EK-BTV-BL TV lift is designed and constructed to move a TV set under the bed. The product in the resting state is placed under the bed; by operating a wired control, the sliding motorised lift brings the TV set into the in-use state. The transition between the two states of rest/use takes place by means of three movements actuated by three electric motors:

Horizontal translation (the TV comes out from under the bed); Rotation (the TV is brought to a vertical position); Lifting (the TV is raised to the height pre-set during installation).

Technical data

- Dimensions in rest position (without TV) 1574 x 680 x 221 mm
- Maximum dimensions (without TV) 1930 x 680 x 1740 mm
- Mass (without TV) 80 kg
- Cvcle time 25-28 s

Power supply

- Voltage 230 V ± 10%
- Frequency 50 Hz ± 2%
- Current 1.6 A
- Total installed power 150 W
- Required protection IP20

Technical data - Television

- Minimum screen size 32"
- Maximum screen size 55"
- Minimum space between TV and bed frame above 50 mm
- Maximum weight 25 kg

FINISHES

NE Black RAL 9005

Order information

Code

Environmental operating conditions

- Closed and dry, domestic environment
- Ambient temperature 5÷40 °C
- Relative humidity 30÷50 % (without condensation)
- Salinity Excluded
- Solar radiation No
- Vibration No

Transport and storage environmental conditions

- Closed and dry environment
- Ambient temperature -25÷55 °C
- Relative humidity 10÷80 % (non-condensing)
- Salinity Excluded
- Solar radiation: No
- Vibration: No
- Water and oil splashes, projection of material and substances from nearby machines: No

Under Bed Lift TV

REVÉLO

Functions / Features

- Function control panel with integrated display (for authorised operator only)
- Brackets for wall or bedside mounting
- Colour: black RAL 9005 Gloss 30
- Silent movement
- Wired control for actuating horizontal travel, rotation, lifting movements
- Infrared laser photoelectric sensors with light/dark pulse
- Approval in accordance with EN 60335-1 and UL 962
- Easily removable cover panels for TV cabling
- Compatible with Sky Glass
- For optimal viewing angle we recommend 48" TVs



Description

The TV lift EK-LTV-BL / EK-LTV-XL-BL is a mechanism designed and constructed to move a concealed TV set into cabinets. The product in the resting state is placed inside a cabinet, where the TV set is also concealed; by operating a wired control, the product brings the TV set into the in-use state. The transition between the two states of rest/use takes place via an electric motor integrated in the lifting column. Models differ according to the length of the lifting column.

Technical data

- Minimum/maximum screen size 32" (EK-LTV-BL) / 65" (EK-LTV-XL-BL)
- Minimum space between TV and cabinet shelf: 13.50 mm
- Maximum weight: 25 kg
- Cvcle time: 18 25 s
- Power supply voltage: 100 240 Vac ± 10% @ 50 60 Hz ± 2%
- Stand-by power: 0.1 W
- Total power output: 300 W
- Protection required: IP20
- Dimensions in idle position (WxHxD, without TV)
- EK-LTV-BL: 471 x 598,5 / 790 x 174.7 mm
- EK-LTV-XL-BL: 753,5 / 471 x 939 x 171.5 mm
- Maximum dimensions (WxHxD, without TV)
- EK-LTV-BL: 471 x 1445 x 174.7 mm
- EK-LTV-XL-BL: 471 x 1945 x 171.5 mm
- Mass (without TV)
- EK-LTV-BL: 15 kg (33 lb)
- EK-LTV-XL-BL: 16 kg (35 lb)

FINISHES



Order information

Code	Height at rest	TV
EK-LTV-BL	790 mm	fino a 43"
EK-LTV-BL	939 mm	fino a 65"

BI White RAL 9016

on request

TV

BI Grey RAL 9006

on request

Package

1 pcs.

For more information see the technical documentation, download from www.ekin**ex.com**



287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules Vi	'isualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Up & Down Lift TV RFVÉLO

Installation dimensions

- EK-LTV-BL: 518 / 545 mm (518 / 545 mm)
- EK-LTV-XL-BL: 700 mm (700 mm)

Maximum excursion closed/open position

- EK-LTV-BL: 655 mm
- EK-LTV-XL-BL: 999 mm

Maximum thrust

- EK-LTV-BL: 700 N
- EK-LTV-XL-BL: 600 N

Bending moment

- EK-LTV-BL: My = max. 150 Nm dynamic
- EK-LTV-XL-BL: My = max. 100 Nm dynamic
- Maximum speed: 38 mm/s

Duty cycle

- EK-LTV-BL: 10 % ~ 2 min at continuous use and full load followed by 18 min break
- EK-LTV-XL-BL: 5 % ~ 2 min. at continuous use and full load followed by 18 min. pause

Functions / Features

- Compact design, guide and actuator are perfectly integrated
- Mounted connector for simple connection to control unit and separate motor cable
- Colour: black RAL 9005 Gloss 30
- Silent movement
- PIEZO™ technology: integrated anti-collision sensor minimises the risk of damage in the up and down direction
- PVC-FreeTM, made without PVC materials
- Invisible slide rails
- Minimum distance between profiles
- Synchronised movement of the middle profile
- Fixing bracket for wired control
- Motor housing (black) pre-mounted in the movement column
- Approval in accordance with EN 60335-1 and UL 962
- For push applications only
- Compatible with Sky Glass

Package 1 pcs. 1 pcs.

For more information see the technical documentation, download from www.ekin**ex.com**



ocumentation





PLANNER is a configuration software made available on its website from Ekinex[®]. This tool, from the easy to use and driven, allows the end user and the designer to identify products that are perfectly suited to the needs of the project. With PLANNER vou can also choose and test different combinations of buttons and wiring devices finishes to get closer as possible to the desired result. PLANNER allows you to fill out a simple list of devices to be used or they can be placed in a preview of a useruploaded file, in order to recreate the actual conditions of the future installation. Finally, the software allows you to create a database of your projects with the ability to retrieve and modify projects at all times. When you finish using PLANNER allows you the chance to ask Ekinex® the best trade offer to the list of materials in your project

Use in 4 steps

1) ADD A PROJECT

From the Ekinex[®] site, reach PLANNER by following this link: **planner.ekinex.com/en/**. At this point you can decide whether or not to insert a map (jpeg, gif, png, pdf image format); in any case you will be asked to give a name to your project, so that you can identify it later.

2) SELECT DEVICES, MODELS AND FINISHING

PLANNER guides you on the page where you can find a list of products and create a list of devices to be installed in the system. All the devices can be placed on the image of the plan if previously inserted.

3) GET THE LIST

PLANNER gives you the ability to export and manage the list of chosen devices, to be able to control the features chosen.

4) SAVE THE PROJECT

By clicking on "save changes", you will save the positions and changes made. You can also print the project and export the list of products in pdf format.

Offer request

Planner is a great business tool. You can request this offer and conditions for devices of your project by clicking on the icon "**Request a quote**". The network of Ekinex® will contact you and will answer quickly and with the best offer for your project.

For further information contact: sales@ekinex.com

Planner

TOOLS



Description

BIM stands for Building Information Modeling and indicates a methodology aimed at optimizing and managing the design and construction of a building.

The BIM is therefore used mainly in the construction sector to promote a working method that involves the generation of a building model that can also manage the data of the entire life cycle through multi-dimensional virtual models generated digitally by means of specific software.

A BIM can contain any information about the building and its parts. The most commonly collected information is geometry, technical and mechanical data, electrical data, material specifications, financial, energy and environmental assessments.

What are the benefits of bim in home automation and construction?

The role of BIM in the construction industry is to support collaboration between the different actors involved (designers, builders, architects, clients) and integrate the design and simulation processes into a single model that can manage all phases of the life cycle of the building.

The main benefit of adopting the BIM methodology is the 3D representation during the design phase, which speeds up processes, reduces delivery times and allows errors and inaccuracies to be detected first. The greater efficiency in sharing information and a more precise control over all the processes involved, also make it possible to contain costs and schedule in advance maintenance operations.

The fields of BIM related to technology allow the management of complex projects such as home automation and the willingness of the customer to control the building. During the design phase it is already possible to simulate the integration of the different systems and the control of the possible scenarios in a 3D environment, giving all the professionals involved the opportunity to work together without data or process conflicts.

287	313	329	357	375	387	391	387	407	411
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Bim TOOLS

Software

The BIM library is available in Autodesk Revit® format, by installing our **Ekinex BIM** Content Creator software, a real advanced configurator of the product range that will be enriched with future updates and expansions.

For further information: ekinex.com/en/bim/library-wall-mount.html





10000	
t Box XL	456
Ring	456
Box	457
Box Pro	457
Box	458
Case	458
ing	459
ner	459
Case	459



Imagine opening a folder and finding yourself immersed in a world of design, technology and innovation: this is the new Pocket Box XL from Ekinex, an elegant and functional binder that encapsulates the essence of the Ekinex product range. Each product family is accompanied by information and descriptions, offering a complete overview of the features and characteristics of each device. To top it all off, integrated QR codes provide immediate access to multimedia content, technical insights and updates, directly from your smartphone or tablet.

For further information: sales@ekinex.com

Orc	ler	inf	orr	nat	ion

Code	Package	Weight
EK-POC-BOX-XL	1 pcs.	0.500 Kg



Description

Glam Box is a finishing box containing all metal, Metal HT and Fenix NTM® samples **represented** by a square rockers (TQQ) of the FF series.

For further information: sales@ekinex.com

Color Ring SALES KIT

Pocket Box XL

SALES KIT



Description

Color Box Pro is a finishing folder that contains a working KNX button equipped with 12 different materials, colours and button types. It is available in a version completely dedicated to Fenix NTM® and metal.

For further information: sales@ekinex.com



Description

Color Ring is a ring equipped with rectangular keys made of plastic, metal and Fenix NTM® in real size that allows you to evaluate the chromatic combination between the button and the wall.

For further information: sales@ekinex.com

Order information

Code	Finishing	Package	Weight
EK-CC-MET	Metal		0.152 Kg
EK-CC-FEN	Fenix NTM®	1 pcs.	0.117 Kg
EK-CC-PLA	Plastic		0.032 Kg

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index



Order information

Code	Package	Weight	
EK-GLAM-BOX	1 pcs.	0.200 Kg	

Color Box Pro

SALES KIT

Order information

Code	Finishing	Package	Weight
EK-CBP-MET-FEN	Metal and Fenix NTM®	1 pcs.	1.332 Kg





Stylebox is a presentation box that contains one or more Ekinex devices declined in different colours and finishes to evaluate the different colour and aesthetic solutions available.

For further information: sales@ekinex.com

Order informati

Code	Version	Package	Weight
EK-SB4-PROXIMA-DK	Style Box serie Proxima		0.800 kg
EK-SB4-FF-DK	Style Box FF Form series		
EK-SB4-71-DEEP-DK	Style Box 71 Deep series		
EK-SB4-71-SURF-DK	Style Box 71 Surface series		
EK-SB4-SIGN-DEEP	Style Box Signum Deep		
EK-SB4-SIGN-SURF	Style Box Signum Surface		
EK-SB4-METAL-HT-DK	Style Box Metal HT		
EK-SB4-PWS-IT	Style Box Power sockets/USB - Italian	1	0.500 Kg
EK-SB4-PWS-DE	Style Box Power sockets/USB - Schuko	— 1 pcs.	
EK-SB4-PWS-UK	Style Box Power sockets/USB - UK		
EK-SB4-PWS-FR	Style Box Power sockets/USB - French		
EK-SB4-20-SURF	Style Day agric 20yanti		
EK-SB4-20-DK	- Style Box serie 20venti		
EK-SB4-4PAN	Style Box Delégo panel 4"		
EK-SB4-5PAN	Style Box Delégo panel 5"		1.500 Kg
EK-SB4-DICO	Style Box Dico		2.300 Kg

Style Case SALES KIT

Style Box

SALES KIT



Description

Style Case was thought to display the Ekinex® wall-mounting devices, appreciate the feel of materials and colours, test the effect on different wall backgrounds. It has four drawers for the different product lines (two of them is equipped with functioning devices) containing demo-versions of wall-mounted devices. Style Case also includes an array of pushbutton faceplates as a colour sampler; the front lid hosts a pouch for catalogues or note sheets. The suede leather belt provides for a convenient carrying handle.

For further information: sales@ekinex.com

Order information

Code	Package	Weight	
EK-SC4-02	1 pcs.	9,300 Kg	



Description

Ekinex logo lettering made of 3 mm thick pre-cut forex, complete with installation template with positioning using double-sided adhesive tape.

For further information: sales@ekinex.com



Description Ekinex table display with Forest or Wood print, complete with packaging box.

For further information: sales@ekinex.com



Description

Tech Case is an ideal solution to support KNX training (basic, advanced, hvac) and product presentations. Tech Case is made of a shock-resistant housing and is equipped with an integrated trolley system that makes it suitable for business travels. Tech Case is delivered with connected Ekinex devices and pre-installed application programmes.

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Lettering SALES KIT

Order informati

Code	Package	Dimension	_	
EK-LET-180		180 cm		
EK-LET-105	1 pcs.	105 cm		
EK-LET-45		45 cm	_	



Crowner SALES KIT

Order information			
Code	Package	Weight	
EK-CROW-FOR (Forest print)	1 200	0 500 %~	
EK-CROW-WOO (Wood print)	—— 1 pcs.	0.500 Kg	

Wall-mount device not included in delivery.





Order information

Code	Version	Package	Weight
EK-TCB-TP	basic	1	11.000 Kg
EK-TCA-TP	advanced	—— 1 pcs.	12.000 Kg







Projecting, configuration and commissioning

TECHNICAL SECTION

The Ekinex® home and buildings automation system was developed in accordance with the KNX open standard; therefore, the planning and the commissioning of a system as well as the configuration of its devices can be carried out easily by means of a PC and the ETS® software. The software allows to program Ekinex® devices, as well as thousands of other interoperable devices produced by companies which are members of KNX Association. All is needed to use Ekinex® devices in a system project, is the download from the www.ekinex.com website of either the application programs general file, the Ekinex[®] product database containing software for all devices, or the single, specific-application program as necessary. After importing product data into the internal ETS® database, one may start laying out the home automation project.

The first activity required consists of assigning a name to the project, along with general descriptive information, which will permit to re-use the same project without problems, even after a long time. The next step is to define the building's structure and the topology required by the home automation project. The devices are looked up in the database, copied into the structure and assigned a unique id, corresponding to their physical address. At this point, each device may be configured independently, by setting a series of parameters, which vary according to the function to be performed. For example, independent function can be attributed to each different channel of a single push-button command, e.g. switching on or off an electrical appliance, a dimmer for a light source or the opening/closing control for a roll-up shutter. The next step is to define the interaction between multiple devices; unlike traditional installations, where this is achieved by physically laying cables, in a home automation system this action is performed by means of virtual connections generated by the ETS[®] program.

It is then possible to upload the application program to each device, thereby including all the settings required to perform the expected function within the system. ETS® also has utility functions for diagnoses and error search; for instance, it is possible to verify physical addresses and to check the status of each single devices on the connected bus. Lastly, the program can produce the necessary project documentation for the end user, so that it may be further expanded and adapted in the future. The constant attention of KNX towards the world of professionals developed into a wide offer of training courses. Courses for experts have been offered for years in numerous countries and KNX constantly monitors the activity of all certified training centres, where it is possible to become KNX Partners. The professional role of a KNX Partner is to guarantee a high level of system expertise in order to achieve the best results. Among KNX Partners are designers, installers and system integrators, who offer expert advice to plan, install, run and maintain a KNX-standard control system for homes and buildings.



In order to become KNX Partner, one must withstand a 40-hours theory and practise exam at a KNX-certified Training Centre. A complete list of KNX Partner is available on the website of KNX Association (www.knx.org).

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index





ETS® (Engineering Tool Software) is manufacturer-independent software. produced and marketed by KNX Association (www.knx.org)

KNX technology

TECHNICAL SECTION

KNX systems realize decentralized building automation; therefore, neither a central unit nor a supervising PC for control are required. Each device is fitted with an electronic part, which allows bus communication with all other devices on the bus, processes the received information or transmits the stored working parameters and the logics required for the completion of its task.

Communication

Communication between KNX devices occurs in digital form, by means of serial transmissions of organized information, called "telegrams". A telegram includes the main information to be transmitted - e.g. a switch on or switch off command. a numerical value corresponding to a physical size detected by a sensor, etc. - and a series of accessory information required to guarantee an efficient, error-free communication. Any telegram, which is not duly received, can be repeated up to three times by the transmitting device. In order to avoid collisions between telegrams being sent out at the same time along the same bus from different devices, the CSMA/CA (Carrier Sense Multiple Access / Collision Avoidance) protocol is used. The information transmission speed occurs at 9600 bit/s, which makes it possible to avoid bus line resistor terminations.

Transmission medium

The family of Ekinex[®] TP bus devices uses twisted-pair signal cables to transmit data; the correct communication is guaranteed by employing bus cables with 1 or 2 conductor pairs made in accordance with KNX Association's TP1 specifications.

Connecting the devices

Ekinex[®] devices are connected to the signal bus cable by means of the KNX bus termination block. The termination block and the cable form part of a convenient, fast-connection system aimed at eliminating errors: the cable has rigid connectors and the termination block is fitted with holding springs (instead of screws); besides, the termination block is formed by two elements having the same colour-coding (black/red) of the conductors to be connected. Each stripped bus conductor will be simply inserted in place, where it will stay firm thanks to the provided holding spring. Each polarity has 4 connection areas and the termination block may be extracted from its seat; Thanks to these two characteristics, the removal of any device from the bus cabling does not determine the interruption of communications with the remaining devices. The termination block is also used for branching cable segments on the same bus.



Installation

230 Vac


KNX bus cables can be laid underneath the 230 Vac power cables along the same duct, provided they are kept isolated. Should the insulating sheath be removed, a distance of at least 4 mm between cable types must be guaranteed.

4 mm


230 Vac




The smallest KNX system may include a single bus line along which up to 64 devices can be connected. The line must be equipped with the special bus power supply, which provides the necessary SELV voltage for the system to work. The effective number of bus devices that can be connected to the line is determined at project level and may vary depending on the voltage supplied by the bus power supply and on the electrical absorption of each device on the bus. Since each Ekinex® device can process multiple functions, a single-bus line can suffice to control an apartment, a detached house or even a larger building with a limited number of bus functions.

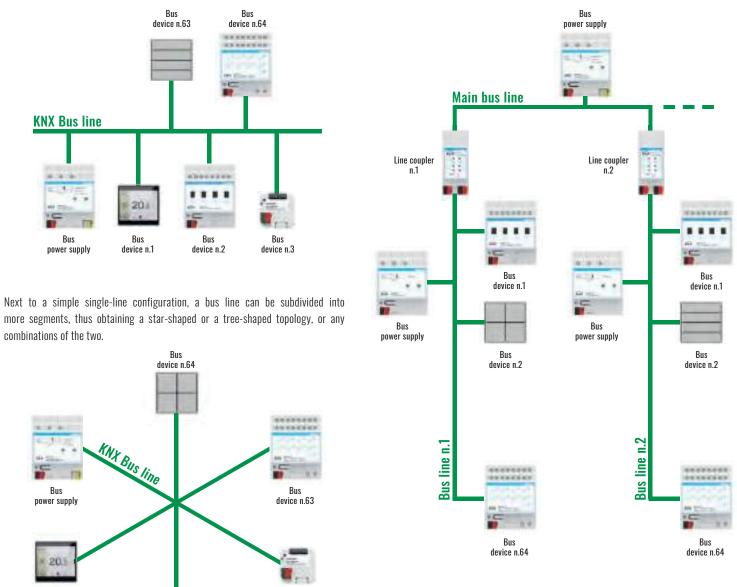

combinations of the two.

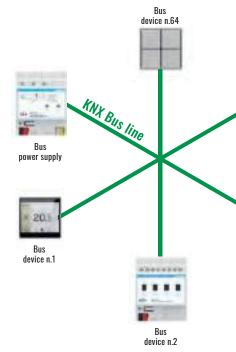

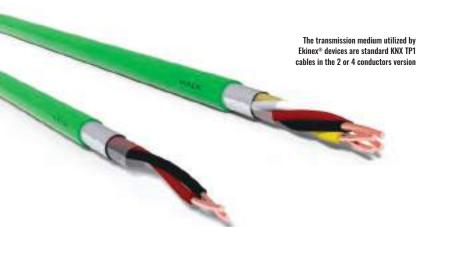


287 357 373 421 439 451 455 461 471 475 IN-Rail mount modules Visualisation Audio Multiroom IP Door Phone Lift TV Tools Sales kit Technical section General index

Adding line couplers, allows the system to expand to accommodate for larger buildings and/or higher numbers of required bus functions. Connecting more lines between them by means of couplers and a backbone line constitutes an area. An area is formed by a backbone line, up to 15 secondary lines and by all the devices connected along them. A unique number between 1 and 15 characterizes each secondary line. With little less than 1000 connectible KNX devices, an area permits the handling of a medium/large size system.

Bus device n.3

KNX technology

TECHNICAL SECTION

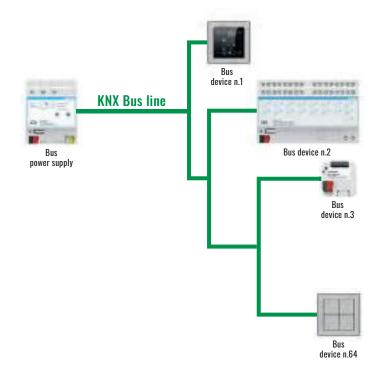

It is necessary to respect KNX topology prescriptions while designing the system, in order to guarantee communication within the system:

- the maximum allowed line length is 1000 m, including all branches;
- up to 64 bus devices can be connected to one line;
- the maximum distance between 2 devices is 700 meters;
- no bus device may be more than 350 meters apart from a bus power supply;
- in case of high numbers of bus devices (> 30) along limited sections lengths (10m), a second bus power supply can be installed, provided it sits at least 200 meters away from the first.

Should the demand increase, a KNX system can be further extended by connecting one another up to 15 areas. The main lines of each single area are connected to a backbone line by means of area couplers. Areas and main lines are numbered 1 to 15, while the backbone line bears number 0. The most extended KNX system permits to connect tens of thousands of devices, thus satisfying the necessities of very large buildings.

Device addressing

The bus is a shared communication medium and each connected device must be exclusively distinguished from all others. The ETS® program takes care of that by assigning a physical address to each device: the address is represented in the form "area.line.device". Thanks to that, the topology of the entire system is mirrored into the devices' physical addresses, making it easy to locate a device in the whole topology, by simply knowing its physical address. For instance:

3.5.12 is the physical address of the bus device number 12, installed along line 5 in area 3

7.11.4 is the physical address of bus device number 4 on line 11 in area 7

A line coupler connects a secondary line to the backbone line; the device forms an integral part of the secondary line and conventionally assumes the device number "O". The physical address of a line coupler can be, for instance:

The area coupler connects an area's main line to the backbone line: the device is part of the main line and conventionally assumes device number "O" and line number "O". The physical address of an area coupler is, for example:


3.0.0 is the physical address of the coupler connecting the main line of area 3 to the system's backbone line

The physical address of the transmitting device is always present in a telegram, working as the "source address" of the message.



e physical addro is used wher and diagnosi

To coordinate the performance of several devices over a particular bus function, a so-called group address is used: this is represented by a two levels structure "main group/subgroup" (e.g. "2/15") or by a three level structure "main group/middle group/subgroup" (e.g. "2/6/54"). This type of address is almost exclusively used as a "destination" address for telegrams.

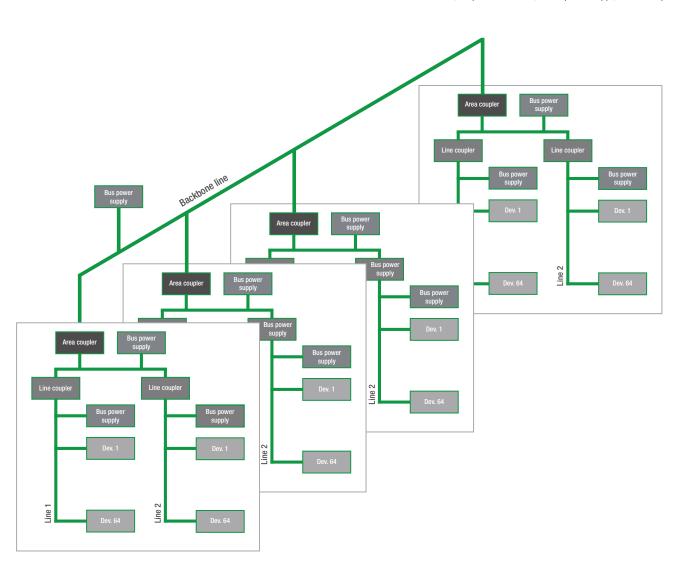

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

KNX technology

TECHNICAL SECTION

ysical address (area.line.device) s used when programming nd diagnosing bus devices.

2/6/54

The group address is used when commanding and controlling the bus devices.

Power supply

KNX systems work with the 30 Vdc SELV (Safety Extra Low Voltage) voltage, supplied by the bus power supply present on each line: this power feeds the electronic parts of the devices and provides for the transmission of information over the bus. Normally, KNX commands and sensors are exclusively connected to the bus line, while parts of KNX actuators require a separate 230 Vac power supply for commanding connected loads. Some devices may require an auxiliary SELV power supply for their operation.

Normative references

TECHNICAL SECTION

Norms are, by nature, voluntary application dispositions: anyhow, complying with norms constitutes the best guarantee in the choice of a product for designers, installers and end users. In fact, norms are "state-of-the-art" developments in their technology sector and precisely define quality, performance and safe conditions of use for a product. Beyond safety norms regarding all products, the systems for the control of houses and buildings are more often requested to integrate energetic efficiency models, consistently abiding to recent tendencies aiming at global system-envelope system efficiency, more so than seek optimization of single parts. KNX represents an open and interoperable system for the automation of houses and buildings, normed at global level thanks to its conformity with international (ISO/ IEC 14543-3), European (CENELEC EN 50090, CEN EN 13321-1 e 13321-2), Chinese (GB/Z 20965) and American (ANSI/ASHRAE 135) norms.

Norm	Title	Notes
ISO/IEC 14543-3	Information technology - Home electronic system (HES) architecture	In sight of the great interest towards KNX compatible products and the technology by them consolidated well beyond European markets, the KNX Association took all necessary steps to obtain approval of its own KNX standards at international levels. At the end of 2004, active CENELEC member countries proposed the European EN 50090 norm for ISO/IEC standardization. In November 2006, the KNX protocol and all transmission media (TP, PL, RF and IP) became approved and published under the international ISO/IEC 14543-3-x normative.
EN 50090	Home and Building Electronic Systems (HBES)	In December 2003, the KNX protocol and the two TP (twisted pair) and PL (power line) transmission media were approved by the European national committees and ratified by the CENELEC Bureau Technique under the European EN 50090 norm. The transmission medium KNX RF (radio frequency) was approved the month of may 2006.
CEN EN 13321-1	Open data communication in building automation, controls and building management. Home and building electronic system. Product and system requirements	Since KNX supplies more and more technical specifications used not only for the automation of electrical devices, but also for HVAC (Heating, Ventilation and Air Conditioning) applications, the KNX Association submitted its specifications to CEN for publishing a European normative for building control systems. CEN accepted the proposal and KNX specifications where published by CEN as EN 13321-1 and EN 13321-2.
CEN EN 13321-2	Open data communication in building automation, controls and building management. Home and building electronic systems. KNXnet/IP Communication	
GB/Z 20965	Control network HBES technology specification - Home and building control	The great interest demonstrated by China for KNX products and technology was the main reason for the KNX Association to have the international ISO/IEC 14543 norm translated into Chinese. The Chinese standardization committee SAC TC 124 introduced the KNX standard into China and adopted it under the GB/Z 20965 norm in July 2007.
ANSI/ASHRAE 135	BACnet - A Data Communication Protocol for Building Automation and Control Networks (ANSI Approved)	Even the interfacing of KNX with other automation systems is now internationally standardized: the norms US ANSI/ASHRAE 135 and ISO 16484-5 support mapping between KNX and BACnet.
CEI EN IEC 63044-3	2018 Home and Building Electronic Systems (HBES) and Building Automation and Control Systems (BACS)	Part 3: Electrical safety requirements
CEI EN IEC 63044-5-1	2017 Home and Building Electronic Systems (HBES) and Building Automation and Control Systems (BACS)	Part 5-1: EMC requirements, conditions and test set-up

The EN 50090 norm

The European EN 50090 norm "Home and Building Electronic Systems (HBES)" was developed at CENELEC from the TC 205 Technical Committee, specifically established in 1996 to write norms covering all relevant aspects of electronic systems dedicated to the control of homes and buildings. Parts of the norm were progressively released and published by the standard committee of several European countries giving birth to the national norms about the electronic systems for homes and buildings.

Part	Home and Building Electronic Sys
EN 50090-1	Part 1: Standardization structure
EN 50090-2-1	Part 2-1: System overview - Architecture
EN 50090-2-2/A2	Part 2-2/A2: System overview - General t
EN 50090-2-3	Part 2-3: System overview - General func
EN 50090-3-1	Part 3-1: Aspects of application - Introduc
EN 50090-3-2	Part 3-2: Aspects of application - User pr
EN 50090-3-3	Part 3-3: Aspects of application - HBES I
EN 50090-4-1	Part 4-1: Media independent layers - Appl
EN 50090-4-2	Part 4-2: Media independent layers - Trar
EN 50090-4-3	Part 4-3: Media independent layers - Con
EN 50090-5-1	Part 5-1: Media and media dependent laye
EN 50090-5-2	Part 5-2: Media and media dependent lay
EN 50090-5-3	Part 5-3: Media and media dependent lay
EN 50090-7-1	Part 7-1: System management - Managen
EN 50090-8	Part 8: Conformity assessment of produc
EN 50090-9-1	Part 9-1: Installation requirements - Gene
CLC/TR 50090-9-2	Part 9-2: Installation requirements - Insp

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

Normative references

TECHNICAL SECTION


Beyond the requirements for the development of HBES systems and components, aimed at builders, the norm also defines the criteria for designing, installing and testing an HBES system. The KNX standard is entirely compliant with the EN 50090 norm.

Systems (HBES) - Title of the part	Year
	2011
ture	1998
eral technical requirements	2008
functional safety requirements for products intended to be integrated in HBES	2006
roduction to the application structure	1997
er process for HBES Class 1	2004
ES Interworking model and common HBES data types	2010
Application layer for HBES Class 1	2006
Transport layer, network layer and general parts of data link layer for HBES Class 1	2005
Communication over IP	2008
t layers - Power line for HBES Class 1	2005
t layers - Network based on HBES Class 1, Twisted Pair	2005
t layers - Radio frequency	2007
agement procedures	2005
oducts	2001
Generic cabling for HBES Class 1 Twisted Pair	2005
Inspection and testing of HBES installation	2009

Energy efficiency in buildings

TECHNICAL SECTION

Based on the fact that buildings in Europe account for over 40% of total energy consumption, the European Union intensified its efforts over the last years so that buildings be projected and re-qualified, thereby restraining consumptions as much as possible. The declared objective is to reduce energy dependence and the emission of polluting and climate-changing gases. The starting point was the publishing of Directive 91 in 2002 about energy performance in building (known as EPBD – Energy Performance Building Directive) - a mandatory implementation for European Union countries – which introduced important new facts, such as the energy performance and leaving up to national measures the identification of the most appropriate interventions needed to increase energy efficiency. The innovative approach required coordinated interventions on the envelope-system integrated system.



The EN 15232 norm

Following the Directive 2002/91/EC, the next step is to pay attention to efficiency recovery in individual behaviours and to concentrate on the relationship between the rate of automation in a building's plan and the corresponding achievable energy saving. This has brought CENELEC to publish the EN 15232 norm, later acknowledged by the standard committee of several European countries. The norm evaluates the savings achievable through the adoption of growing automation levels – both during planning and energy verification operations – and to place buildings in one of four energy efficiency classes: from A (the most efficient) to D (the least efficient).

BACS: Building Automation Control System TBM: Technical Building Management System



287 DIN-Rail mount modules	357 Visualisation	373 Audio Multiroom	421 IP Door Phone	439 Lift TV	451 Tools	455 Sales kit	461 Technical section	471 General terms of sale	475 General index
JIN-IVali IIIOUIII IIIOUUIGS	VISUAIISALIUII	Audio Multilooni		LIILIV	10013	Jaigs Kit	recimical section		UGIIGI di IIIUGA

A class

A class includes highly energy-efficient buildings, fitted with control and automation systems (BACS) and technical system management (TBM), characterized by high levels of precision and completeness in terms of automatic control.

B class

B class includes energetically advanced buildings, fitted with control and automation systems (BACS) and technical system management (TBM) allowing a centralized-type of control.

C class

C class includes buildings, which are standard from an energy point of view and are fitted with basic control and automation systems (BACS). This class is also used as a reference for the calculation of efficiency factors.

D class

D class includes buildings, which are not energy-efficient, having technical systems exclusively of a traditional type, lacking any kind of automation.

The EN 15232 norm also specifies:

- a structured list of regulation functions, automation and technical management which have a certain effect on the energy efficiency of buildings;
- a method to define minimal requirements to apply for regulation, automation and technical management of buildings of different complexity;
- detailed methods to evaluate the effects of such functions on a specific building;
- a simplified method to reach a first impact estimate of such functions on representative buildings.

Quality certification

The Ekinex® products described in this catalogue are developed and built in conformity with the quality management system adopted by Ekinex S.p.A. and certified by DNV - Det Norske Veritas - in accordance ISO EN 9001:2008.

Access through mobile devices

All QR* codes appearing on product catalogue pages, provide quick access - at any time and from any place - to technical documentation or any other web content published at www.ekinex.com, by using mobile devices such as smart-phones or tablets. In order to decode QR, one simply must upload to his mobile device any freeware application found online.

(*) QR Code[®] is a trademark registered by Denso Wave Incorporated



Documentation on the Web

All tech documents for Ekinex[®] devices are available for download from the www. ekinex.com website, without requiring any registration. The search is free, and products may be searched by their code, family or type. The same documentation can quickly be accessed from within the product pages, too.



ETS application software in several languages

All Ekinex® devices have ETS application software in 4 languages: English, German, French and Italian.

Single packaging

Ekinex[®] devices are individually protected against shock & dust by means of a dedicated packaging. The label clearly describes the contents and bears both an (EAN) bar-code and a QR. Inside the packaging, the instructions sheet supplies information for the installation of the product.

General terms of sale

Valid for the Ekinex[®] product range.

1. DEFINITIONS

- 1.1 In these General Terms and Conditions of Sale, the terms below shall have the following meaning:
- a) "Manufacturer": Ekinex S.p.A, with registered office in Vaprio d'Agogna (28010 NO), via Novara 37;
- b) "Purchaser": professional customer, sole proprietor or company, requesting the purchase of Ekinex® products;
- c) "Party" or "Parties": Ekinex S.p.A. and the Buyer;
- d) "Order" or "Orders": the order or purchase orders concerning Ekinex® products issued by the Purchaser to Ekinex S.p.A.;
- f) "General Conditions": the general conditions of sale set out below.

2. SCOPE OF APPLICATION

- 2.1. These General Terms and Conditions of Sale govern all purchase contracts concerning Ekinex® products concluded between the Parties;
- these conditions shall continue to apply for the parts not expressly derogated.
- (Consumer Code) and subsequent amendments.
- Each contract shall be governed by the General Terms and Conditions of Sale in force at the time the order is placed by the Customer.

3. FORMATION OF THE CONTRACT

Within the aforementioned three months Ekinex S.p.A., at its sole discretion, reserves the right to accept or refuse the Order, informing the Buyer accordingly.

- and Conditions of Sale.
- or at the following e-mail address sales@ekinex.com.
- 3.6. If the Buyer cancels the Order before its acceptance or execution by Ekinex S.p.A., Ekinex S.p.A. may ask the Buyer to reimburse the costs of the Order.

4. PRODUCT AVAILABILITY

- 4.1. Ekinex S.p.A. reserves the right to change the Ekinex® product catalogue and the technical characteristics of the products without prior notice.
- The product is not available or cancel the order and receive a refund of any price already paid.
- according to the design specifications.
- 4.4. Ekinex guarantees the correct installation of its products only with the flush-mounting boxes shown in the planner or technical catalogue.

287	357	373	421	439	451	455	455	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	lools	Sales kit	Sales kit	General terms of sale	General index

e) "Products": all Ekinex®-branded products for home and building control, which can be found in the Ekinex® product catalogue in printed and/or electronic form and on the website www.ekinex.com:

2.2. The Buyer may not invoke or object to any conditions other than those contained in the General Conditions. Consequently, any conditions specified in writing shall have no validity, by the Buyer on the Order, or at any other stage of the contractual negotiation, and also after acceptance or knowledge of the General Conditions, as well as any other terms and conditions that the Buyer may have. General conditions of purchase of the Buyer. The execution, even partial, of the Order by Ekinex S.p.A. or any other fulfilment by Ekinex S.p.A. towards the Buyer is not valid and does not apply to the Buyer. Shall be construed as tacit or implicit acceptance of any general terms and conditions other than these Conditions, unless expressly accepted in writing by Ekinex S.p.A. Even in the event of derogations agreed upon in writing,

2.3. The General Terms and Conditions are only valid for contractual relations between Ekinex S.p.A. and professional traders, and therefore Legislative Decree no. 206 of 6 September 2005shall not apply.

2.4. Ekinex S.p.A. reserves the right to amend these General Terms and Conditions of Sale at any time, which shall be communicated to the customer without prior notice.

3.1. The acceptance by the Buyer of the offer or the confirmation of the order by Ekinex S.p.A., in whatever manner, entails the application of these General Conditions of Sale.

3.2. The offers made by agents, representatives and commercial auxiliaries of Ekinex S.p.A. are not binding for Ekinex S.p.A. until they have been confirmed by Ekinex S.p.A. in writing. The offers of sale made by Ekinex S.p.A. are valid for 30 days from the date of their formulation and are limited to the complete supply of what is listed therein. After the expiry of this period, the offer to sell shall no longer be valid.

3.3. The Order sent by the Purchaser to Ekinex S.p.A. constitutes an irrevocable contractual proposal binding for a period of three months, starting from the moment Ekinex S.p.A. becomes aware of it.

In the event that the order confirmation of Ekinex S.p.A. differs from the order sent by the Buyer with regard to the quantity of products, prices, discounts and delivery methods, this confirmation shall be considered as a counter proposal by Ekinex S.p.A., which must be expressly accepted by the Buyer in order for the contract to be considered concluded.

3.4. By sending the order, the Customer acknowledges and declares that he/she has read all the information provided to him/her during the purchase procedure and that he/she fully accepts these General Terms

3.5. Acceptance is expressed by a confirmation e-mail sent to the e-mail address indicated by the Customer. The confirmation message shall contain the date and time of the order and a 'Customer Order Number' to be used for any further communication with Ekinex S.p.A.. The customer may monitor the status of the order at any time by contacting Ekinex S.p.A. at the following telephone number +39 0321 1828980

4.2. If one of the requested products is not available, Ekinex S.p.A. undertakes to contact the Customer within 20 working days from the time of placing the order, communicating by e-mail, to the email address provided by the customer, the unavailability and possible alternative solutions. In this case, the customer can wait for the delivery of the order, if Ekinex S.p.A. believes that it can be found on the market.

4.3. Before purchasing each product, carefully check the installation requirements according to the regulations of the country where the installation will take place and compatibility

For the use of different flush-mounting boxes we recommend that you contact our technical support (support@ekinex.com) or check the correct installation yourself.

General terms of sale

5. PAYMENT METHODS

5.1. The prices of the products refer to the price list in force at the time of acceptance of the sale offer by the Buyer or at the time Ekinex S.p.A. issues the order confirmation.

Ekinex S.p.A. reserves the right to modify the current price list at any time, after written notice to the Buyer, in the event of increases in the cost of raw materials,

labour costs or any other factor leading to a significant increase in production costs. The prices of the products are always Ex-Carrier (FCA Incoterms 2010) and therefore the risks related to

the supply shall pass to the Buyer at the time the products are handed over to the carrier, unless otherwise agreed upon in writing between the parties.

- 5.2. Payments must be made in accordance with the relevant information contained in the sales offer or order confirmation. Payments and any other sum due for any reason to Ekinex S.p.A. shall be made at its domicile and, unless otherwise agreed, in Euros.
- 5.3. Any delay or irregularity in payment gives Ekinex S.p.A. the right to
- a) suspend ongoing supplies, even if not related to the payment in question;
- b) vary the terms of payment and discount for subsequent supplies, including by requiring advance payment or the provision of additional guarantees;
- c) demand, from the due date for payment and without the need for formal notice, default interest on the sum still due, at the rate provided for by the rules of the law currently in force for commercial transactions (in particular Legislative Decree 231/2002 and subsequent additions), without prejudice in any case to the right of Ekinex S.p.A. to claim compensation for any additional costs incurred damage suffered. Moreover, in the above mentioned cases, any amount due to Ekinex S.p.A. for any reason whatsoever becomes immediately due. The Buyer shall be obliged to pay the products in full even if exceptions, disputes or controversies arise which will only be settled after payment of the amount due;
- d) terminate the contract pursuant to Article 1456 of the Italian Civil Code by notifying by registered letter with return receipt or certified e-mail the intention to exercise this right. The termination shall be effective for both parties from the date of receipt of the communication.

6. TRANSPORT AND DELIVERY OF PRODUCTS

6.1. The delivery of the goods is Ex-Carrier (FC Incoterms) and therefore the risks relating to the supply pass to the Buyer at the moment the products are handed over to the carrier, unless otherwise stated written agreements between the parties.

The delivery terms, unless expressly agreed otherwise, are purely indicative. In the event that the execution of the order is prevented by the occurrence of circumstances of force majeure, by the failure to regularity of supplies of raw materials or other unforeseeable circumstances occurring, the delivery terms shall be deemed extended and new terms shall be determined by mutual agreement between the parties, without any compensation and/or damages being awarded for the delay in delivery.

6.2. Upon delivery of the goods by the courier, the Customer is obliged to check that the contents of the package delivered correspond to what was ordered and indicated in the invoice sent by email.

Any damage to the packaging and/or to the product or the mismatch between the number of packages and the invoice must be reported within 3 working days of delivery to customer service of Ekinex S.p.A. at the following e-mail address sales@ekinex.com. After the expiry of this period, the customer may no longer make any complaints about the external characteristics of the product delivered as well as on the number of packages received.

7. FORCE MAJEURE

- 7.1 Force Majeure is the occurrence of an event or circumstance ("Force Majeure Event") which prevents a party from performing one or more of its contractual obligations if, and to the extent that, the party who suffers the event feels:
- (a) that such impediment is beyond its reasonable control;
- (b) the event could not reasonably have been foreseen at the time of the conclusion of the contract;
- (c) that the effects of the impediment could not reasonably have been avoided or overcome by the Interested Party.
- 7.2 Where a party fails to perform one or more of its contractual obligations because of the non-performance of a third party, entrusted by the party to perform all or part of the contract, that party may invoke force Majeure only to the extent that the requirements of paragraph 1 are met by both the party and the third party.
- 7.3 In the absence of proof to the contrary, the following events suffered by a party shall be presumed to satisfy the conditions of paragraph 1 of this clause and that party shall only have to prove the existence of the condition in paragraph 1.
- (a) war (whether declared or not), hostilities, invasion, acts of a foreign enemy, extensive military mobilisation;
- (b) civil war, riot, rebellion, revolution, military force or usurpation of power, insurrection, acts of terrorism, sabotage or piracy;
- (c) currency or trade restrictions, embargoes, sanctions;
- (d) acts of authority, whether lawful or unlawful, compliance with laws or governmental orders, regulations, expropriation, confiscation of property, requisition, nationalisation
- (e) plague, epidemic, natural catastrophe or extreme natural events;
- (f) explosion, fire, destruction of equipment, prolonged suspension of transport, telecommunications or power
- g) generalised social conflicts, such as, in particular, boycotts, strikes and lock-outs, white strikes, occupation of factories and buildings.

- 7.4 The Interested Party shall notify the other party without delay of the occurrence of the event.

- 7.7 The Interested Party shall take all reasonable steps to limit the effects of the invoked event on the performance of its contractual obligations.
- of the impediment exceeds 120 days.

8. GUARANTEES

- 8.1. Ekinex S.p.A. guarantees the conformity of the Ekinex® products with the legislation and technical standards in force in the EEC.
- intended

The guarantee for construction defects is limited to those defects of the products that are attributable to defects in the material used or to design and construction problems attributable to Ekinex S.p.A.

in accordance with the Consumer Code if the end user is a consumer

products have not been put into operation for any reason at the end user.

Please note that the warranty on the products purchased from Ekinex S.p.A. is subject to the full payment of the products.

- agents.
- of the product) must be made within 8 days after the discovery of the defect.

suspensions of electricity.

- the communication with which the latter has complained about the defect.
- warranty right is forfeited.

In order to return the defective products, Ekinex S.p.A. shall, unless otherwise agreed, collect the defective material at its own expense according to the instructions on the day and place agreed upon by the parties. After the return, the defective products shall become the exclusive property of Ekinex S.p.A..

request the payment of the same.

an amount equal to the value indicated on the invoice of the returned products.

Ekinex S.p.A. shall only provide in the above ways if the purchaser has done everything within its competence.

Both in case of replacement and repair of defective products or components, the original warranty period shall continue to run, which shall not be renewed.

It should also be noted that once the correctness of the warranty request has been established Ekinex S.p.A. will only replace the defective products as indicated in this point 7.8, thus excluding that the customer may request the termination of the contract and/or compensation for damages.

287	357	373	421	439	451	455	455	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Sales kit	General terms of sale	General index

General terms of sale

7.5 The party who successfully invokes this Clause shall be released from its obligation to perform its contractual obligations, from any liability for damages or other contractual remedy for non-performance, from the time the event inhibits the performance of its contractual obligations, provided that it has been notified without delay. If notice of the event has not been given promptly, the release takes effect from the time when the notice reaches the other party. The other party may suspend performance of its obligations, if any, from the date of the notice.

7.6 If the effect of the impediment or event invoked is temporary, the consequences referred to in paragraph 5 shall occur only to the extent and for as long as the impediment or event invoked prevents the interested Party from performing its contractual obligations. The Interested Party shall inform the other Party as soon as the impediment ceases to prevent the performance of its contractual obligations.

7.8 If the duration of the invoked impediment has the effect of substantially depriving one or both parties to the contract of what they could reasonably expect under the contract, each party shall have the right to terminate the contract by giving notice to the other party within a reasonable period. The parties agree that, unless otherwise agreed, the contract may be terminated by either party if the duration

7.9 If paragraph 8 applies, and one of the parties has derived a benefit from the performance of the contract before its termination, it will be obliged to compensate the other party for the value of that benefit.

8.2. Ekinex S.p.A. guarantees that the quality and type of the delivered products correspond to the contract and that they are free from defects that could make them unsuitable for the use for which they are

All Ekinex® products sold by Ekinex S.p.A. are covered by the warranty for good functioning and the warranty for defects and/or faults in design and manufacture for a period of 24 months and therefore also

8.3. The warranty operates from the date of delivery of the goods by Ekinex S.p.A., except for the parts that are subject to normal wear and tear. After the expiration of this period, the warranty ceases, even if the

8.4. The above mentioned warranty is effective on condition that the products have been stored and used in accordance with the instructions in the General Catalogue and the technical data sheets provided by Ekinex S.p.A., that no repairs, modifications or alterations have been carried out without the prior written consent of Ekinex S.p.A. and that the defects found have not been caused by chemical or electrical

8.5. The Purchaser shall report any defects in writing no later than 8 days after the delivery of the products, while the report of any hidden defects and/or operating defects (that can only be detected after the use

The warranty does not apply in the event of malfunctions of the software installed on the Product, which are due to overloads, electrical phenomena due to atmospheric events, interruptions and/or

8.6. The notification of defects, including hidden defects, must be made in writing to Ekinex S.p.A. by sending a communication to support@ekinex.com within the prescribed period, indicating 1) the reference of the invoice with which the product was purchased, 2) the serial number of the product, 3) a brief technical report of the defects or non-conformities found and 4) if the end user is a consumer,

8.7. If the purchaser does not allow Ekinex S.p.A. to carry out any reasonable checks as requested by Ekinex S.p.A. and does not return the defective products to Ekinex S.p.A. within 60 days after delivery, the

After the expiration of the above mentioned terms, Ekinex S.p.A. shall consider the latter as forfeited from the warranty and therefore invoice the products sent to replace the defective ones and consequently

8.8. Ekinex S.p.A., a) supply products of the same type (or equivalent) and quantity of those found to be defective free of charge at the registered office of the purchaser (DAP Incoterms 2010), subject to the return of the replaced products by the customer in the terms and conditions stated in paragraph 7. b) repair the defective products at the customer's premises, in accordance with the terms and conditions stated in paragraph 7.7; b) repair the defective products if Ekinex S.p.A. does not find the necessity or urgency for an immediate replacement of the same; c) issue a credit note in favour of the Purchaser for

Unless otherwise agreed between the Parties, it is understood that all the expenses related to the interventions carried out by the technical assistance of Ekinex S.p.A. shall be borne by the same.

03 17 itroduction Wall-mount devices

General terms of sale

8.9 In the event that the defects of the products are not attributable to Ekinex S.p.A., the costs of repair and replacement of the products will be charged to the customer.

The warranty referred to in this article is in lieu of the legal warranties for defects and conformity and excludes any other possible liability of Ekinex S.p.A. arising from the products supplied. In particular, the Purchaser may not make any other claims for damages and Ekinex S.p.A. shall not be held responsible for indirect or consequential damages.

9. INDUSTRIAL PROPERTY

- 9.1. Ekinex S.p.A. remains the exclusive owner of the patents, drawings, projects and everything used for the manufacture of the Products, which the Purchaser therefore undertakes not to hand over to third parties, reproduce or use. If the manufacture of the Products is carried out by Ekinex S.p.A. upon the specific request and technical documentation of the Buyer, Ekinex S.p.A. shall not assume any responsibility for the infringement of industrial property rights of third parties, which shall instead be the exclusive responsibility of the Buyer, who undertakes to guarantee and keep Ekinex S.p.A. indemnified and unharmed against any claim made against it.
- 9.2. The Purchaser undertakes to use the trademarks of Ekinex S.p.A. only for the purpose of identifying, advertising and selling the Products, and shall refrain from depositing them or having them deposited without the prior written consent of Ekinex S.p.A..

10. TERMINATION AND WITHDRAWAL

- 10.1 The buyer, in accordance with article 1454 of the Italian civil code, must give Ekinex S.p.A. a written notice to comply with the contract within a period of time that is not less than 30 days, before acting to terminate the contract due to non-fulfilment. If Ekinex S.p.A. has started to perform within this period, the buyer shall not be able to terminate the contract. (A termination period for Ekinex may also be included, but the termination for non-payment may be decided on the basis of the obligations imposed on the customer in addition to the payment).
- 10.2 Both parties may withdraw from the contract, however in addition to the provisions of Italian law Ekinex S.p.A. may also withdraw from the contract in the event of a force majeure event as specified in Article 7 of the general terms and conditions of sale prepared by Ekinex S.p.A.
- Both parties must therefore communicate their intention to withdraw from the contract by registered letter or certified email and the withdrawal will take effect from the date of receipt of the communication.

10. COMPENSATION FOR DAMAGES

10.1. The liability of Ekinex S.p.A., whether arising from the execution or non-execution of the contract, from the warranty, from an illegal act or from an objective liability, shall not in any case exceed the value of the product to which this liability relates. Under no circumstances shall Ekinex S.p.A. be liable for loss of profit or loss of use or downtime of the product or any associated machinery, for claims by the Buyer and/or third parties relating to the aforementioned damages or for any other indirect or consequential damages.

11. CONFIDENTIALITY

11.1. The Purchaser agrees to (i) treat the information/data/documents/know how/documents received and/or learnt from Ekinex S.p.A. as confidential, (ii) limit the use of such confidential information/documents and the access to them for purposes related to the execution of the contract. Confidential information/documents may not be reproduced without the prior written consent of Ekinex S.p.A., and all copies of such information/documents shall be immediately returned upon request by Ekinex S.p.A.

The above provisions do not apply to information that: (i) is public or becomes public other than by disclosure by the Buyer, its employees or collaborators, or (ii) was in the possession of the Buyer before it was received by Ekinex S.p.A. or (iii) was disclosed by sources that are not subject to the restrictions to which the Buyer is subject regarding its use, or (iv) can be disclosed to third parties based on a written authorization of Ekinex S.p.A.

12. APPLICABLE LAW AND PLACE OF JURISDICTION

12.1. These General Conditions and the related supply contracts shall be governed by Italian law.

The Court of Novara shall have exclusive jurisdiction over any dispute relating to or in any case connected to the contracts to which these General Conditions apply.

13. COVID-19 CLAUSE

- 13.1 By signing this deed, the Purchaser declares that he is aware that the epidemiological emergency in progress due to the spread of the Coronavirus (Covid-19) and the regulations adopted to combat the aforementioned pandemic could have an effect on the fulfilment and execution of orders placed with Ekinex S.p.A.
- 13.2 Ekinex S.p.A. reserves the right to extend the terms, apply additional costs or amend these general terms and conditions of sale in the event that the condition referred to in the previous point occurs, after notifying the Purchaser.

14. CONTACTS

14.1 Indicate Ekinex's contact details + addresses for any communications.

15. VEXATIOUS CLAUSES

15.1 The customer expressly declares that he/she accepts and approves in accordance with articles 1341 and 1342 of the Civil Code the following clauses: 2. Applicable law and competent court; 5. Terms of payment; 6. Transport and delivery of products; 8. Guarantees; 10. Applicable law and competent court; 13 Covid-19 clause.

SUMMARY

	COMPANY			
	Building control			
	The KNX standard			
Advantages				
	Ekinex® devices			

WALL-MOUNT DEVICES

PROXIMA

Proxima Push-buttons

SIGNUM

Signum Deep				
Signum Surface				
Signum Push-buttons				

20VENTI SERIES

20venti Deep
20venti Surface
Push-buttons
4/8-fold push-buttons with backlit text/symbols and proximity
4/8-fold push-buttons with backlit text/symbols and proximity sensor for
5/10-fold push-buttons with backlit text/symbols and proximity sense
5/10-fold push-buttons with backlit text/symbols and proximity sensor for

FF SERIES
FF Form
FF Form
FF 'NF
FF Deep
FF Surface
Pushbuttons
4-channel basic push-buttons
4-channel push-buttons with thermostat
6-channel push-buttons
OMNIA universal push-buttons (NO VOLTAGE)
Room thermostats
Easy room thermostat
Room thermostat
Room thermostat with relative humidity sensor
Touch&See
Touch&See display
Touch&See display with 2-channel push-buttons

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

General index

SERIES 71	95
71 Form	98
71 Flank	100
71 'NF	102
71 Deep	104
71 Surface	106
Push-buttons	109
4-fold basic pushbutton	110
4-fold basic pushbutton and room thermostat for rectangular wall-box	11
4-fold pushbutton and room thermostat	112
4-fold pushbutton and room thermostat for rectangular wall-box	113
Room thermostats and multisensors	117
Room thermostat	118
Room thermostat for rectangular box	119
T, RH and CO2 eq. multisensor with controller	120
T, RH and CO2 eq. multisensor with controller for rectangular box	121
Air quality multisensor with controller	122
Air quality multisensor with controller for rectangular box	123
TOUCH&CONTROL	125
Touch&Control 4'	131
HOTEL SOLUTIONS	135
Card reader	142
Card holder	143
Card programmer	144
Tabletop card programmer kit	145
Accédo software	146
Smart card	14
Tosibox® Lock router	148
USB Tosibox® Key	149
SENSORS	151
KNX Secure multifunction motion sensor	155
KNX Secure multifunction presence sensor	156
Surface mounting bracket for presence sensors	15
POWER SOCKETS / KEYSTONE SYSTEM	159
Proxima series power socket, Italian version	168
Proxima series power socket, Schuko version	169
Proxima series power socket, French version	169
Proxima series power socket, Israeli version	17(
Proxima series power socket, UK version	17
Proxima series power socket, multistandard version	17
Proxima series wiring devices modules	17
Power socket, Italian version (standard and USB A-C)	182
Schuko socket (standard and USB A-C)	183

	9
	10
	12
	15
	17
	19
	27
	31
	34
	36
	39
	45
	48
	50
	55
ty sensor	56
r rectangular box	57
sor	58
r rectangular box	59
	_

61
64
66
68
70
72
75
76
77
78
79
80
84
85
86
88
 92
93

General index

	French socket (standard and USB A-C)	184
	UK socket (standard and USB A-C)	185
_	Waterproof cover IP65	186
_	Keystone system	192
	Proxima series Keystone system	202
_		
	ACCESSORIES	196
	Proxima series push-buttons keys	208
_	20venti series push-buttons keys	209
_	FF series 4-channel push-buttons keys	210
	6-channel push-buttons keys and Touch&See	211
	2-key kit for room thermostats	212
	4-channel push-buttons keys, 71 series	213
_	Complete front cover for multisensor	214
	THERMOFORMED PROTECTIONS	
	Thermoformed protection for Ekinex Push-buttons	215
-	FRAMES	
	Square frame Form version	222
	Rectangular frame Form version	222
	Square frame Flank version	223
	Rectangular frame Flank version	223
	Double frame Form version	224
-	Double frame Flank version	224
	PLATES	017
	Square plate Proxima series	217
	Double plate Proxima series	218
	Proxima series adapters	219 225
	Square plate Adapter for square plate	225
	Rectangular plate	225
-	Adapter for rectangular plate	226
	Double plate	220
	Adapter for double plate	227
	Square Deep plate	228
	Adapter for square Deep plate	228
	Rectangular Deep plate	229
	Adapter for rectangular Deep plate	229
	Double Deep plate	230
	Adapter for double Deep plate	230
	Triple Deep plate	231
	Adapter for triple Deep plate	231
	Square Surface plate	232
-	Adapter for square Surface plate	232
	Double Surface plate	233
	Adapter for double Surface plate	233

TEMPLATES AND SUPPORTS	
Templates for Surface plates	236
Templates for installing standard components on 'NF/Deep' applications	237
Square mounting support (devices not supplied by Ekinex)	238
Square mounting support	239
Rectangular mounting support	240
Template for side-by-side mounting of FF series with Form / Flank frames	241
SWISS MARKET	
Solutions for the Swiss market	238
Mounting brackets	245
Double plate with 68 or 71 mm centre-to-centre window	246
Adapter for square plate and standard wiring devices component (Feller)	247
Adapter for double plate	247

MATERIALS AND FINISHES Materials and finishes Ekinex chooses Fenix NTM®

248

250

CUSTOMISATION USING SYMBOLS

Symbols for customising Proxima plates	251
Symbols for customising buttons	252
Individual symbols	253
Lighting	253
Multimedia	253
Assistance and emergency	253
Doors and garages	254
Hotels	254
Energy	254
Climate	255
Scenarios	255
Indicators	255
Status LEDs (20venti)	255
Double symbols	256
Customisation using text	256

HOW TO ORDER A ROCKER

Rockers for pushbuttons Proxima series	257
Rockers for pushbuttons 20venti series	227
Rockers for pushbuttons FF series	228
Kit 2 rockers for room thermostats FF series	229
Rockers for pushbuttons 71 series	

HOW TO ORDER A FRONT COVER

NUW IU UNDER A FRUNI GUVER	
Multi-sensors	263
Keystone system	264
Hole cover	264
Power sockets	265
USB Power sockets	266

HOW TO ORDER A FRAME
Form version frames
Flank version frames
HOW TO ORDER A PLATE
Proxima series square plates
Proxima series double plates
Square plates
Rectangular plates
Double plates
Deep square plates
Deep rectangular plates

Deep double plates
Surface square plates
Surface double plates

DIN RAIL MODULES

Power supplies and system modules
640 mA bus power supplies
1280 mA bus power supplies
Digital time/astronomical switch
USB interface
Line/area coupler
Secure IP interface
Secure IP router
230Vac switching power supply

UNIVERSAL INTERFACES

Configurable logic module Universal interface 2 (4) IN, 2 (4) OUT Universal interface 4 configurable IN, 4 OUT Universal interface 4 IN, 2 OUT (5A relay) Support for mounting on rail Spring for attachment to wall devices

INPUTS

8-channel binary input

ACTUATORS

		Universal actuator 8 KNX outputs ÆVO series	
--	--	---	--

- Universal actuator 16 KNX outputs ÆVO series 4-channel binary output 8-channel binary output
- 8-channel binary output/4-channel roller shutter actuator
- 16-channel binary output/8-channel roller shutter actuator

287	357	373	421	439	451	455	461	471	475
DIN-Rail mount modules	Visualisation	Audio Multiroom	IP Door Phone	Lift TV	Tools	Sales kit	Technical section	General terms of sale	General index

General index

	INPUT/OUTPUT MODULES	314
267	Input/output module for office applications	315
267	Input/output module for hotel applications	316
	DIMMER	317
268	KNX dimmer 90-230V~50/60Hz	318
270	KNX dimmer 90-230V~50/60Hz 4 channels with common neutral	319
272	KNX dimmer 90-230V~50/60Hz 4 channels	320
273	4-channel RGBW LED dimmer	321
274	4-channel O V actuator	322
276	90-230V~50/60Hz dimmer	323
278		
279	DALI DIMMER	324
282	12/48 Vdc DALI dimmer	325
284	90-230V~50/60Hz DALI dimmer	326
	12/48V dc 4-channel DALI dimmer	327
287	DALI dimmer 90-230V-50/60Hz 4 channels	328
290		
291	THERMOREGULATION	329
292	VRF control interface with KNX communication	330
293	Fan coil actuator/controller with 3-speed control	331
294	Fan coil actuator/controller with O V control	332
295	Fan coil actuator/controller, complete version	333
296	8-channel actuator/controller for electrothermal drives	334
233	Controller for mixing group	335
298	NTC 10 k Ω temperature probes	336
200		
299	GATEWAY	337
300	Modbus RS485 KNX gateway	338
301	Modbus TCP/IP KNX gateway	339
302	BACnet KNX gateway	340
303	DMX KNX gateway	341
304	M-Bus KNX gateway	342
304	PROFINET KNX gateway	343
	Interface for KNX voice assistant	344
305	Konnect4 KNX	345
306	KNX/DALI gateway 1 or 2 channels	346
500		
307	METERING	348
308	KNX three-phase secondary electricity meter	349
309	KNX single-phase secondary electricity meter	350
310	Current transformer for secondary electricity meter	351
310	MID three-phase electricity meter 75A	352
311	Three-phase MID electricity meter 5A	353
312		

354
354
355

VISUALISATION	357
Ekinex Delégo: the system	361
Renewed graphic interface	362
Simplified configuration and maintenance	365
Absolute versatility	366
Main features Licences	367
Delégo server	368
Delégo panel	370

373

MULTIROOM AUDIO SYSTEM

30W streamer amplifier	386
50Wx2 streamer amplifier	387
80Wx2 streamer amplifier	388
50Wx8 streamer amplifier	389
IP66 wall-mounted loudspeaker (pair) black/white	391
2-way full range flush-mounted ceiling loudspeaker	392
Q Series loudspeaker	393
R Series loudspeaker	394
T Series loudspeaker	395
Omni/Iride loudspeaker	396
Sub	397
Modulor loudspeaker	398
KNX-Sentio gateway	399

INVISIBLE PLAYER	401
Acoustic energy transmitters	410
POWER 1 amplifier	414
Accessories	415

IP VIDEO DOOR PHONE	421
5' IP video door phone	435
Dico Security Relay	436

LIFT TV	439
Under Bed Lift TV	448
Up & Down Lift TV	449

451
452
453

SALES KIT	455
Pocket Box XL	456
Color Ring	456
Glam Box	457
Color Box Pro	457
Style Box	458
Style Case	458
Lettering	459
Crowner	459
Tech Case	459

DESIGN, CONFIGURATION AND COMMISSIONING 461

KNX technology	463
Regulatory references	464
Energy efficiency in buildings	465

GENERAL TERMS AND CONDITIONS OF SALE 471

CONTACTS	480
----------	-----

Ekinex® product catalogue - May 2025

The technical information included in this catalogue is to be deemed purely indicative. The company reserves the right to modify any piece of information with no advance notice.

For installation, connection and commissioning of Ekinex® devices, please refer to the related technical documentation.

For the availability of Ekinex® products on your market, please contact the Ekinex® sales department (sales@ekinex.com).

© Ekinex S.p.A. The reproduction of any part of this catalog requires prior written consent of Ekinex S.p.A

Credits

Editing

Photos

Print

Art direction Marketing & Communication Ekinex® Graphic Design Marketing & Communication Ekinex® R&D Ekinex® Product development R&D Ekinex® Tipolitografia Testori Snc Giorgio Possenti Vito Corvasce Alessandro Erbetta Nicola Morittu

CATEKINEXTEC24E

Ekinex is member of:



Architecture intérieure: agence Superstane, Lille (FR). Photo © Stéphane Waroczyk, 2019

Contacts

Ekinex S.p.A. Via Novara, 37 I-28010 Vaprio d'Agogna NO - ITALY T +39 0321 1828980 info@ekinex.com www.ekinex.com





www.ekinex.com