

FCY

Fan coil unit for ducted installations

- Plug and play installation only in horizontal
- Reduced dimensions
- Inspectable ventilation group



DESCRIPTION

Monobloc duct type fan coils for heating and/or cooling small and medium-sized environments for civil and commercial use.

They were designed and built for flush horizontal installation in any type of 2/4 pipe system and in combination with any heat generator, also at low temperatures.

Thanks to the availability of various versions and configurations, with a standard or oversized coil, it is easy to select the optimal solution for any requirement.

FEATURES

Ventilation group

Centrifugal fans in anti-static plastic material with aerofoil profile designed to achieve high airflows and pressures whilst at the same time producing low noise.

Their characteristics permit energy savings compared to conventional fans.

They are statically and dynamically balanced and directly coupled to the motor shaft.

The electric motor is single-phase multi-speed (3 selectable), mounted on anti-vibration supports and with a permanently inserted capacitor. The plastic augers are extractable for easy and efficient cleaning.

Heat exchanger coil

With copper pipes and aluminium fins, the standard or oversized main coil and the possible secondary coil have female gas water connections on the left side and the manifolds have air vents.

- *Reversibility of the water connections during installation only for units with a main standard or oversized coil or standard with BV accessory. Not reversible in all other configurations.*

Air filter

Where present, the **Coarse 25% Class** air filter, which is easy to remove and clean.

Condensate drip

In addition to the internal tray, all units are equipped with a **configurable external condensate collection tray** during installation.

The kit comprises a single element, which is made up of two pieces: the **tray** with a double drain to be installed on the right or left, and the **drip moulding**, which must be installed if mounting the valve kit and may not be used for installations without the valves with limited technical spaces.

Control

The unit's electrical box is reversible, with the option of mounting it also on the same side of the water connections.

The standard equipment includes a single 10-pin control board as an interface for the electrical connections, the preparation for the VMF series thermostat fastener and the included supply of a DIN guide for the installation of a third-party control.

GUIDE TO SELECTING THE POSSIBLE CONFIGURATIONS

Field	Description
1,2,3	FCY
4	Size 2, 3, 4, 5, 6, 7
5	Main coil (1)
0	Standard
5	Oversized
6	Secondary coil
0	Without coil
1	Standard (2)
7	Version
C	Compact
U	Universal (3)
8	Connections
D	Water connections and electrical panel on the right
G	Water connections and electrical panel on the left
L	Hydraulic connections on the left and electric connections on the opposite side
R	Hydraulic connections on the right and electric connections on the opposite side
9	Options (4)
H	Electric heater (500W)
P	With the photocatalytic device
X	No present
10	Filter
F	With air filter
X	No present

(1) Reversibility of the water connections during installation only for units with a main standard or oversized coil. They are not reversible for units with a secondary coil.

(2) Only for the standard main coil

(3) Only for sizes from 2 to 5

(4) Options "P and H" are available only in units for 2-pipe systems.

SIZE AVAILABLE FOR VERSION

C version

Size	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
Versions produced (by size)																		
Versions available (by size)

Version U

Size	200	201	250	300	301	350	400	401	450	500	501	550
Versions produced (by size)												
Versions available (by size)

INSTALLATION VERSIONS AND EXAMPLES

C: Compact version.

Compact structure with opposed intake and delivery lines, for an "H"-shaped configuration.

The unit is provided without openings and without flanges, which can be purchased separately as an accessory.

The delivery and intake part of the structure is designed to house flanges of Ø 200 mm (or Ø 160 mm) and one of the intake flanges can be replaced by a Ø 125 or 100 mm flange for the intake of outside air.

On the side, it can house Ø 125 or 100 mm flanges for the intake of outside air for delivery.


U: Universal version.

Structure for the "U" configuration with intake and delivery on the same side, opposite of the side with the water connections and the electrical box.


The unit is supplied with Ø 200 mm delivery and intake flanges.

The delivery and intake part of the structure is designed to house flanges of Ø 200 mm (or Ø 160 mm) and one of the intake or delivery flanges can be replaced by a Ø 125 or 100 mm flange for the intake of outside air.

This version is called universal because it guarantees the possible installations permitted by the C version and adds additional possibilities.

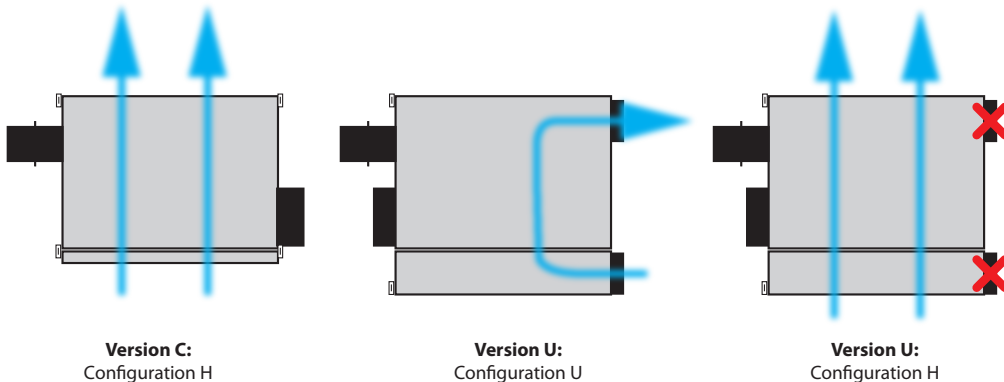

POSSIBLE ALTERNATIVE CONFIGURATIONS OF THE U VERSION

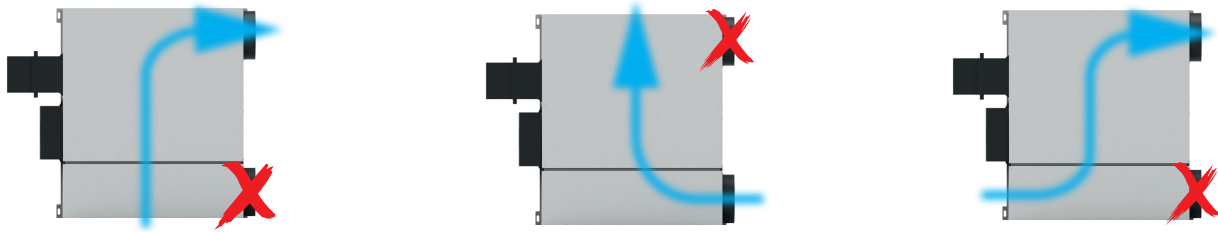


The performance data for the configurations shown here are equal to those for the U version in the U configuration.

POSSIBLE POSITIONS FOR THE INSTALLATION OF THE BRY ACCESSORIES

In every unit it is possible to use a maximum of one flange accessory for the intake of outside air (BRY210 or BRY212). The number and position of the preparations for the installation of the BRY accessories varies based on the unit size and version.

The standard **U version unit is supplied with 2 installed flanges (diameter 200 mm)** in the U configuration.

The standard **C version unit is supplied without flanges**, which can be purchased separately as an accessory.

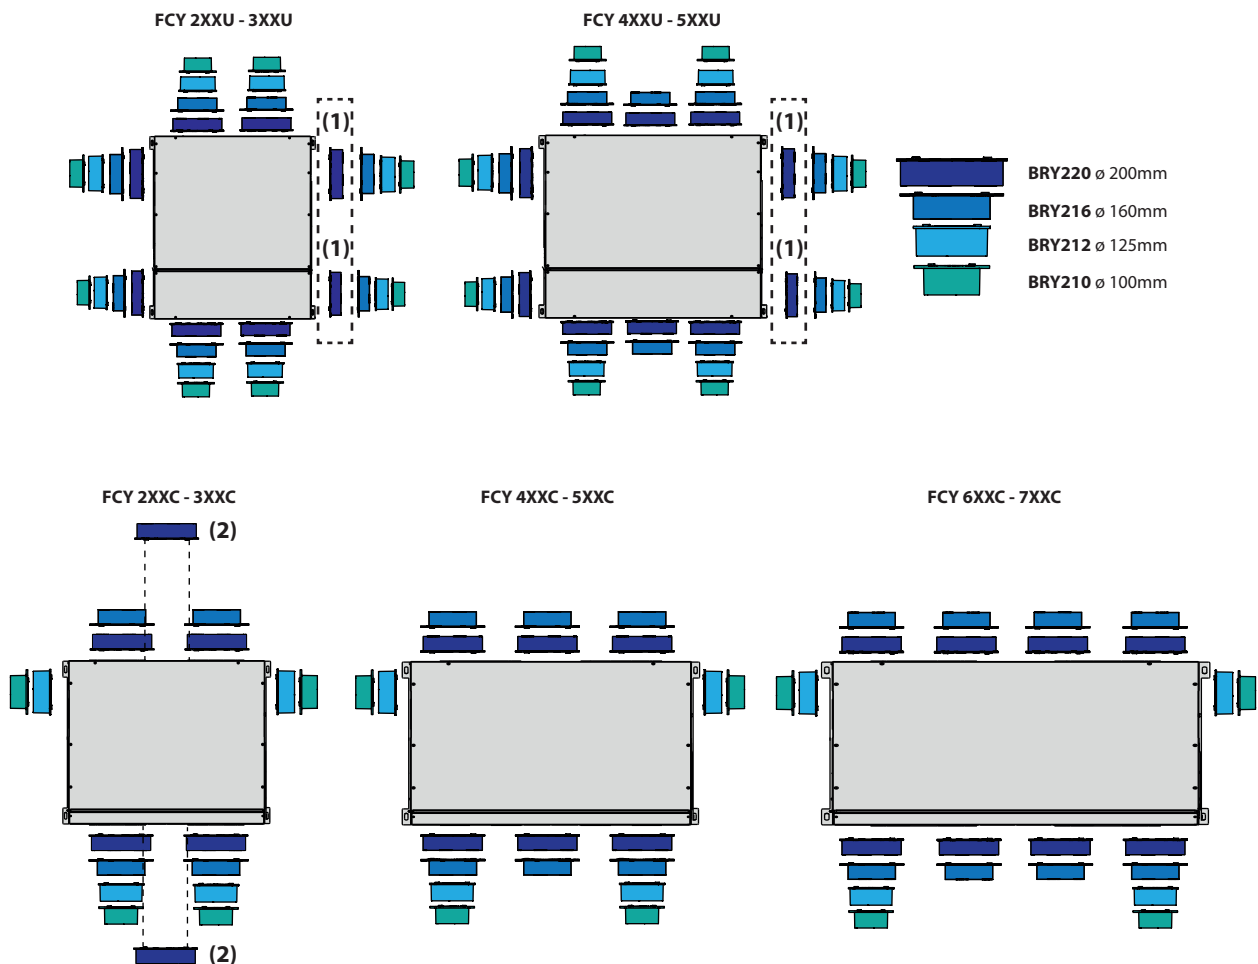

- 1 Accessories **BRY220** supplied installed with the standard unit in the U version
- 2 There is a central preparation for the installation of an accessory BRY220 as an alternative to using the two more external preparations.

For the C version: it is necessary to use a number of recirculation air preparations **at least equal to the maximum number possible for the size selected less 1**.

Example: for FCY6xxC it is necessary to open at least 3 flange preparations for intake recirculation air and 3 flange preparations for delivery recirculation air (= maximum number - 1).

ACCESSORIES

Control panels

AER503: Flush-mounting thermostat with backlit display and capacitive keypad, for controlling fan coils (either brushless or with asynchronous motors). In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, with air purifying devices (Cold Plasma and germicidal lamp), with a radiant plate or FCZ-D twin delivery (Dualjet). In 4-pipe systems, only standard fan coils. In addition, it can control systems with radiant panels or mixed (fan coil and radiant floor) systems.

SA5: air probe kit (L = 15 m) with probe-locking cable grommet.

SIT3: Thermostat Interface Card allowing the creation of a network of fan coils (max. 10) commanded by a central control panel (selector or thermostat). Commands the 3 fan speeds and must be installed on each fan coil within the network; receives the commands from the selector or the SIT5 card.

SIT5: Thermostat Interface Card allowing the creation of a network of fan coils (max. 10) commanded by a central control panel (selector or thermostat). Commands the 3 fan speeds and up to 2 valves (four pipe systems); sends the thermostat's commands to the fan coil network.

SW3: Water probe (L = 2.5 m) for controlling the minimum and maximum and to allow automatic seasonal switching for electronic thermostats fitted with water side changeover.

SW5: water probe kit (L = 15m) with probe-holder connection point, fixing clip and probe-holder from heat exchanger.

TX: Wall-mounting thermostat for controlling either brushless fan coils or those with asynchronous motors. In 2-pipe systems, the thermostat can control standard fan coils or those equipped with an electric heater, with air purifying devices, radiant plate or FCZ-D twin delivery (Dualjet). In 4-pipe systems, only standard fan coils.

VMF system

SIT3Y: Interface card that permits connecting the VMF-E19 thermostats to a fan coil with a high power motor.

VMF-E0X: Thermostat to be secured to the side of the fan coil, fitted as standard with an air probe and a water probe.

VMF-E19: Thermostat to be secured to the side of the fan coil, fitted as standard with an air probe and a water probe.

VMF-E4DX: Wall-mounted user interface. Grey front panel PANTONE 425C (METAL).

VMF-E4X: Wall-mounted user interface. Light grey front panel PANTONE COOL GRAY 1C.

VMF-SW: Water temperature probe.

VMF-SW1: Extra water probe to be used for 4-pipe systems.

Valves for main coil

VCY41 - 42 - for main coil: 3-way motorised valve kit for the main coil. The kit consists of a valve, an actuator and the relative pipe fittings. It can be installed on fan coils with both right and left hydraulic connections.

VCYD for main and secondary coil: The 2-way motorised valve kit for the primary or secondary coil or an additional optional heat only coil. The kit consists of a valve, the actuator and the corresponding hydraulic fittings. It can be installed both on fan coils with right-hand and left-hand connections.

VDP15HF: Combined adjustment and balancing valve, for 2 and 4 pipe systems to be installed outside the unit. It is comprised of a valve body without nipples with Ø 3/4" M water connections, a 230 V powered actuator with On-Off function and a 5 m power supply cable. The valve is supplied without connections or hydraulic components.

VDP15HF24: Combined adjustment and balancing valve, for 2 and 4 pipe systems to be installed outside the unit. It is comprised of a valve body without nipples with Ø 3/4" M water connections, a 24 V powered actuator with On-Off function and a 5 m power supply cable. The valve is supplied without connections or hydraulic components.

VDP15HFM: Combined adjustment and balancing valve, for 2 and 4 pipe systems to be installed outside the unit. It is comprised of a valve body without nipples with Ø 3/4" M water connections, a 24 V powered actuator with modulating function and a 5 m power supply cable. The valve is supplied without connections or hydraulic components.

Valves for secondary coil

VCY44 - for the secondary coil: 3-way motorized valve kit for hot only coil. The kit consists of a valve, actuator and relative hydraulic fittings, it is suitable for installation on both fan coils with hydraulic connections on the right and left.

VCYD for main and secondary coil: The 2-way motorised valve kit for the primary or secondary coil or an additional optional heat only coil. The kit consists of a valve, the actuator and the corresponding hydraulic fittings. It can be installed both on fan coils with right-hand and left-hand connections.

Additional hot water coil.

BV: Single row hot water heat exchanger.

Valve support kit

KITVPI: Main coil VDP valve support kit. The kit consists of a bracket for supporting the valve and the corresponding hydraulic fittings.

KITVPI12H: VDP valve support kit for the secondary coil. The kit consists of a bracket for supporting the valve and the corresponding hydraulic fittings.

Installation accessories

BDP: 200 mm plug.

BRY: Flange with hydraulic "spigot" connection.

GMYC: Plate flange that makes it possible to install the delivery grille accessory GM-Z in the delivery section. The accessory is comprised of a plate flange with gasket and 4 screws to fasten it to the unit.

GM_Z: Delivery grille with a painted sheet frame (RAL 9003) and laterally adjustable (right-left) thermoplastic fins, permitting precise air diffusion. The grille is supplied with an outer casting.

AFY: the kit is comprised of a Coarse 25% class filter and four fastening brackets to insert in the grille GM100Z. To be used together with fan coils supplied without a filter installed in unit "X".

GMJU: Plate flange that makes it possible to install the accessory GM100Z either in the intake section or in the delivery section. The accessory is comprised of a plate flange with gasket and 4 screws to fasten it to the unit.

DSC: Condensate drainage device.

BC: Condensate drip.

DAYKIT: Air deflector for U versions. To be installed in the delivery plenum, on the side opposite the air outlet, to facilitate the flow towards the delivery opening.

AMPY: Additional brackets for ceiling mount. Only for "U" version.

Accessories in multiple packages

DFA: Size of filter halved on the short side. The kit is comprised of two filters with a length equal to the standard filter and with half the height. This facilitates filter cleaning and/or replacement operations if there is a reduced space for vertical extraction. 20 piece package.

PPB: Protection for flanges to be used during installation to prevent dust from entering the unit before connecting the ducts. To be removed when making the connection. 100 piece package.

CHR12: Hydraulic connection kit for Ø 1/2" two-way valves, with soft coil side O-ring seal and with a flat plate and system side gasket, which can also be used for installing flat seal two-way valves. 50 piece package.

CHR34: Hydraulic connection kit for Ø 1/2" two-way valves, with soft coil side O-ring seal and with a flat plate and system side gasket, which can also be used for installing flat seal two-way valves. 30 piece package.

ACCESSORIES COMPATIBILITY

Control panels and dedicated accessories

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
AER503 (1)	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SA5 (2)	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SIT3 (3)	C,U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SIT5 (4)	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SW3 (2)	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SW5 (2)	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
TX (5)	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

(1) Wall installation

(2) Probe for AER503-TX thermostats, if fitted.

(3) Cards for AER503-TX thermostats, if present, to be installed if the unit absorption exceeds 0.7 Amperes.

(4) Datasheets for AER503-TX thermostats, if fitted.

(5) Wall-mount installation.

VMF system

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
SIT3Y	C													*	*	*	*	*	*
VMF-E0X (1)	C,U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-E19 (2)	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-E4DX	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-E4X	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-SW	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
VMF-SW1	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	C	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*

(1) Also the accessory VMF-SIT3 is mandatory if the unit exceeds 0.7 Amperes.

(2) Also the accessory SIT3Y is mandatory if the unit exceeds 0.7 Amperes.

Additional heat only coil for only option "X" (without an electric heater and without a photocatalytic device)

Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
C	BV122	-	-	BV132	-	-	BV142	-	-	BV142	-	-	BVZ800	-	-	BVZ800	-	-
U	BV122	-	-	BV132	-	-	BV142	-	-	BV142	-	-	-	-	-	-	-	-

Combined adjustment and balancing valve

	200	201	250	300	301	350	400	401	450
Main coil	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF
	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24
	VDP15HFM	VDP15HFM	VDP15HFM	VDP15HFM	VDP15HFM	VDP15HFM	VDP15HFM	VDP15HFM	VDP15HFM
Secondary coil	-	VDP15HF VDP15HF24 VDP15HFM	-	-	VDP15HF VDP15HF24 VDP15HFM	-	-	VDP15HF VDP15HF24 VDP15HFM	-
	Additional coil "BV"	VDP15HF	-	-	VDP15HF	-	-	VDP15HF	-
		VDP15HF24	-	-	VDP15HF24	-	-	VDP15HF24	-
VDP15HFM		-	-	VDP15HFM	-	-	VDP15HFM	-	
Main coil	500	501	550	600	601	650	700	701	750
	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF	VDP15HF
	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24	VDP15HF24
Secondary coil	-	VDP15HF VDP15HF24 VDP15HFM	-	-	VDP15HF VDP15HF24 VDP15HFM	-	-	VDP15HF VDP15HF24 VDP15HFM	-
	Additional coil "BV"	VDP15HF	-	-	VDP15HF	-	-	VDP15HF	-
		VDP15HF24	-	-	VDP15HF24	-	-	VDP15HF24	-
VDP15HFM		-	-	VDP15HFM	-	-	VDP15HFM	-	

Valves combinations for main and secondary coil

3-way valve kit - main and secondary coil or accessory BV coil

	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
Main coil	VCY41	VCY41	VCY41	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42	VCY42
	VCY4124	VCY4124	VCY4124	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224	VCY4224
Secondary coil	-	VCY44	-	-	VCY44	-	-	VCY44	-	-	VCY44	-	-	VCY44	-	-	VCY44	-
		VCY4424			VCY4424			VCY4424			VCY4424			VCY4424			VCY4424	
Additional coil "BV"	VCY44	-	-	VCY44	-	-	VCY44	-	-	VCY44	-	-	VCY44	-	-	VCY44	-	-
	VCY4424			VCY4424			VCY4424			VCY4424			VCY4424			VCY4424		

2-way valve kit - main and secondary coil or accessory BV coil

	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
Main coil	VCYD1	VCYD1	VCYD1	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2	VCYD2
	VCYD124	VCYD124	VCYD124	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224	VCY224
Secondary coil	-	VCYD1	-	-	VCYD1	-	-	VCYD1	-	-	VCYD1	-	-	VCYD1	-	-	VCYD1	-
		VCYD124			VCYD124			VCYD124			VCYD124			VCYD124			VCYD124	
Additional coil "BV"	VCYD1	-	-	VCYD1	-	-	VCYD1	-	-	VCYD1	-	-	VCYD1	-	-	VCYD1	-	-
	VCYD124			VCYD124			VCYD124			VCYD124			VCYD124			VCYD124		

Valve support kit

Main coil VDP valve support kit.

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
KITVPI12 (1)	C,U	.	.	.															
KITVPI34 (2)	C			
	U				U

(1) Connections Ø 1/2"

(2) Connections Ø 3/4"

Secondary coil VDP valve support kit.

	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
Main coil	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Secondary coil	-	KITVPI12H	-	-	KITVPI12H	-	-	KITVPI12H	-	-	KITVPI12H	-	-	KITVPI12H	-	-	KITVPI12H	-
Additional coil "BV"	KITVPI12H	-	-	KITVPI12H	-	-	KITVPI12H	-	-	KITVPI12H	-	-	KITVPI12H	-	-	KITVPI12H	-	-

	700	701	750
Main coil	-	-	-
Secondary coil	-	KITVPI12H	-
Additional coil "BV"	KITVPI12H	-	-

Connections Ø 1/2"

Installation accessories

Plastic caps

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
BDP200	C
	U

Flange

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
BRY210 (1)	C
	U
BRY212 (2)	C
	U
BRY216 (3)	C
	U
BRY220 (4)	C
	U

(1) Ø 100 mm

(2) Ø 125 mm

(3) Ø 160 mm

(4) Ø 200 mm

Flanges for the installation of the delivery grilles GM_Z

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
GMV200C (1)	C	.	.	.															
GMV300C (1)	C				.	.	.												
GMV400C (1)	C												
GMV600C (1)	C												

(1) only for "C" version.

Flange for the installation of the grille GM100Z

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
GMJU (1)	U

(1) Only for "U" version with connections "G and D".

Coarse 25% class air filter kit

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
AFY100 (1)	U

(1) To be used with fan coils supplied without a filter installed in unit "X" and in association with GM100Z and GMJU.

Air deflector

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
DAYKIT	U

Brackets for ceiling mount.

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
AMPY (1)	U

(1) Only for "U" version.

Condensate discharge device kit

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
DSC6 (1)	C
	U	U

(1) Only for "L and R" connections.

Condensate drip

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
BC8 (1)	C
	U	U

(1) For horizontal installation.

Accessories in multiple packages

Hydraulic connection kit

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
CHR12 (1)	C,U
CHR34 (2)	C
	U	U

(1) Hydraulic connections Ø 1/2"
 (2) Hydraulic connections Ø 3/4"

Half-size filter kit

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
DFA2	C,U
DFA3	C,U
DFA5	C,U
DFA7	C

Protection for flange

Model	Ver	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750	
PPB	C
	U

PERFORMANCE DATA - FCY_C AND FCY_U (CONFIGURATION OF THE H NOZZLES) - 2 PIPES

2-pipe

		FCY200C			FCY250C			FCY300C			FCY350C			FCY400C			FCY450C		
		2	4	6	2	4	6	1	4	6	1	4	6	1	3	6	1	3	6
		L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 70 °C / 60 °C (1)																			
Heating capacity	kW	2,11	3,00	3,32	2,29	3,24	3,60	3,50	5,03	5,45	3,80	5,59	6,10	4,49	6,02	6,74	4,79	6,62	7,40
Water flow rate system side	l/h	182	258	285	197	179	310	301	433	469	327	481	524	386	517	580	412	569	637
Pressure drop system side	kPa	7	12	15	9	16	19	8	15	18	9	18	21	11	18	22	7	12	15
Heating performance 45 °C / 40 °C (2)																			
Heating capacity	kW	1,05	1,49	1,65	1,14	1,61	1,79	1,74	2,50	2,71	1,89	2,78	3,03	2,23	2,99	3,35	2,38	3,29	3,68
Water flow rate system side	l/h	160	224	248	196	277	308	299	430	466	325	478	521	383	514	576	409	566	633
Pressure drop system side	kPa	7	12	15	9	16	19	8	15	18	9	17	20	11	18	22	7	12	15
Cooling performance 7 °C / 12 °C (3)																			
Cooling capacity	kW	0,93	1,30	1,44	1,11	1,59	1,74	1,70	2,40	2,63	1,91	2,77	3,00	2,29	3,06	3,41	2,51	3,37	3,79
Sensible cooling capacity	kW	0,74	1,14	1,18	0,83	1,23	1,36	1,27	1,86	2,03	1,34	1,99	2,16	1,66	2,24	2,52	1,76	2,42	2,73
Water flow rate system side	l/h	160	224	248	191	273	299	292	413	452	328	476	516	394	526	586	432	580	652
Pressure drop system side	kPa	8	13	15	10	18	21	9	16	18	11	21	25	11	18	22	11	16	20
Fan																			
Type	type	Centrifugal																	
Fan motor	type	Asynchronous																	
Air flow rate	m ³ /h	148	226	254	148	226	254	263	404	446	263	404	446	346	487	559	346	487	559
High static pressure	Pa	21	50	63	21	50	63	21	50	61	21	50	61	25	50	66	25	50	66
Sound power level (inlet + radiated)	dB(A)	41,0	56,0	59,0	41,0	56,0	59,0	39,0	51,0	54,0	39,0	51,0	54,0	44,0	54,0	55,0	44,0	54,0	55,0
Sound power level (outlet)	dB(A)	37,0	52,0	55,0	37,0	52,0	55,0	35,0	47,0	49,0	35,0	47,0	49,0	40,0	50,0	52,0	40,0	50,0	52,0
Input power	W	28	41	74	28	41	74	38	55	78	38	55	78	53	63	102	53	63	102
Water coil																			
Water content	l	0,50			0,70			0,80			1,00			1,00			1,40		
Diametre hydraulic fittings																			
Main coil	∅	1/2"			1/2"			3/4"			3/4"			3/4"			3/4"		
Power supply																			
Power supply		230V~50Hz																	

		FCY500C			FCY550C			FCY600C			FCY650C			FCY700C			FCY750C		
		1	5	6	1	5	6	1	4	7	1	4	7	2	5	7	2	5	7
		L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H
Heating performance 70 °C / 60 °C (1)																			
Heating capacity	kW	5,27	7,22	7,59	5,81	8,25	8,67	6,86	8,55	10,00	7,63	9,72	11,51	8,77	10,10	10,52	10,02	11,65	12,09
Water flow rate system side	l/h	453	621	652	500	709	746	590	735	860	656	836	990	754	868	905	862	1002	1040
Pressure drop system side	kPa	12	21	23	10	19	21	13	20	26	15	23	31	19	25	27	12	15	16
Heating performance 45 °C / 40 °C (2)																			
Heating capacity	kW	2,62	3,59	3,77	2,89	4,10	4,31	3,41	4,25	4,97	3,79	4,83	5,72	4,36	5,02	5,23	4,98	5,79	6,01
Water flow rate system side	l/h	451	617	648	497	705	741	586	731	855	652	831	984	750	863	899	856	996	1034
Pressure drop system side	kPa	12	21	23	10	19	21	13	19	25	15	23	31	19	25	27	12	15	16
Cooling performance 7 °C / 12 °C (3)																			
Cooling capacity	kW	2,68	3,65	3,82	2,91	4,08	4,28	3,37	4,08	4,65	4,15	5,02	5,67	4,24	4,97	5,18	4,69	5,53	5,80
Sensible cooling capacity	kW	1,94	2,70	2,83	2,07	2,94	3,09	2,70	3,34	3,92	2,93	3,60	4,12	3,24	3,83	4,02	3,53	4,20	4,41
Water flow rate system side	l/h	461	628	657	500	702	736	580	702	800	714	863	975	729	855	891	807	951	997
Pressure drop system side	kPa	13	22	24	12	21	23	15	21	26	16	23	28	20	26	28	12	16	17
Fan																			
Type	type	Centrifugal																	
Fan motor	type	Asynchronous																	
Air flow rate	m ³ /h	400	592	627	400	592	627	567	770	920	567	770	920	785	978	1050	785	978	1050
High static pressure	Pa	22	50	56	22	50	56	27	50	71	27	50	71	32	50	58	32	50	58
Sound power level (inlet + radiated)	dB(A)	45,0	55,0	57,0	45,0	55,0	57,0	46,0	56,0	61,0	46,0	56,0	61,0	54,0	60,0	62,0	54,0	60,0	62,0
Sound power level (outlet)	dB(A)	41,0	51,0	53,0	41,0	51,0	53,0	44,0	54,0	60,0	44,0	54,0	60,0	52,0	59,0	61,0	52,0	59,0	61,0
Input power	W	49	80	96	49	80	96	66	89	118	66	89	118	92	117	138	92	117	138
Water coil																			
Water content	l	1,00			1,40			1,20			1,60			1,20			1,60		
Diametre hydraulic fittings																			
Main coil	∅	3/4"																	
Power supply																			
Power supply		230V~50Hz																	

(1) Room air temperature 20 °C d.b.; Water (in/out) 70 °C/60 °C

(2) Room air temperature 20 °C d.b.; Water (in/out) 45 °C/40 °C; EUROVENT

(3) Room air temperature 27 °C d.b./19 °C w.b.; Water (in/out) 7 °C/12 °C; EUROVENT

The U version with the H nozzle configuration has the same data as the C version. For information of the performance data related to the "U" versions in the "U" configuration refer to the selection software.

PERFORMANCE DATA FCY_C AND FCY_U (CONFIGURATION OF THE H NOZZLES) - 4 PIPES

4-pipe


	FCY201C			FCY301C			FCY401C			FCY501C			FCY601C			FCY701C					
	2	4	6	1	4	6	1	3	6	1	5	6	1	4	7	2	5	7			
	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H	L	M	H			
Heating performance 65 °C / 55 °C (1)																					
Heating capacity	kW			1,06	1,37	1,48	1,82	2,39	2,55	2,19	2,75	2,99	2,59	3,30	3,34	3,13	3,85	4,35	4,13	4,40	4,60
Water flow rate system side	l/h			93	120	130	159	210	223	192	240	262	226	290	301	274	336	381	361	385	403
Pressure drop system side	kPa			5	8	9	8	12	14	5	7	8	6	9	9	9	13	16	16	15	17
Cooling performance 7 °C / 12 °C (2)																					
Cooling capacity	kW			0,93	1,30	1,44	1,70	2,40	2,63	2,29	3,06	3,41	2,68	3,65	3,82	3,37	4,08	4,65	4,24	4,97	5,18
Sensible cooling capacity	kW			0,74	1,14	1,18	1,27	1,86	2,03	1,66	2,24	2,52	1,94	2,70	2,83	2,70	3,34	3,92	3,24	3,83	4,02
Water flow rate system side	l/h			160	224	248	292	413	452	394	526	586	461	628	657	580	702	800	729	855	891
Pressure drop system side	kPa			8	13	15	9	16	18	11	18	22	13	22	24	15	21	26	20	26	28
Fan																					
Type	type			Centrifugal																	
Fan motor	type			Asynchronous																	
Air flow rate	m ³ /h			148	226	254	263	404	446	346	487	559	400	592	627	567	770	920	785	978	1050
High static pressure	Pa			21	50	63	21	50	61	25	50	66	22	50	56	27	50	71	32	50	58
Sound power level (inlet + radiated)	dB(A)			41,0	56,0	59,0	39,0	51,0	54,0	44,0	54,0	55,0	45,0	55,0	57,0	46,0	56,0	61,0	54,0	60,0	62,0
Sound power level (outlet)	dB(A)			37,0	52,0	55,0	35,0	47,0	49,0	40,0	50,0	52,0	41,0	51,0	53,0	44,0	54,0	60,0	52,0	59,0	61,0
Input power	W			28	41	74	38	55	78	53	63	102	49	80	96	66	89	118	92	117	138
Diametre hydraulic fittings																					
Main coil	Ø			1/2"			3/4"			3/4"			3/4"			3/4"			3/4"		
Secondary coil	Ø			1/2"																	
Power supply																					
Power supply	230V~50Hz																				

(1) Room air temperature 20°C d.b.; Water (in/out) 65°C/55°C; EUROVENT

(2) Room air temperature 27°C d.b./19°C w.b.; Water (in/out) 7°C/12°C; EUROVENT

The U version with H configuration of the nozzles has the same data, for information of the performance data related to the "U" versions in the "U" configuration refer to the selection software.

DIMENSIONS

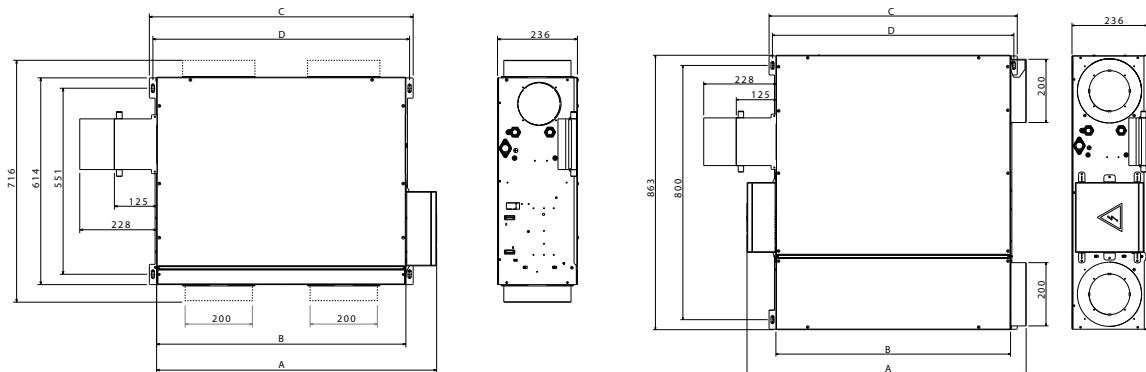

FCY - C

Size	200	201	250	300	301	350	400	401	450	500	501	550	600	601	650	700	701	750
Dimensions and weights																		
A	mm	598	598	598	829	829	829	1050	1050	1050	1050	1050	1171	1171	1171	1171	1171	1171
B	mm	507	507	507	735	735	735	960	960	960	960	960	1080	1080	1080	1080	1080	1080
C	mm	550	550	550	781	781	781	1003	1003	1003	1003	1003	1122	1122	1122	1122	1122	1122
D	mm	529	529	529	760	760	760	982	982	982	982	982	1100	1100	1100	1100	1100	1100
Empty weight	kg	19	20	21	23	24	26	31	32	33	31	32	33	41	43	46	41	43

FCY - U

Size	200	201	250	300	301	350	400	401	450	500	501	550
Dimensions and weights												
A	mm	647	647	647	878	878	878	1100	1100	1100	1100	1100
B	mm	508	508	508	739	739	739	960	960	960	960	960
C	mm	550	550	550	781	781	781	1003	1003	1003	1003	1003
D	mm	529	529	529	760	760	760	982	982	982	982	982
Empty weight	kg	22	23	24	26	27	29	35	36	37	35	37

Aermec si riserva la facoltà di apportare in qualsiasi momento tutte le modifiche ritenute necessarie per il miglioramento del prodotto con eventuale modifica dei relativi dati tecnici.

Aermec S.p.A.

Via Roma, 996 - 37040 Bevilacqua (VR) - Italia

Tel. 0442633111 - Telefax 044293577

www.aermec.com

Numero Verde
800-843085