


± Ø157 - 171mm

Image shown above 28.9a.2, 500mm extender

Mounting	Ceiling mounted
Glass Colours	Clear, various colours
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Extenders	Available in 150mm, 250mm, 500mm, 1200mm, 750mm (attached with 2 pendants). Up to 2500mm drop
Finish	Black powder coated
Materials	Blown glass, black powder coated stainless steel armature, electrical components, matte black canopy
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	Optional levelling pendant anchor kit included. Every single Bocci product is handmade. They are blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	CAN 134238 US D687,740 EU 001695834-001 to 004

Certifications



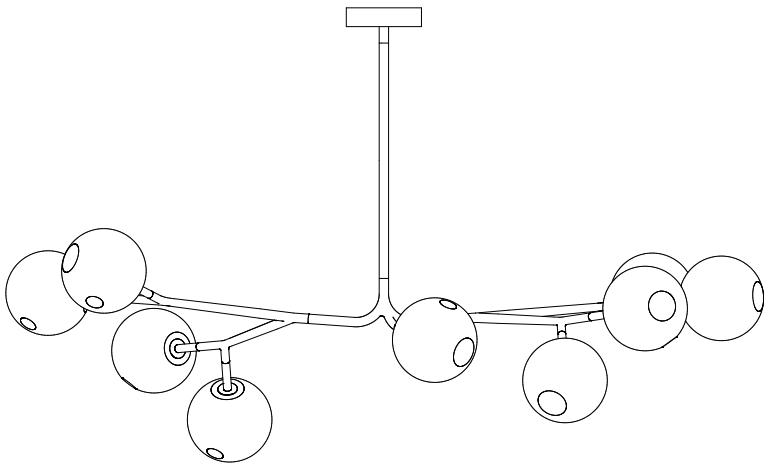


Weight (kg)	
28.5a.1	9.4
28.8a.1	14.4
28.8a.2	16.1
28.9a.1	16.5
28.9a.2	14.6
28.11a.1	21.7
28.11a.2	20.3
28.13a.1	23.7
28.17a.1	29.5
28.20a.1	35.1
28.23a.1	41.9
28.33a.1	59.1




Each product is unique, there may be a variance in the weight up to 10%.

28.5A.1

All dimensions are in millimeters (mm) unless otherwise specified.

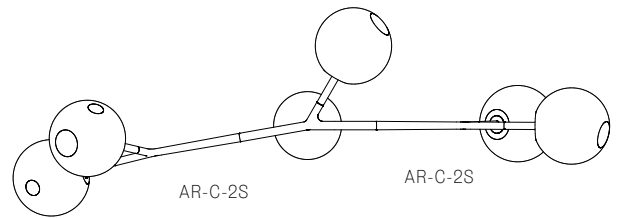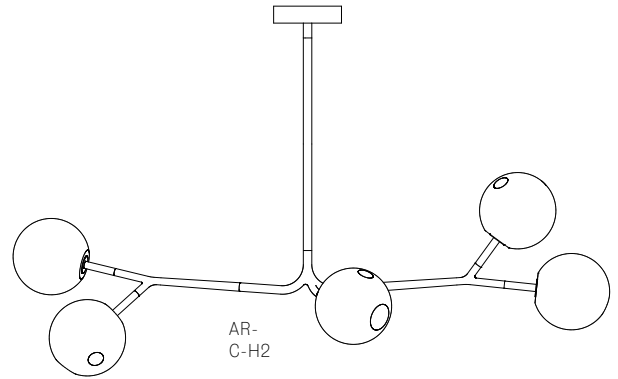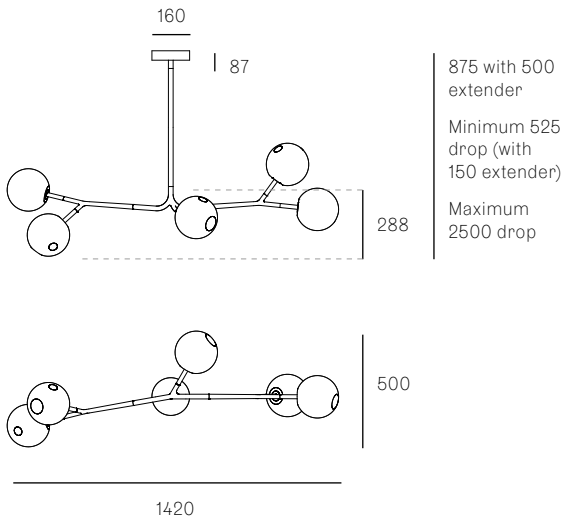


28.8A.1

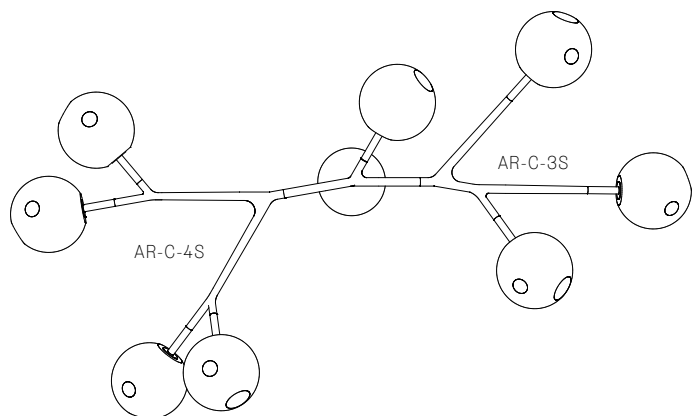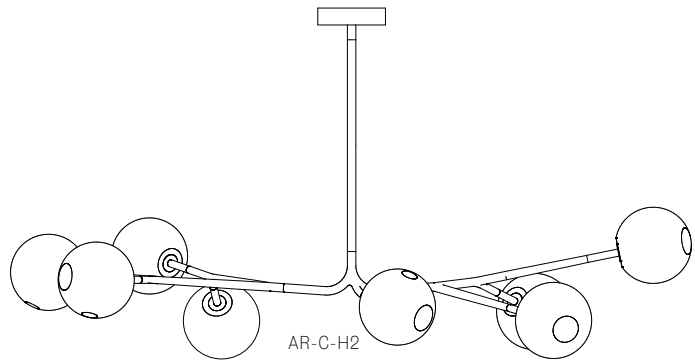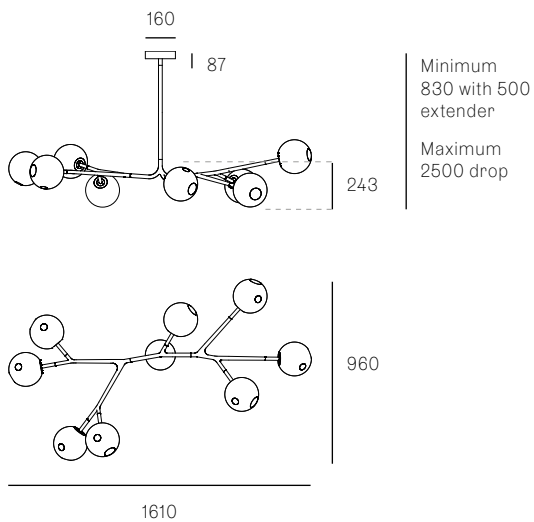


28.8A.2

All dimensions are in millimeters (mm) unless otherwise specified.


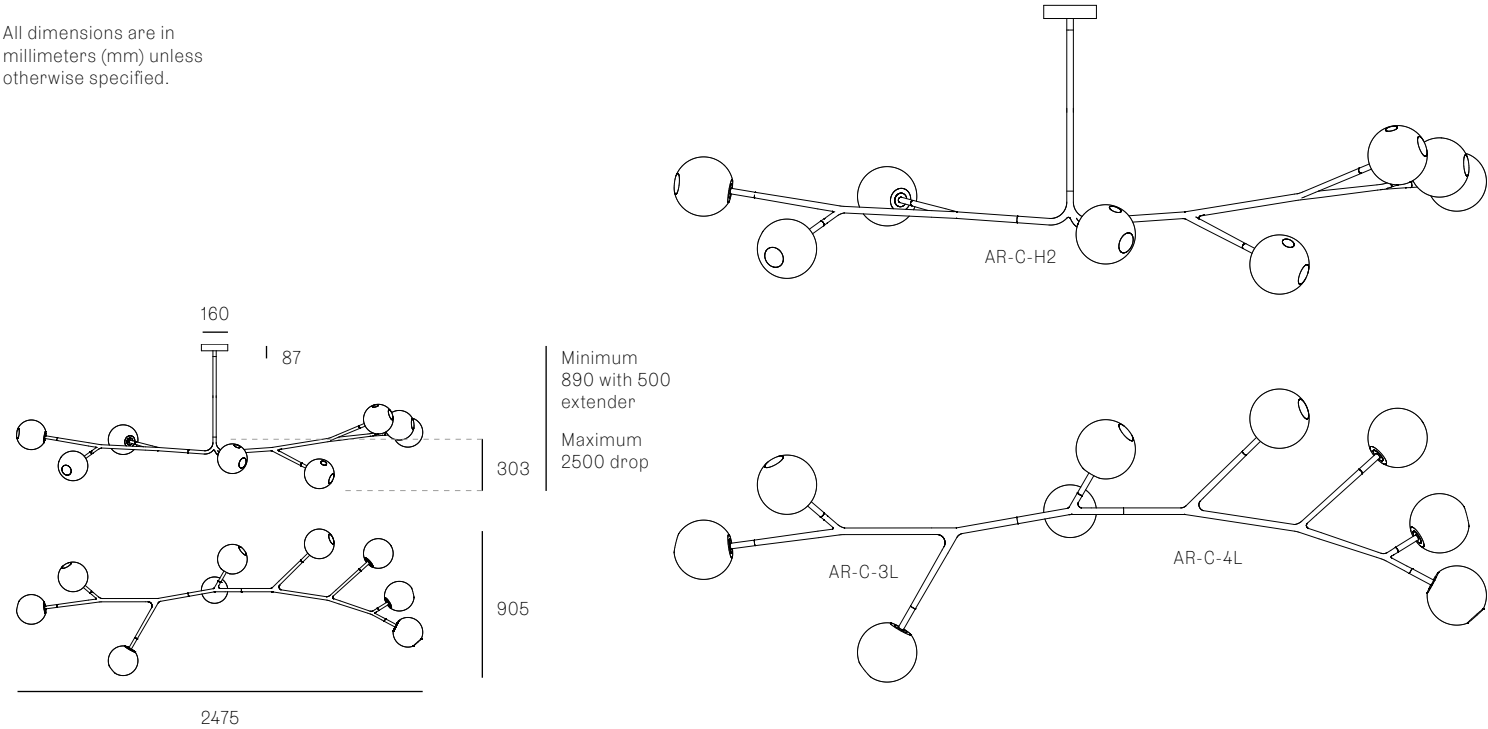


28.9A.1


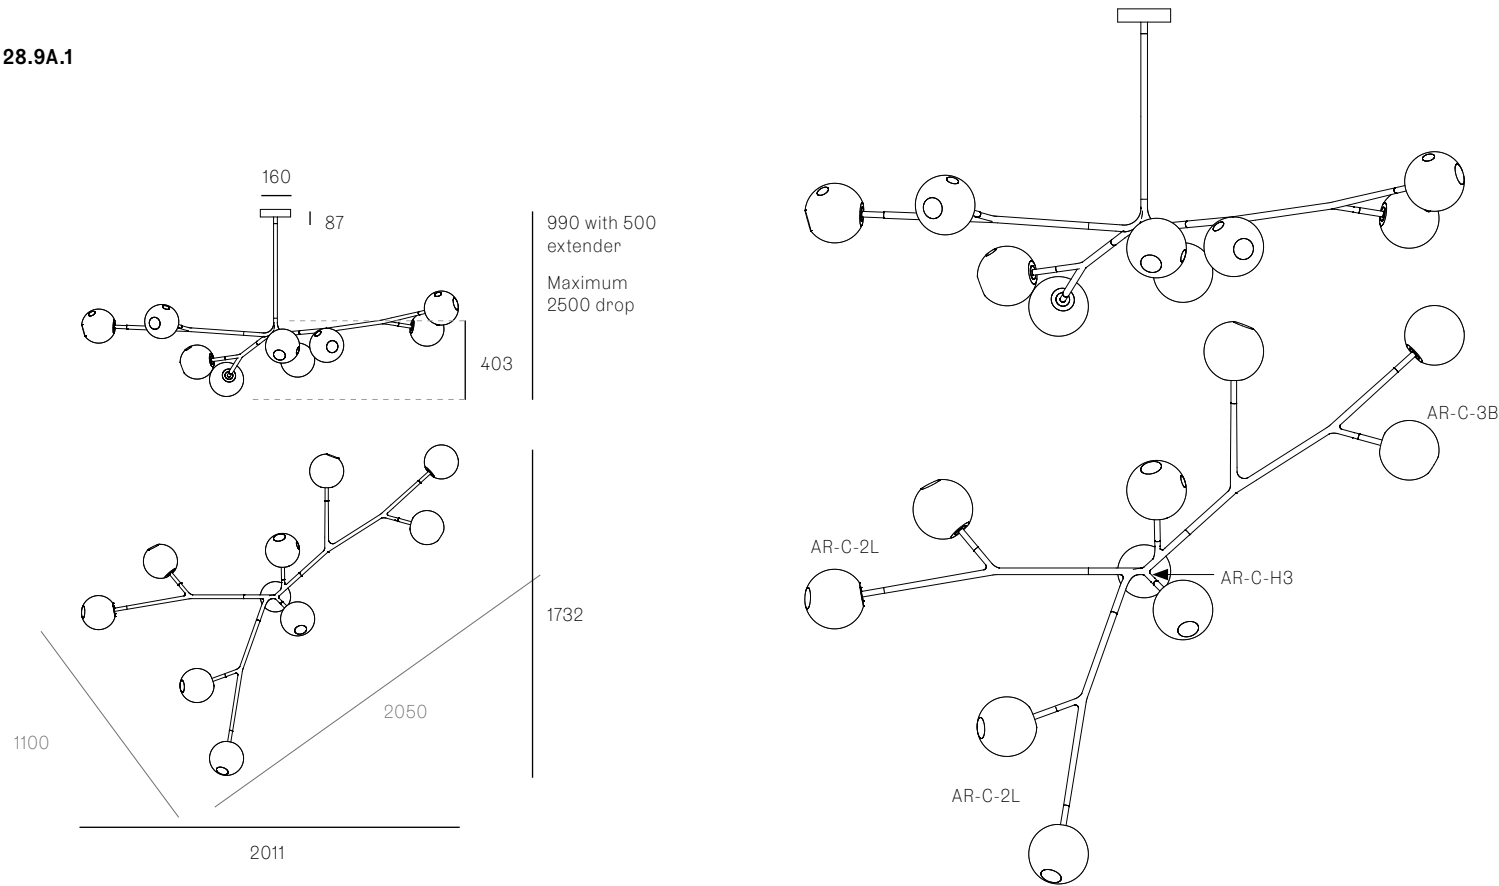


28.9A.2

All dimensions are in millimeters (mm) unless otherwise specified.


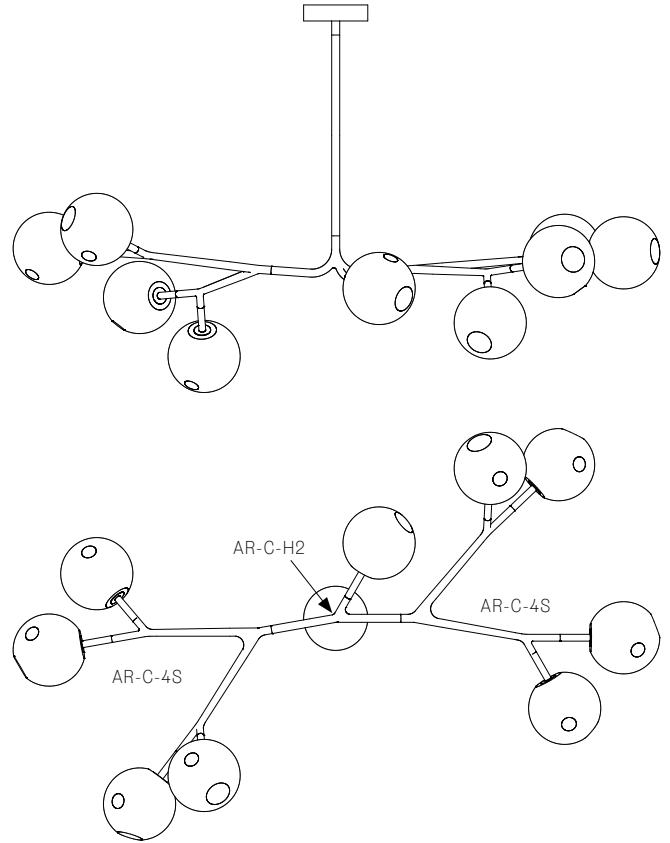
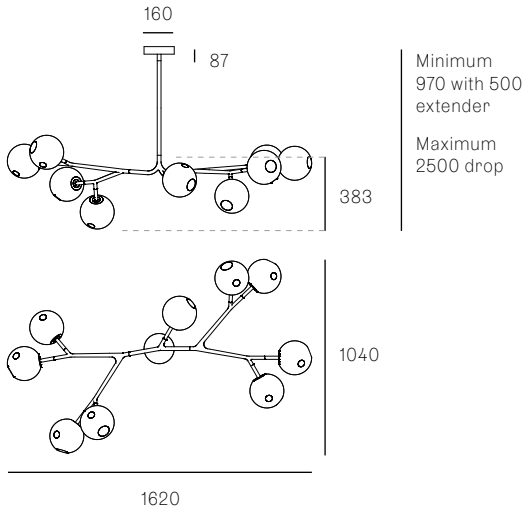


28.11A.1


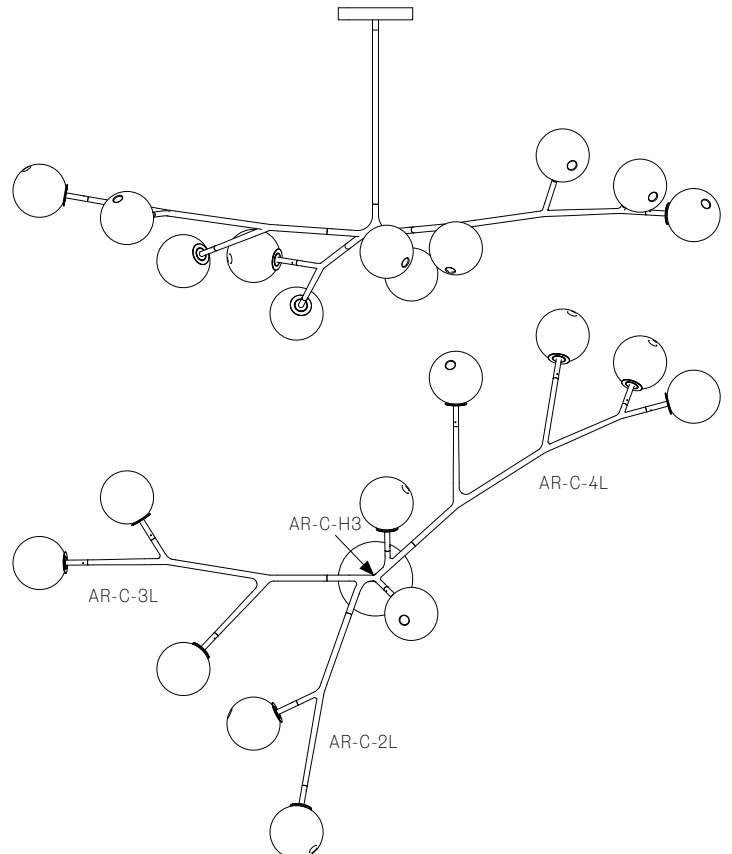
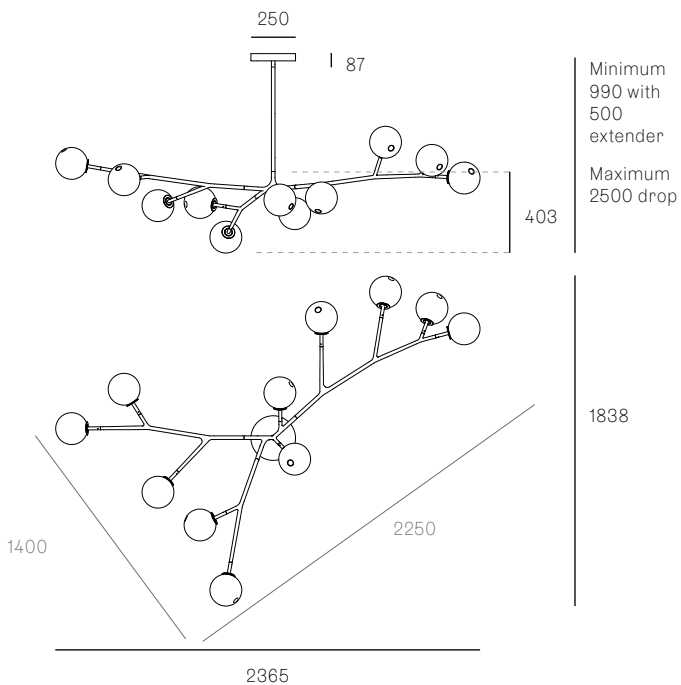


28.11A.2

All dimensions are in millimeters (mm) unless otherwise specified.


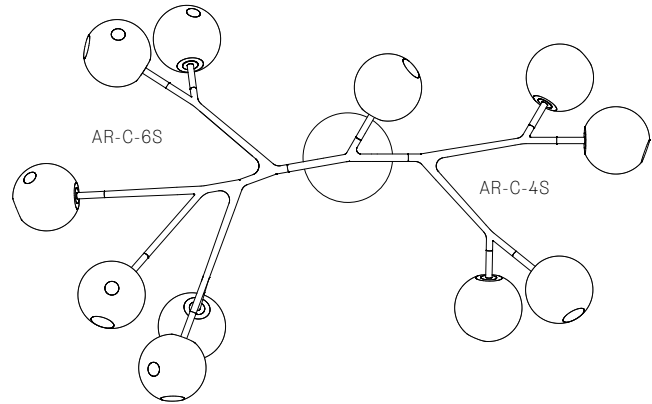
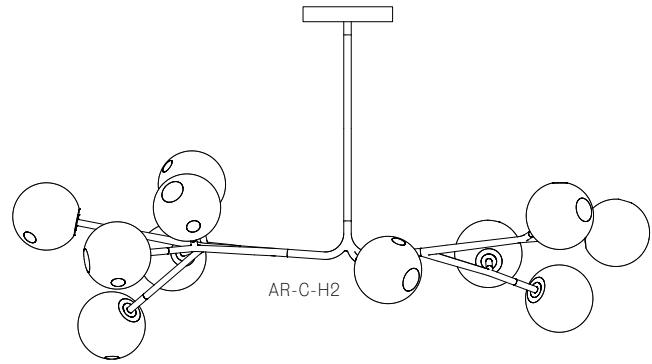
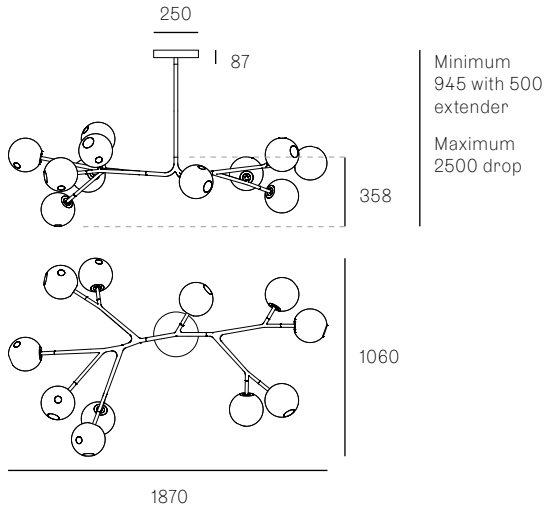


28.13A.1

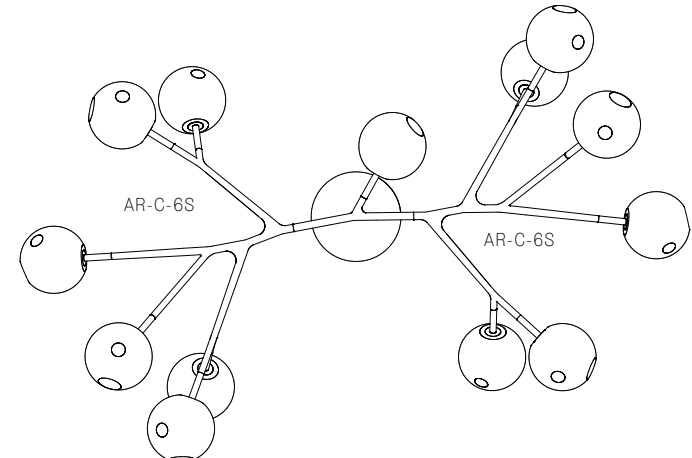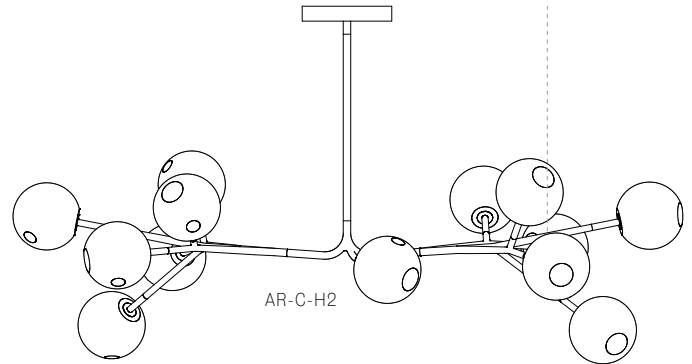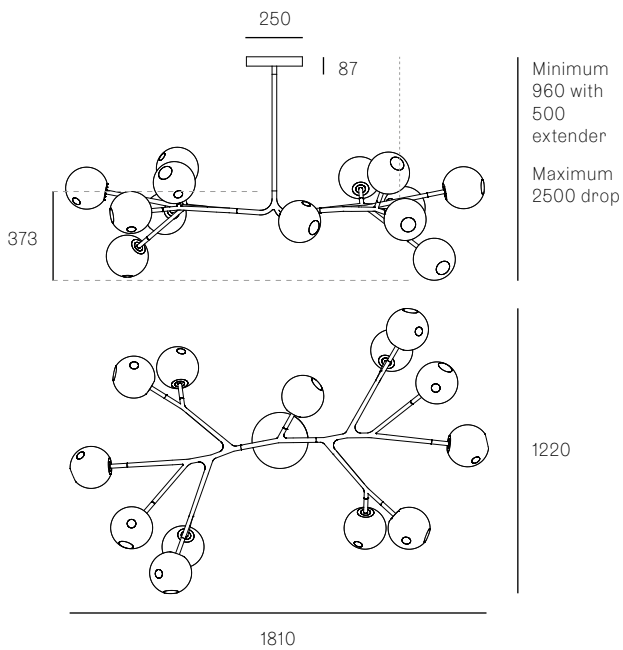


28.17A.1

All dimensions are in millimeters (mm) unless otherwise specified.

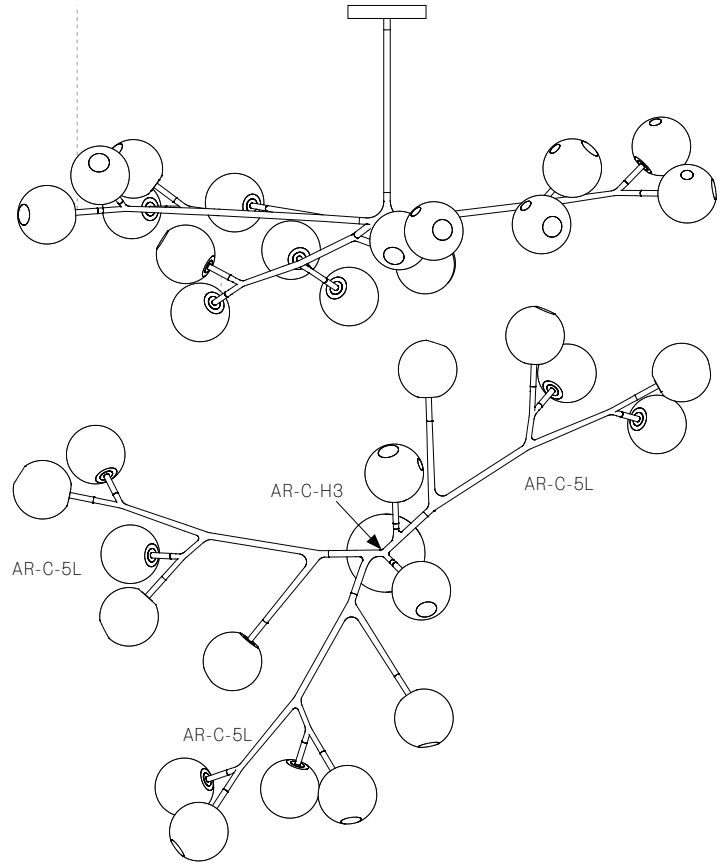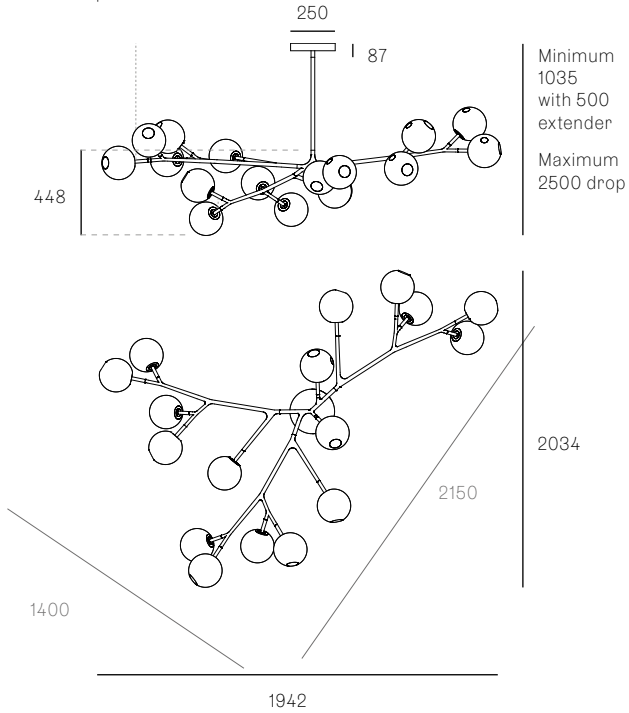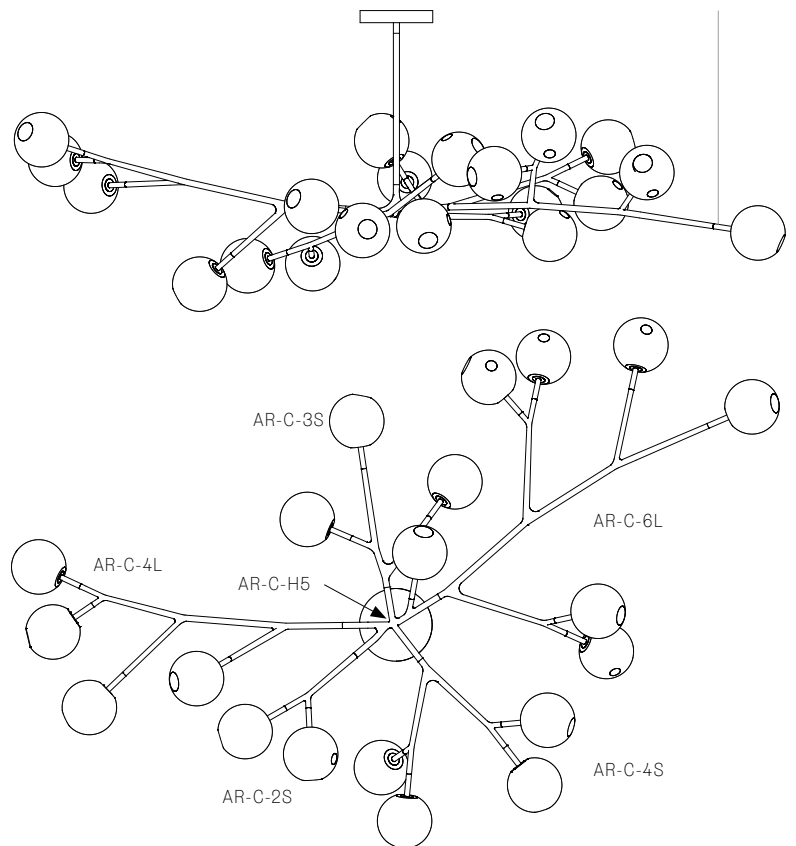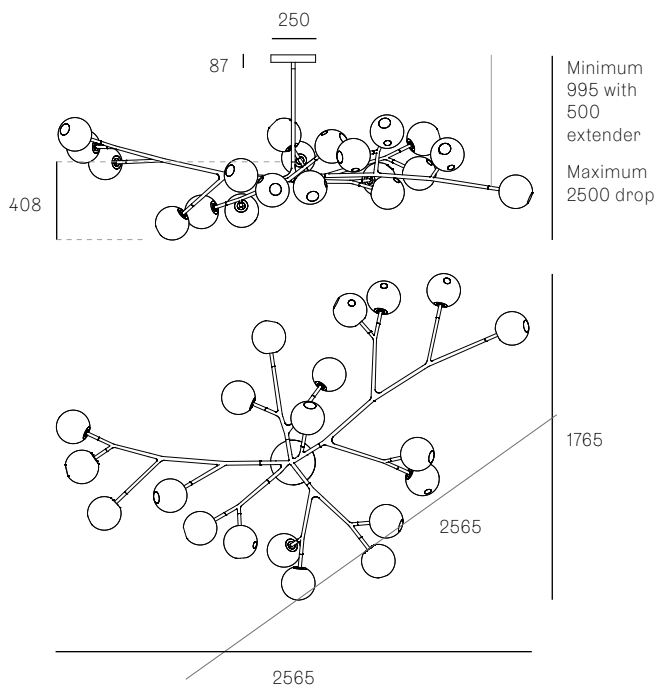
**28.20A.1**

28.23A.1


All dimensions are in millimeters (mm) unless otherwise specified.

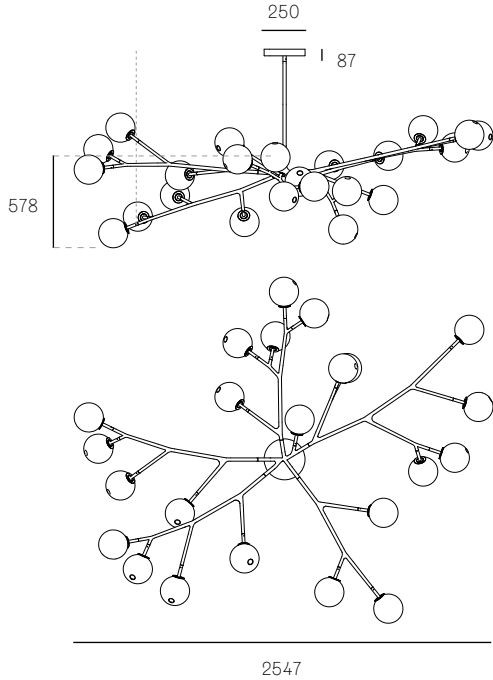

Minimum
1165
with 500
extender
Maximum
2500 drop

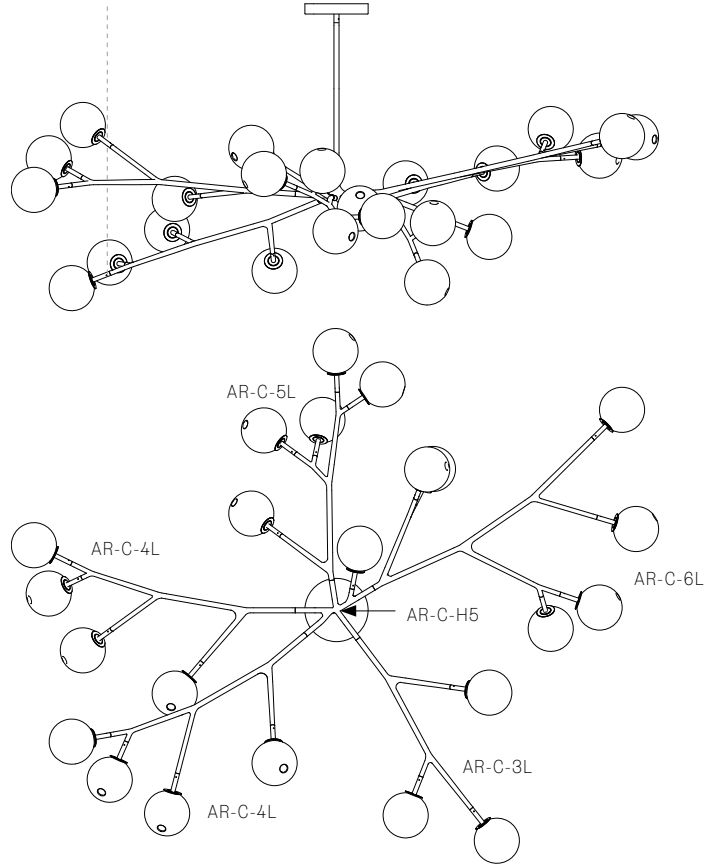

28.33A.1

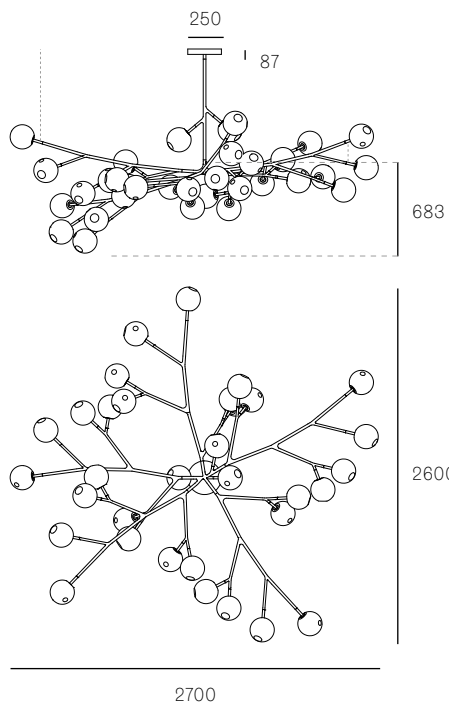

1520
with 750
extender
Maximum
2500 drop

