

A BRAND AT-2 Advanced Performance Thread Mill for High-Hardness Steels

One Tool - Two Processes!

PRIMARY TARGETS

- Customers threading high hardened materials
- Customers looking for thread processing efficiency

SOLUTIONS

- Combining Drilling & Threading Simultaniusly, Great Cycle Savings Can be Achieved
- By Eliminating Drilling and Tapping Operations, Tool Breakage in Hole can be Eliminated, Thus Eliminating **Tool Removal Processes**

WHAT OUR CUSTOMERS SEE

I Cannot Believe My Eyes!

HOW DOES IT WORK?

End Cutting Geometry w/ Roughing Teeth

 Helical Drilling while Rough Cutting the Thread Form Suppresses Bending of the Tool with Load

Left Hand Cutting

 Tool specification enables climb cutting which prolongs tool life

DUROREY Coating

 New SUPER Coating Technology Provides Superior Heat Restance and High Toughness, Opitimzed for **High Hardened Materials**





osgtool.com OSG USA, Inc.: 800-837-2223

OSG Canada, Ltd. : 905-632-8032 • OSG Royco (Mexico) : +52 (722) 279-36-08 to 11

A Brand AT-2

Advanced Performance End-Cutting Thread Mill for High-Hardness Steels



A Brand AT-2

The OSG A Brand AT-2 Thread mills with end-cutting edge for high hardness steels is ideal for highly difficult high hardness steel applications. The risk of sudden tool breakage can be minimized by breaking chips into small and manageable pieces and evacuating them smoothly. Since no pilot hole is required, process integration and the risk of breakage can be avoided.



Features & Benefits


- OSG's DUROREY coating enables superior heat resistance and high toughness optimized for high-hardness steel milling!
- Special cutting edge shape controls tool deflection.
- · Left-hand cut configuration enables climb milling to
- prolong tool life.
- · Added roughing teeth to distribute the load.
- No pilot hole is required Helical drilling + threading can be done simultaneously.


2 Processes with 1 Tool


Helical Drilling & Threading Done Simultaneously!

Helical drilling and threading are performed simultaneously, which reduces the risk of potential machining problems in the processing of high hardness steels.


The risk of sudden tool breakage is minimized as the chips are broken into small, manageable pieces and evacuated smoothly. Since no pilot hole is required, AT-2 integrates two processes while avoiding part scrap.







With AT-2 concerns about breakage from chip packing are eliminated, providing trouble-free threading.

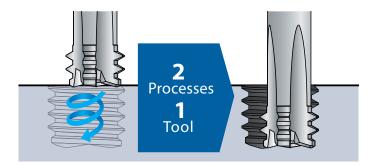



For more information use your phone to scan the QR code to the right and visit: osgtool.com/AT-2



osgtool.com OSG USA, Inc.: 800-837-2223 OSG Canada, Ltd.: 905-632-8032 • OSG Royco (Mexico): +52 (722) 279-36-08 to 11

List Numbers

16645 - A Brand AT-2 (Inch) 16640 - A Brand AT-2 (Metric) Size Range

#8-1/2" M3-M12