

Installation Guide

PERLATO


Perlato Fireclay Sinks

IMPORTANT


Before beginning installation, make sure that the sink is the correct model and size and conduct a thorough inspection. It is recommended to inspect sink for damage even if it was previously inspected.

1. Insert pencil through holes on back of sink to mark wall. Alternatively, measure distance between holes and mark wall appropriately.


Ensure sink will be anchored to wall studs or reinforced wall for support.

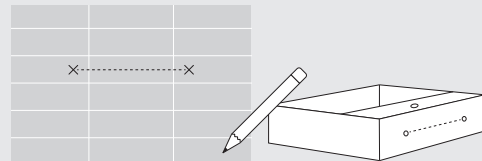


2. Drill mounting holes in wall.

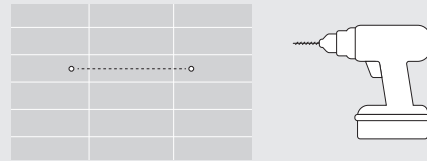


3. Attach faucet and drain to sink.

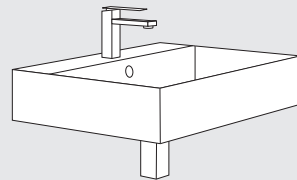


4. Apply silicone to back of sink.

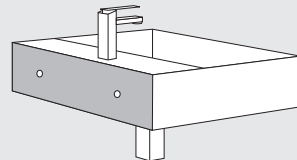


5. Attach sink to wall using bolts and large washers through back of sink.

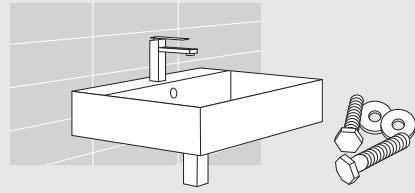

6. Connect water supply and drain lines.

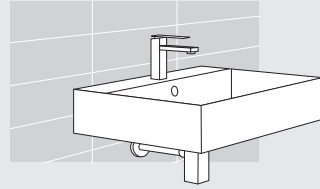

7. Run faucet and check for leaks.

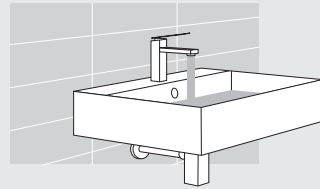

Towel Bar *optional*

If towel bars are not used, the four screws beneath sink may be discarded.

Unfasten screws on bottom of sink, position towel bar, then secure screws.

