

Double Rotor Rakes
Andex 725-728




NEW Andex Rotary Rakes



My way of Farming!

Vicon Andex 725 & 785

High Capacity, Superior Results

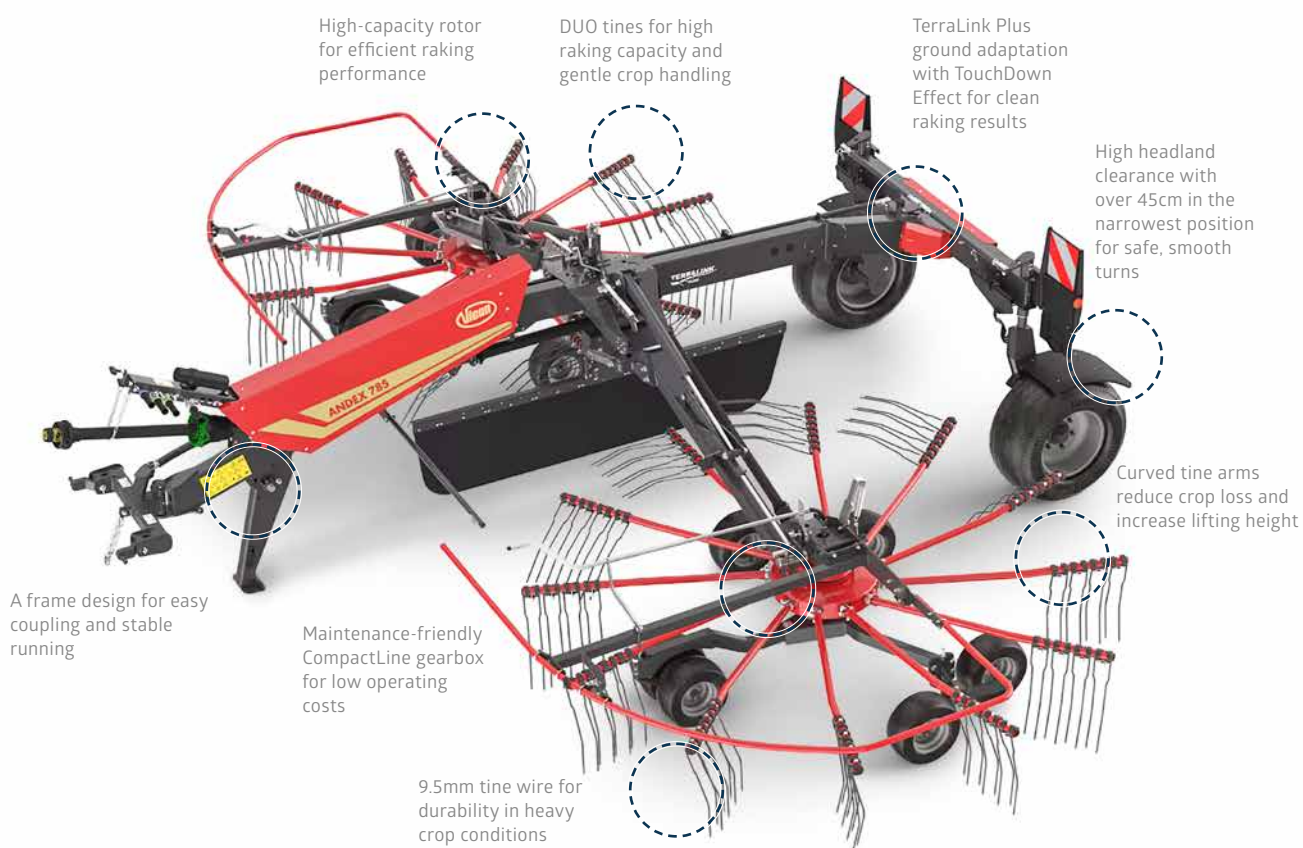

DuoTines providing perfect raking quality with raking in two rows.



Comfortable storage of all elements relevant to connect the machine.



Optional hydraulic locking devices allow to unfold without opening the cabin or pulling a rope.

Cleaner Crop *with DuoTine and Curved Tine Arms*



DuoTine System

The new Vicon DUO tine system rakes the crop in two rows using 9.5mm curved tines, ensuring consistent tine height and controlled crop pick-up:

- Clean forage with minimal contamination
- Gentle crop handling reduces leaf loss
- Reduced stress to the machine as tines do not require aggressive set up to reach same capacity as straight tines
- High raking capacity without damaging the sward


Customer Benefits

- Raking in two rows ensures clean crop pick-up with minimal contamination
- High raking capacity in heavy crops, supported by reinforced 9.5mm tine wire.



Curved Tine Arms

Curved tine arms further improve crop lifting and material flow, ensuring smooth guidance into the swath with reduced losses. The curved arm reduce crop loss as crop is not pushed into the rotor but into the tines to get lifted from the ground; Curved arm secures higher lifting at the swath, securing that a airy, well formed swath is placed; curved arms reduce the risk of material being pulled out of high volume swaths.



Customer Advantages

- Improved crop lifting and smooth, continuous crop flow into the swath
- Reduced crop losses with consistent results in light and heavy crops.

Stay on Track with TerraLink Plus

TerraLink Plus is Vicon's advanced rotor attachment system, designed for excellent ground following and high forage quality. It enables rotors to closely follow ground contours, while the TouchDown Effect ensures smooth operation and gentle lowering without tines digging into the soil. The result is clean crop pick-up with minimal soil contamination, supporting higher forage quality, animal health, and farm productivity.

TerraLink Plus

Outstanding ground adaptation keeps the crop cleanly lifted, even on uneven terrain, protecting valuable forage from soil and stone contamination. Smooth, quiet running and gentle rotor contact safeguard the grass sward, preserving yield and regrowth. From the first meters, especially on headlands, the result is a clean, precise rake that sets the foundation for top-quality forage. Effortless lifting and lowering reduce operator strain, making long working days more comfortable.

Customer Benefits

- Precise ground following on uneven terrain
- Clean crop pick-up with minimal contamination
- Protected sward and consistent swath quality

Customer Advantages

- TouchDown effect for ideal lifting and lowering without tines sticking in the ground
- Ideal countour tracking as well in challinging conditions independend of working width
- Fast but not overspeeded lifting and lowering to turn effizient without risking damages

How TerraLink Plus Adapts in 3 Dimensions



The rotors are fully flexible in all directions, which means the tines have exceptional ground following ability....



... ensuring a clean raking result without dirt in the crop.

Comfort

Easy and Intuitive Operation



Customer Benefits

- Easy to check adjustments
- Comfortable connecting and disconnecting of machine
- Rotor head with only 3 greasing points and most critical elements in oilbath.
- Optional hydraulic transport locks increase comfort further to unfold without pulling a rope or open the cabine.

Customer Advantages

- Simplicity
- Comfortable to operate
- Good capacity
- Reliability
- Modern design
- Balanced cost level
- Fast control of performance
- No wasting of time
- Limited need for maintenance
- Tractor cabine and driver stays clean and relaxed

Focus on Operator Comfort and Simplicity

The new Vicon rakes are designed with a strong focus on operator comfort and simplicity, without compromising capacity or reliability. Hydraulic working-width adjustment enables easy operation directly from the tractor seat, while practical details such as hydraulic couplers with handles, clear laser cut adjustment indicators and integrated storage positions simplify daily use.

A heavy-duty parking stand ensures safe and effortless coupling and uncoupling, and the maintenance-friendly gearbox supports reliable operation with reduced service effort. The machines combine modern design, comfortable operation and proven performance with a well-balanced cost level.



Thanks to comfortable parking position of hydraulics etc. The machine is easy to connect and disconnect.



Laser cut indicators allow a fast and long term lasting control of the machine set up.

“**Higher Productivity**
– Maximum Operator Comfort”

High Manoeuvrability

Confident Handling in Field and on Road



Excellent Manoeuvrability,

The new Vicon rakes are designed to deliver excellent manoeuvrability, ensuring confident handling in the field and safe transport on the road. Controlled rear-frame steering enables tight and smooth headland turns, while precise tractor following ensures stable and predictable machine behaviour. On slopes, the stable steering concept supports safe operation, maintaining control even under challenging conditions.

To increase stability further weight can optionally be added on the rear frame of AnDEX 785 to increase stability specially on slopes. Together, these features provide reliable handling during work and transport, improving efficiency and operator confidence in all situations. Ground clearance with over 450 mm in narrow position during headland turns, secure turning with big swaths in the headland is no problem.



Compact transport position.

Customer Benefits

- Easy and precise manoeuvring on headlands and in tight field conditions
- Stable handling on slopes and safe, confident road transport
- High clearance under the rotor don't destroy existing swaths

Customer Advantages


- Entering fields in one go from the road
- Simplify operating in hilly conditions as automatic steering reduce stress
- Feeling safe driving on the road
- Allow everybody to operate the machine
- Headland rows stay in shape

Reliable and *Maintenance-Friendly Performance*

CompactLine Gearbox

The CompactLine gearbox is designed to deliver smooth operation, precise swath formation and long-term reliability with minimal maintenance effort. Oil-immersed cam discs and guide rollers ensure smooth and consistent rotor movement, while the maintenance-free cam track and tine-arm bearings significantly reduce service requirements. Bearings on both sides of the driveshaft provide high durability and dependable power transmission.

The unique cam-track design supports precise swath formation. The left over greasing spots have a maintenance interval of 100 hours. In most cases this means seasonal greasing for you.

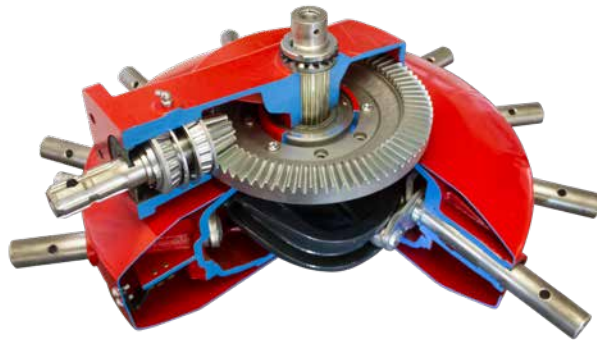

Double bearings for crown wheel and pinion.

Maintenance-free cam track and tine arms, running in an oil bath.

High tensile tine arm holders for strength and dependability.

“**Less
Maintenance.**
More Raking.”



Customer Benefits

- Double bearing for pinion and crown wheel
- No movement of gears
- Cam track oil filled
- Tine arm bearings running in lifetime filled oil bath
- Checking of oil level from the outside via window

Customer Advantages

- Limited steps for greasing
- No money spend for changing oil
- Dirt can not get into the cam track
- Clean fingers as oil can be checked without opening the gear
- No flipping of gears
- Enjoyable work days

Precision in Every Setup

Smart options for efficiency in every pass



Configured Precisely to match Different Operating

A wide range of options allows the new Vicon rakes to be configured precisely to match different operating conditions and customer requirements. Optional 380 mm wheels improve stability and ground protection, while mudguards for the transport wheels enhance cleanliness during road travel. Hydraulic transport locking increases safety and ease of handling, and the optional tandem axle further improves stability and ground following, especially on uneven terrain.

Single-side lift options provide additional flexibility when raking along field boundaries or on irregular field shapes, either via two hydraulic lines or with electric pre-selection. Together, these options allow operators to tailor the machine for maximum efficiency, comfort and performance.



Extra weight for operating in hilly conditions

Customer Benefits

- Greater flexibility to adapt the machine to different field conditions and operating requirements.
- Increased comfort, safety and efficiency during field work and transport



Spring for rotor stabilisation. A spring on the rotor head improves stability for better performance on hilly or uneven terrain.



Smart design for faster maintenance and higher efficiency.



Wider 380 transport wheels to protect the ground, while mud guards keep the machine cleaner during transport.



A 16" spare wheel ensures you stay operational at all times.



For regular need for single side lift, or as well to integrate the single side lift into tractor section control, each rotor is lifted directly from the tractor via one single acting valve each.



For only limited use of single side lift the electric preselected single side lift is recommended.



Tandem 16" wheels provide improved stability in the field



The NEW ***AnDEX 725***

Compact, Easy and Efficient

The Vicon AnDEX 725 is designed to deliver clean raking results with a strong focus on simplicity, operator comfort and reliability. With a working width of 6.4-7.2m, the AnDEX 725 offers an ideal balance between capacity and manoeuvrability, making it well-suited for a wide range of farming operations. Intuitive operation and practical comfort features allow most functions to be controlled easily from the tractor, reducing operator workload during long working days.

Proven Vicon raking technology ensures gentle crop handling and consistent swath formation, while the compact, maintenance-friendly design supports reliable performance and low service effort in daily use. The AnDEX 725 is the ideal choice for operators seeking dependable performance, easy handling, and efficient capacity in a compact machine.

The NEW *Andex 785*

Intuitive Operation and Reliable Performance

The Vicon Andex 785 is designed for operators who require higher capacity combined with comfortable, intuitive operation and reliable daily performance. With a working width 7-7.8m, the Andex 785 increases productivity while maintaining precise handling and excellent manoeuvrability.

Comfortable tractor-based operation allows key functions to be controlled easily from the cab, reducing operator workload during long working days. Proven Vicon raking technology ensures gentle crop handling, clean forage and consistent swath formation. With 12 arms per rotor even in heavy crop conditions. The robust, maintenance-friendly design supports reliable operation with low service effort, helping to minimise downtime and operating costs. The Andex 785 is the ideal solution for professional users seeking higher output, greater comfort and dependable performance in demanding conditions.

**“Where Efficiency
meets Reliability”**



Precision Farming

Vicon's precision farming solutions combine innovation with flexibility. With Vicon Sync, machine data moves seamlessly into IsoMatch FarmCentre, your farm management platform. Vicon ServiceCentre supports you every step of the way, while universal terminals take precision to the next level. Smart tools, built around the way you farm.



Tellus 700 & Tellus 1200



IsoMatch FarmCentre



Vicon Sync



With you, all the way
2 years of warranty


Customer service and quality are values that we hold dear. We regard each sale of a Vicon machine as the start of a long-term relationship. We believe in our high quality products! More than 140 years of experience in developing products including special steel and heat treatment processes have resulted in an unsurpassed quality and wear resistance. Vicon machine design is the result of long study, thorough test plans and passion from experienced R&D engineers to optimise the quality and efficiency leading to high customer satisfaction year after year.

*Vicon machines delivered from 1st September 2022 get a 2 year standard warranty from the date of delivery.**

**Terms and Conditions apply*

MY VICON

EASY ACCESS to all information you need. Register your Vicon machine and get access to a wide array of valuable services. My Vicon simplifies your journey with personalised solutions by integrating the management of your fleet with full access to Data, Technology, and Services designed exclusively for your Vicon machine.

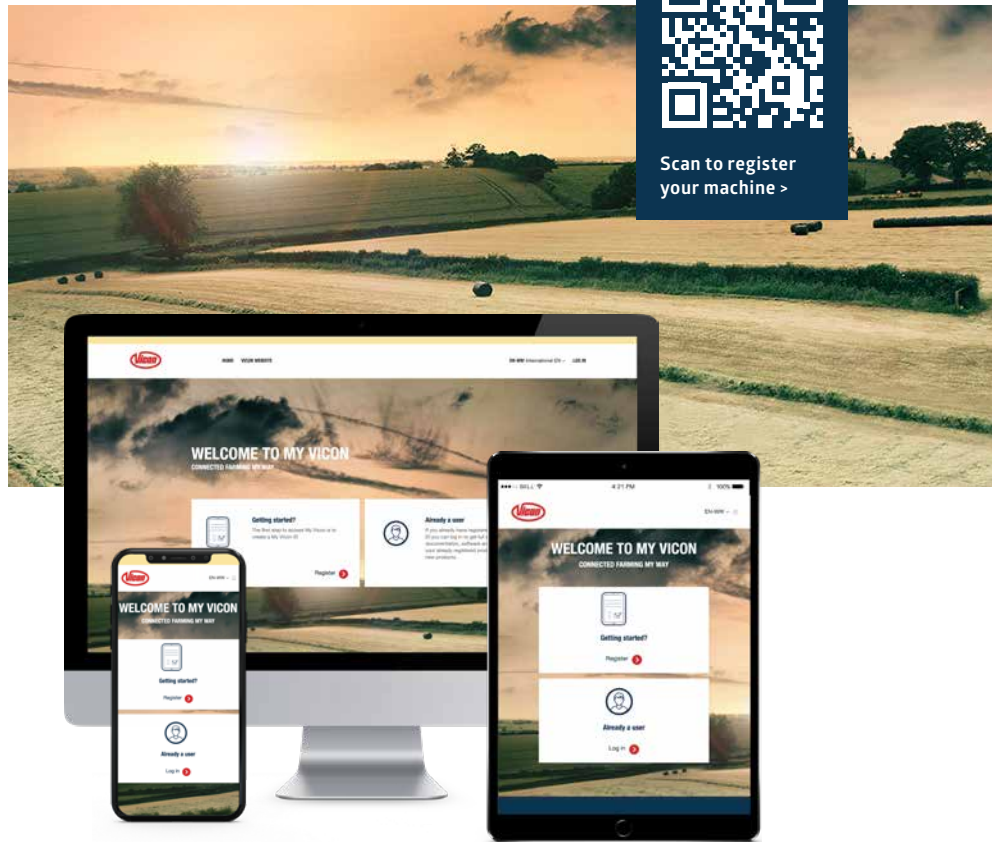

Scan to register
your machine >



Register Product
Register your Vicon
product



My Parts Service
Keep your machine
running



My Fleet
Manage your
registered products



Events & Offers
Benefit from special
offers and event
invitations



My Digital Tools
Connect your
products



Get in Contact
How can we
help you



Smart Search

SHOOT, IDENTIFY AND ORDER YOUR PARTS!
Finding the right parts for your Vicon machines have never been easier. With Smart Search, you can quickly and efficiently locate all Vicon genuine parts you need, minimizing downtime and keeping your operations running smoothly. Available on MyVicon.



Discover Smart
Search here >


Facts

Model Index	Double Rotor Rakes	
	725	785
Dimensions & Weights		
Working width (m)	6.20/7.20	7.00/ 7.80
Working width (ft)	(20'4"/ 23'7")	(23'/ 25'7")
Transport width (m)	3	3
Transport width (ft)	(9'8")	(9'8")
Transport length (m)	6,16	6,16
Transport length (ft)	(20'2")	(20'2")
Parking height (m)	3.00**/ 3.90	3.00**/ 3.99
Parking height (ft)	(9'8"/ 12'10")	(9'8"/ 13'1")
Weight (kg)	2130	2215
Weight (lb)	-4695	-4883
Swath width (m)	1.20-1.80	1.30- 1.90
Swath width (ft)	(3'11"-5'11")	(4'3"-6'3")
Capacity theo. (ha/h)	8,5	9,3
Hitching system		
Pivoting 3-pt headstock (cat.)	-	-
Lower links (2-pt.)	●	●
Linkage drawbar	-	-
Gauge wheel 16°	-	-
Rotors/Tine arms/Tines		
Rotor diameter (m)	3.0	3.35
Rotor diameter (ft)	(9' 10")	(10' 12")
Swath delivery	centre	centre
Number of rotors	2	2
Number of arms per rotor	11	12
Number of double tines/arm	4	4
Tine diameter (mm)	9.5	9.5
Adjustable cam track	-	-
Detachable tine arms/rotor	-	0
Height adjustment	●	●
Wheels and axles		
Tyre (rotors)	16x6.50-8	16x6.50-8
Fixed tandem axle	0	0
Pivoting tandem axle	-	-
Stand. tyres (carrying frame)	10.0/75-15.3	10.0/75-15.3
Opt. tyres (carrying frame)	380/55-17"	380/55-17"
Optional Equipment		
Hill side stabiliser	0	0
Lift arm suspension	-	-
Safety accessories		
Warning panels	●	●
Road lights	●	●
● Standard 0 Optional - Not available * Double swath ** With detached tine arms *** Hydraulically lowered main frame		

Information provided in this brochure is made for general information purposes only and for worldwide circulation. Inaccuracies, errors or omissions may occur and the information may thus not constitute basis for any legal claim against Kverneland Group. Availability of models, specifications and optional equipment may differ from country to country. Please consult your local dealer. Kverneland Group reserves the right at any time to make changes to the design or specifications shown or described, to add or remove features, without any notice or obligations. Safety devices may have been removed from the machines for illustration purposes only, in order to better present functions of the machines. To avoid risk of injury, safety devices must never be removed. If removal of safety devices is necessary, e.g. for maintenance purposes, please contact proper assistance or supervision of a technical assistant. ® = trade mark protection in the EU. © Kverneland Group Kerteminde AS



Proud History of Ground Breaking Innovations

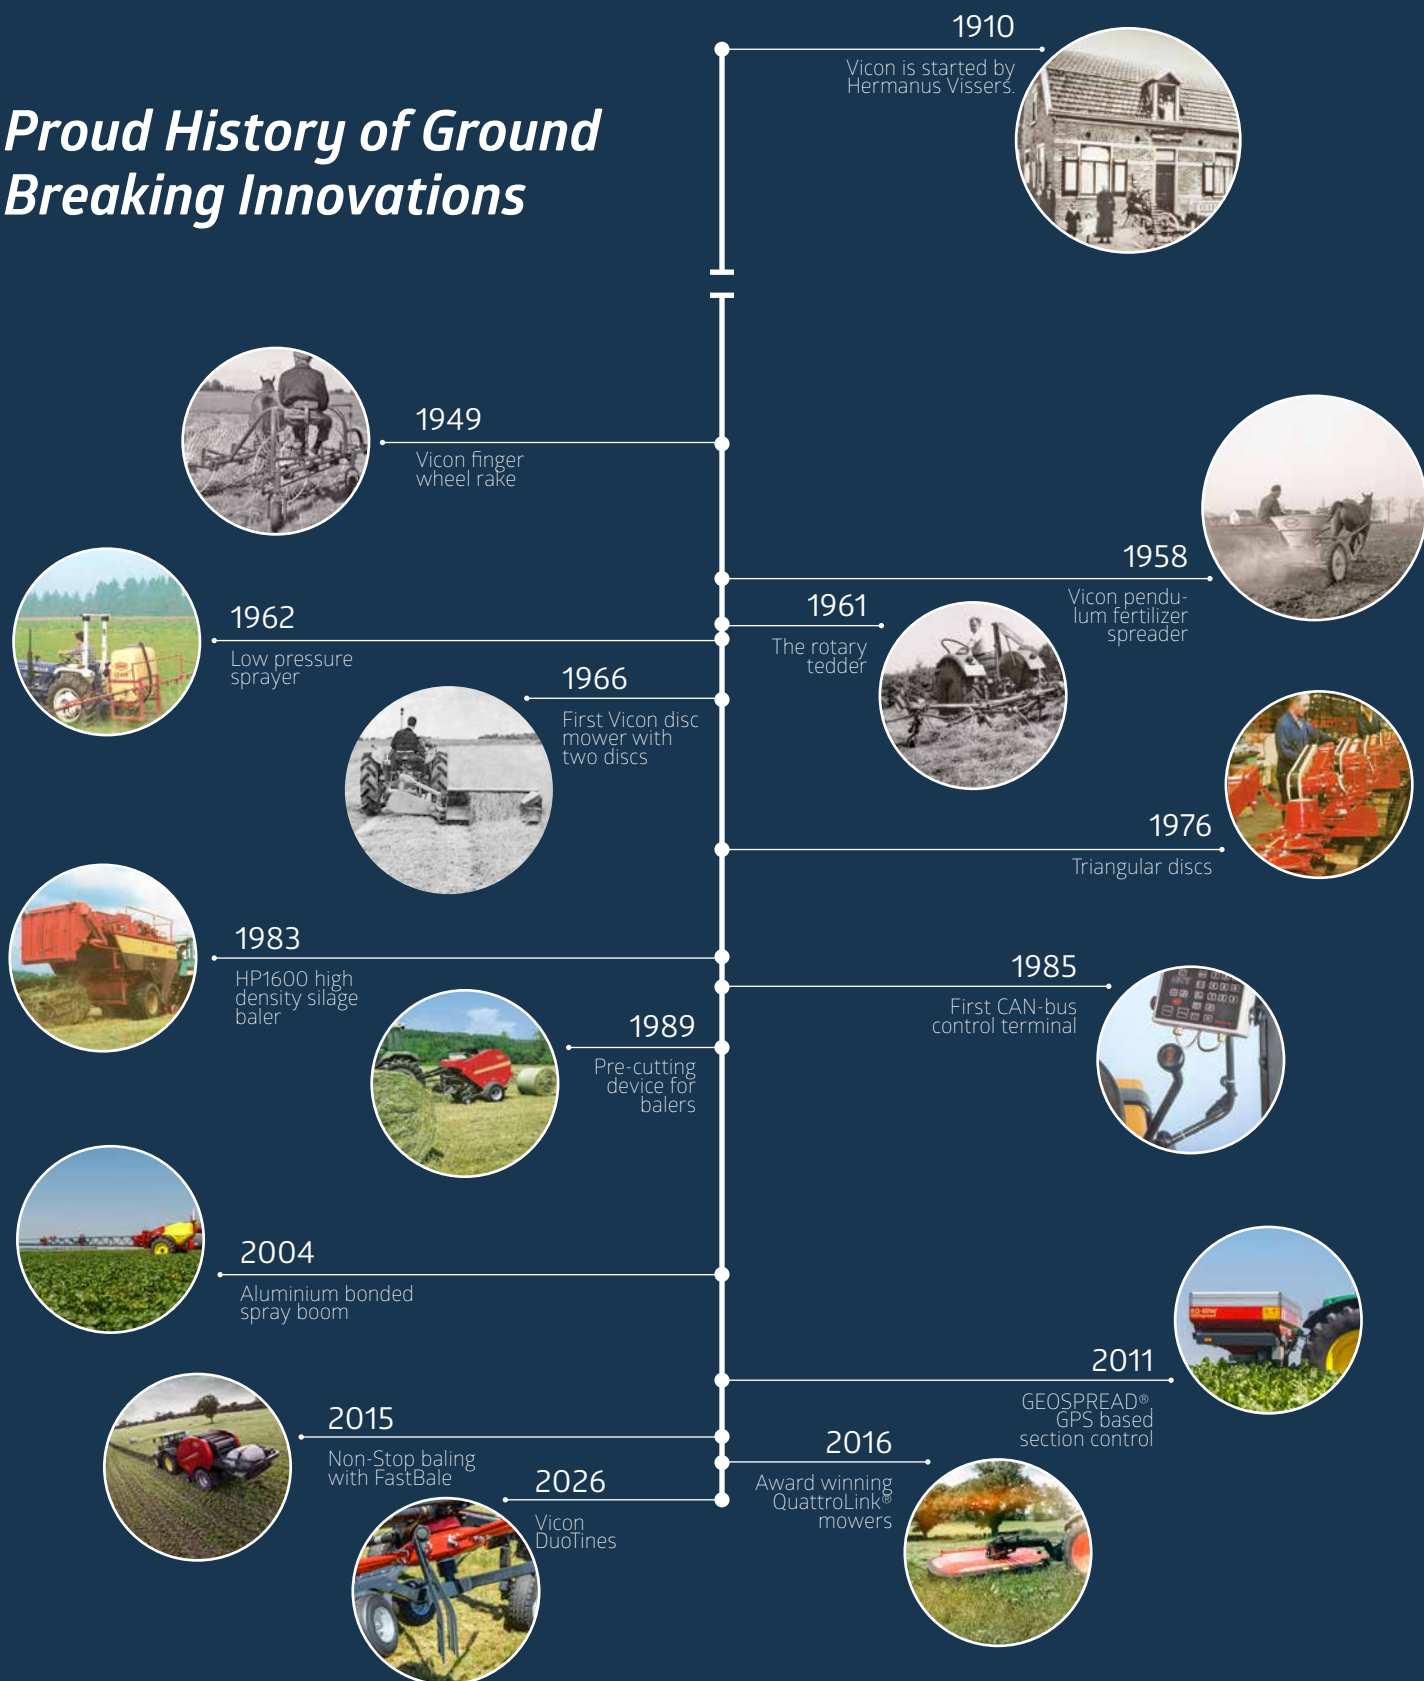

My way of Farming!



www.vicon.eu