

Super Unit

[Double pump type]

Maximum operating pressure


21 MPa

Maximum flow rate


80 L/min

Model code

SUT××D8021-30




Tankless type



Unit type

Pressure – Flow rate characteristics (Representative)

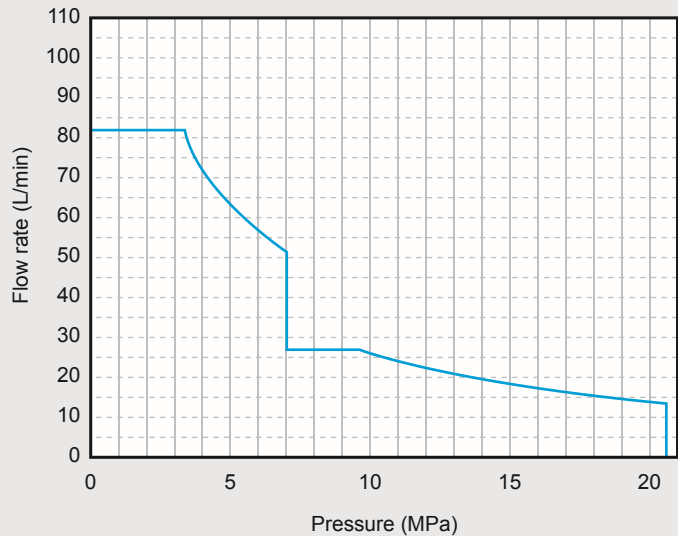

* The graph shows actual flow rates (representative values).

* Operating flow rate at the maximum pressure in continuous operation:
14 L/min maximum

Specifications

Model code		Tankless type	Unit type	
		SUT00D8021-30	SUT10D8021-30	SUT16D8021-30
Pump unit	Maximum flow rate (theoretical value; L/min) *1	83.0		
	Maximum operating pressure (MPa)	20.6		
	Operating flow rate adjustment range (L/min)	11.6 to 83.0		
	Operating pressure adjustment range (MPa)	1.5 to 20.6		
Motor capacity	Motor capacity (equivalent kW)	Equivalent to 7.0 kW		
Power supply	Motor pump/unit	3-phase, 200 V (50 Hz), 200 V (60 Hz), 220 V (60 Hz) (Permissible voltage fluctuation: ±10%)		
Rated current (A)	AC3 φ200V (50 Hz)	25.5		
	AC3 φ200V (60 Hz)	24.8		
	AC3 φ220V (60 Hz)	22.7		
Power source breaker setting (A)		50		
External input signal		5 channels Photo-coupler insulation, DC 24 V (DC 27 V maximum), 5 mA/channel		
External output signal	Digital output	2 channels, photo coupler insulation, FET output, DC 24 V, 50 mA maximum per channel		
	Contact output	1 channel (1 common contact), dry contact Contact capacity: DC 30 V, 0.5 A (resistance load)		
Mass (kg)		72	133	145
Operating conditions	Usable oil *2	Special mineral-oil base hydraulic oil/wear-resistant hydraulic oil • Viscosity grade: ISO VG32 to 68 • Viscosity range: 15 to 400 mm ² /s • Contamination: Within NAS class 9 • Volumetric water content: 0.1% maximum		
	Operating hydraulic oil temperature (in tank)	0 to 60°C (Recommended operating temperature range: 15 to 50°C)		
	Operating ambient temperature	0 to 40°C		
	Storage ambient temperature	-20 to 60°C		
	Operating ambient humidity	85% RH max. (no condensation)		
	Installation site	Indoors (Be sure to secure the unit with bolts.)		
Others		<ul style="list-style-type: none"> • Be sure to connect a circuit breaker for all (three) poles and the earth leakage breaker. • Make sure that the electrical wiring meets the requirements of European Standard EN60204-1. • Frequent turning this unit's power supply ON/OFF will considerably shorten the control unit's service life. To start or stop the unit at 8-minute or shorter intervals, use the unit's control stop function. • Be sure to connect the ground terminal. 		
Tank capacity (L)		-	100	160
Standard coating color		Ivory white (Munsell code 5Y7.5/1)		

Note) *1: The pump flow rate has been factory-set to the maximum discharge rate. The maximum discharge rate given in the table above is a theoretical value, not a guaranteed value.

*2: Consult Daikin about the use of hydraulic oils other than mineral-oil base type (e.g. hydrous/synthetic) such as water-glycol hydraulic oil. Keep the contamination level of the hydraulic fluid within NAS contamination class 10 for operating pressures of 7 MPa or lower.

*3: The unit incorporates a safety valve.

*4: When selecting a Super Unit, refer to "Pressure-Flow rate characteristics and how to select a unit" on Page 49.




For the purpose of making improvements, the specifications given in catalogs are subject to change without prior notice. Be sure to refer to the latest outside drawing.

External Dimension Diagram


Tankless type

SUT00D8021-30

Part No.	Name	Quantity
1-1	Motor pump incorporating an IPM motor	1
1-2	Controller	1
2	AC fan	1
3	Base	1
4	Check valve	1

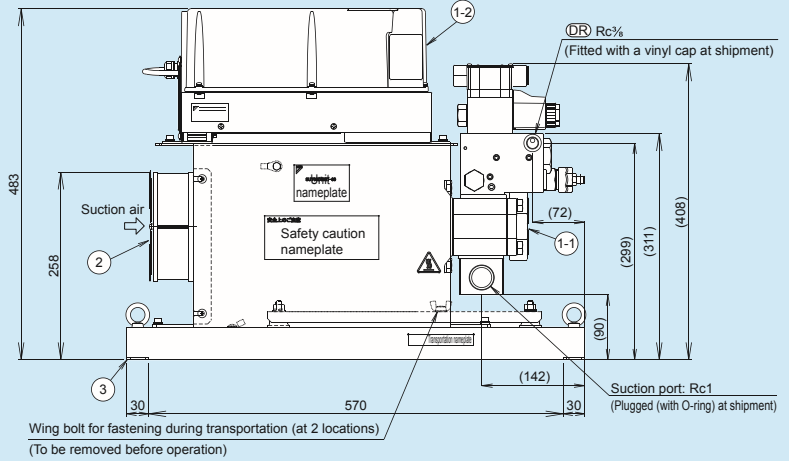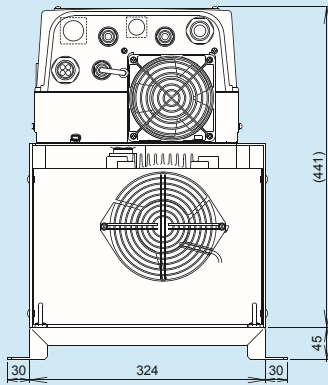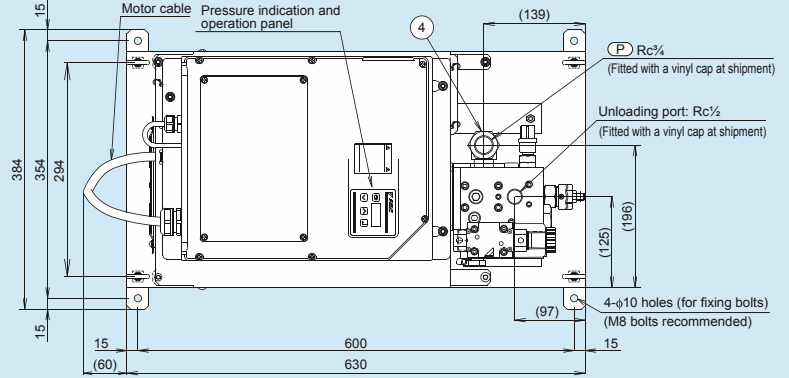


Unit type

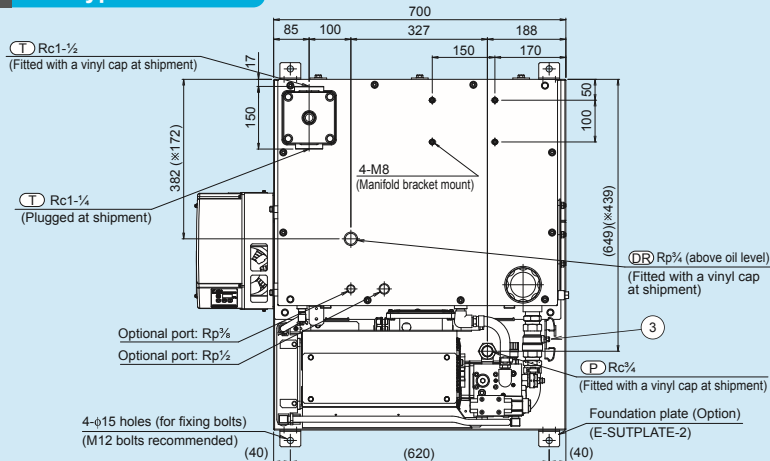

SUT10D8021-30 SUT16D8021-30

Part No.	Name	Quantity
1	Oil tank	1
2	Suction strainer	1
3	Stop valve	1
4	Oil level gauge	1
5	Oil filler port-cum-air breather	1
6-1	Motor pump incorporating an IPM motor	1
6-2	Controller	1
7	Oil cooler	1
8	AC fan	1
9	Return filter	1
10	Check valve	1

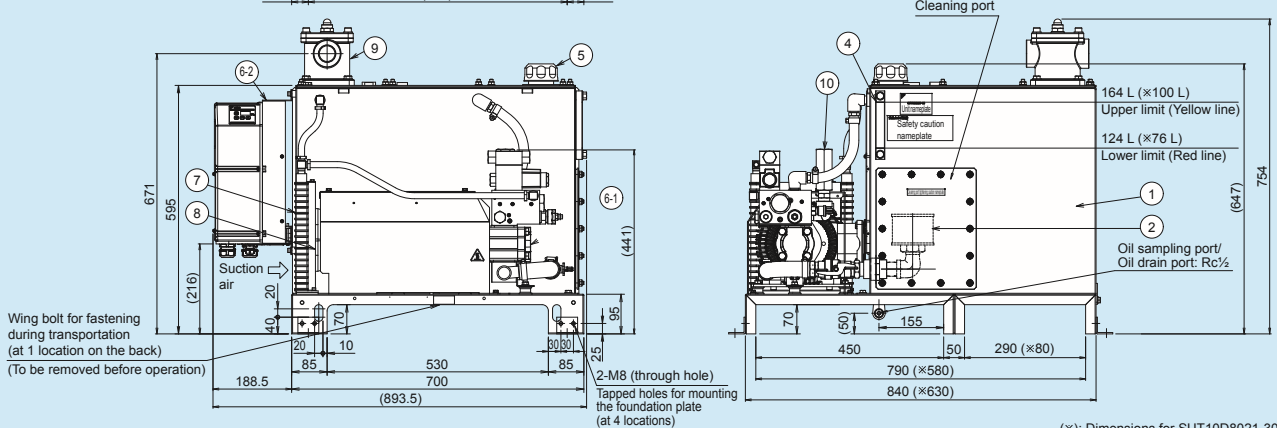

(×): Dimensions for SUT10D8021-30