
Key **Features**

- 231" seamless large screen with high brightness and powerful speakers
- All-in-One integration for effortless installation
- Anti-collision, dustproof, and moisture-proof with GOB surface treatment
- Detachable system control box for a minimalist appearance and easy access
- Premium aesthetics with an ultraslim and bezel-free design



Product **Description**

The ViewSonic LDM231-251 is a cutting-edge 231" All-in-One LED display designed to elevate visual and auditory experiences in high-end corporate and educational environments. Boasting an impressive 600-nit brightness, a high 6,500:1 contrast ratio, and a 3,840Hz refresh rate, complemented by dual 30W speakers, it ensures exceptional clarity and immersive audio for every video, presentation, or lecture. The All-in-One design seamlessly streamlines installation, allowing 2 people to set it up within 2 hours, thereby minimising labor costs and downtime. This display utilises the Glue-on-Board (GOB) surface treatment technology, achieving an IP54 rating for enhanced protection from collisions, dust, and moisture. Featuring a 31mm ultra-slim design and 6mm thin bezels, the display offers a premium aesthetic and ensures an engaging viewing experience. Additionally, the detachable control box enables it to achieve a nearly 99% screen-to-body ratio, seamlessly integrating into any space while providing easy accessibility. Moreover, it supports PIP/PBP display and wireless casting capabilities, offering more flexibility for collaboration. Adding to its convenience, compatibility with AV control systems enables IT staff to remotely configure the display.

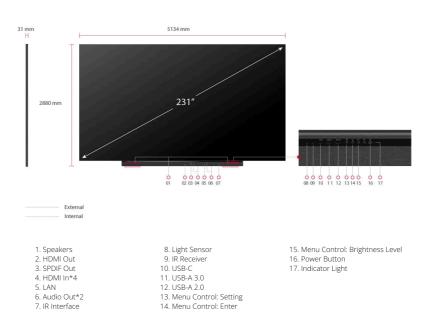



SPECIFICATION		OTHERS	
Screen Size:	231"		100-120V/40A ~ 50/60Hz or 220-
Display Area (mm):	5120 (H) x 2880 (V)	11,	240V/25A ~ 50Hz (vary by country)
Native Resolution:	2048x1152	Power Consumption:	1443W (typ), 4124W (max) < 0.7W (Off)
Panel Technology:	Direct view LED	Operating Temperature:	0~40°C
LED Package Type:	SMD 3 in 1	LED Module Quantity:	288
Bonding Wire:	Copper	Ingress Protection Rating:	IP54(Front)
Pixel Pitch (mm):	2.5	· ·	833.34 lbs
Refresh Rate:	3840Hz	Net Weight:	(378kg)
Brightness (max.):	600 nits (100 levels adjustable)	Gross Weight:	1600.56 lbs
Contrast Ratio (typ.):	6500:1		(726kg)
Orientation:	Landscape	Screen Dimensions (WxHxD):	202.1x113.4x1.2 inches (5134 x 2880 x 31mm) (TBD)
Viewing Angles (typ.):	H = 170, V = 170		
LED Lifetime (typ.):	100,000 Hours	Screen Dimensions (WxHxD) with wall mount:	202.047 x 113.86 x 2.1 inches (5132 x 2892 x 53mm)
Local Storage:	Total 32GB (26GB available storage)	Packing Dimensions (WxHxD):	64.96 x 37.4 x 19.68 inches x4 (1650 x 950 x 500 mm x4) 59.05 x 43.3 x 41.33 inch (1500 x 1100 x 1050 mm) 77.95 x 14.96 x 18.5 inch (1980 x 380 x 470mm)
Embedded OS:	Android 9.0		
Resolution Support:	VGA(640 x 480) to 4k(3840 * 2160@60hz)		
HDTV Compatibility:	480p, 576p, 720p, 1080p, 2160p	STANDARD ACCESSORIES	
Horizontal Frequency:	31K-94kHz	Power Cord:	x1
Vertical Scan Rate:	56-85Hz	LAN Cable (Cat 5A):	x1
INPUT		IR Extender Cable:	x1
HDMI:	x4 (HDMI 2.0, HDCP 2.2) (internal x3 + external x1)	Remote Control:	x1
		QSG:	x1 (Installation guide)
USB Type A:	x2 (USB3.0 x1, USB2.0 x1)	Wall Mount:	x1
		Spare Parts:	LED PCB Unit x20
RJ45 Input (Internet):	x3 (internet x2, control x1)	Maintenance Tool:	LD-MK-004 x1
IR in:	x1	OPTIONAL ACCESSORIES	
Wi-Fi Input:	2.4G/5G Hz	Maintenance Tool:	LD-MK-004
LICE Type C	x1 (data only)	ViewBoard Cast Button(USB-C):	VB-WPS-001
USB Type C: OUTPUT		ViewBoard Cast Button(USB-A+HDMI):	VB-WPS-003
HDMI out:	x1 (HDMI 1.4, HDCP 1.4) (internal x1)		
Speaker:	30Wx2		
Audio out (3.5mm):	x2		
USB Type A (Power):	Shared with USB input (5V/0.9A x1, 5V/0.5A x1, USB-C 5V/1A x1)		
CONTROL			
RJ45 (LAN control):	x1(shared with internet)		
USB Type A (Services):	x1(shared with USB A input)		
RS232 (DB 9-pin female):	x1		

IR Receiver:

x1