MAXHUB 01

MAXHUB XCore Room Kit for Microsoft Teams Rooms

Model: XT10-WS Kit

MAXHUB XT10-WS Kit incorporates a high-quality Speakerphone and USB Camera. With the inclusion of a mobile Speakerphone and camera, this bundle adeptly caters to participants' dynamic audio and video needs, driving a flexible and seamless collaboration experience. Compatible with Microsoft Teams Rooms, the Kit also helps to facilitate the switch to Microsoft Teams Rooms smart spaces for BYOD scenarios, enhancing Teams-native audio and video experiences while accommodating cost-balance needs.






One Cable Technology



Device Management



Flexible & Ease of Installation



Easy Content Sharing



3-Year Warranty & Local support



Secured and Managed

Product Specification

Type

CPU

Mini-PC

Intel i3-1220P TDP: 28W

Memory 8GB DDR4 3200MHz

Optional hard disk 128GB SATA SSD (M.2-2280 SATA3 up to 6Gb/s)

Graphics Intel® UHD Graphics for 12th Gen Intel® Processors;

Chipset ADL PCH-P

Sound Card
USB Audio, HS-100B, Cmedia

Network 1000Mbps RJ45

Operating system Windows 11 IoT Enterprise SAC

Certifications

Certifications Microsoft Teams Rooms

I/O Port

USB-A 3.0	4
LAN	1
USB-C (For Teams Rooms Console)	1
HDMI OUT	1
Audio OUT	1
AC POWER	1
Kensington lock slot	1

Power

Power Supply ModeAC POWERPower Requirements100-240V AC 50/60HzMax Power90W

Accessories (included in the package)

Wall Bracket	×1
PC Bracket	×1
Cable Cover Screw	×2
Machine Screw	×4
Expansion Screw	×4
Self-tapping Screw	×4
Cable Cover	×1
HDMI Cable (1.8m/5.9ft)	×1
Power Cord (1.8m/5.9ft)	×1
Quick Start Guide	×1

Physical Specifications

Dimension L × W × H	230mm × 185mm × 41.5mm / 9.06" x 7.28" x 1.63"	
Dimension (package) L × W × H	342 × 246 × 146mm / 13.46" x 9.69" x 5.75"	
Net Weigh	1.36kg / 3lbs	
Gross Weight	4.36kg / 9.6lbs	

Environmental Conditions

Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%-90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%-90%RH
Altitude	Below 5000m / 196850"

Displo	ay
--------	----

Size10.1 inchResolution1920 (H) x 1200 (V)Frequency Refresh Rate60HzNTSCMin.62%, Typ.65%Back Light UnitELEDBrightness with glassMin.250cd/m², Typ.300cd/m²Life Time≥ 20000 Hours

Touch System

Type Capacitive touch

Touch Tool Finger

Accuracy ± 2mm / 0.08"

Touch Point 10 points touch

Minimum object size 6mm / 0.24"

I/O Port

HDMI INGEST (SCREEN SHARE)

USB-A (USB PERIPHERAL)

USB-C (TO PC)

3.5mm (AUDIO OUT)

1

Physical Specifications

 Dimension L×H×D
 245 × 164.3 × 77.4mm / 9.65" x 6.47" x 3.05"

 Dimension (package) L×W×H
 332 × 246 × 166mm / 13.07" x 9.69" x 6.54"

 Net Weight
 880g / 1.94lbs

 Gross Weight
 2.38kg / 5.25lbs

Accessories (included in the package)

USB Type-C Cable (Type C-C) 5m / 16.4ft ×1
HDMI Cable 1.8m / 5.9ft ×1
Quick Start Guide ×1

Power

Power Requirements15V 3A (Type-C PD)Overall Power (Max.)20WStandby Power≤ 0.5W

Environmental Conditions

Operation Temperature 0°C-40°C / 0°F-104°F
Operation Humidity 10%~90%RH
Storage Temperature -20°C-60°C / -4°F-140°F
Storage Humidity 10%~90%RH
Altitude Below 5000m/ 196850"

USB-A Dongle for wireless connection to PC

PC via combined USB-A (to PC) and USB-C (to BM35) cable; smartphone via Bluetooth

Compatible Compatible with Windows 7/8/8.1/10/11, MAC OS 10.10 and above

User Interface Features

Physical button user controls for	Touch button user controls for	LED Indicator light
Power on/off	Call/hang up	Annular LED
Bluetooth Pairing	Mute	
	Volume +/-	

Wireless		
Bluetooth		
Version	BT5.3	
Operating Frequency	2.4GHz	
Operating Distance	10m/393.7"	
Compatibility	Support audio playback, HD audio input	
Dual Bluetooth Design	One dedicated Bluetooth for connection to the MAXHUB Bluetooth Dongle, the other Bluetooth can be flexibly connected to smartphones and other devices.	
Wireless connection to your co	mputer via the included Bluetooth Dongle;	
Expand your BM35 by wireless daisy-chain to suit meeting rooms with up to two BM35.		
NFC	Connect your Android device with NFC	
Battery		

Music Time	up to 8h
Charge Time	4h 40m (5V 1A)
Physical Specification	
Dimensions(LxWxH)	126.7 x 126.7 x 35.3 mm (5.0 x 5.0 x 1.4 inch)
Dimension(package)(LxWxH)	1pcs 225 x 158 x 50 mm (10.0 x 6.2 x 2.0 inch) 20pcs 472 x 335 x 292 mm (18.6 x 13.2 x 11.5 inch)

Lithium-ion battery

4400mAh

up to 15h

0.47Kg/1.04lbs

1pcs 0.71kg/1.57lbs

20pcs 16.89kg/37.24lbs

Audio Features	
Microphone	
Quantity	8
Voice Pickup Range	6m/236.2"
Type	Digital Microphone
Microphone Frequency Rang	(1) USB: 100Hz ~ 12kHz; ge (2) Bluetooth: 100Hz ~ 7.5kHz
Special Features k	Al noise reduction, filter-off background noise such as eyboard noise, table and chair moving noise, road noise, etc.
Speaker	
Sound Channel	1.1
Output Power	5W + 3W
Maximum Sound Pressure	80dBSPL@1m
Distortion	<7% (80Hz ~ 350Hz); <3% (351Hz ~ 4kHz); (4.1kH≰5% 8kHz)
Signal to Noise Ratio	>75dB
Frequency Range	80Hz ~ 18kHz
Special Features	Using treble + bass combo design for wider music bandwidth.

Environmental	
Operation Temperature	0°C-40°C
Operation Humidity	10% ~ 90% RH
Storage Temperature	-20°C-60°C
Storage Humidity	10% ~ 90% RH
Altitude	Below 5000 meter/196850"

Supported Applications

Battery Type

Talk Time

Net Weight

Gross Weight

Battery Capacity

MAXHUB Align software for Windows & Mac

Platform Certification

ZOOM Certified

Supports major VC software including ZOOM, Microsoft® Teams, Google Meet, Google Hangouts, Cisco WebEx®, RingCentral, etc.

Warranty 3-year hot swap warranty

What's in the box

1 x USB TYPE-C Cable (1.0m/39.37 inch), 1 x USB dongle

Image SensorIMX577Pixel12MP

Output Resolution H.264/MJ:

(1) 3840×2160 (2) 2560×1440 (3) 1920×1080 (4) 1280×720 (5) 1024×576 (6) 960×540 (7) 800×600 (8) 640×480 (9) 640×360 (10) 480×270 (11) 352×288 (12) 320×240

(13) 320×180

NV12 / YUY2:

(1) 1920×1080 (2) 1280×720 (3) 640×360

FF

Focus Method

Field Of View FOV(H): 109.1°

FOV(V): 74.4° FOV(D): 117.8°

Touch Point

2.4

Digital Maiae Dealwatian

Digital Noise Reduction
Yes
Output Format
MJPG;H.264;YUY2;NV12

White Balance
Yes
Exposure
Yes

I/O Port

USB Type-C(Device)

Microphone Parameters

Quantity 2
Pickup Distance 4m/157.5"

Physical Specifications

 Dimension L×H×D
 85x63x68.2mm/3.35"x2.48"x2.69"

 Dimension (package) L×W×H
 160x144x114mm/6.3"x5.67"x4.49"

 Net Weight
 175g/0.39lbs

 Gross Weight
 300g/0.66lbs

Accessories

USB Cable ×1
Privacy cover ×1
Hand-tightened screw ×1

Environmental Conditions

Operation Temperature0 °C ~40 °COperation Humidity10%~90%RHStorage Temperature-20 °C ~60 °CStorage Humidity10%~90%

Altitude Below 5000m/196850"


Package Includes

- XC13T Mini-PC x1
- TCP20T Touch Control Panel x1
- UC BM35 x1
- UC M31 x1

Package Physical Specifications

- Dimension (package) L×W×H 890x270x265mm/35.04"x10.63"x10.43"
- Net Weight 8.034kg/17.7lbs
- Gross Weight 9.91kg/21.85lbs

Connection

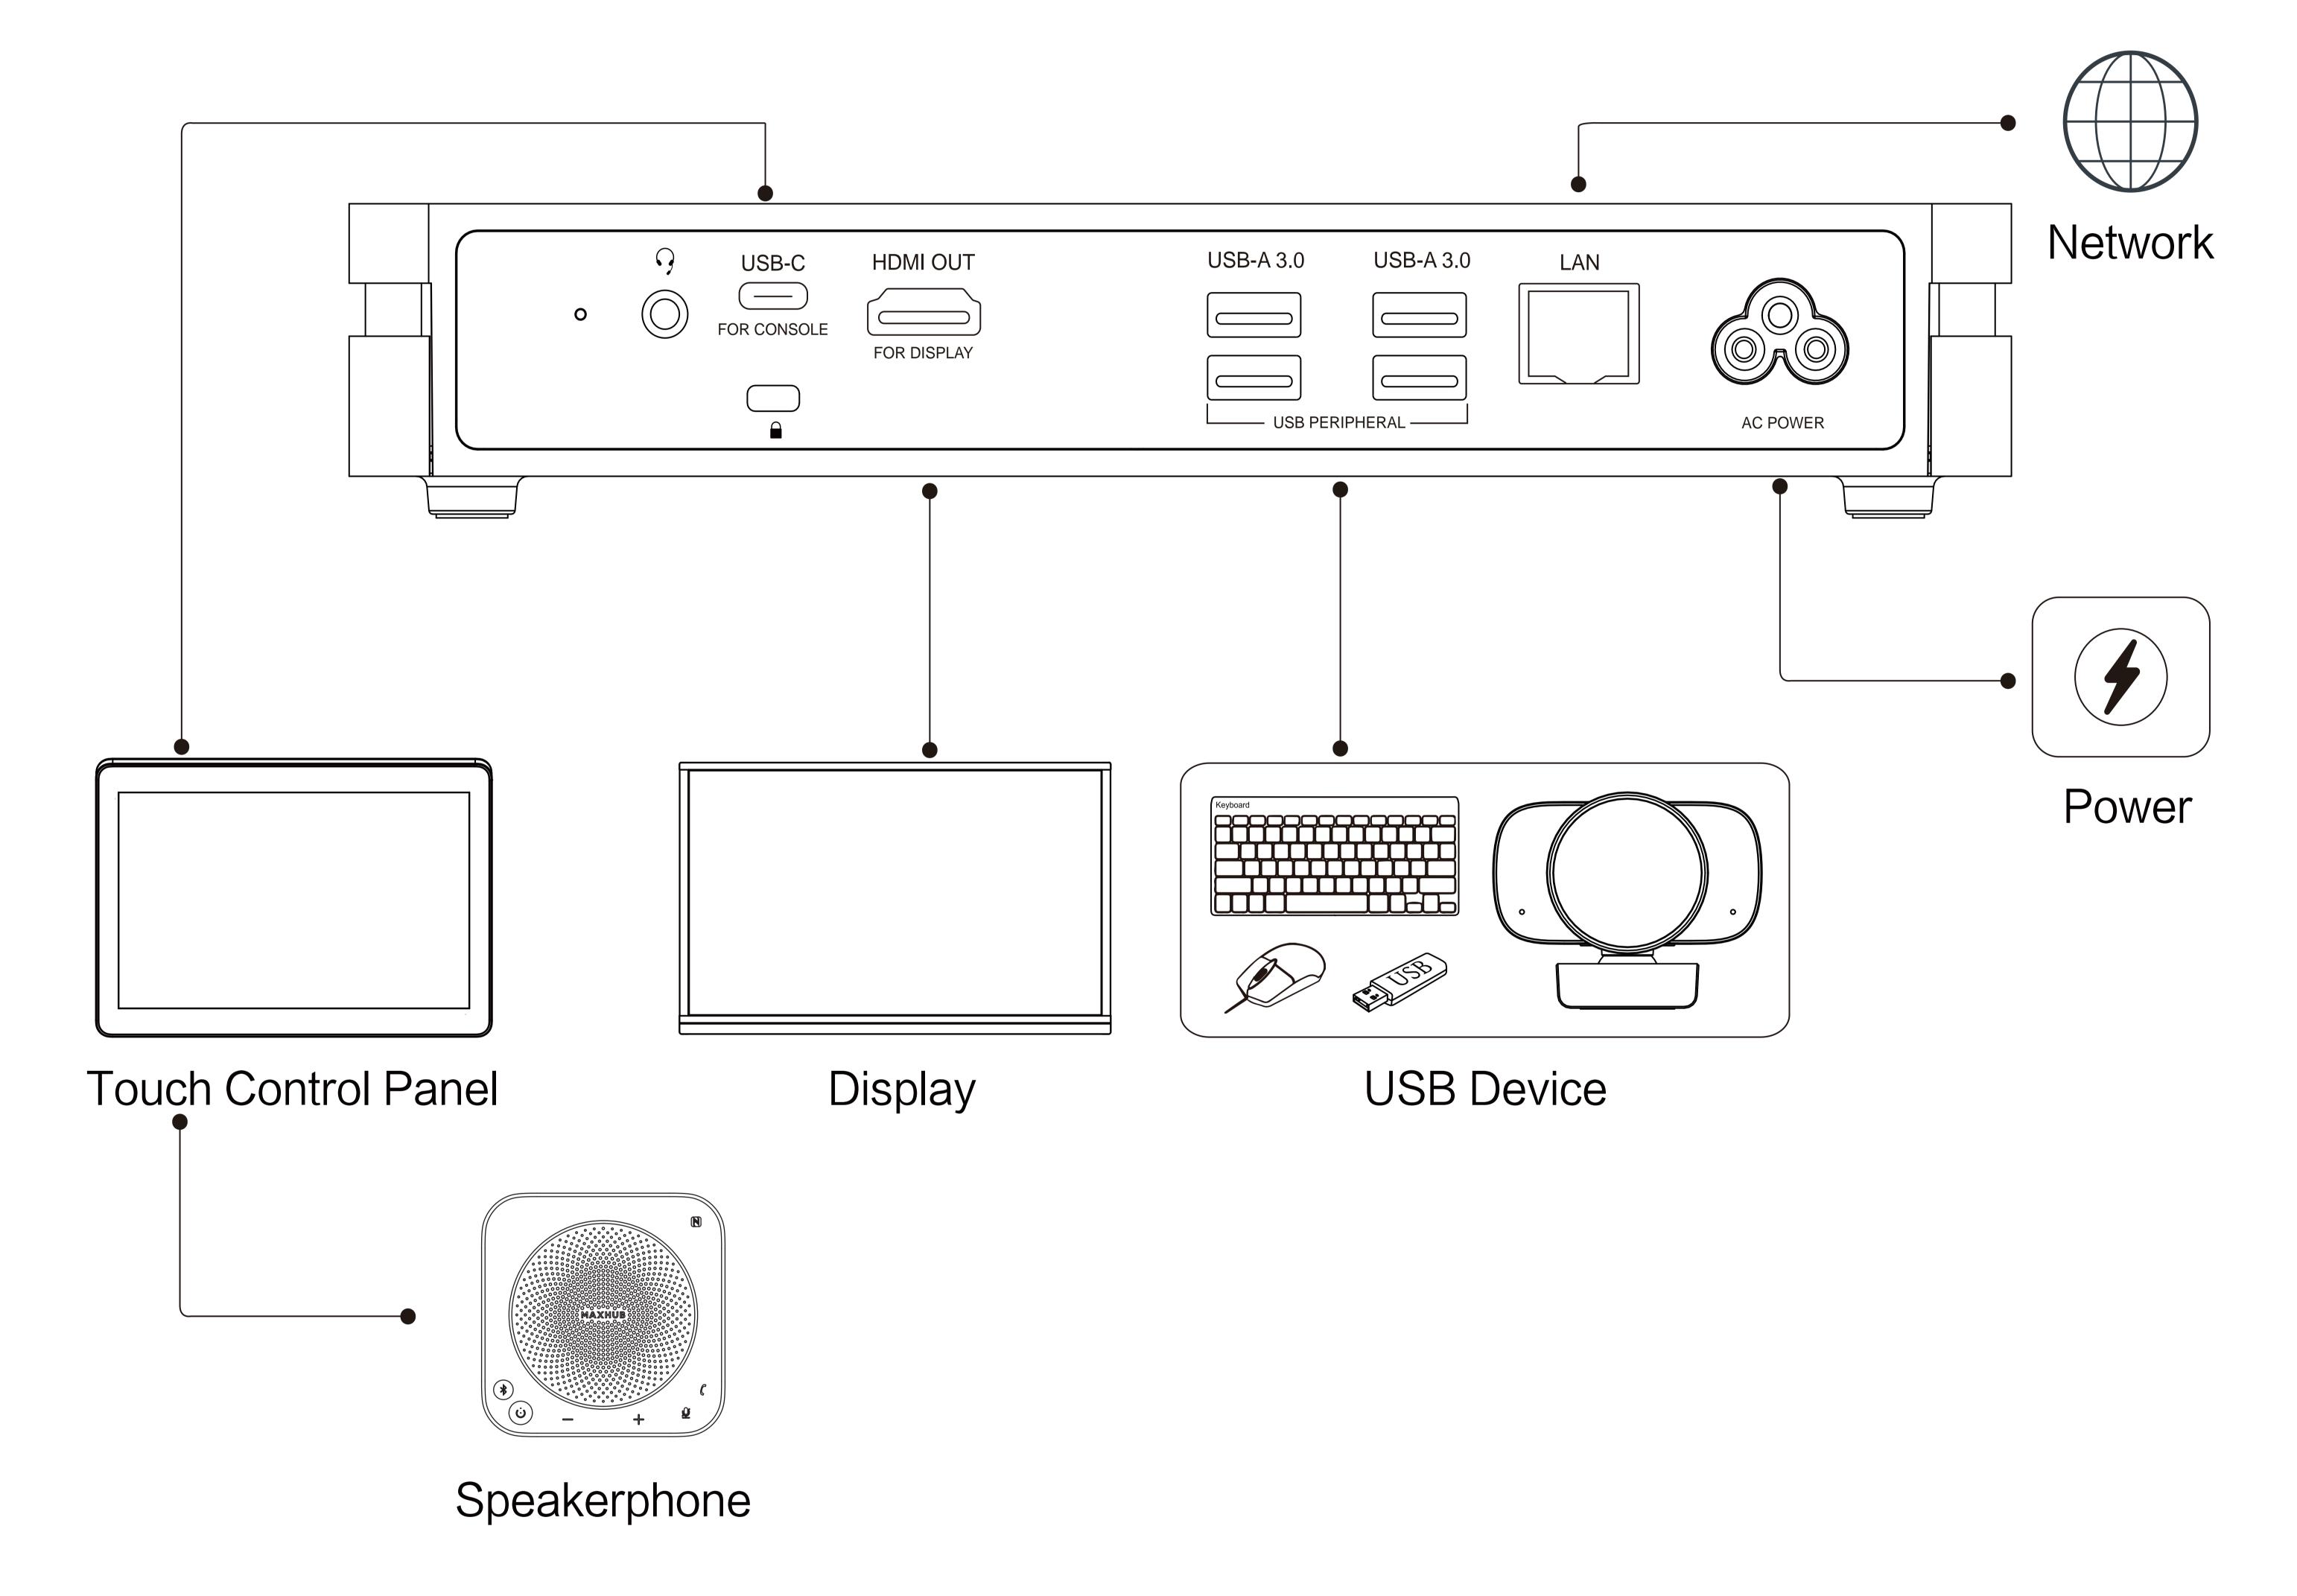

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with thelatest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.





