


Key Features

- Pre-assembled kit ready for instant use
- Foldable screen with the movable flight case for easy delivery
- Built-in stand with motorised height adjustment
- Impressive audio from Harman Kardon speakers
- Seamless large display for rental at any event/exhibition



Product Description

The ViewSonic® LDS135-151 is a 135" All-in-One Direct View LED Display Solution Kit that boasts instant use, easy delivery, and convenient maintenance, making it an ideal rental-ready solution for events, exhibitions, or any other short-term usage. The pre-assembled design and built-in motorised height adjustment stand enables effortless set up within just a few minutes. Delivery convenience is greatly enhanced with the new foldable screen design, reducing the packaging size of the movable flight case by nearly 50% compared to the previous generation, thus minimising shipping costs. With the seamless large screen and superior built-in Harman Kardon speakers, be ready to impress your audience everywhere from high-end board rooms and receptions to galleries, auditoriums, and other large venues.

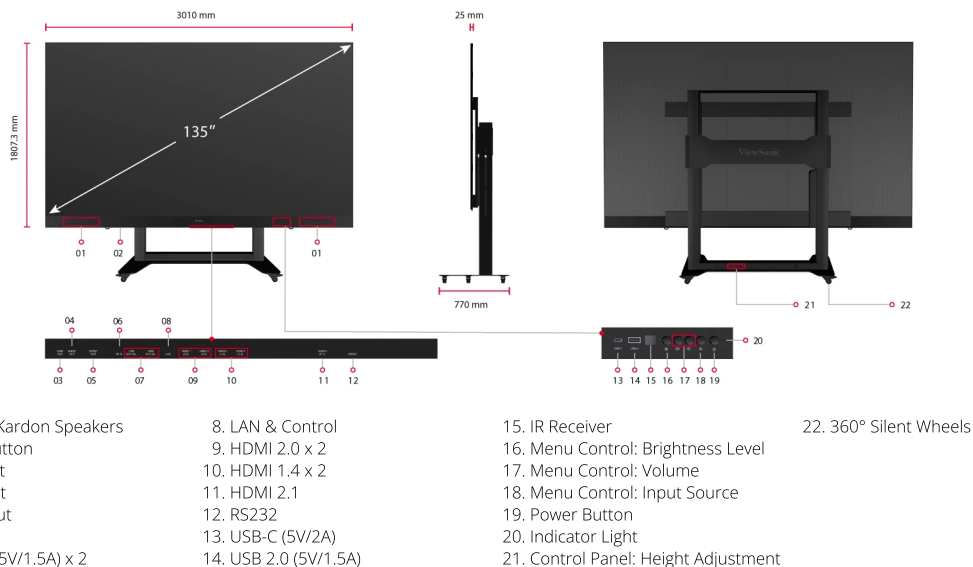

SPECIFICATION

| | |
|------------------------|--|
| Screen Size: | 135" |
| Display Area (mm): | 3000 (H) x 1687.5V) |
| Native Resolution: | 1920x1080 |
| Panel Technology: | Direct view LED |
| LED Package Type: | SMD 3 in 1 |
| Bonding Wire: | Gold |
| Pixel Pitch (mm): | 1.56 |
| Refresh Rate: | 4440Hz |
| Brightness (max.): | 600 nits (8 levels adjustable) |
| Contrast Ratio (typ.): | 6000:1 |
| Orientation: | Landscape |
| Viewing Angles (typ.): | H = 160, V = 160 |
| LED Lifetime (typ.): | 100,000 Hours |
| Local Storage: | Total 64GB (56GB available storage) |
| Embedded OS: | Android 9.0 |
| Resolution Support: | VGA(640 x 480) to 1080p(1920 x 1080) |
| HDTV Compatibility: | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160P/60Hz |
| Horizontal Frequency: | 23-120 kHz |
| Vertical Scan Rate: | 15-135 Hz |

INPUT

| | |
|------------------------|--|
| HDMI: | x6 (HDMI 2.1 x 1, HDMI 2.0 x 2, HDMI 1.4 x 2, HDMI 2.0 internal x1) |
| USB Type A: | x3 (USB2.0 x3) |
| RJ45 Input (Internet): | x1 |
| IR in: | x1 |
| Wi-Fi Input: | 2.4G/5G Hz |

| | |
|-------------------|---|
| USB Type C: | x1 (Video input, Power output (5V/2A)) |
| Audio-in (3.5mm): | x1 |

OUTPUT

| | |
|---------------------|--|
| HDMI out: | x2 (HDMI 2.0 external x1,internal x1) |
| Speaker: | 20W x2 (Harman Kardon) |
| Audio out (3.5mm): | x1 |
| USB Type A (Power): | Shared with USB input (5V/1A x3) |

CONTROL

| | |
|--------------------------|-----------------------------|
| RJ45 (LAN control): | x1(shared with internet) |
| USB Type A (Services): | x1(shared with USB A input) |
| RS232 (DB 9-pin female): | x1 |
| IR Receiver: | x1 |

OTHERS

| | |
|----------------------------|---|
| Power Supply Voltage: | 100-120V/30A~50/60Hz or 220-240V/15A~ 50Hz (vary by country) |
| Power Consumption: | 1200W (typ), 2300W (max) < 0.5W (Sleep), < 0W (Off) |
| Operating Temperature: | 0~40°C |
| LED Module Quantity: | 100 |
| Ingress Protection Rating: | IP30 |
| Net Weight: | 496 lbs (225 kg) |
| Gross Weight: | 965 lbs (438 kg) |
| Screen Dimensions (WxHxD): | 1800x1948x770 mm(min.) 3010x2598x770 mm(max.) |
| Packing Dimensions: | 74.8x80x31.5 inches (1900x2032x800 mm) |

STANDARD ACCESSORIES

| | |
|---------------------|-----------------|
| Power Cord: | x1 |
| LAN Cable (Cat 5A): | x1 (5m) |
| IR Extender Cable: | x1(3m) |
| Remote Control: | x1 |
| QSG: | x1 |
| Spare Parts: | LED PCB Unit x7 |
| Maintenance Tool: | LD-MK-001 x1 |

OPTIONAL ACCESSORIES

| | |
|------------------------------------|------------|
| Maintenance Tool: | LD-MK-001 |
| ViewBoard Cast Button(USB-C): | VB-WPS-001 |
| ViewBoard Cast Button(USB-A+HDMI): | VB-WPS-003 |

