

Key Features

- 4K UHD display for rich details and immersive visuals
- Reliable operation with COB
 LED packaging technology
- Immersive audio from builtin Harman Kardon speakers
- All-in-One design without complicated setup
- Adaptable and flexible to suit any display scenario

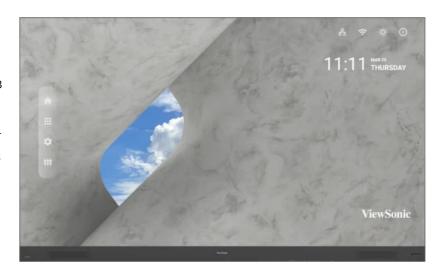

Product **Description**

Behold truly spectacular picture quality from ViewSonic® 4K UHD LDP216-121 All-in-One LED Display. A breakthrough innovation in LED displays – the large screen boasts industry-leading Chip-on-Board (COB) LED packaging technology, 4K UHD resolution, and superior audio fidelity from professional Harman Kardon speakers for an out-of-this-world audiovisual experience. Embedded with cutting-edge COB LED packaging technology, it enables finer pixel pitch and well-engineered performance that you can depend on. The minimalistic 4K UHD display is supported with HDR/HLG capabilities to deliver deeper contrasts, ultimate clarity, and more engaging visuals. Soak in a rich, studio-grade soundscape from the seamlessly flushed Harman Kardon speakers – the LDP216-121 is an audiovisual innovation perfect for sophisticated engineering, research institution, and a luxurious audiovisual feast for reception and VIP room. Cleverly designed for user-centric installation and maintenance, the All-in-One solution offers total versatility to fit and enhance any indoor location. Equipped with a detachable system control box, it offers maximum flexibility to blend harmoniously into its surroundings. Stretch beautiful UHD content across an expandable ultra-wide 32:9 video wall. Or simply turn it into portrait mode for an alternative viewing perspective.

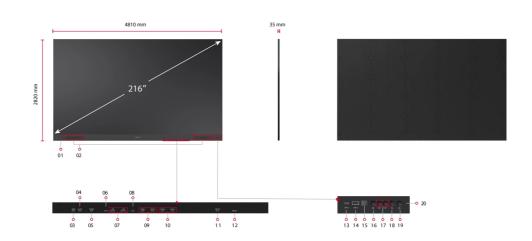



Power Switch
 Harman Kardon Speakers
 HDMI Out

4. Audio Out 5. S/PDIF Out

6. IR In 7. USB 2.0 (5V/1.5A) x 2

8. LAN & Control 9. HDMI 2.0 x 2 10. HDMI 1.4 x 2 11. HDMI 2.1 12. RS232 13. USB-C (5V/2A) 14. USB 2.0 (5V/1.5A)

15. IR Receiver
16. Menu Control: Brightness Level
17. Menu Control: Volume
18. Menu Control: Input Source
19. Power Button
20. Indicator Light

Visit Us www.viewsonic.com

SPECIFICATION		CONTROL	
Screen Size:	216"	RJ45 (LAN control):	x1
Display Area (mm):	4800 (H) x 2700(V)	USB Type A (Services):	x1(shared with USB A input)
Native Resolution:	3840x2160	RS232 (DB 9-pin female):	x1
Panel Technology:	Direct view LED	IR Receiver:	x1
LED Package Type:	СОВ	OTHERS	~ 1
Pixel Pitch (mm):	1.25		100-120V/30A~
Refresh Rate:	3840Hz	Power Supply Voltage:	50/60Hz or 220- 240V/15A~ 50Hz
Brightness (max.):	500 nits (8 levels adjustable)		(vary by country) 2500W (typ), 4000W
Contrast Ratio (typ.):	20000:1	Power Consumption:	(max) <0.5W (Sleep),<0W (Off)
Orientation:	Landscape / Portrait		
Viewing Angles (typ.):	H = 170, V = 170	Operating Temperature:	0~40°C
LED Lifetime (typ.):	100,000	LED Module Quantity:	768
Local Storage:	Total 64GB (56GB available	Ingress Protection Rating:	IP54(Front)
	storage)	Net Weight:	925.9 lbs (420kg)
Embedded OS:	Android 9.0	Cross Weight	1168.45 lbs
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160)	Gross Weight:	(530 kg)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p,	Screen Dimensions (WxHxD):	189.3x111x1.4 inches (4810x2820.3x35 mm)
Horizontal Frequency:	2160P/60Hz 23-120 kHz	Screen Dimensions (WxHxD) with wall mount:	189.8x111x3 inches (4810x2820.3x77 mm)
Vertical Scan Rate:	15-135 Hz	Packing Dimensions (WxHxD):	109.5x33.5x50.4 inches
INPUT		CTANDARD ACCESCODIES	(2780x850x1280 mm)
HDMI:	x5 (HDMI 2.1 x 1, HDMI 2.0 x 2, HDMI 1.4 x 2)	Power Cord:	x2
	x3	LAN Cable (Cat 5A):	x1 (5m)
USB Type A:	(USB2.0 x3)	IR Extender Cable:	x1 (3m)
RJ45 Input (Internet):	x1	Remote Control:	x1
IR in:	x1	QSG:	x1
Wi-Fi Input:	2.4G/5G Hz	Wall Mount:	x1
USB Type C:	x1 (Video input、Power output (5V/2A))	Spare Parts:	42
		Maintenance Tool:	LD-MK-002 x1
HDBaseT:	x1 (1080P@100m、 4K30Hz@70m)	OPTIONAL ACCESSORIES	
		Maintenance Tool:	LD-MK-002 x1
OUTPUT		ViewBoard Cast Button(USB-C):	VB-WPS-001
HDMI out:	x2 (HDMI 2.0 external x1,internal x1)	ViewBoard Cast Button(USB-A+HDMI):	VB-WPS-003
Speaker:	20W x2 (Harman Kardon)		
Audio out (3.5mm):	x1		
USB Type A (Power):	Shared with USB input (5V/1.5A x3)		