


## Key Features

- **Fast Warm Boot** eliminates long startup delays, launching signage and content in under 7 seconds.
- **Native 4K UHD in Any Orientation** delivers sharp, high-resolution visuals in landscape or portrait.
- **USB media playback & scheduling with automatic failover** ensures uninterrupted signage
- **Commercial-Grade Brightness & 24/7 Reliability** keep content clear and visible around the clock.
- **Centralized control** with Pro-AV integration and remote management via Web UI and ViewSonic Manager.

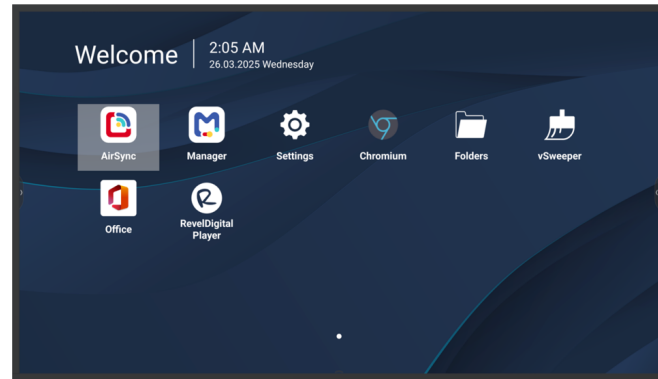

## Product Description

**Visit Us**

[www.viewsonic.com](http://www.viewsonic.com)

DISPLAY

|                    |                                       |
|--------------------|---------------------------------------|
| Panel Size:        | 65"                                   |
| Type/ Tech:        | TFT LCD module with DLED backlight    |
| Display Area (mm): | 1428.48(H) x 803.52(V) 64.5" diagonal |
| Native Resolution: | 3840x2160                             |
| Aspect Ratio:      | 16:9                                  |
| Colors:            | 8bit+2bitFRC                          |
| Brightness:        | 500 nits                              |
| Contrast Ratio:    | 1200:1 (typ.) / 5000:1 (DCR enabled)  |
| Response Time:     | 6.5ms                                 |
| Viewing Angles:    | H = 178, V = 178 typ.                 |
| Backlight Life:    | 50,000 Hours                          |
| Surface Treatment: | Anti-Glaire, 3H hardness, Haze 25%    |
| Bezel:             | 15.9mm/15.9mm/15.9mm/15.9mm (L/R/T/B) |
| Orientation:       | Landscape & Portrait                  |

PLATFORM

|            |                          |
|------------|--------------------------|
| Processor: | Quad-core ARM Cortex-A73 |
| RAM:       | 8GB DDR4                 |
| Storage:   | 32GB                     |

INPUT

|            |                                    |
|------------|------------------------------------|
| HDMI:      | x3 (HDMI 2.0*3, HDMI1 support ARC) |
| Audio:     | 3.5mm X 1                          |
| RS-232:    | x 1                                |
| WiFi Slot: | x 1                                |

OUTPUT

|        |                     |
|--------|---------------------|
| HDMI:  | x 1                 |
| Audio: | 3.5mm x1 (Line out) |
| SPDIF: | x 1                 |

LAN

|       |                                                                   |
|-------|-------------------------------------------------------------------|
| RJ45: | x 2 (*1 LAN-in & *1 LAN-out) 10/100M for USB TypeC, 1000M for OPS |
|-------|-------------------------------------------------------------------|

USB

|         |                                                                   |
|---------|-------------------------------------------------------------------|
| Type A: | x 2 (USB2.0 x1, USB3.2 Gen1 x1)                                   |
| Type C: | x 1 (PD65W/15W with OPS + DP1.2 + Data USB2.0 + 10M/100M sharing) |

SPEAKERS

|         |
|---------|
| 16W x 2 |
|---------|

COMPATIBILITY

|       |                 |
|-------|-----------------|
| HDMI: | 3840X2160 @60Hz |
|-------|-----------------|

EMBEDDED OS

|                 |
|-----------------|
| Android 14 AOSP |
|-----------------|

BUNDLED SOFTWARE

|                        |         |
|------------------------|---------|
| Wireless Presentation: | AirSync |
| Device Management:     | Manager |
| ViewSonic Launcher:    | Yes     |

POWER

|              |                                  |
|--------------|----------------------------------|
| Voltage:     | 100-240 VAC +/- 10%              |
| Consumption: | 99.42W (74.23W with Energy Star) |

ERGONOMICS

|                      |            |
|----------------------|------------|
| Wall Mount (VESA® ): | 600x400 mm |
|----------------------|------------|

OPERATING CONDITIONS

|                    |            |
|--------------------|------------|
| Temperature (° C): | 0 to 40°C  |
| Humidity:          | 20%-80% RH |

OPERATING HOURS

|      |
|------|
| 7/24 |
|------|

DIMENSIONS (W X H X D)

|                        |                                                 |
|------------------------|-------------------------------------------------|
| Physical (inch / mm):  | 57.61 x 31.75 x 2.68 in/ 1463.3 x 806.5 x 68 mm |
| Packaging (inch / mm): | 64.09 x 37.09 x 7.28 in/ 1628 x 942 x 185 mm    |

WEIGHT

|                  |                   |
|------------------|-------------------|
| Net (lb / kg):   | 52.58lb / 23.85kg |
| Gross (lb / kg): | 70.9lb / 32.16kg  |

REGULATIONS

|                                                                                                                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| cTUVus, FCC/ICES003, Energy star 8, EPEAT Gold, EEI,, EMC/CE Report, CB, EAC, UkrSEPRO, RCM, LBL, flicker free, Green BOM, RoHS DoC, ErP-Eco, REACH DoC, SCIP, WEEE report, Annex I, Annex II, TPCH DoC, Packing waste, CA65 DoC |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

PACKAGE CONTENTS

|                                     |
|-------------------------------------|
| 1. 3m power cord by ship area       |
| 2. Remote control                   |
| 3. AAA battery x 2                  |
| 4. Quick Start Guide                |
| 5. RS232 adapter                    |
| 6. Clamp x 5                        |
| 7. wall mount Screw x 4             |
| 8. HDMI cable 3m(HDMI LA certified) |
| 9. Compliance statement             |