


Key Features

- **Fast Warm Boot** eliminates long startup delays, launching signage and content in under 7 seconds.
- **Native 4K UHD in Any Orientation** delivers sharp, high-resolution visuals in landscape or portrait.
- **USB media playback & scheduling with automatic failover** ensures uninterrupted signage
- **Commercial-Grade Brightness & 24/7 Reliability** keep content clear and visible around the clock.
- **Centralized control** with Pro-AV integration and remote management via Web UI and ViewSonic Manager.

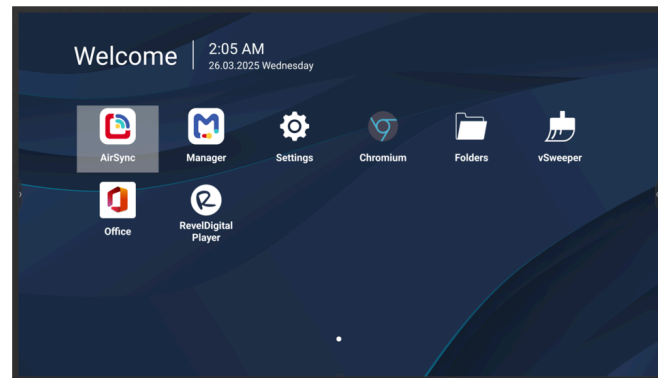

Product Description

Visit Us

www.viewsonic.com

DISPLAY

Panel Size:	75"
Type/ Tech:	TFT LCD module with DLED backlight
Display Area (mm):	1650.24(H) x 928.26(V) 74.6" diagonal
Native Resolution:	3840x2160
Aspect Ratio:	16:9
Colors:	8bit+2bitFRC
Brightness:	500 nits
Contrast Ratio:	1200:1 (typ.) / 5000:1 (DCR enabled)
Response Time:	6.5ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 Hours
Surface Treatment:	Anti-Glaire, 3H hardness, Haze 25%
Bezel:	15.9mm/15.9mm/15.9mm/15.9mm (L/R/T/B)
Orientation:	Landscape & Portrait

PLATFORM

Processor:	Quad-core ARM Cortex-A73
RAM:	8GB DDR4
Storage:	32GB

INPUT

HDMI:	x3 (HDMI 2.0*3, HDMI1 support ARC)
Audio:	3.5mm X 1
RS-232:	x 1
OPS Slot:	x 1 PC Slot
WiFi Slot:	x 1

OUTPUT

HDMI:	x 1
Audio:	3.5mm x1 (Line out)
SPDIF:	x 1

LAN

RJ45:	x2 (*1 LAN-in & *1 LAN-out) 10/100M for USB TypeC, 1000M for OPS
-------	--

USB

Type A:	x2 (USB2.0 x1, USB3.2 Gen1 x1)
Type C:	x1 (PD65W/15W with OPS + DP1.2 + Data USB2.0 + 10M/100M sharing)

SPEAKERS

16W x 2

COMPATIBILITY

HDMI:	3840X2160 @60Hz
-------	-----------------

EMBEDDED OS

Android 14 AOSP

BUNDLED SOFTWARE

Wireless Presentation:	AirSync
Device Management:	Manager
ViewSonic Launcher:	Yes

POWER

Voltage:	100-240 VAC +/- 10%
Consumption:	115.8W (89.19W with Energy Star)

ERGONOMICS

Wall Mount (VESA®):	600x400 mm
----------------------	------------

OPERATING CONDITIONS

Temperature (° C):	0 to 40°C
Humidity:	20%-80% RH

OPERATING HOURS

7/24

DIMENSIONS (W X H X D)

Physical (inch / mm):	66.36 x 37.94 x 2.68 in/ 1685.6 x 963.7 x 68 mm
Packaging (inch / mm):	73.35 x 42.91 x 8.86 in/ 1863 x 1090 x 225 mm

WEIGHT

Net (lb / kg):	75.29lb / 34.15kg
Gross (lb / kg):	106.79lb / 48.44kg

REGULATIONS

cTUVus, FCC/ICES003, Energy star 8, EPEAT Gold, EEI,, EMC/CE Report, CB, EAC, UkrSEPRO, RCM, LBL, flicker free, Green BOM, RoHS DoC, ErP-Eco, REACH DoC, SCIP, WEEE report, Annex I, Annex II, TPCCH DoC, Packing waste, CA65 DoC

PACKAGE CONTENTS

1. 3m power cord by ship area
2. Remote control
3. AAA battery x 2
4. Quick Start Guide
5. RS232 adapter
6. Clamp x 5
7. wall mount Screw x 4
8. HDMI cable 3m(HDMI LA certified)
9. Compliance statement