


# Key **Features**

- Write Away quick-start annotation, enhanced by 50-point touch and palm rejection for precise writing.
- 70W total output power speaker system with built-in 8-microphone array, for rich, immersive audio.
- EDLA-Certified with Android 14, integrated ViewSonic Education Software for seamless
  functionality
- NFC and SSO sign-in for swift access to the intuitive launcher and personal settings.
- EPEAT Silver certified for enhanced energy efficiency and sustainability.



# Product **Description**

Bring energy-efficient performance to your classroom with the ViewBoard® IFP51 Series, available in sizes from 55" to 98" to suit any setup. Seamless interactivity is at your fingertips, thanks to its ultra-responsive 50-point touch technology and instant 'write away' annotation. Powered by Android 14 and EDLA-Certified, it offers secure access to Google Play apps, while NFC and SSO sign-in ensure instant access to personalised settings. Integrated ViewSonic Education Software completes the experience with tools for whiteboarding, casting, and device management—delivering a more dynamic and efficient teaching experience.

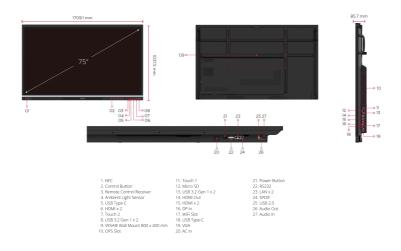

**Visit Us** 

www.viewsonic.com

DISPLAY	
Panel Size:	75"
Panel Type:	TFT LCD Module with DLED Backlight.
Display Area (mm):	1650.24mm(H) x 928.26mm(V) (74.5")
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160
Colors:	1.07G colors
Brightness:	500 nits
Contrast Ratio:	1200:1 (typ.); 5000:1 (DCR)
Response Time:	6.5 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 Hours (Min)
Surface Treatment:	Hardness:9H, AG+AF
Orientation:	Landscape
PLATFORM	
Processor:	Octa-Core CPU
RAM:	16GB
Storage:	128GB
тоисн	
Type/ Tech:	Ultra Fine Touch Techology (IR Recognition)
Touch Resolution:	32767 x 32767
Touch Point:	EDLA/Android/Windows: 50 points of touch
Palm Rejection:  NPUT	Yes
HDMI:	x4 (Frontx2:HDMI2.1 with CEC,HDCP; Rearx2: [(HDMI2.1 with
	CEC, HDCP)x1+(HDMI2.1 with CEC, HDCP, ARC)x1]
RGB / VGA:	x1
DisplayPort:	x1
Audio:	x1
RS232:	x1
SD/SDHC:	TF Card Slot(Micro SD)
OPS:	x1 PC Slot
DUTPUT	A (UDMI o.4. UDOD 4)
HDMI:	x1 (HDMI 2.1, HDCP 1.x)
Audio:	x1 (Line out)
SPDIF: -AN	x1 (optical)
RJ45:	x2
JSB	AC .
Type A:	x5 (Front x2 and Rear x 2 with USB3.2 Gen 1, all support SmartPol USB; Rear x 1 with USB 2.0 for system update)
Type B:	x2 (Front x 1 and Rear x 1 with USB3.2 Gen 1)
Type C:	x3 (Frontx1 with USB3.2 Gen 1, DP1.2, Ethernet 100M, PD 65W; Rearx1 with USB3.2 Gen 1, DP1.2, Ethernet 100M, PD 15W; Topx1 with USB3.2 Gen 1, PD 15W)
SPEAKERS	with 6050.2 deli 1, 1 5 1500)
25W x 2 front soundbar + 20W x 1	subwoofer
MICROPHONE	
Built-in 8-array microphone	
TOP CAMERA PLATE	
Yes	
COMPATIBILITY	
RGB PC/HDMI PC:	1920x1080 @ 60Hz
	1920x1080 @ 60Hz 3840x2160
HDMI: DisplayPort:	3840x2160
HDMI: DisplayPort: EMBEDDED OS	3840x2160
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14	3840x2160
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE	3840x2160 3840x2160 myViewBoard for Android
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software:	3840x2160 3840x2160
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software:	3840x2160 3840x2160 myViewBoard for Android
HDMI: DisplayPort: EMBEDDED OS  EDLA-certified with Android 14 BUNDLED SOFTWARE  Basic Annotation Software: Pro Annotation Software: Wireless Presentation:	3840x2160 3840x2160 myViewBoard for Android myViewBoard for Windows (embedded in VPC)
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management:	3840x2160  3840x2160  myViewBoard for Android myViewBoard for Windows (embedded in VPC)  AirSync
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher:	3840x2160  3840x2160  myViewBoard for Android myViewBoard for Windows (embedded in VPC) AirSync Manager
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES	3840x2160  3840x2160  myViewBoard for Android myViewBoard for Windows (embedded in VPC) AirSync Manager
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: EPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP	3840x2160  3840x2160  myViewBoard for Android myViewBoard for Windows (embedded in VPC)  AirSync  Manager  Yes
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: EPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP	3840x2160  myViewBoard for Android myViewBoard for Windows (embedded in VPC)  AirSync Manager Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor:	3840x2160  myViewBoard for Android myViewBoard for Windows (embedded in VPC)  AirSync  Manager  Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor:	3840x2160  myViewBoard for Android  myViewBoard for Windows (embedded in VPC)  AirSync  Manager  Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)  Yes
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: NFC Reader: Pen Sensor:	3840x2160  myViewBoard for Android  myViewBoard for Windows (embedded in VPC)  AirSync  Manager  Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)  Yes  Yes
HDMI: DisplayPort: EMBEDDED OS EDLA-certified with Android 14 BUNDLED SOFTWARE Basic Annotation Software: Pro Annotation Software: Wireless Presentation: Device Management: ViewSonic Launcher: SPECIAL FEATURES All-in-one USB port: Simple LAN sharing between IFP and slot-in device: Light Sensor: NFC Reader:	3840x2160  myViewBoard for Android  myViewBoard for Windows (embedded in VPC)  AirSync  Manager  Yes  USB 3.2 Gen 1 "SmartPort USB" to all channels  10/100/1000M (USB Type-C 10/100, Android & PC 10/100/1000)  Yes  Yes

On: 99.84W ; ff:< 0.5 W

Consumption:

# **ERGONOMICS**

Wall Mount (VESA® ): 800 x 400

# **OPERATING CONDITIONS**

Temperature (° C): 0°C to 40°C
Humidity: 20% ~ 80% RH non-condensing

### DIMENSIONS (W X H X D)

Physical (inch / mm): 67.29 x 40.85 x 3.36 in / 1709.1 x 1037.5 x 85.5 mm

Packaging (inch / mm): 73.35 x 45.79 x 8.86 in / 1863 x 1163 x 225 mm

# WEIGHT

Net (lb / kg): 101.54 lb / 46.06 kg

Gross (lb / kg): 126.88 lb / 57.55 kg

# REGULATIONS

cTUVus, FCC ID/IC ID, FCC SDoC, Energy Star 8.0, EMC/CE, CB/LVD, GOST-R/EAC, UkrSEPRO, EPEAT Silver, UK-EEL, BSMI, BIS, LBL(Low Blue Light Certification), Flicker Free, RoHS, ErP-Eco, REACH, SCIP, WEEE, TPCH, Packing waste, CA65, PAIA

# PACKAGE CONTENTS

- 1. Power Cord x1 3 meters,
- 2. USB Type-C cable x1 1.8 meters
- , USB-IF certified
- 3. USB Touch cable x1 3 meters
- 4. Touch pen (Passive pen) x 2
- 5. Quick Start Guide
- 6. RS232 adapter x1
- 7. Clamp x 5
- 8. Camera Plate x1
- 9. Screw x 8 (camera 2+2, wall mount 4)
- 10. HDMI cable x1 3meters,

(HDMI LA certified)

- 11. Remote controller x1
- 12 AAA battery x2
- 13. Compliance statement

# COMPATIBLE SLOT-IN PC

VPCF5-W33-G1, VPC37-W53-G1, VPC35-W53-G1, VPC-A31-O1