

SPECIFICATIONS

BANNOCKBURN™ TRIM ONLY SINGLE HANDLE PRESSURE BALANCE TUB & SHOWER FAUCET

Model

D500056T (Tub & Shower trim) D510556T (Shower only trim)

Description

- Boost 3F Showerhead D460048,
 2.5GPM (9.5LPM) maximum flow rate @ 80 psi
- · 6" brass showerarm
- · Solid brass handle
- Diverter on spout
- Use with valve: D112000BT (w/ stops) or D115000BT (w/o stops) or D112500BT (w/ stops) or D115500BT (w/o stops)

2.5 2 1.5 1 20 40 60 80 PSI v/o stops) — Wide --- Centerjet Aeration



Standards



- UPC/cUPC
- Energy Policy Act of 1992



• ASME A112.18.1M/ A112.18.1




 ADA Accessibility Guidelines for Buildings and Facilities -4.27.4 Controls and Mechanisms

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

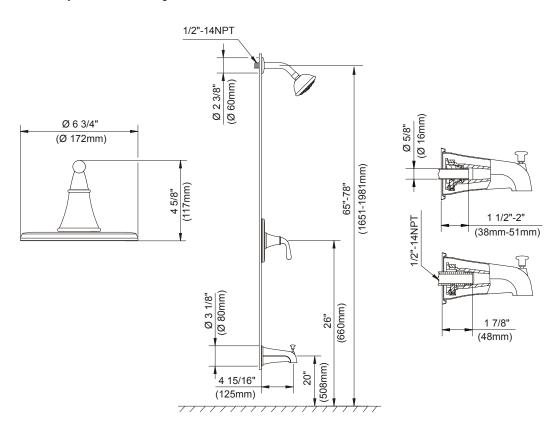

Submittal Information:	
Job Name:	Location:
Contractor:	Contact #: