


SILHOUETTE™ LIGHTED MIRROR

Residential Performance Specification

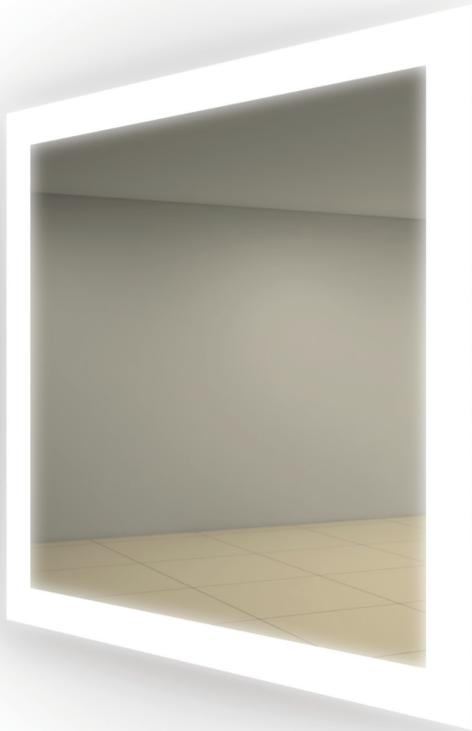

The Silhouette™ Lighted Mirror remains a classic favorite, illuminating the entire bathroom and washing the wall with light while creating the illusion that it is floating free above the vanity.

FEATURES

- Elife™-8 Years extended lamp replacement cycle
- Brilliant chassis design for increased light output
- Zip finger-print protection for edge frosted mirrors
- Natural light color ideal for makeup application
- HardCoat™ anti-corrosion mirror treatment
- Rust resistant powder coated metal construction
- Environmentally sustainable and energy efficient
- Proudly made in the USA
- Wall Glow
- Stainless steel hanger
- Welded Construction

LIGHTING

- Low-Mercury T5HO warm fluorescent (US Made)
- CRI 85
- CCT (K) 3000
- Average lamp life of 35,000 hours
- 50,000 cycle ballast
- Lamps can be seen from side of mirror

OPTIONS

- Diamond Clear™ extra white mirror
- Dimmable - Separate wall control required
- Defogger
- Add TV (See Silhouette™ Lighted Mirror TV)
- Side Diffusers

SAFETY

- Tested to UL/UL-C 1598 including section 16.23 (adhesive support test)
- International Certifications
- Safety backed mirror

THERE'S ONLY ONE ELECTRIC MIRROR™

Electric Mirror is the global leader in lighted mirrors and Mirror TV technology. With unparalleled customer service and amazing innovation, Electric Mirror is the standard of luxury for five-star hotels, upscale commercial projects and designer homes.


SILHOUETTE™ LIGHTED MIRROR

Residential Performance Specification

SPECIFICATION

- The top of the lighted mirror above the bathroom vanity should be a minimum of 6' 6" above the finished floor.
- Electrical connections made with MC cable brought through the chassis knockout, no electrical box required.
- Electrical power should be controlled by a light switch.
- Fixture should be mounted to wall studs to provide sufficient support. Mounting holes are provided in the chassis.

MODEL NUMBER	DIMENSIONS	POWER REQUIREMENTS	LAMPING
SIL-24.00x36.00	24" W x 36" H x 3" D 610mm x 914mm x 76.2mm	120 - 277 VAC, .80 - .35 Amps, 96W	4 x T5HO, 24W
SIL-36.00x36.00	36" W x 36" H x 3" D 914mm x 914mm x 76.2mm	120 - 277 VAC, 1.1 - 45 Amps, 154W	4 x T5HO, 39W
SIL-48.00x36.00	48" W x 36" H x 3" D 1,219mm x 914mm x 76.2mm	120 - 277 VAC, 1.3 - .56 Amps, 186W	4 x T5HO, 39W/54W
SIL-60.00x36.00	60" W x 36" H x 3" D 1,524mm x 1,372mm x 76.2mm	120 - 277 VAC, 1.55 - .67 Amps, 238W	4 x T5HO, 39W/80W

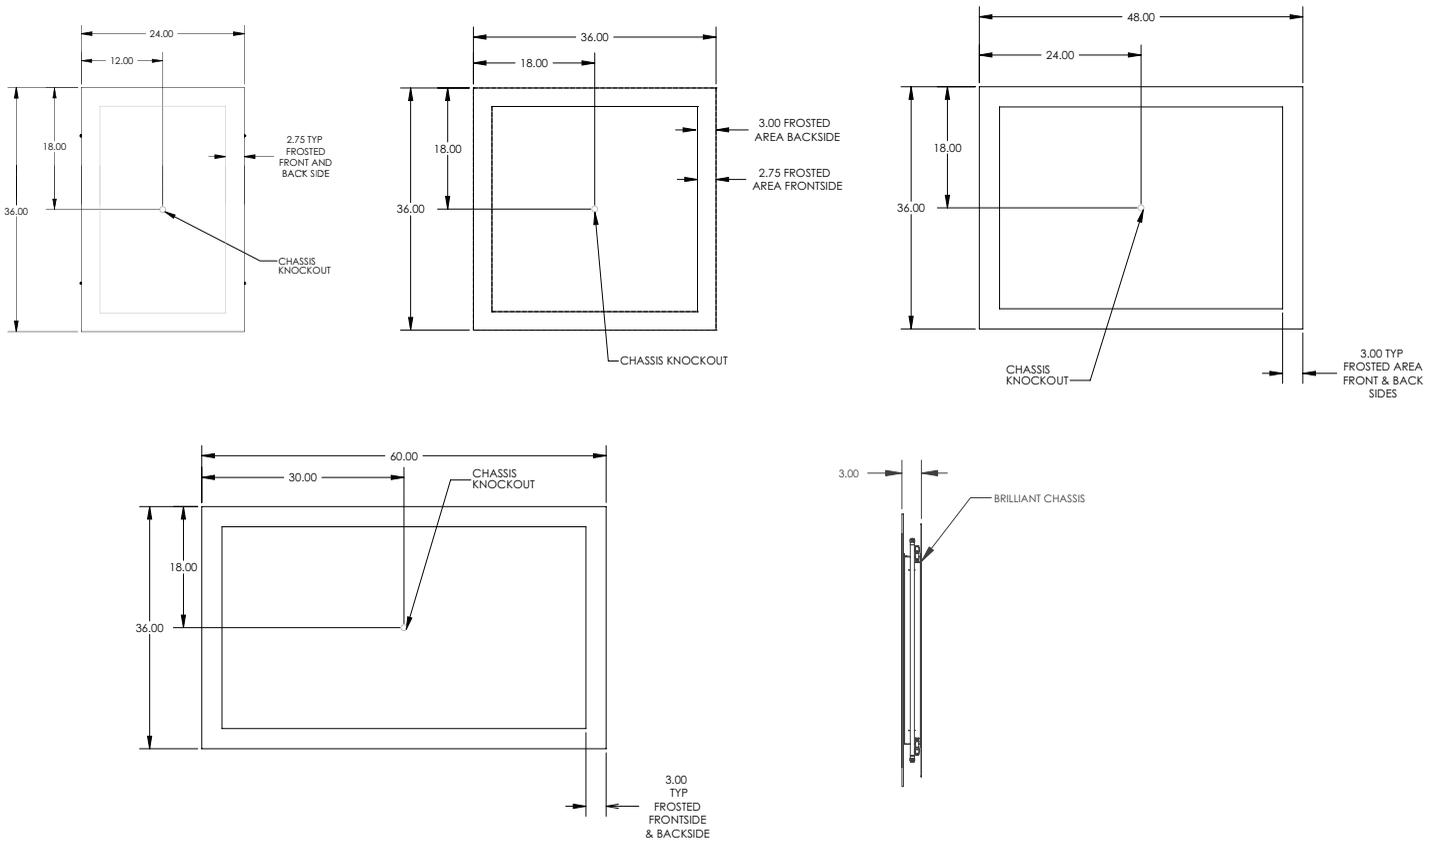

PROPRIETARY AND CONFIDENTIAL: The information contained in this specification is the sole property of Electric Mirror®. Any reproduction in part or in whole without written permission from Electric Mirror® is prohibited.

© 2012 ELECTRIC MIRROR®