


TECHNICAL SPECIFICATIONS

Asbury Series: Widespread Pillar Kitchen Faucet

27x250

Asbury#

272 250 xxx	277 250 xxx
273 250 xxx	278 250 xxx
275 250 xxx	

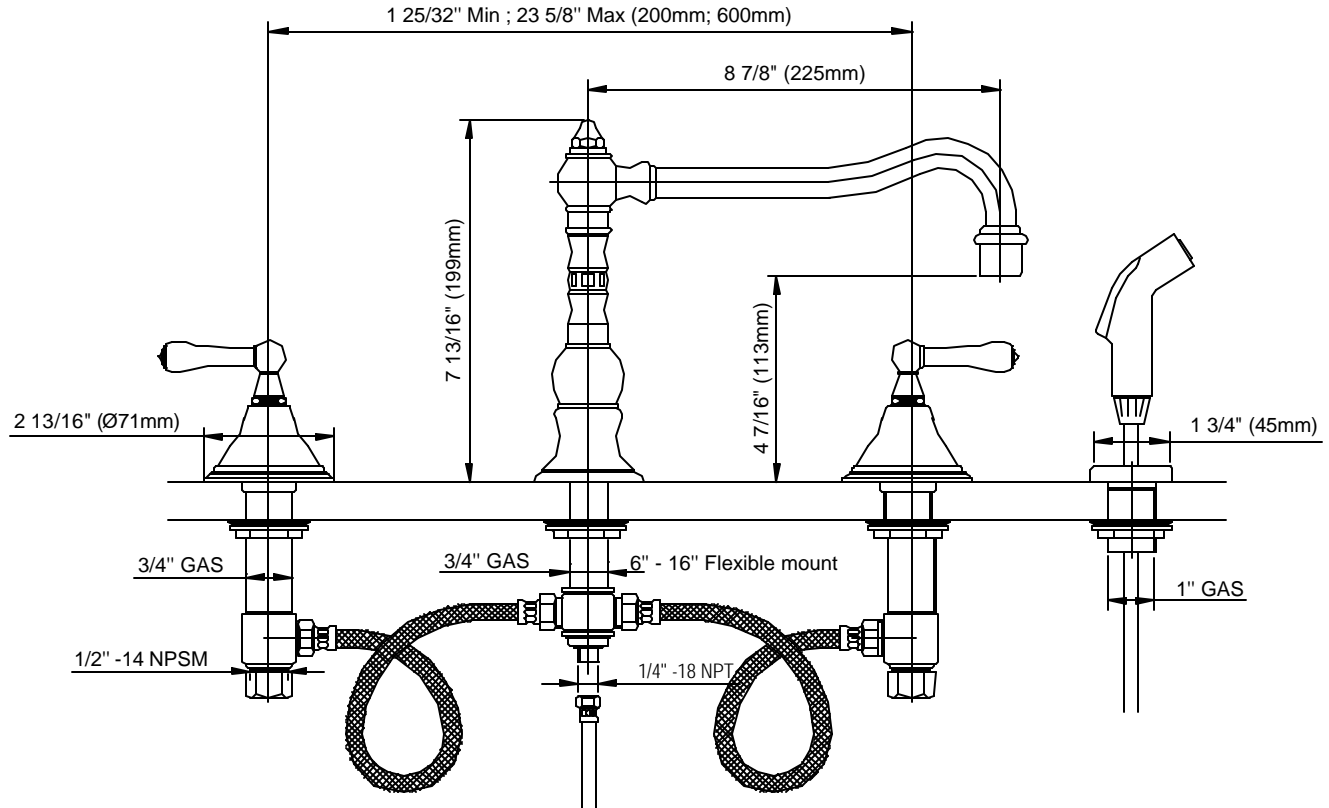

Spout: Cast brass with water conserving aerator.

Trim: Hot forged brass.
Three handles available

Valve: 1/2" Ceramic disc valve cartridge.
1,000,000 Tested cycles.
1/4 Turn positive on/off.

Inlets: Sized for either coupling or sweat connections.

Pressure: Maximum (tested): 200 psi (14.1 kg/cm).
Recommended (flowing): 15-75 psi (1.1-5.3 kg/cm)

Waste: 1 1/4" Pop-up waste (standard).

Flow rates: 2.2 GPM @ 60psi (flowing); (8.4 l/min. @ 4.2 kg/cm (flowing))

TECHNICAL SPECIFICATIONS

Asbury Series: Widespread Pillar Kitchen Faucet

27x250

Service Parts

1	Spout assembly	
1.1	Spout body	
1.2	Aerator M24x1	
2	Nipple assembly	
2.1	Nipple	
2.2	Washer	
2.3	Locknut 3/4"	
2.4	Brass washer	
2.5	O-ring 22x5	
2.6	Locknut 1/2"	
2.7	Brass tee for Kitchen swivel	
3	Trim ring	
4	Flexible hose	
5	Bracket assembly	
5.1	Bracket	
5.2		
5.3		
5.4	Rubber washer	
5.5	Locknut	
6		
7	Bell	
8	Asbury brass lever handle	

Asbury#

272 250 xxx	277 250 xxx
273 250 xxx	278 250 xxx
275 250 xxx	

