

## INSTALLATION INSTRUCTIONS FOR SKU#: 4080


**CAUTION : TO AVOID POSSIBLE ELECTRICAL SHOCK, MAKE CERTAIN ELECTRICITY IS SHUT OFF AT MAIN PANEL BEFORE WIRING.**

All wiring must be in accordance with national and local electrical codes. If you are not familiar with wiring, you should use a qualified electrician.

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Ce produit doit être installé selon le code d'installation pertinent, par une personne qui connaît bien le produit et son fonctionnement ainsi que les risques inhérents.

**WARNING, RISK OF FIRE, USE ONLY TYPE LED 120V 3W 700mA.**


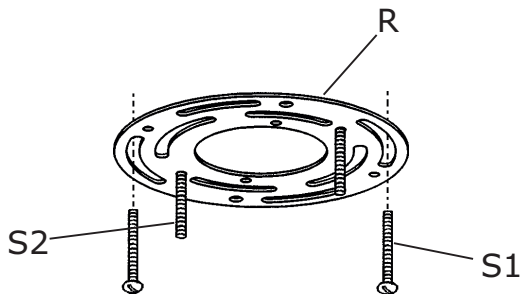


**1-** Making certain that the threads of the cross bar screws are pointing away from the ceiling, secure the round cross bar (R) to the junction box using the mounting screws (S1) after inserting the screws (S2) from within out.

**2-** Loosen the three screws (A) to remove the base (B)

**3-** Connect the white fixture wire to the white wire of the supply circuit. Connect the black fixture wire to the black wire of the supply circuit. Secure with the wire nuts (N) and tape connections with electrical tape. Connect the fixture yellow and green ground wire and the supply green tinted ground wire to the ground screw on the round cross bar using the ground terminal.

**4-** Push the connections and all excess wire to the interior of the junction box. Spread the electrical splices on the round cross bar (R) so that the black wires are on one side of the junction box and the white wires on the other. Secure the plaque (C) to the round cross bar, using the cross bar screws (S2) and the thumb nuts (T).

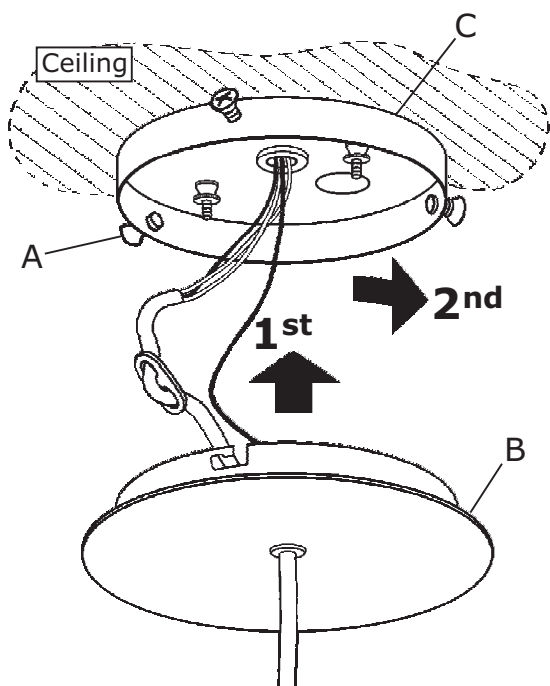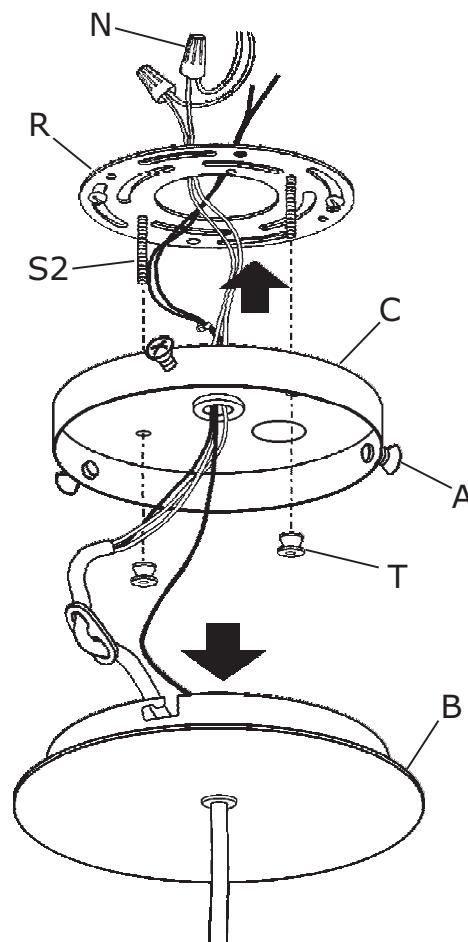

**5-** Reinstall the base (B) as shown by the arrows. Tighten the screws (A) to fix the lamp to the plaque (C).