


Avonmore EECOSH Contemporary

ECTRIC

Technical Information

- . 120VAC 60Hz
- . 1-1/2" "D" Vertical Tubes
- . 1" Round Horizontal Tubes
- . Smart Thermo Control Element
- . Steel Construction

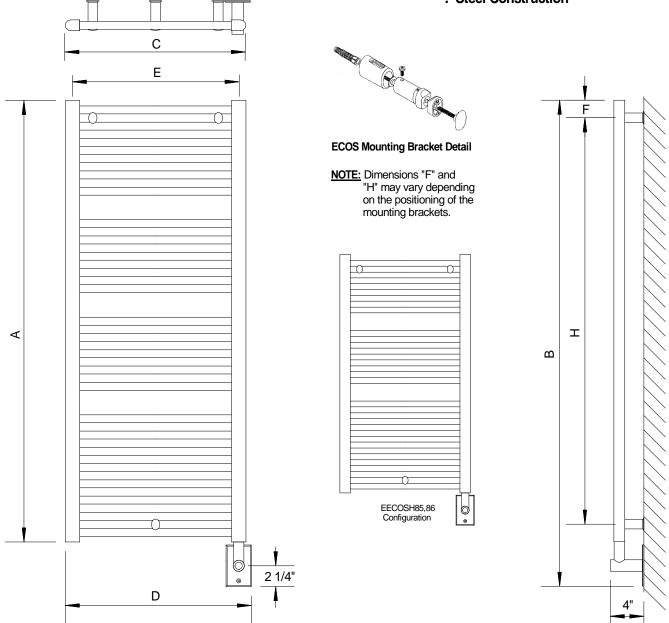

MODEL	Dim "A"	Dim "B"	Dim "C"	Dim "D"	Dim "E"	Dim "F"	Dim "H"	Watts*	Amps	Wgt.(lbs)
EECOSH85	33 15/16"	38 7/8"	19 11/16"	20 3/16"	17 15/16"	3 11/16"	26 9/16"	200	1.75	40
EECOSH86	33 15/16"	38 7/8"	23 5/8"	24 1/8"	21 7/8"	3 11/16"	26 9/16"	200	1.75	45
EECOSH125	48 1/8"	53 1/16"	19 11/16"	20 3/16"	17 15/16"	7 1/4"	33 11/16"	300	2.73	60
EECOSH126	48 1/8"	53 1/16"	23 5/8"	24 1/8"	21 7/8"	7 1/4"	33 11/16"	300 PL 400 PA	2.73 3.63	70



^{*}Represents draw at steady state. Power could be higher during warm up. PL = Plated Finishes
PA = Painted Finishes