

**SPECIFICATIONS**

**MELROSE™ TWO HANDLE WIDESPREAD LAVATORY FAUCET**

**Model**

D304012

**Description**

- Ceramic disc valves
- 6" high spout, 5 3/4" spout length
- 50/50 touch down drain assembly
- 3 hole mount, 6" - 12" installation
- 1.5gpm (5.7L/min) maximum flow rate @60 psi

**Standards**



NSF/ANSI 372

• NSF/ANSI 372

MEETS ASME A112.18.1M/A112.18.1

• ASME A112.18.1M/A112.18.1




• ADA Accessibility Guidelines for Buildings and Facilities - 309.4 Operation for Operable Parts

**Warranty**


Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

**Flow Rate**

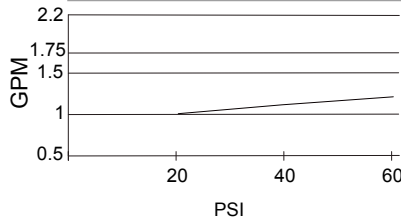

**Finishes Available**

- Chrome
- Other: Refer to Price List for additional finish

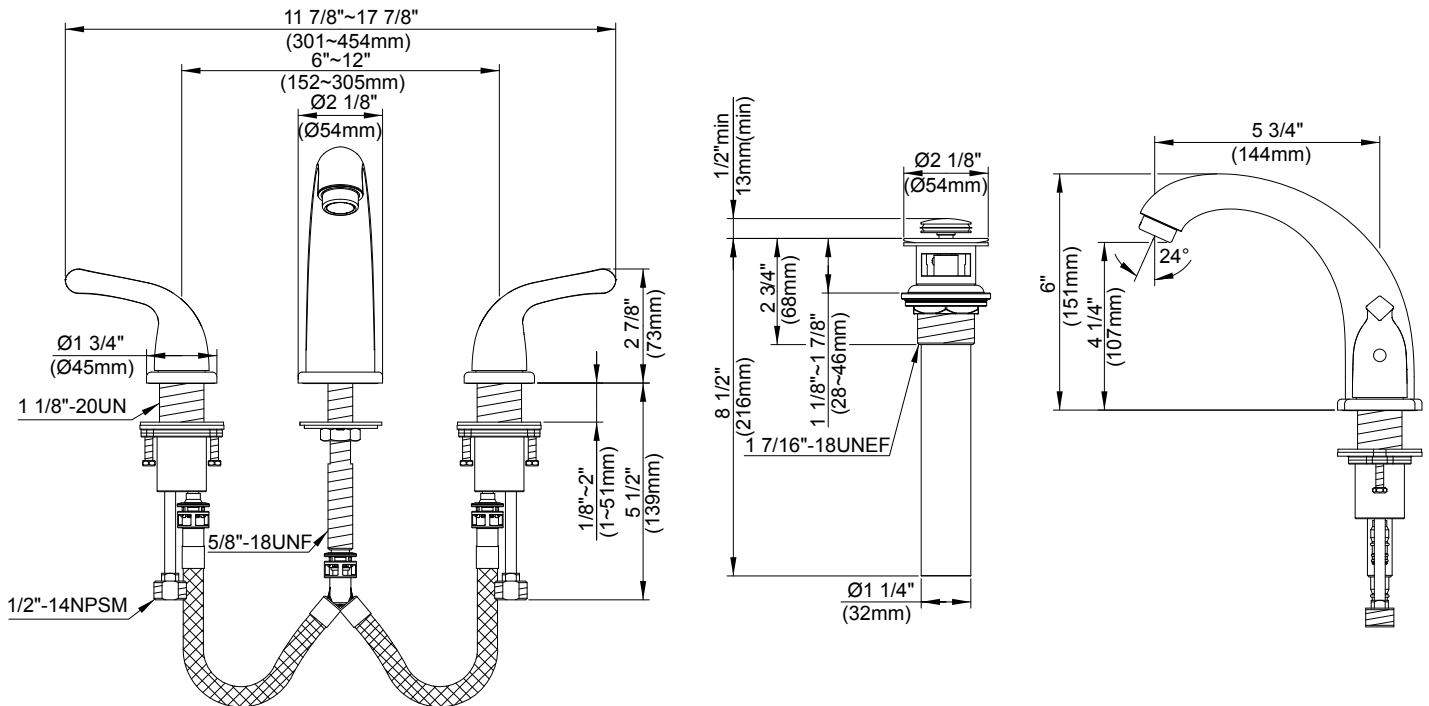

**Submittal Information:**

Job Name: \_\_\_\_\_  
 Contractor: \_\_\_\_\_

Location: \_\_\_\_\_  
 Contact #: \_\_\_\_\_