

SPECIFICATIONS

ROMAN TUB FAUCET WITH SOFT TOUCH PERSONAL SHOWER™

Description

- · 2 handle with solid brass spout
- Soft Touch Personal Shower[™] with integral diverter system*
- Spout plug for pressure testing & plaster quard
- Fits 1 3/8" to 1 1/2" diameter mounting hole

Standards

- ASME A112.18.1
- CSA B125
- Listed IAPMO/UPC
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

Warranty

Specific Features: _

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



D306757 OPULENCE™

Available Colors & Finish

Chrome


بغ

- Antique Copper (AC)
- Brushed Nickel (BN)
- · Satin Black (BS)
- Polished Brass (PBV)
- Polished Nickel (PNV)
- Oil Rub Bronze (RB)

Trim Kits:(for use w/rough-in valves) D306957T (w/o Personal Shower)

Special Packaging

- This product also available with valve packaged separate from trim.
- Use with rough-in valve: D210000BT (10" CC fixed) OR D215000BT (widespread)
- Valves are combination 1/2" copper sweat, 1/2" NPT threaded connectors for all ports

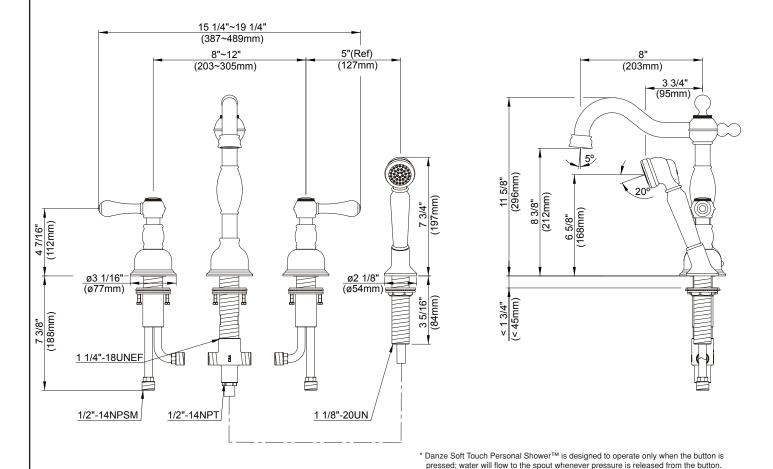


Submitted Model No.: _



SPECIFICATIONS

ROMAN TUB FAUCET ROUGH-IN VALVES-CRITICAL DIMENSIONS

Rough-in valve D215000BT (widespread)

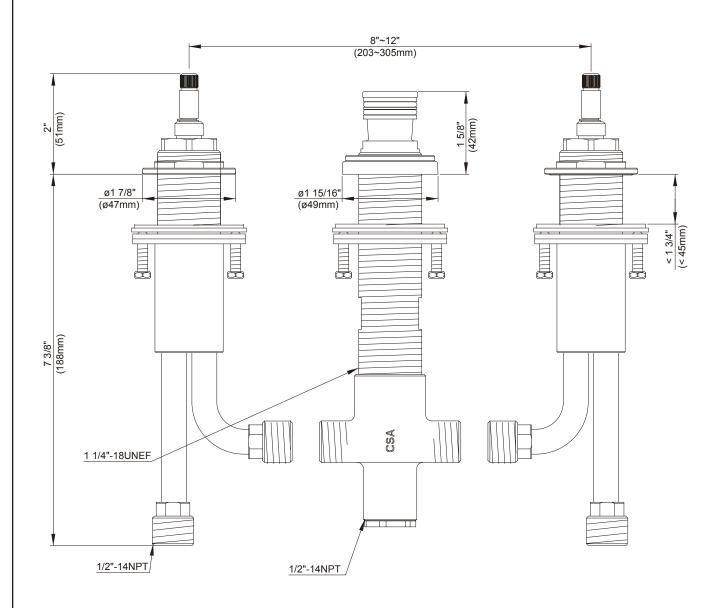

^{*} Installation method shown is for deck thickness of less than 1-3/4".

If the installation is for deck thickness between 1-3/4" and 3-1/2", the sleeve nut needs to be reversed.

 Specific Features:
 Submitted Model No.:
 Submitted Model No.:
 SD306757/09-07.02