

MEDITERRANEAN

SPECIFICATION DOCUMENTS


Acryline
spa baths



From 8:00 a.m. to 5 p.m. Monday to Friday (EST)

T: 1.800.794.4667 F: 1.800.935.5785 www.acryline.ca

MEDITERRANEAN - DIMENSIONS

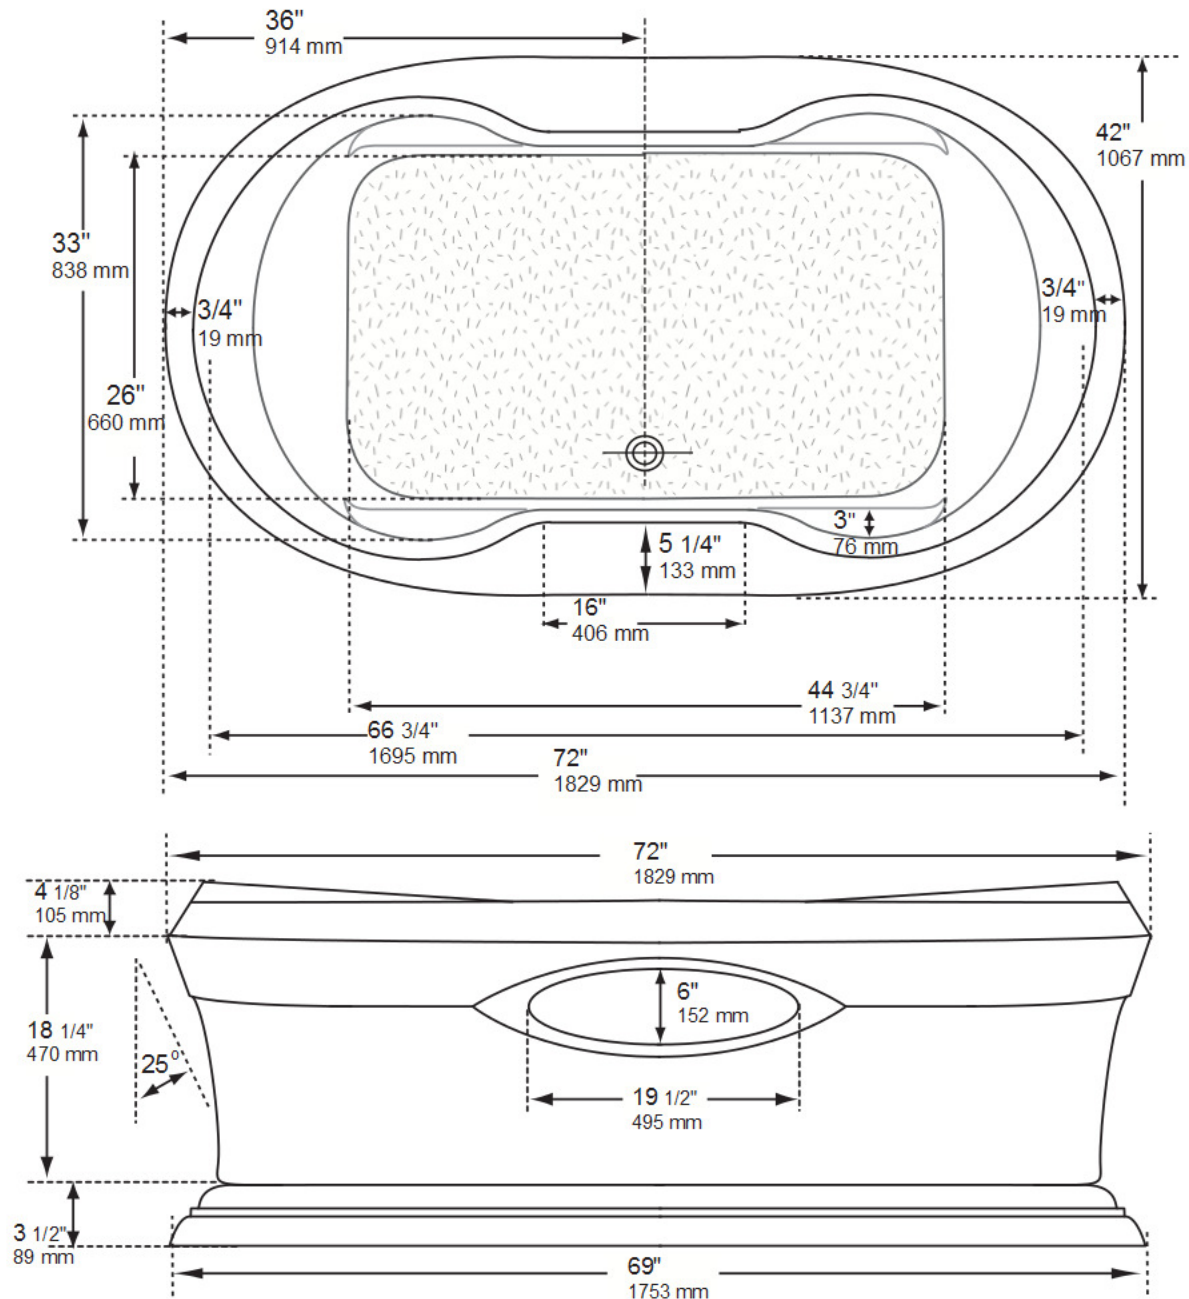

NOTE: All published dimensions are for reference only. Acryline accepts a 1/4" (0.64 cm) variance. Technical specifications are subject to change when product improvements are performed. All critical dimensions required for installation should be taken directly on the unit being installed.

MEDITERRANEAN - TECHNICAL SPECIFICATION

ENCORE COLLECTION	STATISTICS	CONFIGURATIONS
True Drain Channel 51 Air Portals - Intermediate to vigorous massage	Size: 72± x 42± V x 26 1/8± H	Heated Head/Neck Rest: 2 (with air system baths)
Injection Air 16 Injector Air Jets	Capacity: 63 US Gal 238 Litres	Armrests: 4
Ultimate Combination 51 Air Portals + 16 Injector	No. of Bathers: 2	Raised Seats: 0
Soaking Bath	Lumbar Support: 2	Reveal Options: N/A
	Water Depth: 14 1/2±	Applications: Freestanding

STANDARD FEATURES	OPTIONAL FEATURES
Available in White or Biscuit	Chromatherapy Lights Air Baths: 2 or 4 LED
3 Wall Intergrally Molded Tiling Flange	Chromatherapy Lights Soaker Baths: 2 or 4 LED
1Hp heated blower motor(s) with silencer (1 per system)	Grab Bars: Quantity - 1 or 2 Size - 8 or 12 inch
Rectangular Backlight Deluxe Keypad (Encore Collection)	Relocation Kits / Extension Wires: Up to 12 ft.
Wave and Pulse (Encore Collection)	Non-Standard Colors: Consult factory for availability
Rectangular 3 speed Keypad (Classic Collection)	Waste & Overflow: Available in white Chrome or Brushed Nickel
Built in 20 min. timer.	Remote Control: Replaces Backlight Deluxe Keypad (Encore Collection only)
Auto-purge Cycle	Faucets: Vogue Floormount Tub Filler with Handshower (Chrome) Soto Floormount Tub Filler With Handshower (Chrome) Soto Wallmount Tub Filler with Handshower (Chrome)

STANDARDS

ANSI Z124.1 / CSAB45.5-02, CSAB45.0-02, UL1795 Third Edition, Rev. Sept.2006 CSA C22.2 No.218.2-93 (R2004) ASME A112.19.7

ELECTRICAL REQUIREMENTS

Single system baths require a dedicated 15A, 120V, circuit protected by a ground fault circuit interrupter. (GFI)
Ultimate Combination system baths require 2 dedicated 15A, 120V, circuits protected by a ground fault circuit interrupter. (GFI) Always consult local electrical code for requirements

NOTES

All published dimensions are for reference only. Acryline accepts a 1/4±(0.64 cm) variance. Technical specifications are subject to change when product improvements are performed.
All critical dimensions required for installation should be taken directly on the unit being installed.

WARRANTY*

Encore Collection: Acrylic: 20 Years / Blower motor(s): 5 Years / Control(s): 2 Years Classic Collection: Acrylic: 5 Years / Blower motor(s): 1 Year / Control(s): 1 Year

* Some restrictions apply. Copy available upon request.

MEDITERRANEAN - ORDER FORM

P.O. # _____

Acryline
spa baths

STANDARD OPTIONS

Application ☐ Freestanding

Color of Bath ☐ White

☐ Biscuit

Reveal ☐ 3/4in.

☐ 2in.

☐ 4in.

ACCESSORIES


☐ Vogue Roommount Tub Filler With Handshower (Chrome)

☐ Soto Roommount Tub Filler With Handshower (Chrome)

☐ Soto Wallmount Tub Filler With Handshower (Chrome)

Waste & Overflow

☐ Chrome (Included) ☐ Brushed Nickel

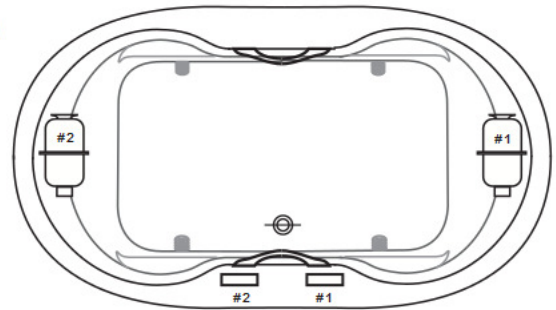

LEGEND

FEATURES

ENCORE COLLECTION

CLASSIC COLLECTION



System

☐ True Drain ☐ Injection Air ☐ Ultimate Combination

☐ True Drain ☐ Soaker Bath



Keypad Trim(s) [Ⓜ]

☐ White ☐ Biscuit ☐ Chrome ☐ Brushed Nickel



Remote Control ⁺

☐ White Only (The Remote Control option replaces the keypad - Indicate desired docking position on the bath drawing drawing)



3 Speed Keypad ⁺⁺

☐ White ☐ Biscuit (Field Installation Required)



Injector Trim(s) ^{ⓂⓂ}

☐ White ☐ Biscuit ☐ Chrome ☐ Brushed Nickel ☐ Mini Chrome/White ☐ Mini Brushed Nickel/White



Chromotherapy Air System Baths - (optional)

☐ 2 Lights ☐ 4 Lights (If 2 Lights, indicate desired position on above drawing)



Chromotherapy Soaker Baths - (optional)

☐ 2 Lights ☐ 4 Lights (If 2 Lights, indicate desired position on above drawing)



Acrylic Grab Bar(s) (optional)

☐ 1x 8in. ^{*} ☐ 2x 8in. ☐ 1x 12in. ^{*} ☐ 2x 12in.

Color: _____

^{*}Indicate location on above drawing



Waterfall Fill Spout (optional)

☐ A ☐ B (See drawing)



Overflow Side

☐ A ☐ B (See drawing)



Acrylic Apron

☐ Easy Access^{*} ☐ Standard Rectangular^{**} ☐ Corner^{**}

^{*}Factory Installed
^{**}Field installation required



Tiling Flange

☐ Fiberglass ☐ PVC (Field installation required)



Blower 12ft. Relocation Kit

☐ x1 ☐ x2 Includes air hose, wire, and necessary hardware



Pillow

☐ x1 ☐ x2

⁺ (with True Drain, Air Channel or Injector System; not applicable for Ultimate Combo or Classic Collection)

[Ⓜ] (does not apply to remote control)

⁺⁺ (only with classic collection)

^{ⓂⓂ} (for injector & ultimate combo air system)

Signature _____ Printed Name _____ Date (dd/mm/yy) _____

From 8:00 a.m. to 5 p.m. Monday to Friday (EST)

T: 1.800.794.4667 F: 1.800.935.5785 www.acryline.ca