

**SPECIFICATIONS**

**OPULENCE™ SINGLE HANDLE LAVATORY FAUCET**

**Model**

D225557 (Replaces D221016 series)

**Description**

- Ceramic disc valve
- 4 3/4" high spout, 6" spout length, laminar flow
- With metal touch-down drain assembly
- Single hole mount
- A112.18.1M, 1.5 gpm (5.7 LPM) maximum flow rate @ 20 - 80 psi

**Standards**



- NSF 61-9
- Energy Policy Act of 1992



- ASME A112.18.1M/A112.18.1
- NSF/ANSI 372
- CSA B125.1




- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms

**Warranty**


Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

**Flow Rate**

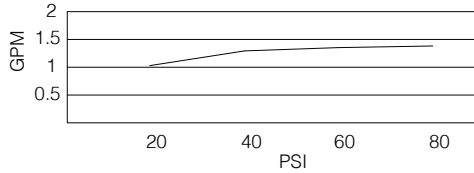

**Finishes Available**

- Chrome
- Other: Refer to Price List for additional finish

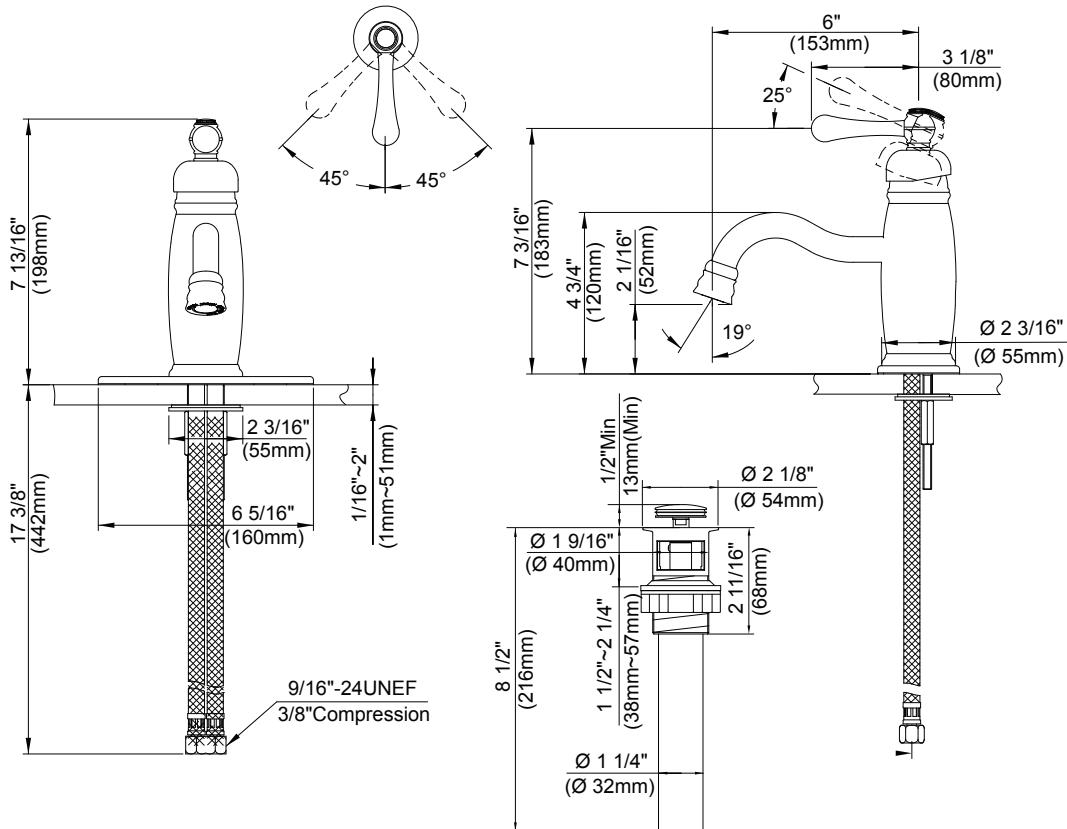

**Submittal Information:**

Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Contractor: \_\_\_\_\_ Contact #: \_\_\_\_\_