


FEATURES:


- All brass construction. Flexible hoses designed to be installed on 8" to 16" centers.
- Includes soft touch drain assembly with overflow P/N 18.11.052
- Lever style handles with setscrew attachment.
- 1/4-turn ceramic disc valve cartridge.
- Available in all finishes. Warranty varies according to finish selection.
- Flow restrictor in spout tee is limited to 1.5 gpm.
- Certified to meet or exceed the following codes and standards: ASME A112.18.1-2005/CSAB 125.1-2005


TechData SPECIFICATIONS

Series 1900

1.196008 Harlow Widespread Lavatory Set



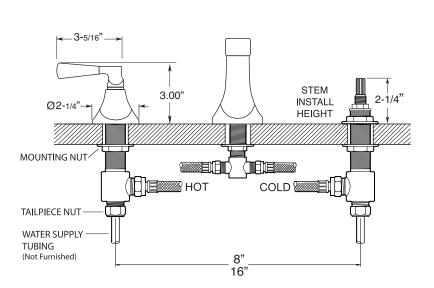



NOTE: Spout and valves install through 1-1/4" diameter holes

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.