

Technical Datasheet



R&M DM Global Outlet 84x84

Duct Global Outlet 84x84



This outlet suitable for duct mounted installations from Thorsman trunking system

Standard:
IEC 60603-7: Electrical Characteristics for telecommunication Outlet

In-House Testing after Standard:

IEC 60068-2-2: Dry warm for outlet
IEC 60068-2-1: Cold

In General

Material:	PC+ABS
Colour:	White / RAL9010
R Number	R318205
.....	Frame 84x84 R318214

Measure

Width	84 mm
Length	84 mm

Technical Datas

Environment temperature	-10°C...80°C
-------------------------	--------------

Results

In Trunking

Press out force:	85.3 till120.2N
------------------	-----------------

Module Holder

Press out force:	87.28 N = 8.9 Kg
------------------	------------------

Matching Modules

Connection Modules	Cat.5e s/u, Cat.6 s/u
R-Numbers:	R925370/ R925371 /R304325/ R304326/ R302372/ R302373/ R304327/ R304328





FO Modules

R-Numbers:


SC-RJ; E-2000TM

R308461 /R308459 /R306882/ R306878/ R308889

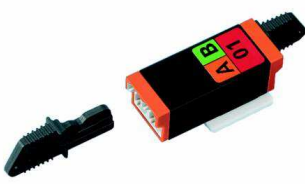

Matching Accessories

R&M Security System (3 Lever RJ45 and FO)

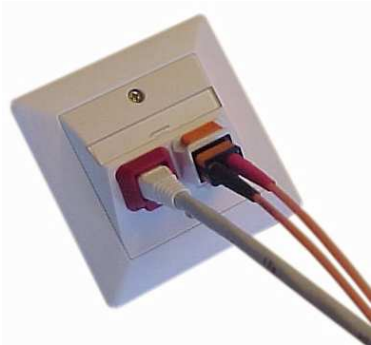


R&M Environment System



Labelling Sheet

R312102

Dimensional Drawing

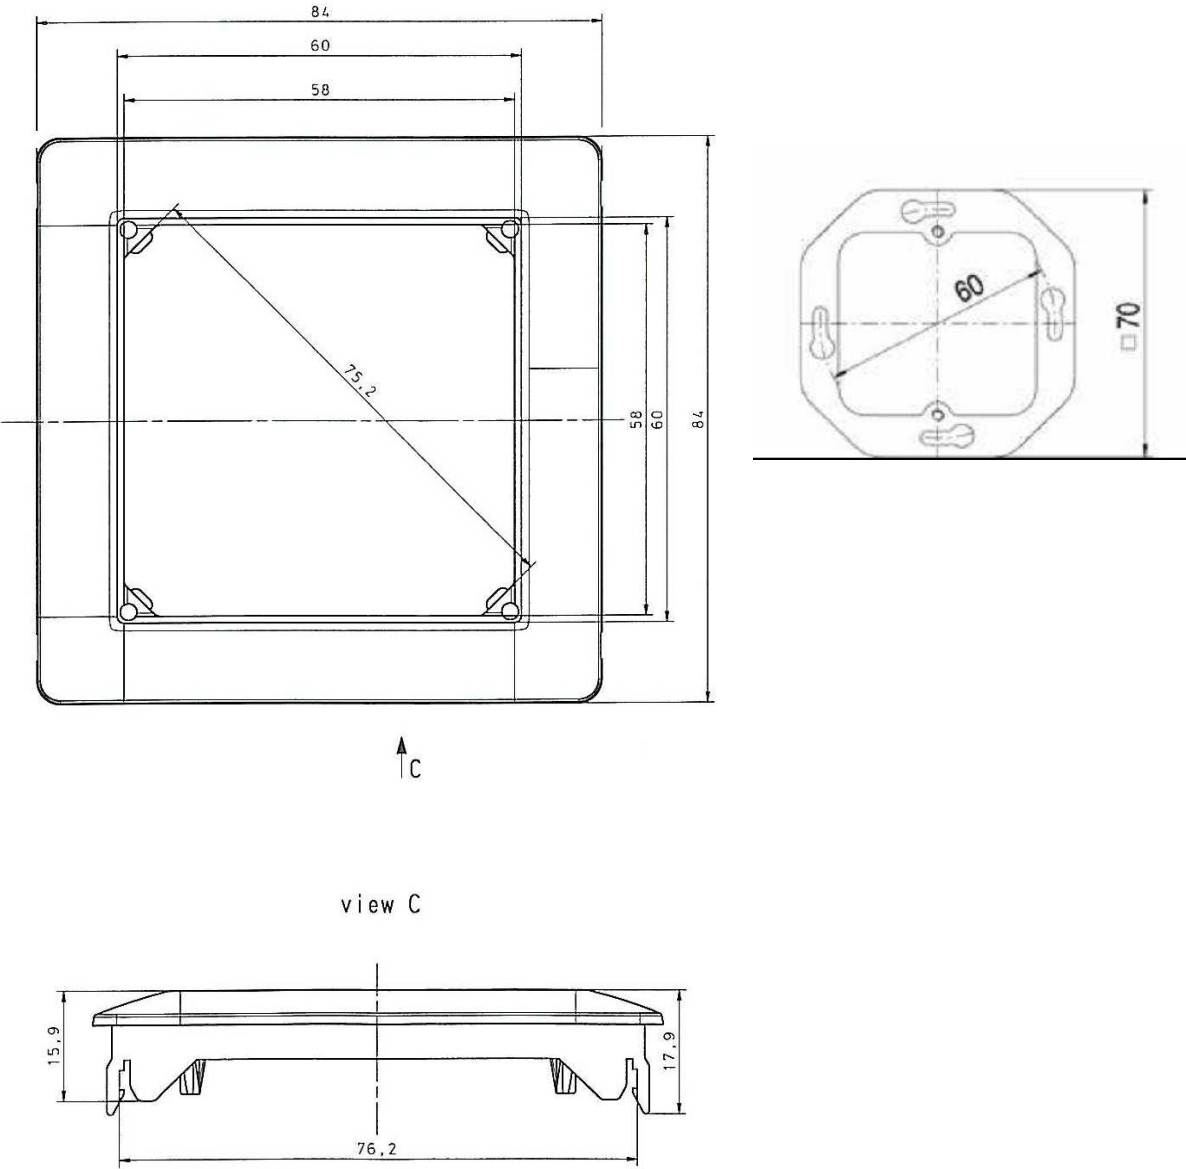

Installation Information

