Module Holder HD, 4x 12-Port/s



Supplies

- Module Holders are numbered for LCD/MPO
- Ample labelling options despite limited space

Technical Data

| Number of Module Holder | 4 numbered Module Holders with 1-6 & 25-30 / 7-12 & 31-36 / 13-18 & 37-42/ 19-24 & 43-48 |
|--------------------------------|---|
| Space for adapters MPO/LCD | 24 |
| Space for adapters LSH/SC-Simp | lex 24 |

Standards

| UL listed | Material listed (UL 94) | |
|-----------|-------------------------|--|

Mechanical characteristics

| Material | >PC-GF10< NCS-S-1005-R80B gray |
|-------------|--|
| | >PC< RAL 9005 black |
| Halogenated | none (in accordance with DIN/VDE 0472/815) |

Environmental characteristics

| Operating temperature | -10℃ to 60℃ |
|-----------------------|-------------|
| IP rating | IP 20 |


This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.




Version 1.0/2012 1-2

Module Holder HD, 4x 12-Port/s

Drawing



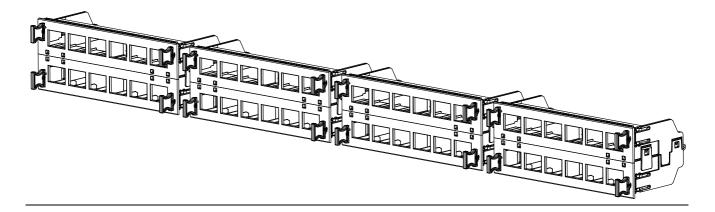

Ordering information

| MH HD-prf-4x12-gray | 1 | 807768 |
|----------------------|---|--------|
| MH HD-prf-4x12-black | 1 | 807769 |

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.

