

The R&Mfreenet Cat 8.1 shielded connection modules, part of the freenet cabling system, are ideal for very fast data transmissions and high bandwidth applications. This high-performance Cat 8.1 module is perfect for use in 25/40 Gigabit Ethernet (25GBASE-T / 40GBASE-T) and future high-speed applications up to 2000 MHz.

## Features of Cat.8.1 Module

- Attains Cat 8.1 values together with Cat 8.1 patch cables as specified in standard ISO/IEC 11801 and EN50173-1
- When installed as part of an R&M Cat 8.1 shielded channel or permanent link, it meets the IEEE 802.3bq requirements for 40GBASE-T performance, as well as the requirements for Class I performance according to ISO/IEC 11801 and Cat 8.1 performance according to TIA/EIA 568.2-D.
- Supports extended reach of 25G transmission according to ISO/IEC TR11801-9909
- Very good margins on class EA permanent link limits
- Supports PoE (IEEE 802.3af), PoEP (IEEE 802.3at) and 4PPoE (IEEE 802.3bt) type 1 to 4
- Meets IEC 60512-99-001 and IEC 60512-99-002 for currents up to 1.2A
- Gold-plated contact area and tin-plated insulation displacement contact area
- Capacitive and inductive compensation
- Compatible with Cat 8.1 and full mechanical and electrical backwards compatibility with Cat 6A, 6 and 5e standard patch cords
- Automatic cutting of wires for precise, consistent termination
- X-Separator isolates pairs from each other, minimizing influence of cable termination on NEXT performance
- Use of all four sides of modules maximizes distance between pairs for optimum performance
- Unique termination design maximizes space for routing wires without sacrificing density
- Equipped with gauge to prevent RJ11/12 insertion
- Fits into 3<sup>rd</sup> party outlets and patchpanels with different adapters
- Wiring option according to TIA/EIA T568A and T568B without splitting of pair 3, 6
- Easy to read color wiring chart
- Optional termination tool available
- Halogen-free materials, ROHS II
- GHMT certified channel lengths: 30m / 40 Gbit/s and 50m / 25 Gbit/s



## Standards

IEC 60603-7

ISO/IEC 11801

TIA/EIA 568.2-D

EN50173-1

## Technical Data

Criteria	Date / value
Operating temperature range	-10°C to +60°C
Storage temperature range	-40°C to +70°C
Humidity	95% (non-condensing)
Contact material	CuSn
Contact surface	1.2 µm gold over nickel
Housing material	Polycarbonate (UL-94-V0)
Number of IDC* connections	8 / jack
IDC contact material	CuSn, tin-plated
Cutting blade material	Stainless steel
Admissible wire Ø	0.4 mm (AWG26) – 0.65 mm (AWG22)
Admissible strand Ø	AWG26/7 – AWG22/7
Admissible insulation Ø	0.8 mm – 1.6 mm
Admissible cable Ø	4.5 mm – 9.0 mm
Cable strain relief	Through cable tie
Shield contact to plug	Through contact springs (on jack)
Shield contact to installation cable	Low impedance contact via bayonet
Earth contact	1 contact finger for flat socket 4.8 x 0.5 mm
Shield material	CuSn, tin-plated
Jack Type	RJ45, not suitable for RJ11/12 insertion

## IDC Insulation Displacement Contact


Description	Standard value	Relevant Standard	Typical value (at 20°C)
Mating cycles min.	> 750	ISO/IEC 11801	> 750
IEC 60352-3*	≥ 20		

\*Re-terminations may be performed with wire of either same or up to two wire gauges smaller wire than originally terminated.

## Electrical Data

Description	Standard value	Relevant standard	Typical value (at 20°)
Dielectric strength			
Contacts	1000V DC or AC peak	IEC 60603-7	> 1000V DC
Contact to shield	1500V DC	IEC 60603-7	1500V DC
Insulation resistance	> 500MΩ (100V DC)	IEC 60603-7	> 5GΩ (100V DC)
Contact resistance	< 20mΩ	IEC 60603-7	~ 5mΩ
I/O resistance	< 200mΩ	IEC 60603-7	< 40mΩ
I/O resistance unbalance	< 50mΩ	IEC 60603-7	< 15mΩ
Current carrying capacity	1A @ 60°C	IEC 60603-7	Pass

## Dimensions

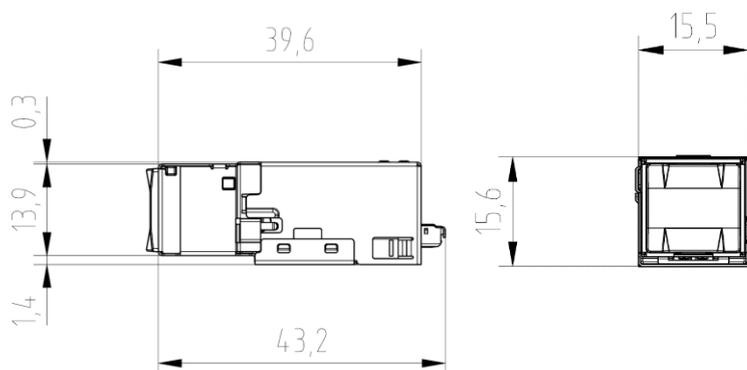


## Available Adapters

Freenet	Keystone IEC	Keystone LARGE 20.3mm (UTP only)
	A3/L3: see below, STP/UTP different 	A3: 20.1 – 20.9mm L3: 1.20 – 1.95mm 

## IEC Keystone cut-out

The keystone adapter ensures that the module will fit in keystone cut-outs as defined in IEC60603-7 ed. 3 Annex D.

## Dimensions IEC Keystone

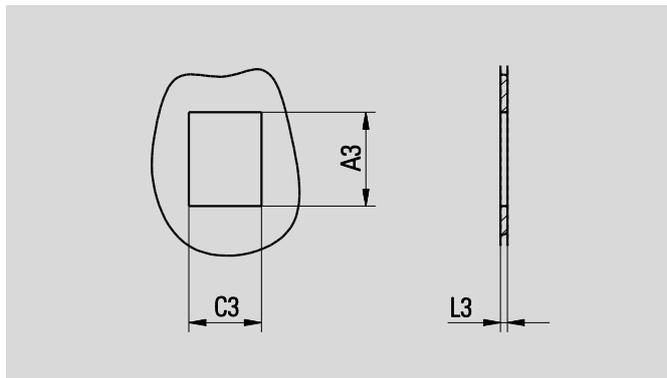

Letter	IEC standard values		Adapter capabilities	
	Maximum (mm)	Minimum (mm)	STP (mm)	UTP (mm)
A3	19.61	19.30	19.3 - 19.6	19.3 - 19.7
C3	15.04	14.78	n.a.	n.a.
L3	1.54	1.22	1.22 – 1.80	1.20 – 1.95