

### Features


- Industry leading space at front for patch cord guiding and handling
- Inserts for RJ45 applications (shielded and unshielded)
- Inserts for FO adapters, FO modules and splice
- Mixtures of all kind of inserts supported
- Support for trunk installation from side or rear
- Optional rear cable manager simplifying installation, and operation (adjustable cable support RCS)



### Mechanical characteristics

Material housing	Stainless steel (1.4016 - powder coated) / Polyoxymethylene (POM) / Polycarbonate + Acrylonitrile Butadiene Styrene (PC+ABS)	
Color housing	Black (RAL 9005)	
Copper Grounding	Integrated, method A, B and C plus additional grounding points on panel	

### Dimensions

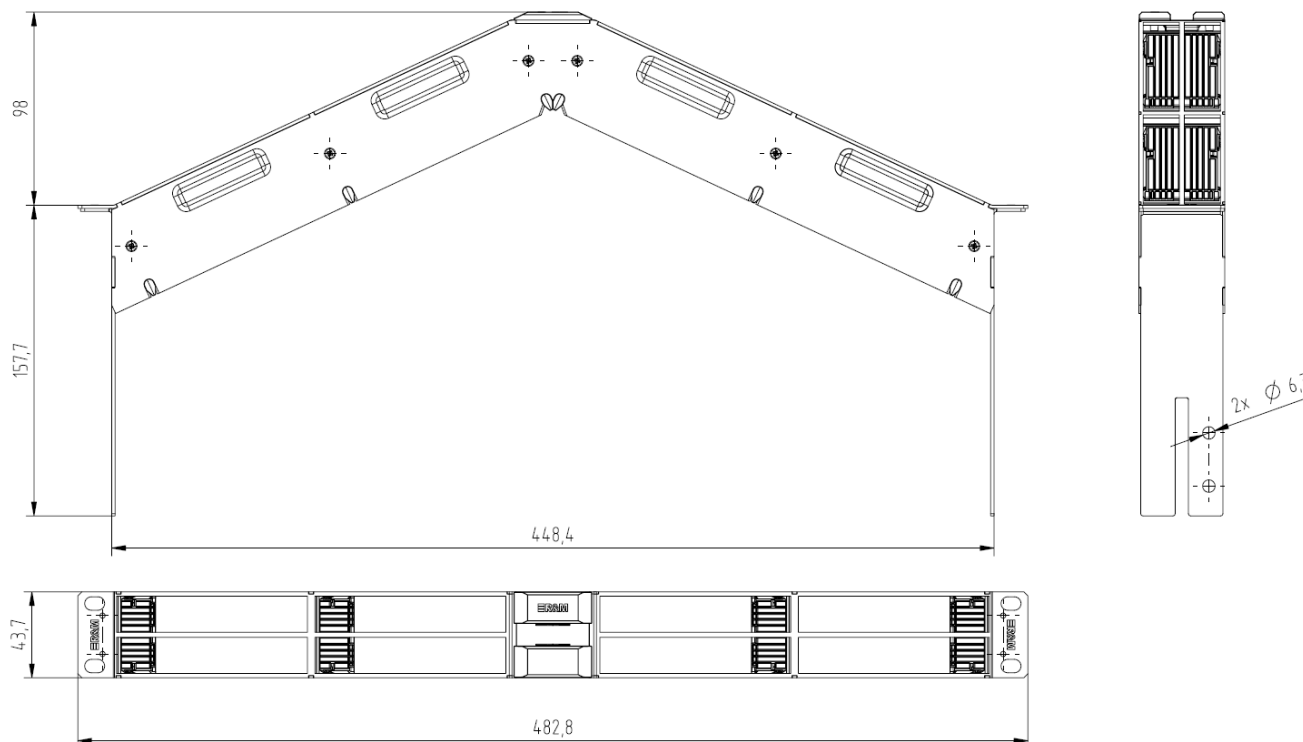

### Environmental characteristics

Operating temperature	-10°C to +60°C	
IP protection class	IP20	IEC 60529

### Ordering Information

Netscale 48 housing empty 1U angled	R875195
Netscale 48 Blind Cover	R868293