

Features


- Industry leading space at front for patch cord guiding and handling
- Inserts for RJ45 applications (shielded and unshielded)
- Inserts for FO adapters, FO modules and splice
- Mixtures of all kind of inserts supported
- Superior front cable management* with two sizes (80 mm and 100 mm depth)
- Support for trunk installation from side or rear
- Optional rear cable manager simplifying installation, and operation (adjustable cable support ACS)



Mechanical characteristics

Material housing	Stainless steel (1.4016 - powder coated) / Polyoxymethylene (POM)
Material door	Polycarbonate (PC) / Steel (DC04 - black coated)
Material FCM	Polyamide (PA66) (RAL 7000)
Color housing	Black (RAL 9005)
Copper Grounding	Integrated, method A, B and C plus additional grounding points on panel

Dimensions (without front door)

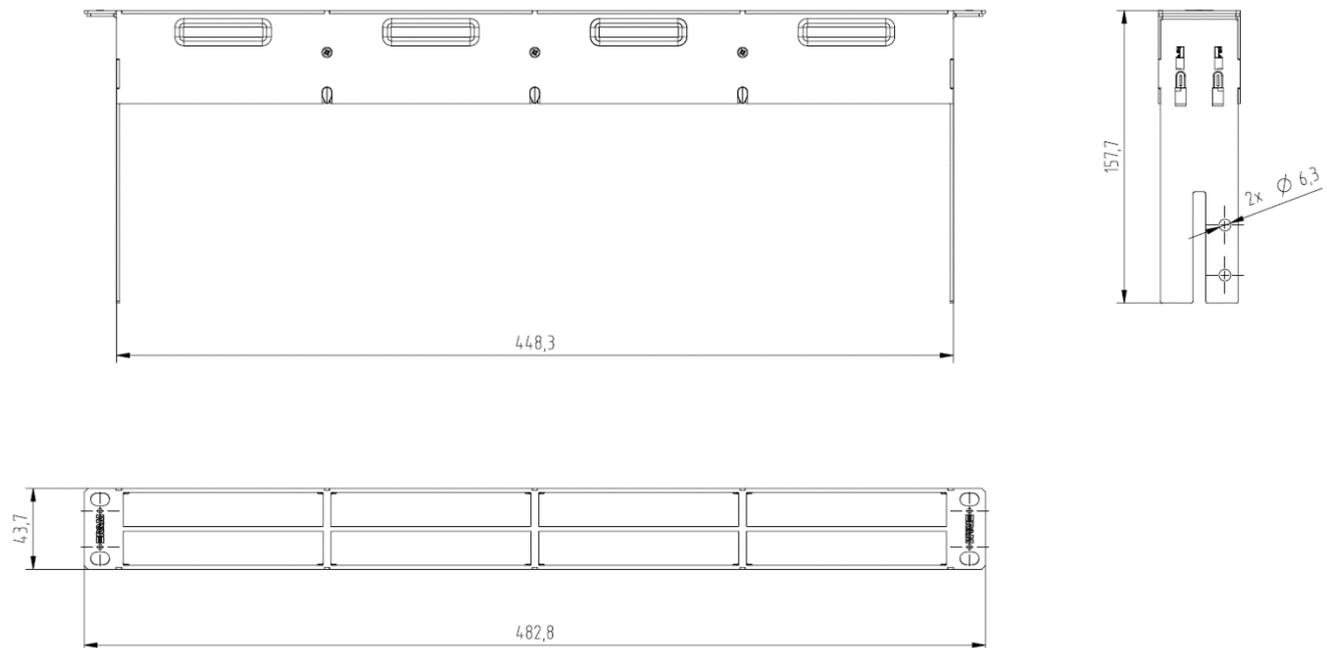

Environmental characteristics

Operating temperature	-10°C to +60°C
IP protection class	IP20
	IEC 60529

Ordering Information

Netscale 48 housing empty 1U straight	R868288
Netscale 48 housing empty 1U with FCM80 + Door	R875196
Netscale 48 housing empty 1U with FCM100 + Door	R875197
Netscale 48 Front door kit 80*	R868289
Netscale 48 Front door kit 100*	R875198
Netscale 1U Front door*	R875543
Netscale 48 Front Cable Manager 80mm*	R875544
Netscale 48 Front Cable Manager 100mm*	R875545
Netscale 48 Blind Cover	R868293

* suitable for straight panels only