


Netscale Housing 3U


Features

- Highest port density available
- Industry leading space at front for patch cord guiding and handling
- Two variants optimizing width versus optimizing cable management
- Support for trunk installation at left, right and rear side
- Easy one-person installation
- Support for superior cable manager simplifying installation, and operation (Rear Cabling Manager RCM)

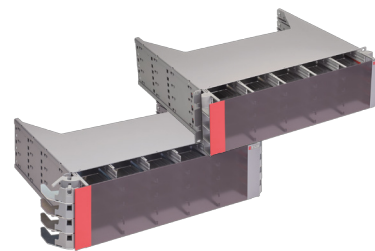

Mechanical characteristics

Criteria	Date / value
Material housing	Steel (DC01 electrogalvanized & HC420LA)
Colors housing	Gray (RAL 7000), zinc coated tray
	Front Cable Guide Front Cable Manager
Dimensions [mm]	482.2 x 435.1 x 132.5 576.0 x 430.2 x 132.5

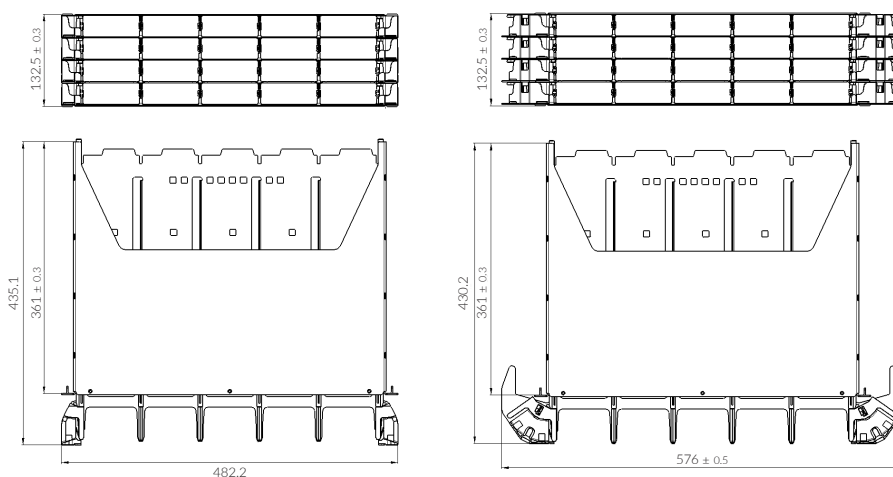

Environmental characteristics

Criteria	Date / value	Standard
Operating temperature	-10°C to +60°C	
IP protection class	IP20 (protection against contact)	IEC 60529

Ordering information

Description	Number
Housing 3U with Front Cable Guide For any server rack, network racks and open frames	828644
Housing 3U with Front Cable Manager For wide racks without air partitioning ($\geq 750\text{mm}$)	826603