


Screen,215,FLF6/5,1Port,bk

R451690

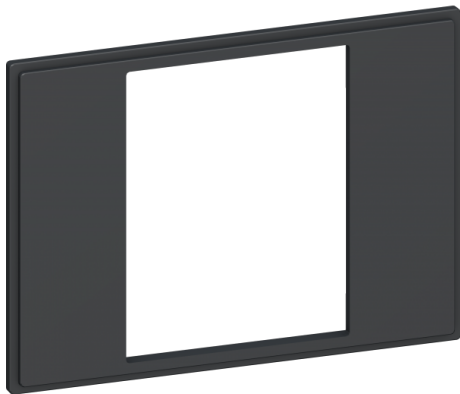

Screen for accommodating a component with the form factor 75 x 62.5 mm (FLF6/5).

Suitable for installation in R&M U-Boxes with 2 width unit (WU) and 1.5 height units (HU).

TECHNICAL DATA

MATERIAL & COLOR

Material:	PC+ABS,FR(40),Bayblend®,FR3010
Color:	RAL 9005

DIMENSIONS

Width:	109 mm
Height:	79 mm
Depth:	5 mm

LEGAL

Conformity:	CE
Combustability:	UL 94 V-0
Halogen Free:	Ja
Customs Tariff Number:	8536.50

OPERATING CONDITIONS

Storage Temperature:	min. -15 °C
Operating Temperature:	-5 °C bis +60 °C

TENDER TEXT

Screen,215,FLF6/5,1Port,bk

Screen for accommodating a component with the form factor 75 x 62.5 mm (FLF6/5).
Suitable for installation in R&M U-Boxes with 2 width unit (WU) and 1.5 height units (HU).

Characteristics:

Material: PC+ABS,FR(40),Bayblend®,FR3010

Color: RAL 9005

Width: 109 mm

Height: 79 mm

Depth: 5 mm

Conformity: CE

Combustability: UL 94 V-0

Halogen Free: Ja

Storage Temperature: min. -15 °C

Operating Temperature: -5 °C bis +60 °C

Article Number: R451690

ENo: 154 763 329

Customs Tariff Number: 8536.50

Manufacturer: Reichle & De-Massari AG