



**St. steel AISI 316 case 8" chart recorder
for pressure De Wit model 4888SS
for temperature De Wit model 1888SS**

***Designed
for reliable,
continued,
long-term performance
and
dependable operation***

Specifications

Rectangular recorder 277x277 mm for wall or panel mounting
Case st. steel AISI 316, weatherproof, corrosion resistant
Recording with disposable felt pen on circular recorder charts
diameter 223 mm (8"), writing width 80 mm
Mechanical spring wound clock, rev. time 24 hrs (clockwise)
Viewing window laminated safety glass
Accuracy cl. 1,0 (+/- 1 % of full scale)
Connection bottom or back, 1/2" NPT male or 1/2" BSP male

Minimum pressure range : 0-1 bar (0-15 psi)
Maximum pressure range : 0-4000 bar (0-60.000 psi)

Minimum temperature span : 60 °C
Minimum temperature : -170 °C
Maximum temperature : + 600 °C


Options

Portable execution (with handle & feet, add T to model number)
Mechanical spring wound clock, single revolution time, 1 hr, 4 hrs,
8 hrs, 12 hrs or 7 days (clockwise, optional: anti-clockwise)
Switchable clockworks 1 hr/15 min, 1 hr/4 hrs, 2 hrs/8 hrs, 24 hrs/
7 days (clockwise)
Multiprogrammable battery operated chart drive (anti-clockwise)
Dual pen execution
Other ranges, connections, special executions on request


DE WIT

PORTABLE


FRONT

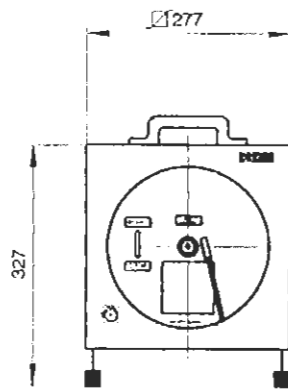




BACK

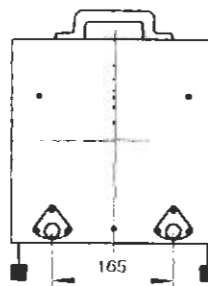

SIDE

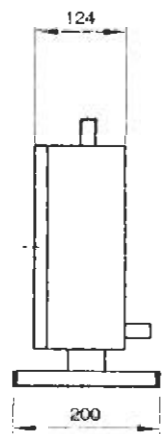

WALL MOUNTING

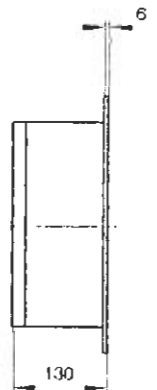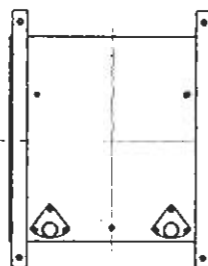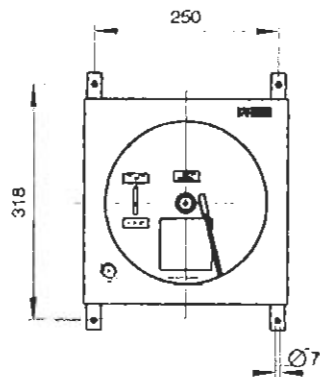

PANEL MOUNTING

