

Rigging Projects

Locking Headboard Car 4T, 6T, 8T with Gaff Lock User Guide



RP4064 - HBM - GL - UG - 01



Scan or Click
for Demo

Setup Guide

Sail Plate Installation	4
Securing Sail Plate to Headboard Car	5
Gaff Lock Halyard Connection	6
Installing Headboard Car onto Track	7
Trigger Seat Installation	7

How to

Headboard Car Load Diagram	8
Safety Lockout Mode	9
Gaff Lock	10
On the Lock	12
Off the Lock	14
Manual Lock - Trip Line	15
Reefing	15
Sensor Kit	16

Service Guide

Inspection Intervals	18
Serviceable Parts	18
Troubleshoot	1

Global View

Exploded Diagram Headboard Car	20
Bill of Materials	21
Exploded Diagram Self Lock Cassette HB4 & HB6	22
Bill of Materials	23
Exploded Diagram Self Lock Cassette HB8	24
Bill of Materials	25

Customer Support

Email & Telephone	26
-------------------	----

Introduction

This manual provides an overview of the Rigging Projects Self Locking Headboard Car system and its maintenance. Please read this manual carefully before installation, use or maintenance, to ensure that you have understood and are familiar with all relevant details.


Prior to using this product, all persons should be made aware of the possible hazards associated with its operation and use. Any service work, repairs maintenance or equivalent work carried out on the product should be undertaken by technically qualified persons.

Key Design Features

- Patented self-lock mechanism; negates the need for internal trip lines within the mast
- A choice between an manual lock or self-lock
- Automatic self locking activation
- Aluminium carriage with independent titanium locking cartridge
- Titanium cartridge carries all the vertical load, hence lowering the centre of effort in the car & reducing track levering
- Impossible to false lock on fastener holes in track
- Safety system to allow triggers to be disengaged independently from trip line
- An external manual trip line is also installed as a backup

Caution

The Rigging Projects Locking Headboard Car has been tested extensively to ensure the safety and function of the product. However, it is important for the users to understand the risks involved in the event of a mechanical failure. Care should be taken to stow the halyard appropriately to avoid entanglement should the sail drop unexpectedly. Failure to take safety precautions could lead to severe injury or death.

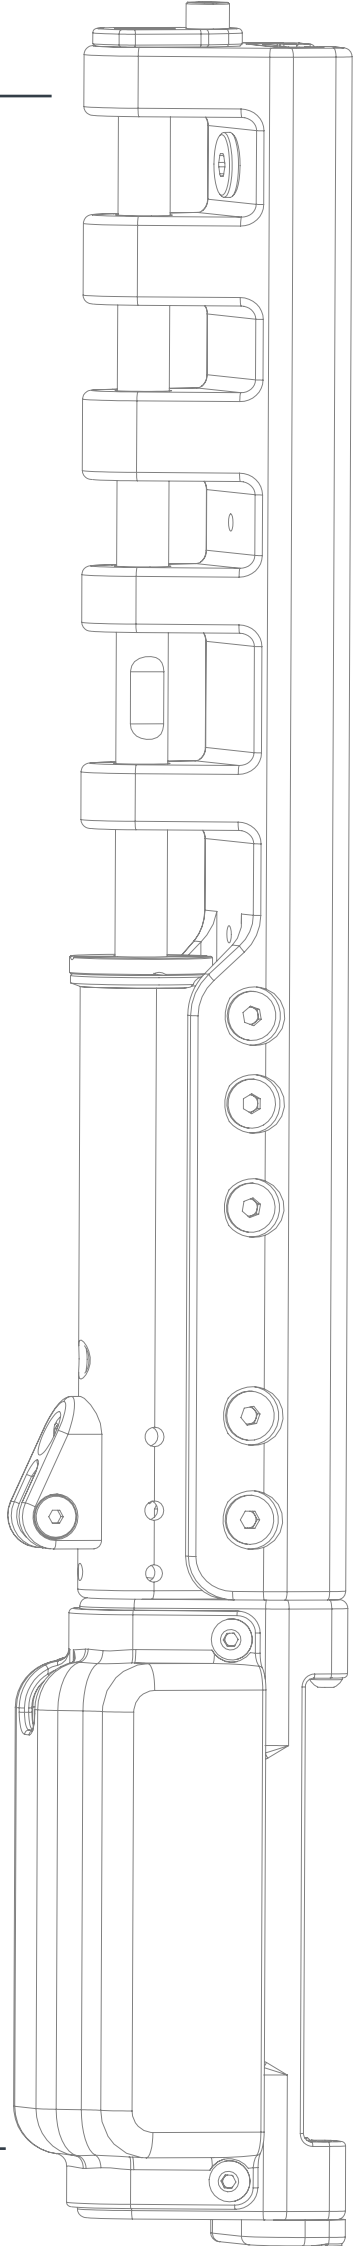


Rigging Projects Gaff Lock	(A) Max Halyard Ø (mm)	(B) Eye Splice for Lever (mm)	Max Halyard Load 80% BL (T)	Min. Gate length	
				Auto	Manual
RBGL4	8	55	3.6	500	350
RBGL6	10	60	4.4	530	380
RBGL8	10	70	4.4	540	400

Running Rigging

In order for the Sail Plate Pin to effectively engage into the Gaff Lock the Sail Plate Pin is levered into position with the halyard. The diameter (A) of the halyard is crucial to ensure the Sail Plate Pin can move past the locking lip.

If it is required to deviate from the stated diameter, please contact Rigging Projects to dicuss a redesign of the lever.

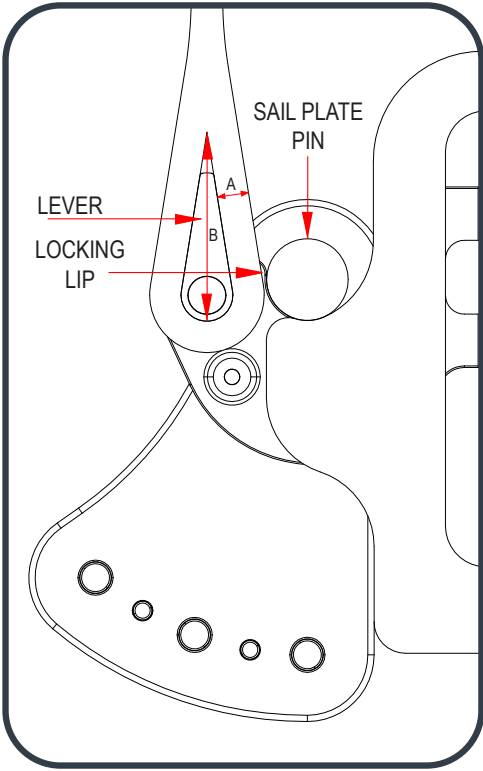

⚠ Important: Gaff Lock Sail Plate Installation

Please find attached to your user guide pack a sail maker installation guide supplied by Rigging Projects to ensure the correct geometry for the head of the sail with the Gaff Lock sail plate.

Please note:

- The sail plate geometry is **critical** to the function of the RP Gaff Lock system
- Rigging Projects highly recommends installing an adjustable lashing system to facilitate the fine tuning of the sail head relative to the sail plate
- The head plate must be installed so the sail plate sits inline with the track
- It is **critical** the the sail cut out is clear of the headboard car and selflock
- If installed- the luff penant **must** be short enough to allow for the head to automatically disengage from the gaff lock
- The position of the trip line luff exit to should allow the sail disengage effectively

Secure Sail Plate on Headboard Car


1. Undo the retaining button head fastener ④
2. Remove car main pin ③
3. Align sail plate ① in place, ensure the main washer ⑤ is correctly positioned between the Sail Plate ① and the Main Car ②

Please do not apply any grease or Tef-Gel to main washer ⑤

4. Insert main pin through the car, washer and sail plate secure with cap head fastener.
5. The main pin is required to align with the pawl shaft located in the main car housing. Some alignment of the pawl shaft might be required to seat main pin correctly.

Do not use a hammer to secure the pin

6. Use a few drops of Blue Loctite 423 💧 on the fastener ④ that retains the main pin.

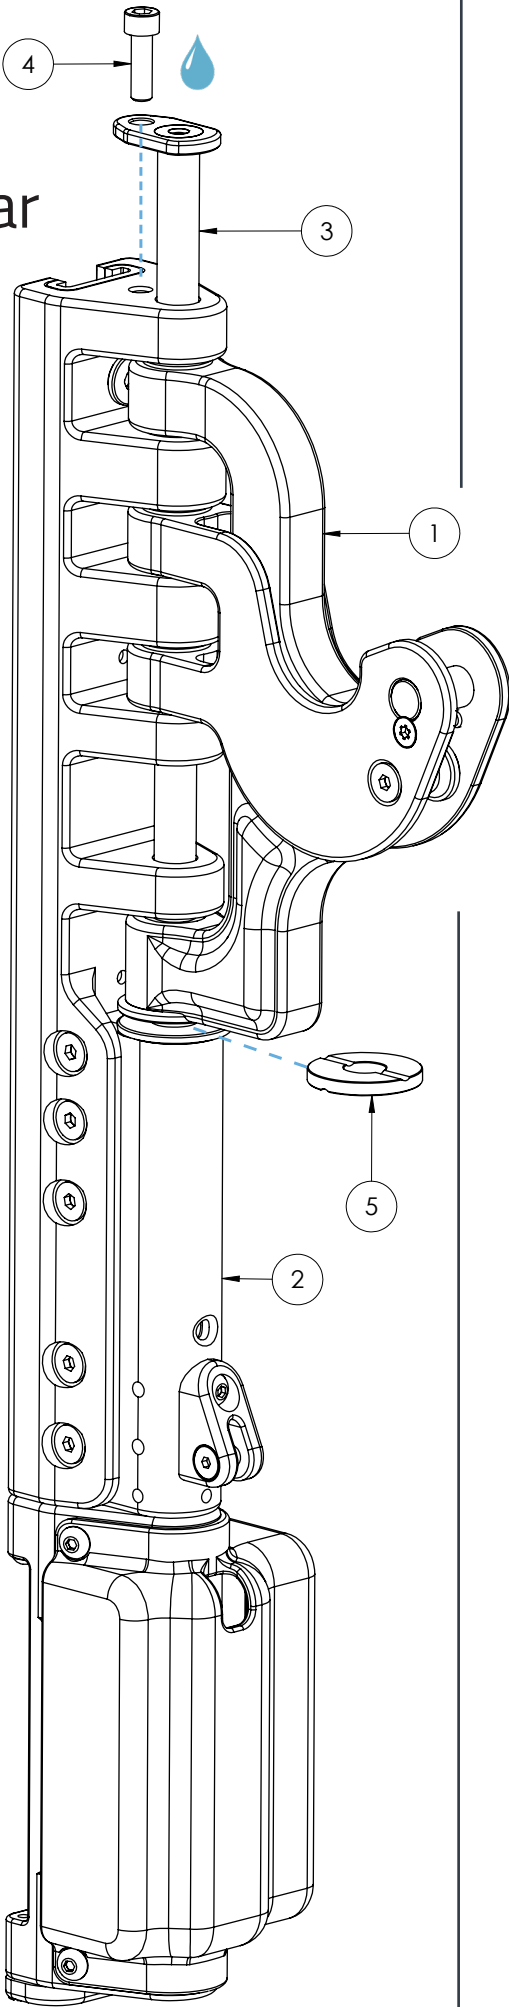

Connect Halyard to Gaff Lock

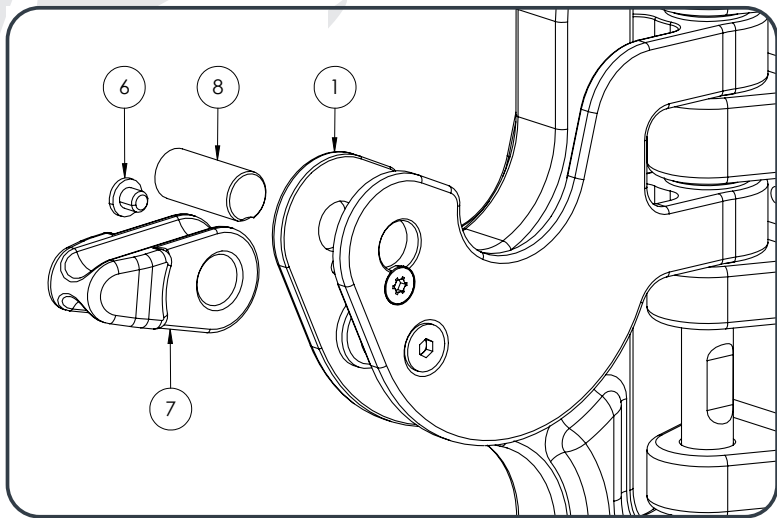


Fig. 1 Remove Thimble

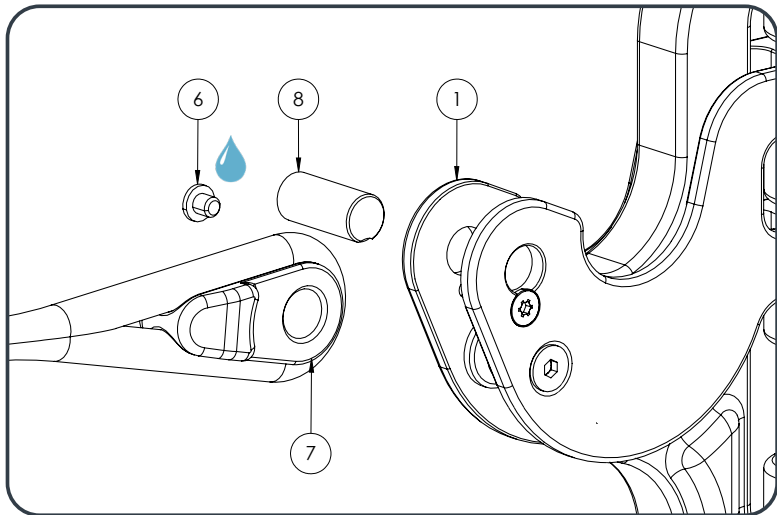


Fig. 2 Attached Thimble with Halyard

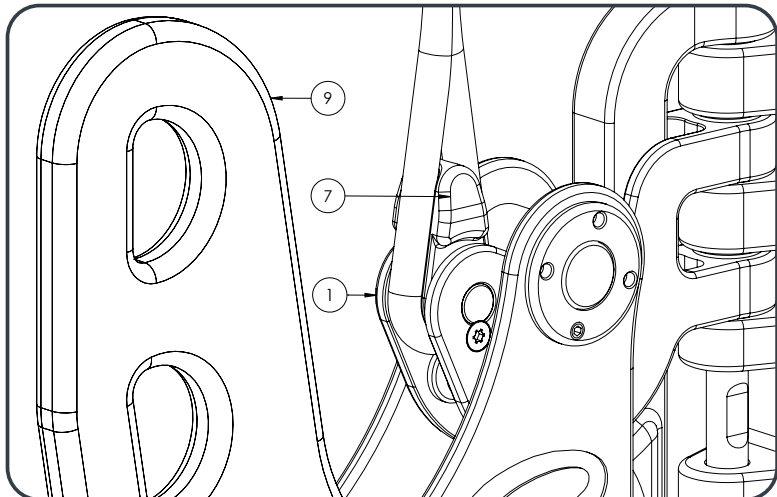


Fig. 3 Sail Plate Engaged

1. Remove halyard pin fastener ⑥
2. Remove main halyard pin ⑧
3. Remove thimble ⑦ from gaff lock ①
4. Secure spliced halyard eye to thimble ⑦
5. Thread the halyard eye fitted with the thimble ⑦ through the sail plate ⑨ fitted to the sail (fig.2)
6. Insert pin ⑧, rotate until it is seated and secure with fastener ⑥ with a few drops of blue Loctite 423
7. Install thimble ⑦ in between gaff lock cheeks ①

Installing Headboard Car onto Track

1. Remove gate track section from mast
2. Slide the locking headboard car on to track ensuring the barrel section of the car is at the lower end
3. Reinstall gate section. Make sure track joins are seamlessly aligned

Trigger Seat Installation


If retrofitting the headboard car, the self locking trigger seat must be installed by a Rigging Projects technician.

Halyard Indicators

If there is no sensor kit installed Rigging Projects recommends marking your main halyard at full hoist and at all reef point with a whipping in different colours.

Disclaimer


It is not permitted to modify the product or its parts, other than replacing parts specified in this manual. Rigging Projects Ltd is not liable for any dangerous situation, accidents, damage and consequences thereof caused when deviating from the instructions, guidelines and procedures described in this manual. To retain warranty do not deviate from the instructions, guidelines and procedures described in this manual.

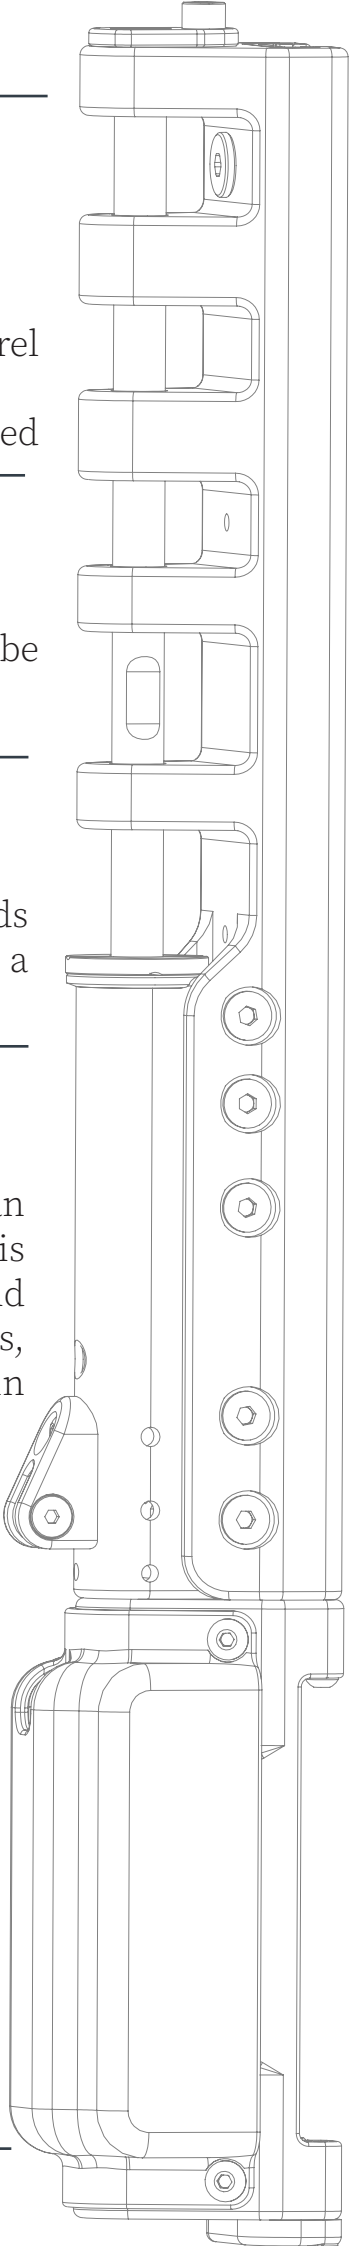

Headboard Car Load Diagram

Rotation from Center	% of Maximum Working Load
0°	100%
15°	100%
30°	85%
45°	70%
60°	60%
More than 60°	Not advised
105°	Maximum Rotation


This diagram shows the operating range of a mainsail headboard car relative to the boat's centerline. As the headboard car rotates away from the centerline, its load capacity decreases.

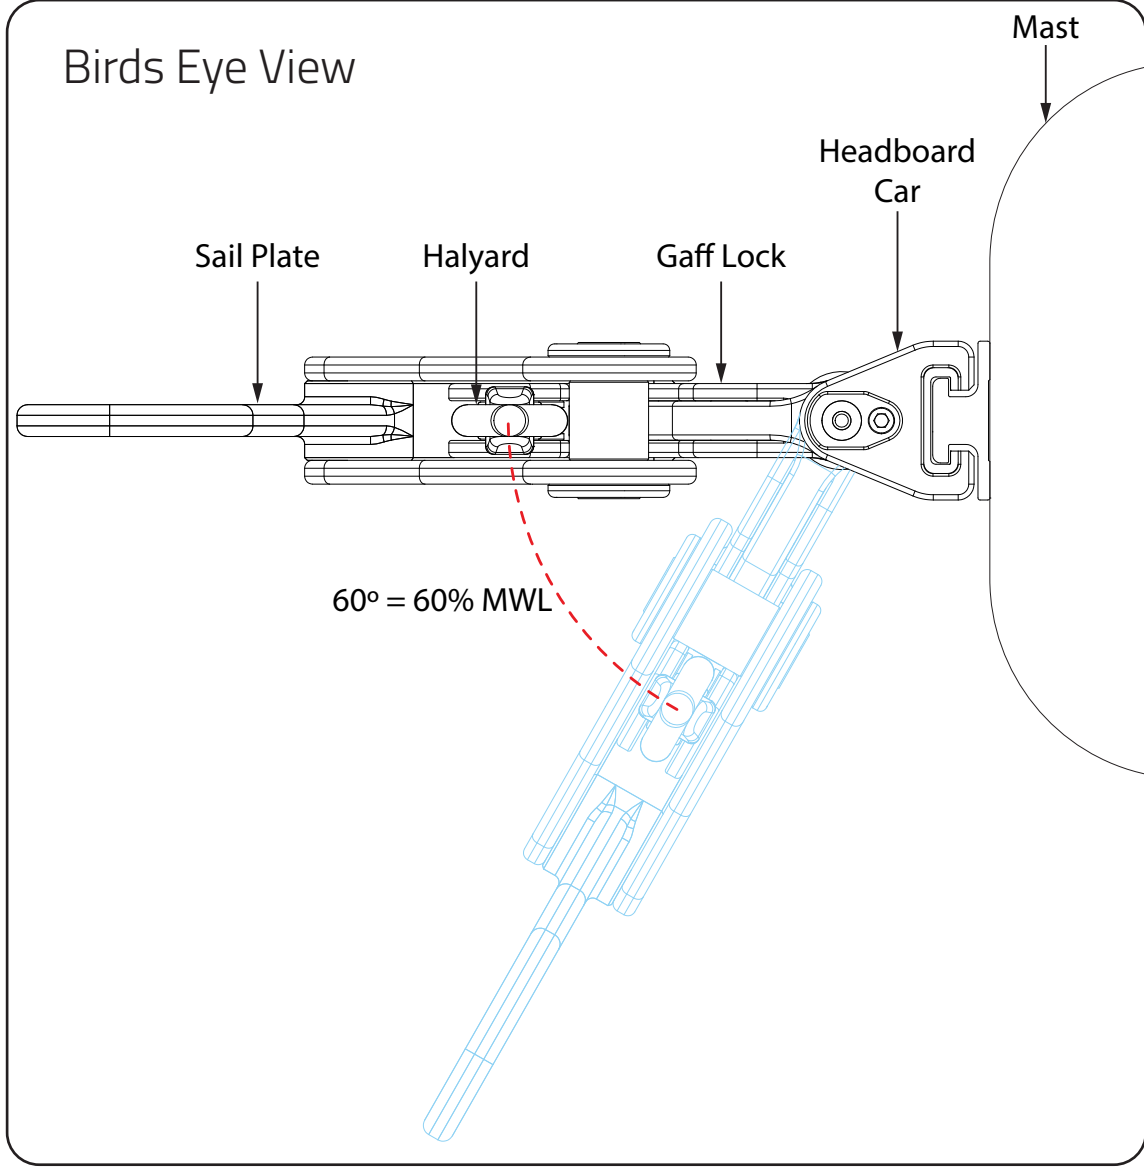


Safety Lock Out Mode

In the unlikely event of the main pawl not retracting during the dropping of the sail, follow these steps:


1. Using a metal rod (max. 5mm diameter- a bolt, Allan key or screw driver)
2. Ascend the mast to the headboard car
3. Move the car away from the high load track section where the pawl can engage
4. Insert the rod through small hole perpendicular to the pawl housing
5. Ensure the rod is installed through entire body
6. Ease the main halyard
7. Contact Rigging Projects customer support

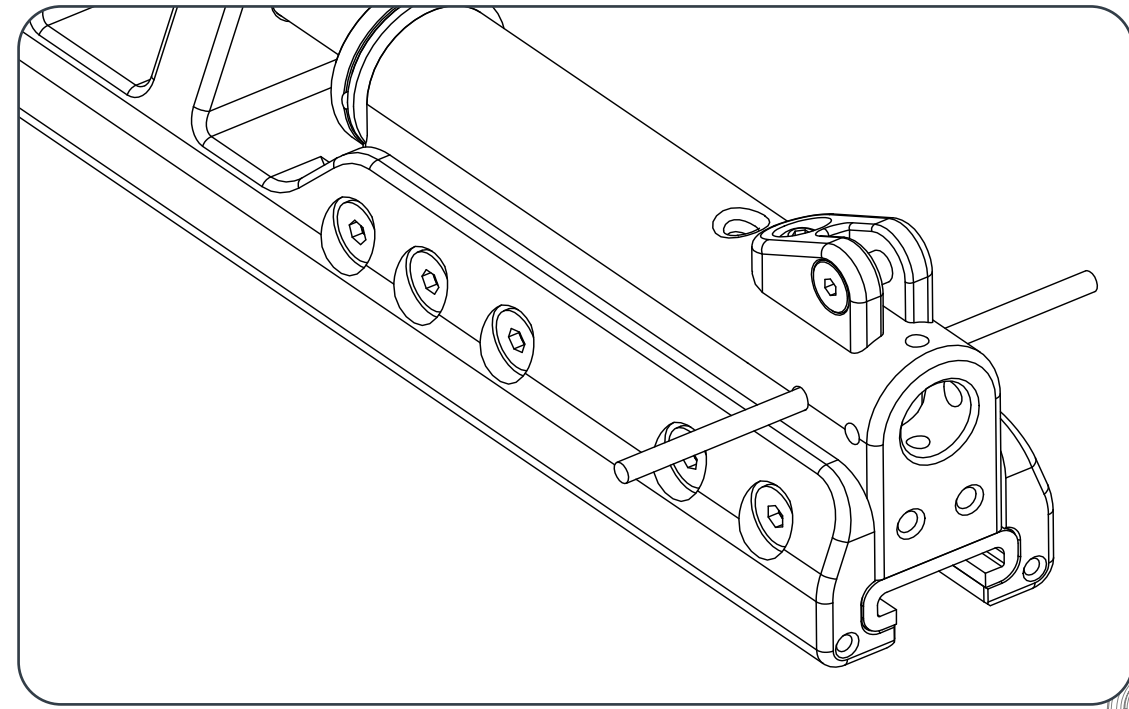


Gaff Lock On the Lock

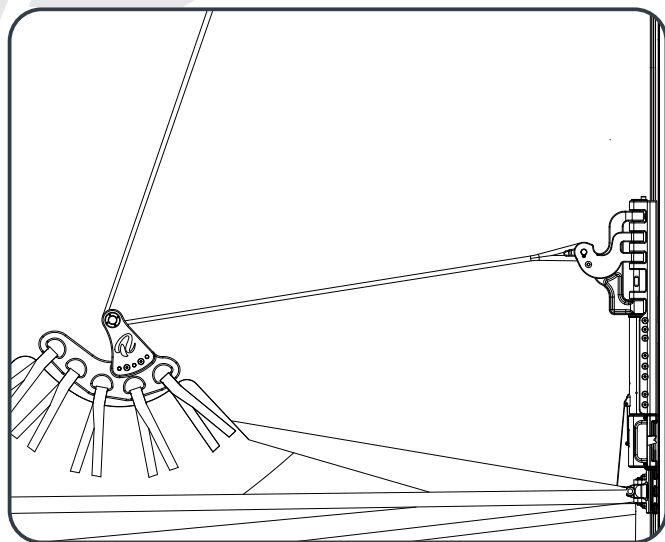


1. During the initial hoist the 2:1 system engages with the Gaff Lock sail plate and lifts the head of the sail away from the sail stack on the boom

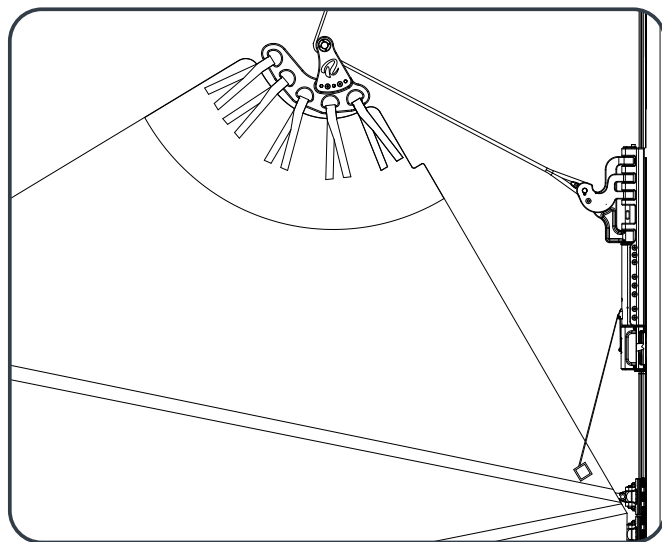

2. The halyard will engage with the gafflock and hoist the headboard car to meet the sail plate

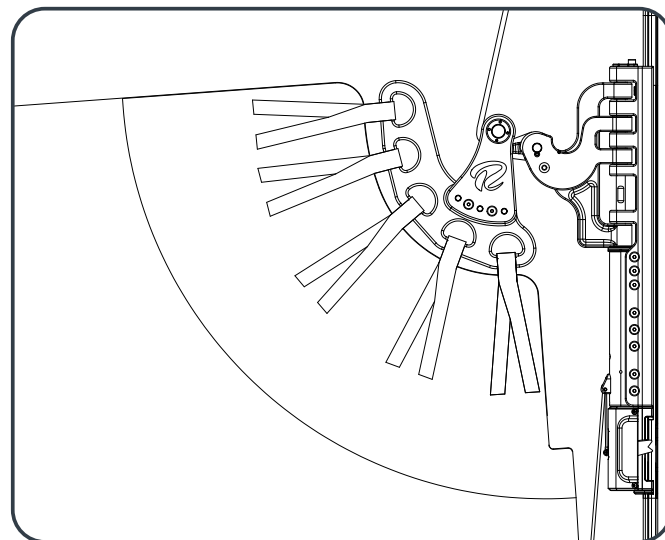


3. The sail plate will slide onto the lever and engage with the gaff lock

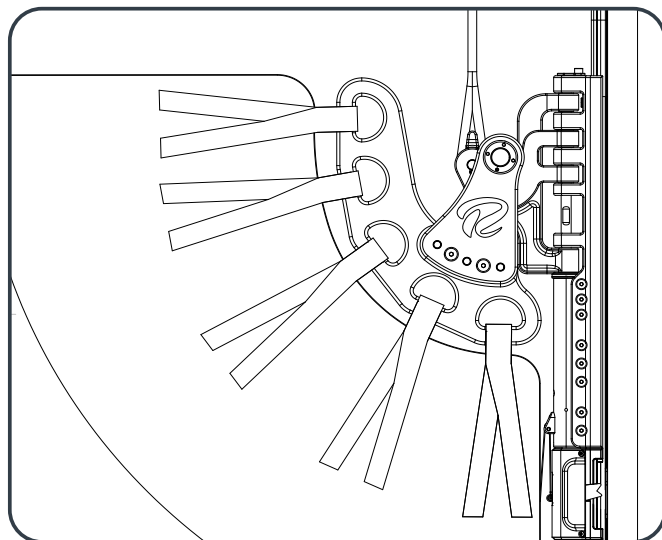


4. During the hoist the sail plate will automatically lock into position under the weight of the sail


Gaff Lock Off the Lock

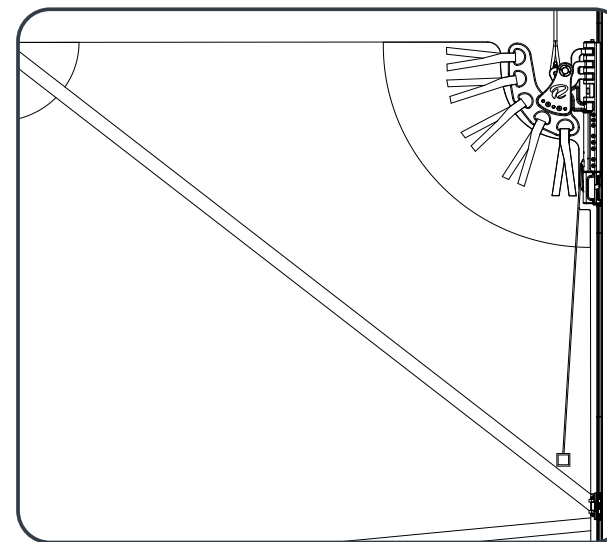


1. During the dropping of the sail the sail plate will be locked in the gaff lock until the baton car engages with the car stack at the base of the mast

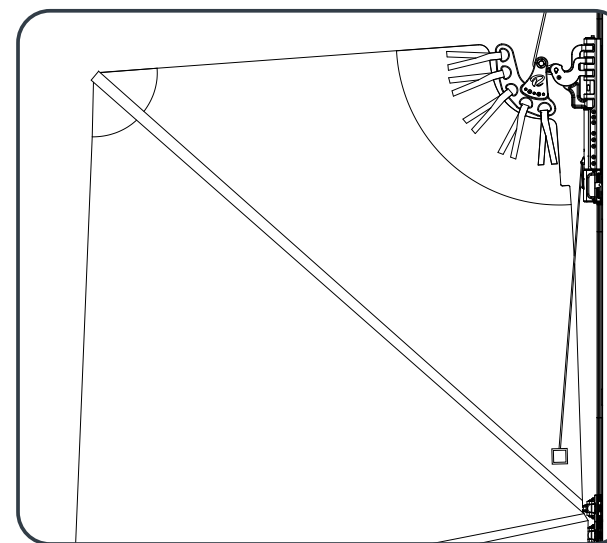

2. The gaff baton then forces the sail plate to disengage from the gaff lock

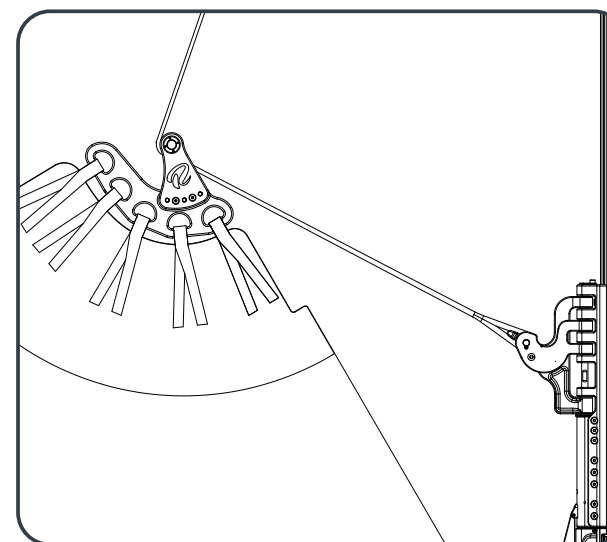

3. The head of the sail is now able to be eased onto the sail stack

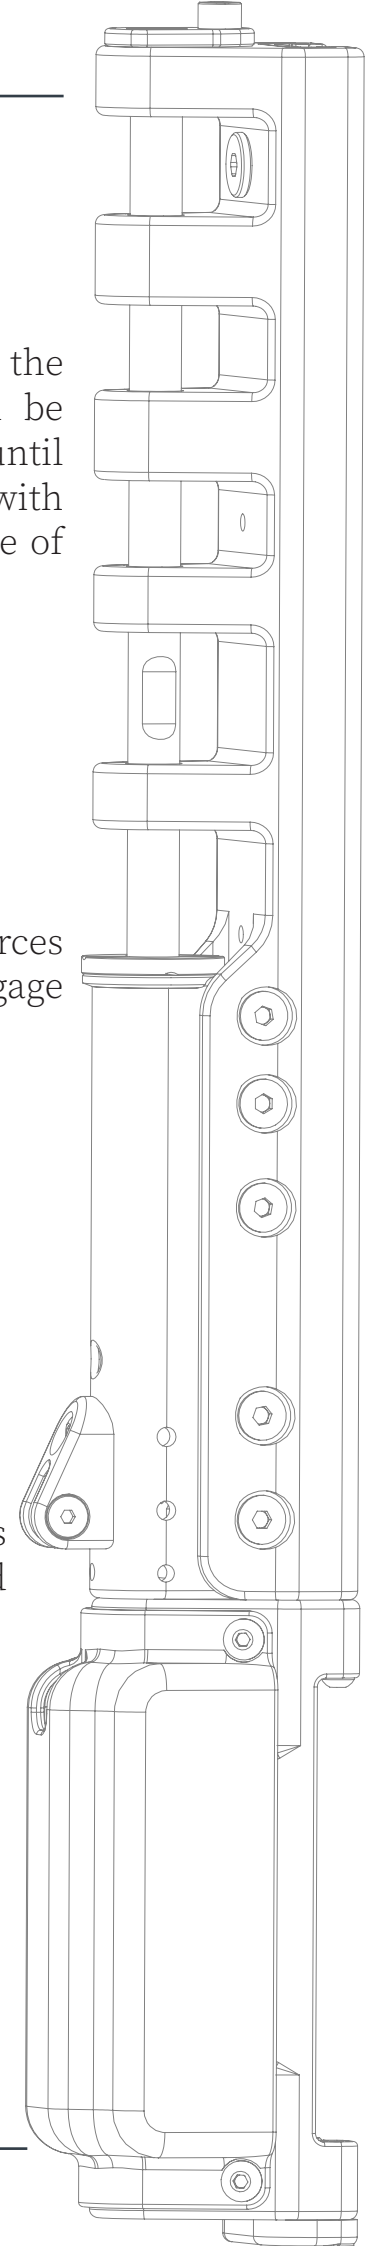

On The Lock


Scan or Click
for Demo



01 During Hoist Pawls Retracted

1. Ease main sheet, vang and tack tension before manoeuvre


During this time the self lock pawl is free to spring over the trigger seat and the main pawl is retracted

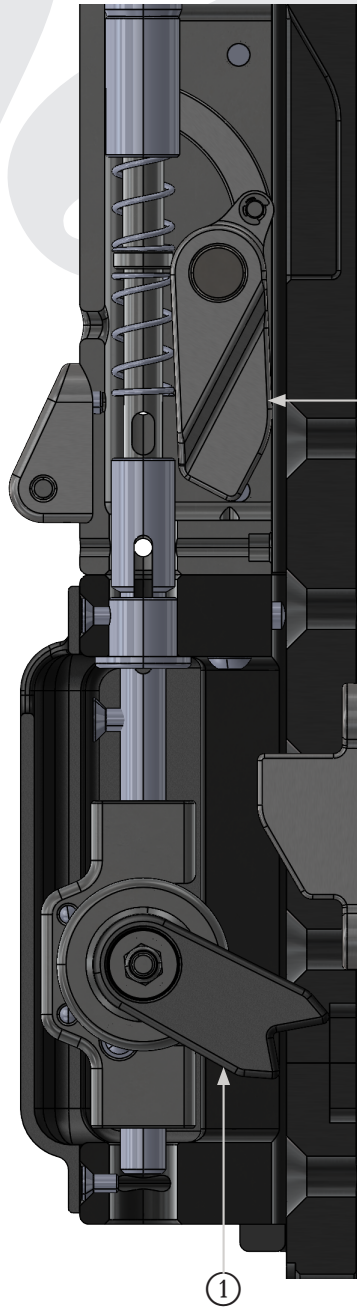

02 Over Hoist Position

1. Hoist the halyard and wait for the position sensor signal to indicate the correct height. Without sensor kit: to maximum hoist halyard mark


Once hoisted past the trigger seat (3), the self lock pawl (1) is in lock mode and ready to activate the main pawl (2)

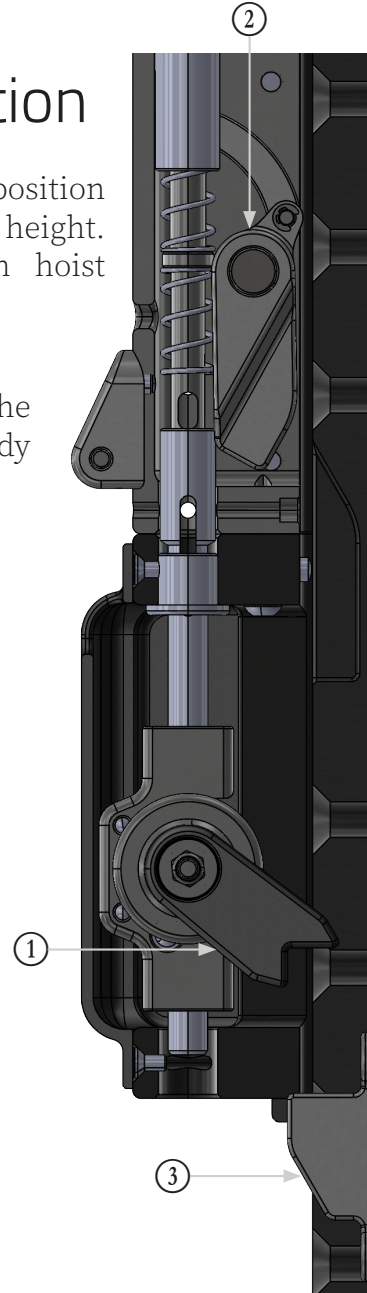

03 Self Lock Engages

1. **Slowly ease** the halyard to allow the self lock pawl (1) to engage with the trigger seat (3).

When the self lock pawl (1) is engaged with the trigger seat (3), the mechanism causes a chain reaction to activate the main pawl (2) into the high load track section (4).

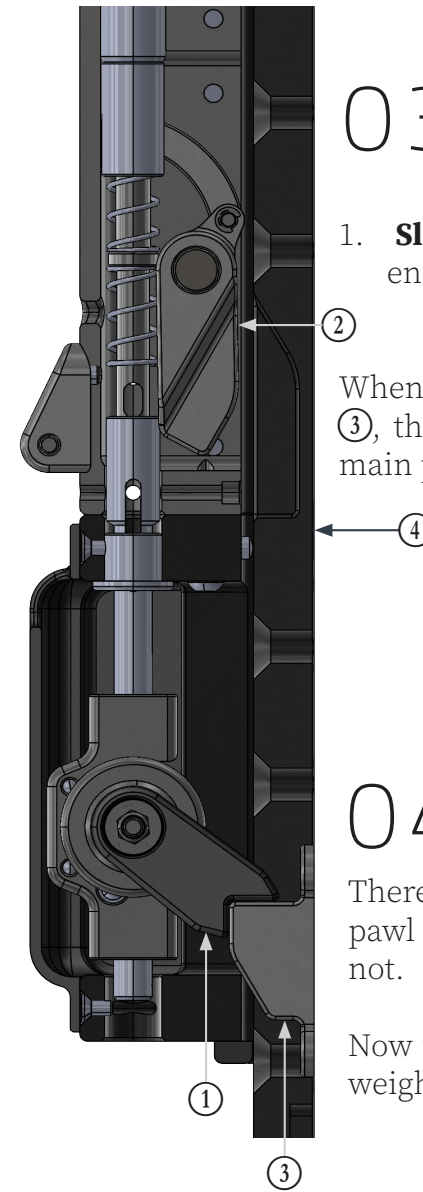


04 On the Lock

There will be no weight on the halyard if the main pawl (2) is properly engaged. Repeat the process if not.

Now the main pawl (2) is engaged there will be no weight on the self lock pawl (1).

Please ensure the halyard is stowed appropriately so that there is no risk of entanglement in the event of mechanical failure and the sail drops unexpectedly.

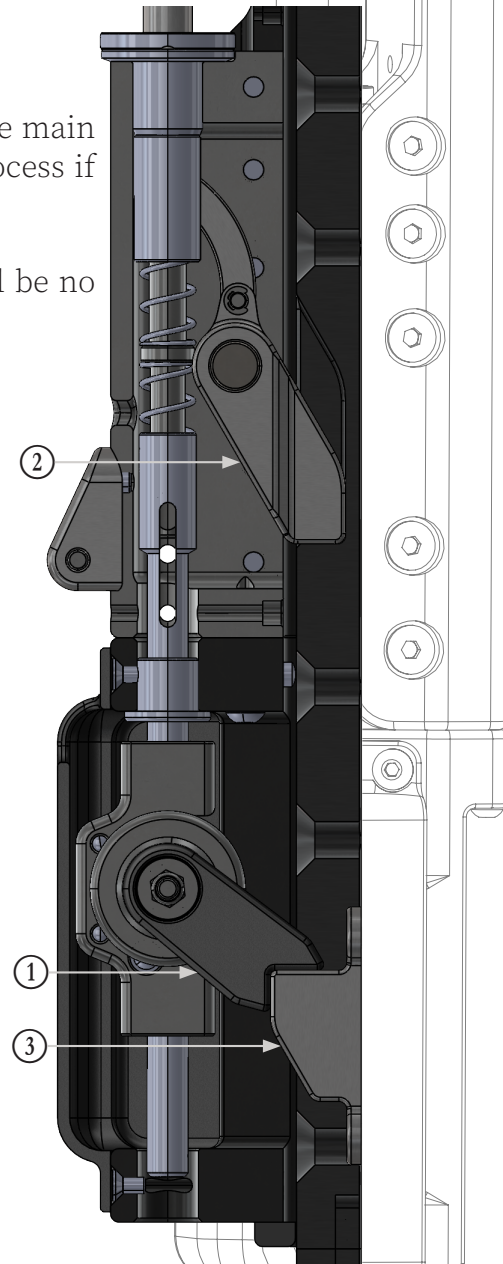

Off The Lock

01 Over Hoist


1. Ease main sheet, vang and tack tension before manoeuvre
2. Hoist the halyard until the sensor indicates the correct position of the car. Without sensor kit: to maximum hoist halyard mark.

During the hoist the main pawl automatic retracts and the self lock pawl goes into **unlock mode** and is able disengaged from the trigger seat.

02 Halyard Ease

1. Ease the halyard to drop the sail

Now both of the pawls are disengaged and the sail is free to be lowered

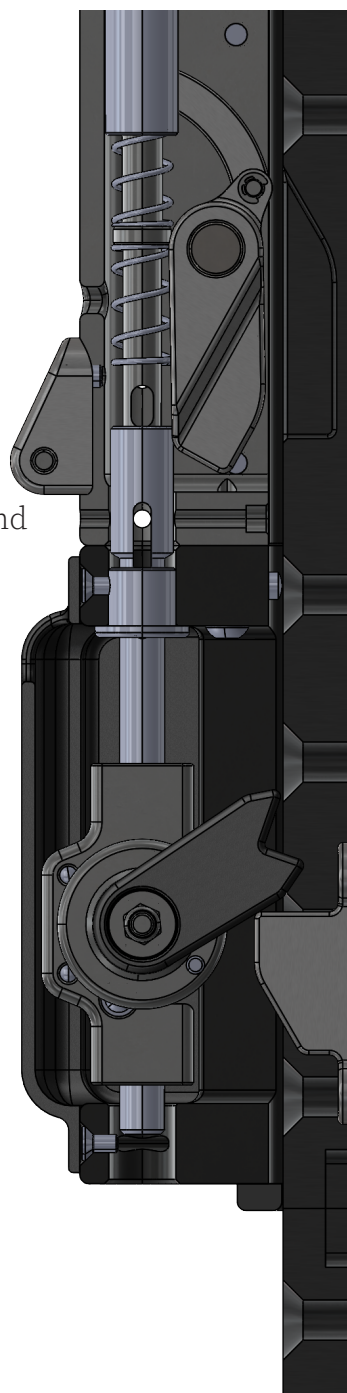

Manual Lock - Trip Line

To engage pawls on the lock using the manual trip line;


1. Over hoist the head board car
2. Gently pull the trip line
3. Ease the halyard **slowly**
4. The main pawls ② x2 will engage

Due to the nature of mechanism for the manual trip line it is important the line is **free to run** if not in use.

Reefing

To reef the sail, please follow the same 'On The Lock' procedure.


1. Ensure the car is lowered below reef trigger seat
2. Over hoisted the head board car to activate self lock pawl
3. **Slowly ease** onto the lock

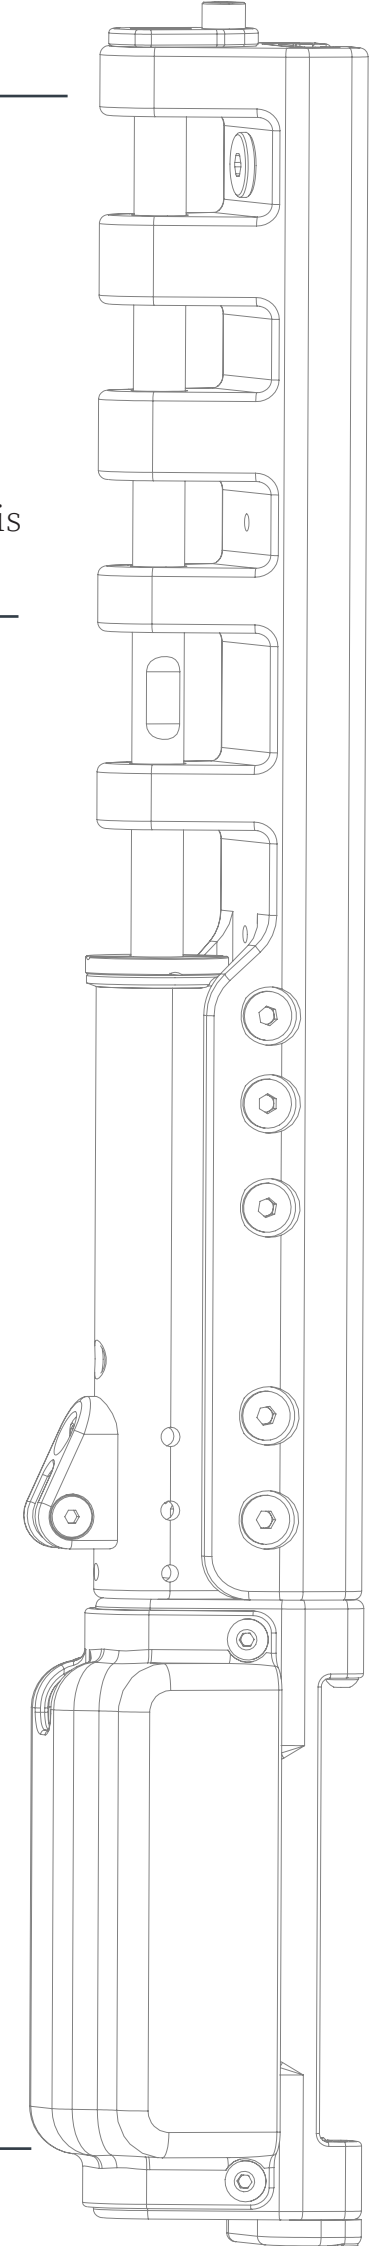

Sensor Kit Installation

Step	Instruction
1	Mouse sensor wires from the junction box to the relative reef points and full hoist locations on the mast
2	Pass the sensor through the mast and thread onto the back high load track section. Ensure the sensor is 3.9mm recessed from the surface of the track
3	Secure the sensor in place with backing nut
4	Test the sensor signal to ensure the function of the sensor
5	Secure the high load track section to the mast

On The Lock

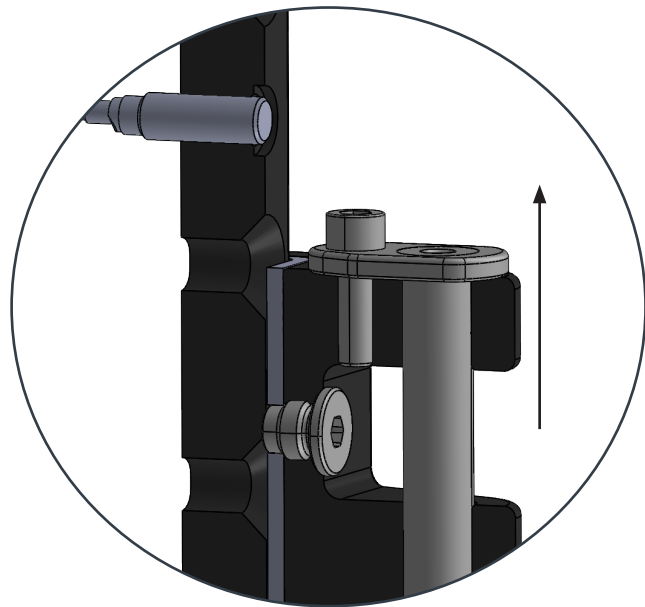

0 1 During Hoist




The sensor will activate at each reefing point during a full hoist manoeuvre. Otherwise the indicator will be off.


0 2 Over Hoist



The sensor will activate to indicate the headboard car is in the over hoist position and can now be **slowly eased** onto lock.

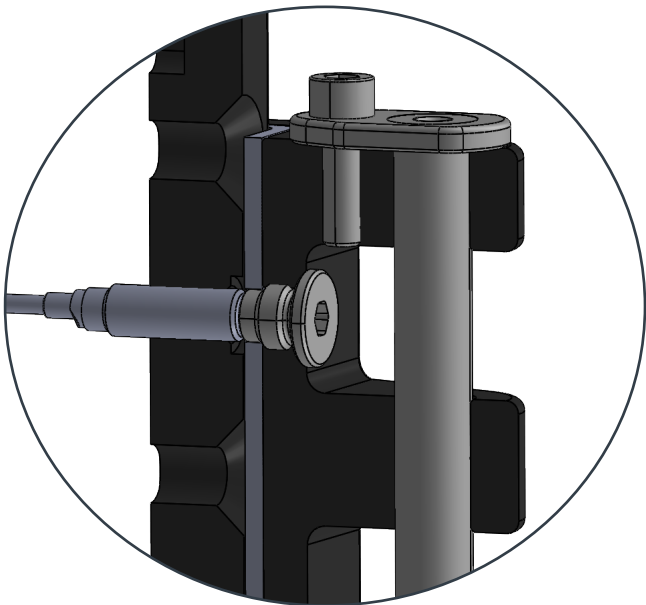

Off The Lock

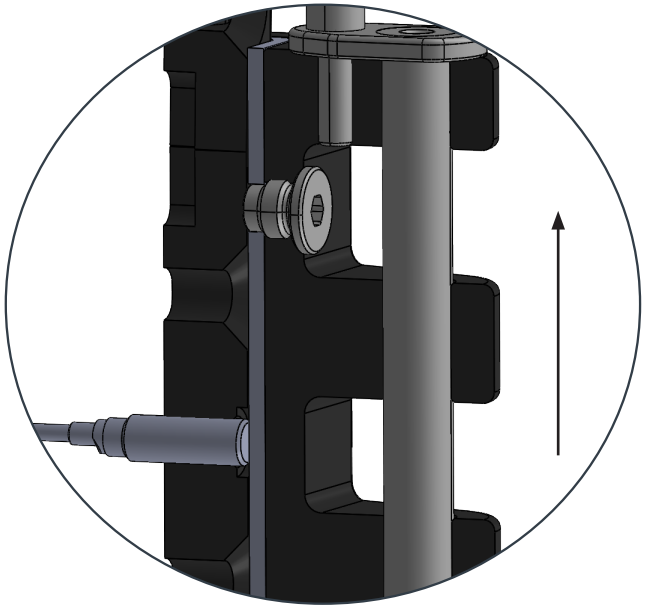


0 1 Over Hoist

From the 'on lock' position, when the car is hoisted, the signal will show an Off, On, Off sequence. The headboard car is now in the unlocked position.

0 2 Halyard Ease

From the 'over hoist' position the signal will repeat an Off, On, Off sequence as the sensor is activated during the dropping of the sail.

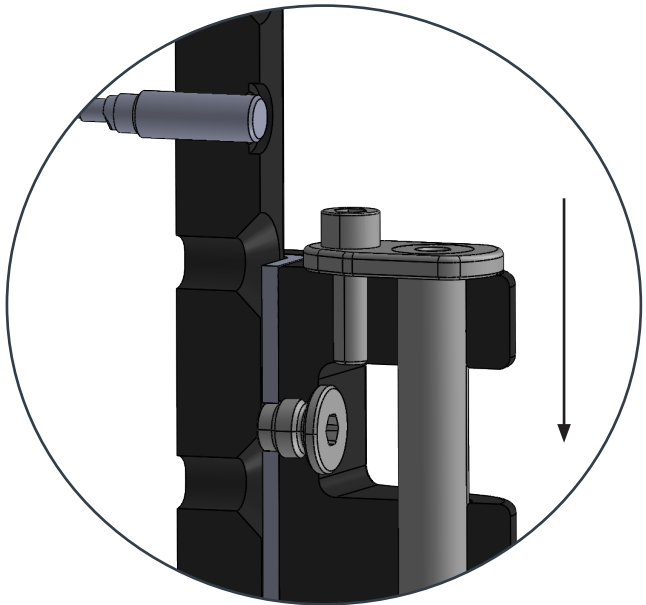

0 3 On the Lock



After the halyard is eased the sensor will be disengaged when the headboard car is on the lock.

Inspection Intervals

During each interval please carry out preceding inspection advisories

Interval	Advisories
Inshore Racing Daily Inspection	Visual inspection over the body for signs of wear and tear
	Ensure all fasteners are secure of the high load track section, sail plate and the main car
	Rinse thoroughly with fresh water
	Inspect top of main car body for cracking
Offshore Sailing or 2 Months or 2500nm	Inspect the top hat bushings of the sail plate for signs of wear and tear
	Remove, inspect and clean the main washer
	Inspect the main pin for alignment and deformation
	Check the sail plate is free to rotate on the main pin
	Check for chafe on the manual trip line
	Inspect locking track section fasteners are secure
	Remove self lock cassette cover to visually inspect the ball plunger and self lock pawl mechanism. Please do not attempt to disassemble.
If Racing- Annual	Full visual inspection by Rigging Projects Technician
2 Years or 35,000nm	Return to Rigging Projects HQ for full service

Service Guide



Manual Lock

Click
or
Scan



Auto Lock


Important

Rigging Projects equipment is designed for minimal maintenance, but some maintenance is required for optimum and safest possible operation and to comply with the Rigging Projects limited warranty. In general, the most important aspect of maintenance is to keep your equipment clean by frequently flushing with fresh water. In corrosive atmospheres, stainless parts may show discolouration around holes and screws. This is not serious and may be removed with a fine abrasive. Exposure to some caustic solutions can result in discolouration of part and is not covered under the Rigging Projects warranty.

Trouble Shoot


Problem	Probable Cause	Solution
Car binds on track	Slider damaged or missing	Check or replace slider and dowels
	Track misaligned	Check alignments on track
	Track fasteners protruding	Check all track fasteners are properly secured
Car jams when hoisting	Headboard is catching on running rigging e.g. lazy jacks, reef lines and halyard	Use topping lift to hold boom and pull lazy jacks forward if possible
Luff on sail is loose and car is engaged	Check range of Cunningham and luff length	Adjust Cunningham or luff length
Luff of sail is tight and not engaging	Incorrect set up of control lines	Mainsail tack should be eased, or consider floating tack car instead of lashing
Car is not locking	Self lock pawl is seized and requires lubricating	Remove plastic cover, inspect self lock spray internal mechanism with WD40
	On self-lock models, the self lock pawl may have become damaged due to a fast drop	Remove plastic cover of self lock cassette and inspect self lock pawl for damage
	Trip line damaged	Check trip line is activating lever and replace if necessary (Should be carried out by qualified personnel)
	Trip line under tension	Ensure the manual trip line slack
	Self-lock pawl shaft has deformed	Part needs replacing; please contact Rigging Projects
	The car is not moving past the high load track section	Ensure the halyard marks are correct and the car has reached the appropriate height
	Damage to self lock ramp	Part needs replacing; please contact Rigging Projects
Car is not unlocking	Manual trip line is caught and forcing the pawl to engage	Go aloft to visually inspect the manual trip line is slack
	The self lock pawl is no deactivating	Go aloft to visually inspect the self lock pawl unlocking during the over hoist. If not, disengage manually
Gaff Lock not Disengaging/engaging	Speed of halyard ease	Hoist main slightly and drop at faster speed. Do not allow free fall
		May require small pull on leech of sail
	The sail plate is jammed in the gaff lock	Ensure you are pointing exactly upwind during the unlocking
	The sail geometry is incorrect	Please contact Rigging projects with photos of the sail head should you suspect the geometry is incorrect

Headboard Car

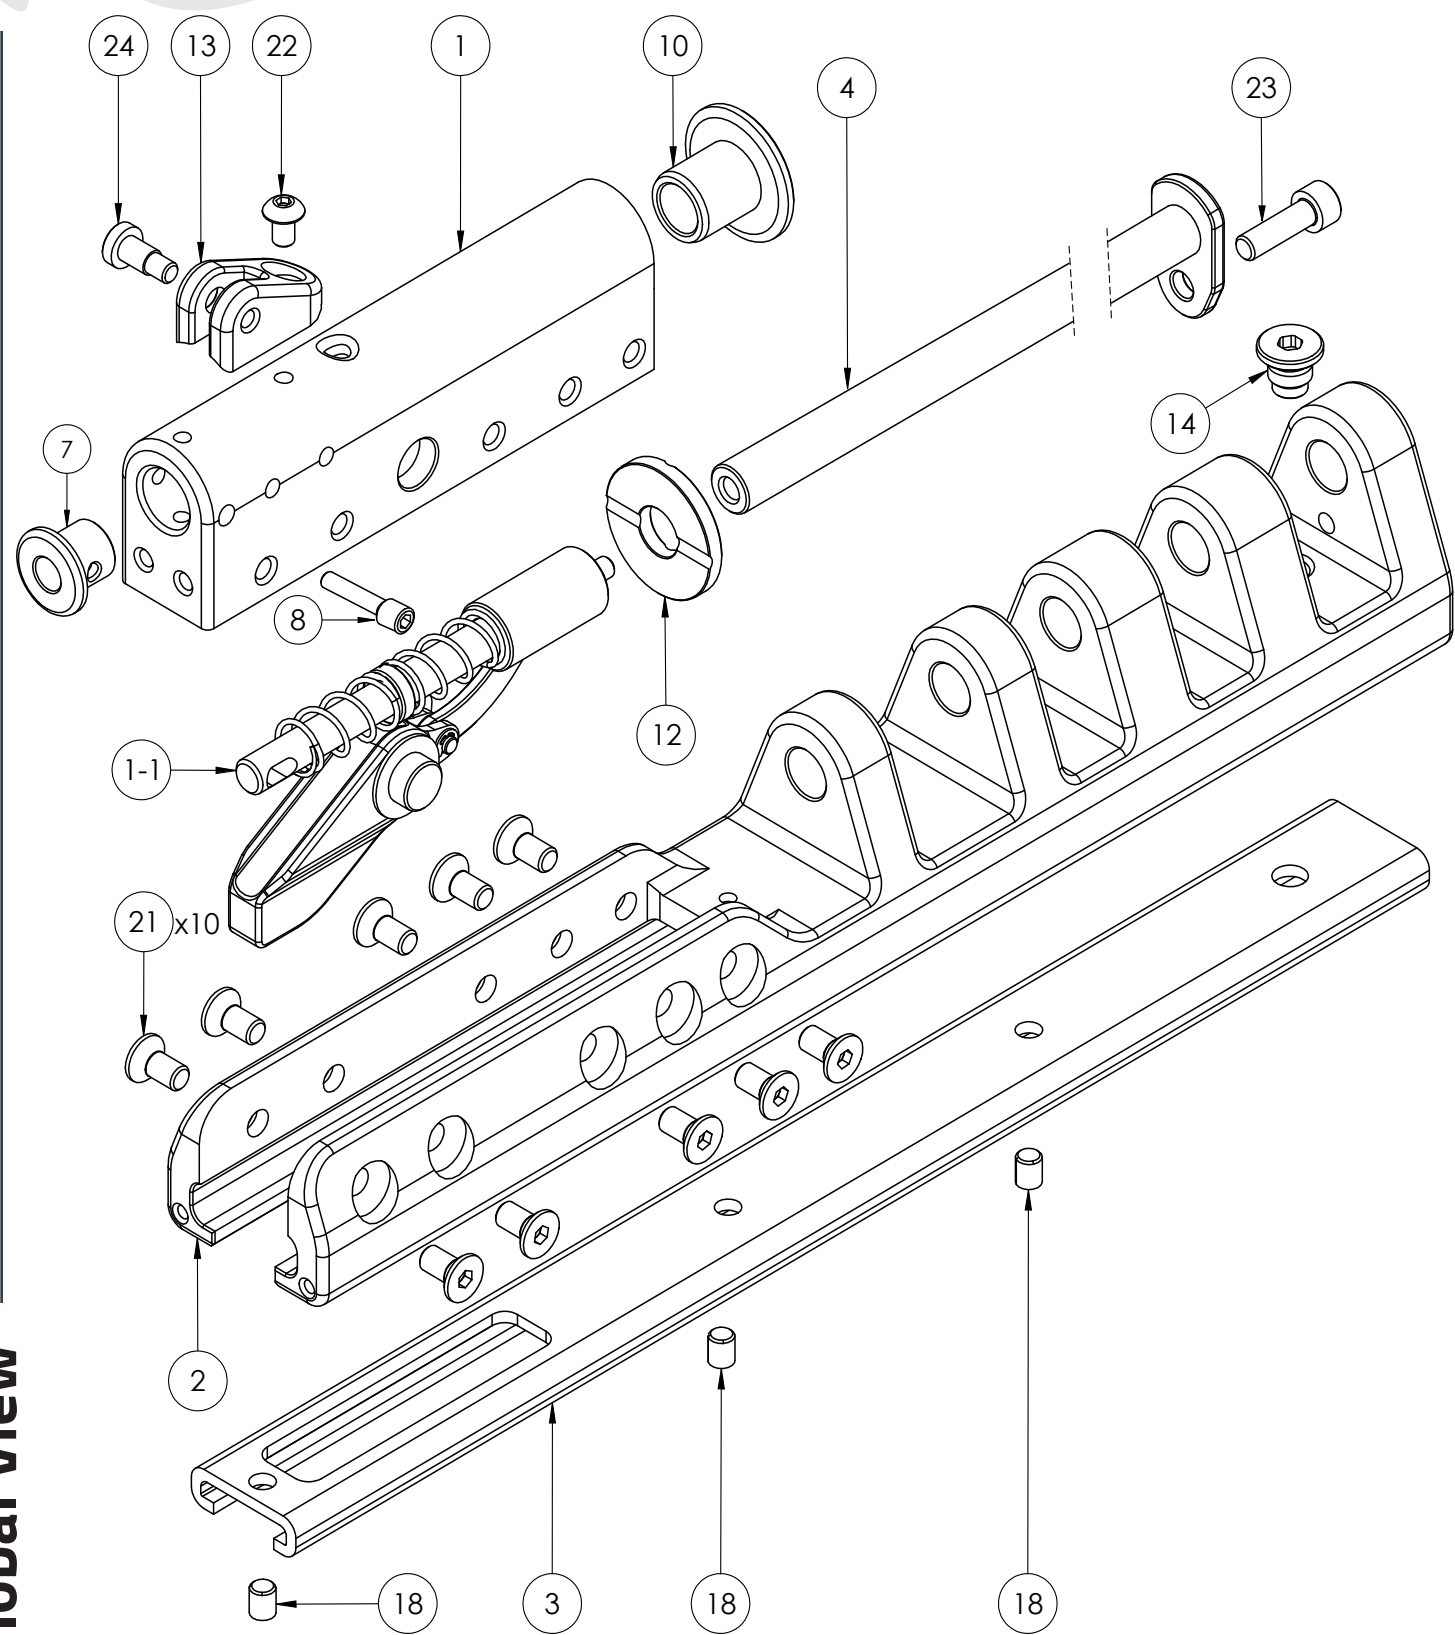


Bill of Materials

ITEM No.	DESCRIPTION	Qty
1-1	MAIN CAR PAWL ASSEMBLY	1
2	MAIN CAR BODY	1
3	SLIDER	1
4	MAIN PIN	1
7	GUIDE (MANUAL LOCK ONLY)	1
8	ANTI ROTATION SCREW	1
10	TOP HAT	1
12	MAIN WASHER (SERVICABLE PART)	1
13	TRIP LINE BRACKET (AUTO LOCK ONLY)	1
14	INDUCTIVE SENSOR TARGET	1
18	DOWEL	3
21	SOCKET CSK HEAD SCREW	10
22	SOCKET BUTTON HEAD SCREW	1
23	SOCKET HEAD CAP SCREW	1
24	LOW HEAD SOCKET SHOULDER SCREW	1

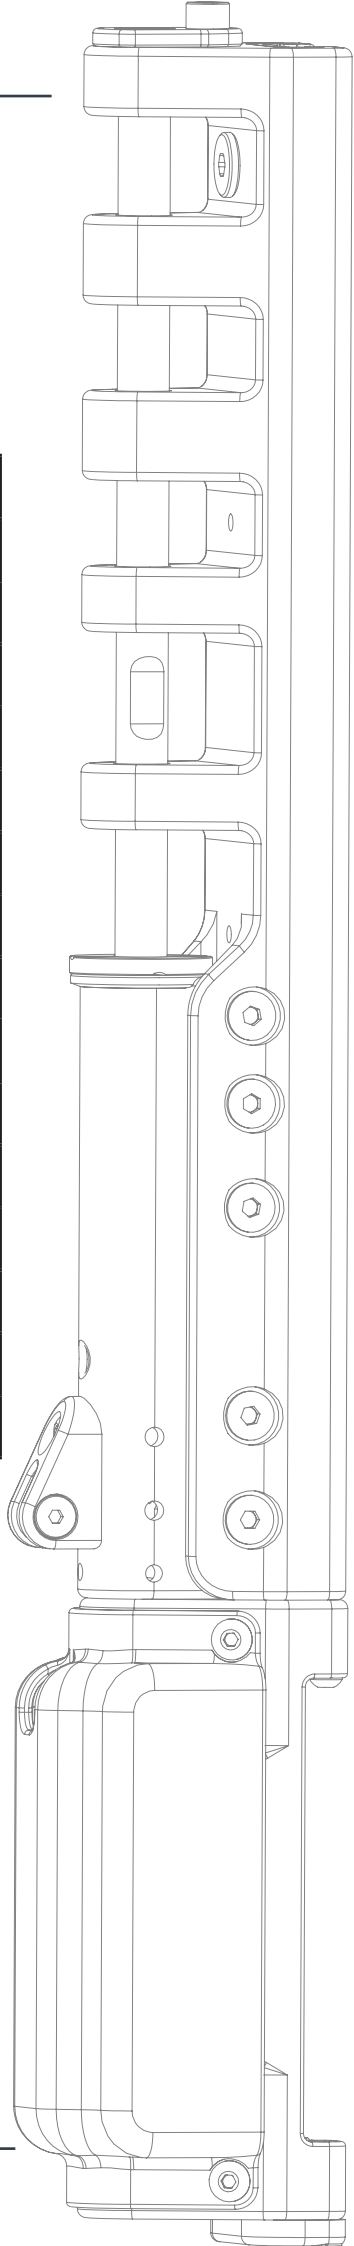


Self Locking
Cassette
HB4 & HB6

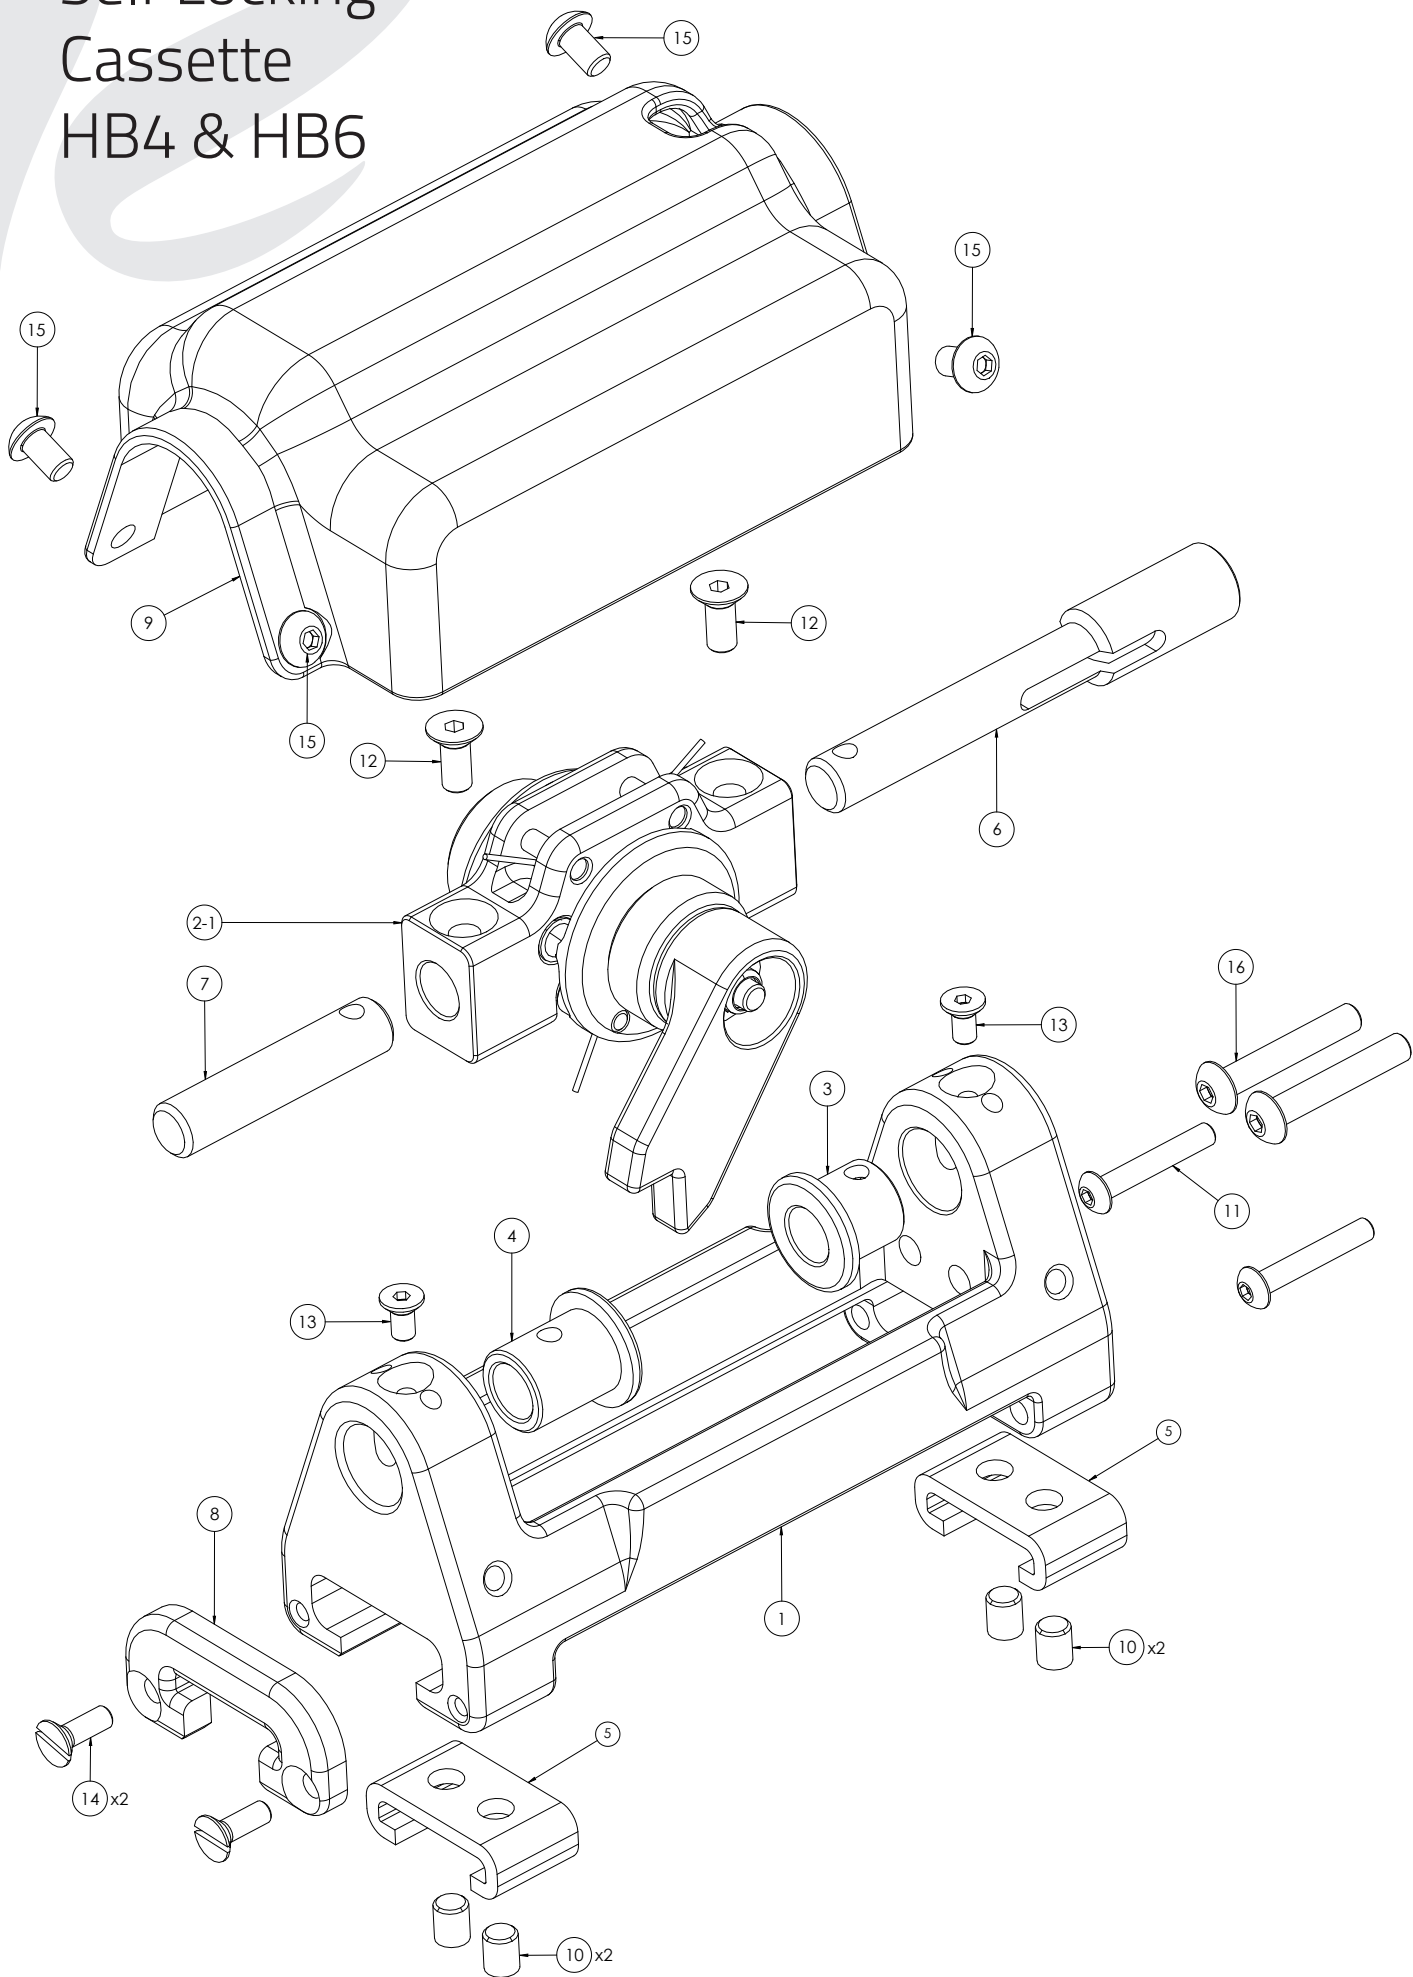

Bill of Materials


ITEM No	DESCRIPTION	Qty
1	HOUSING	1
2-1	PAWL ASSEMBLY - STBD	1
3	UPPER BUSH	1
4	LOWER BUSH	1
5	SLIDER	2
6	UPPER SHAFT	1
7	LOWER SHAFT	1
8	RUBBER BUFFER	1
9	COVER	1
10	DOWEL	4
11	SOCKET BUTTON HEAD SCREW	2
12	SOCKET CSK HEAD SCREW	2
13	SOCKET CSK HEAD SCREW	2
14	SLOTTED CSK HEAD SCREW	2
15	SOCKET BUTTON HEAD SCREW	4
16	SOCKET BUTTON HEAD SCREW	2

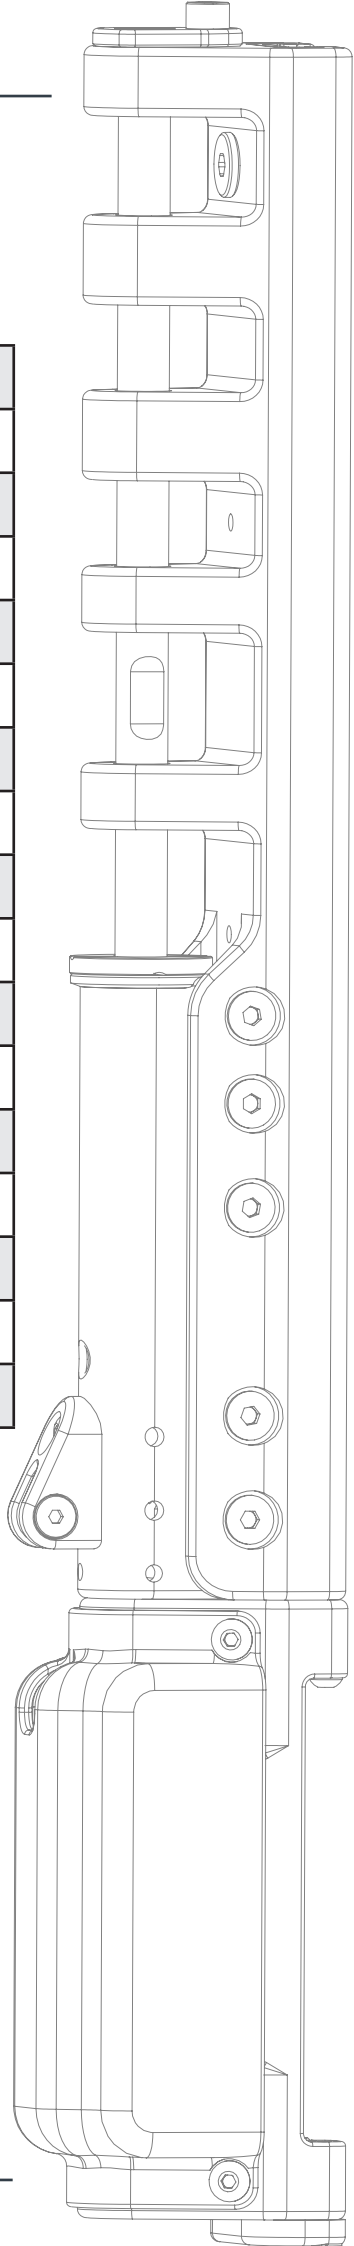

Global View




25

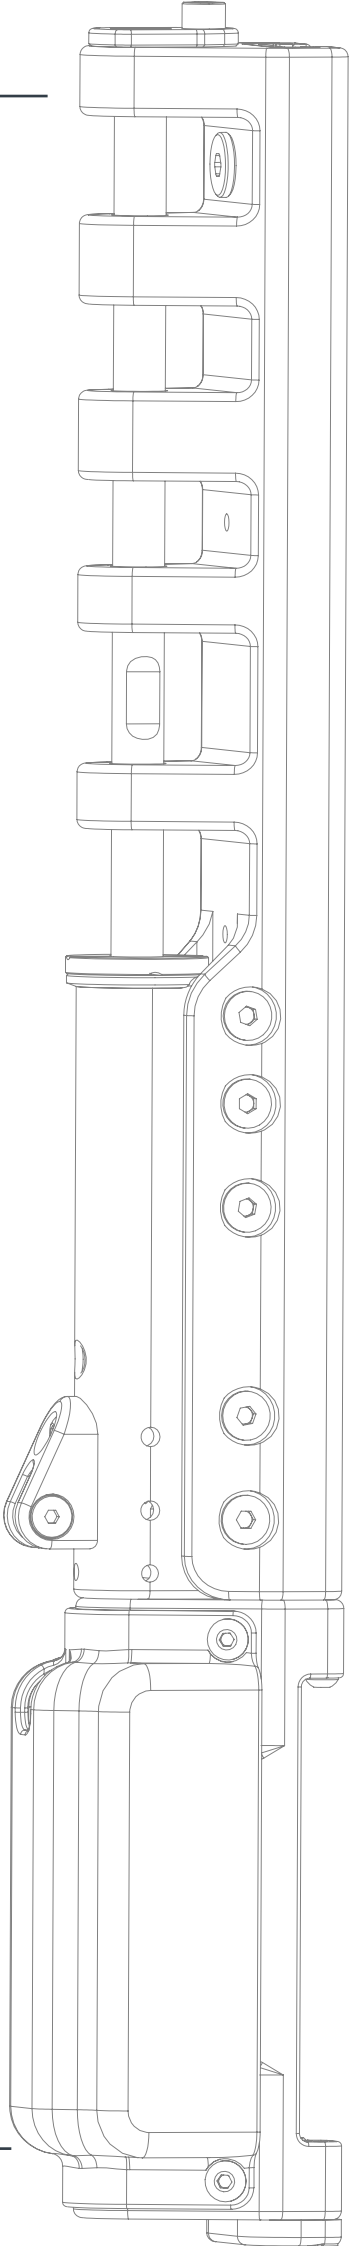


Customer Support

Info@riggingprojects.com


+44 23 8045 6358

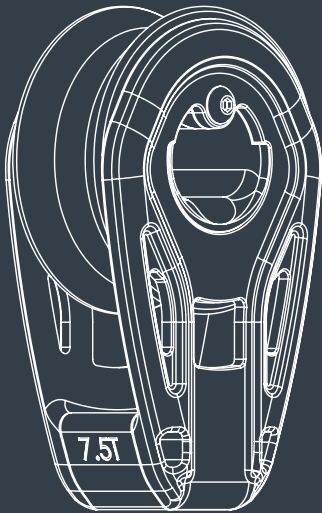

X- Glide Range

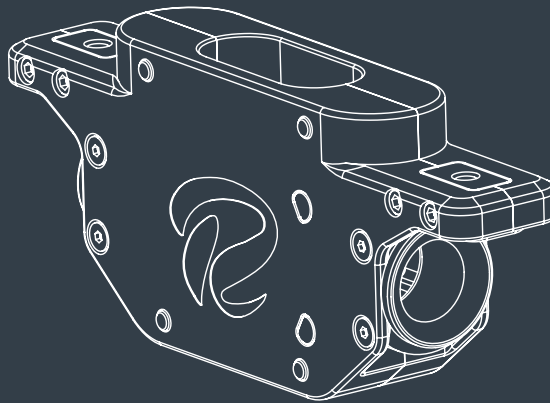

Internal Lock Range

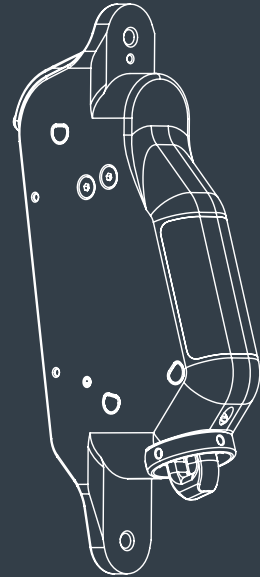

Fwd Lock Range

Newport RI, USA

Southampton, UK

Zaandam, Netherlands

Palma de Majorca, Spain

AHEAD OF THE CURVE

- Project Management
- Sail Handling
- Hardware
- Textile Solutions
- Service
- Custom