



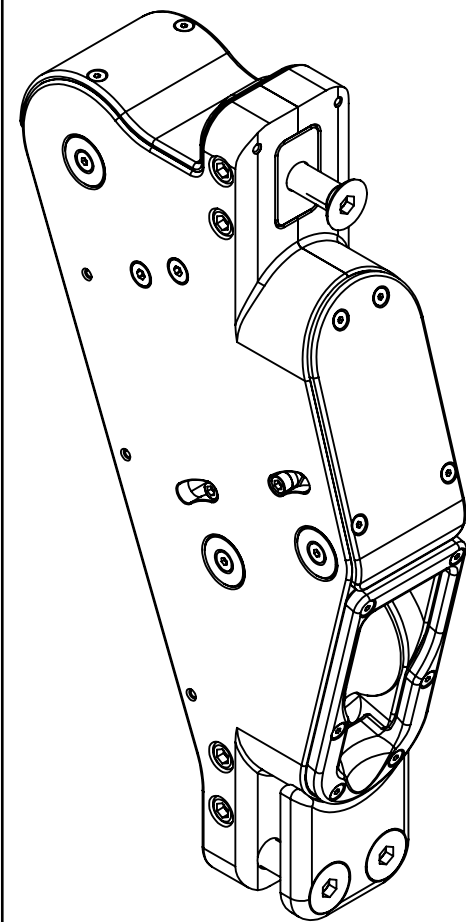


ISOMETRIC VIEW
SCALE 1:3

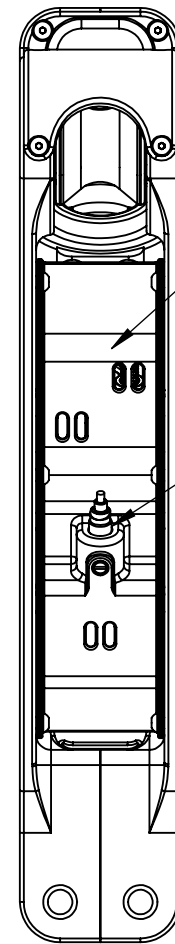


OVER-HOIST
INDUCTIVE SENSOR
IGC261 (IFM)


ON/OFF
INDUCTIVE SENSOR
IGC261 (IFM)

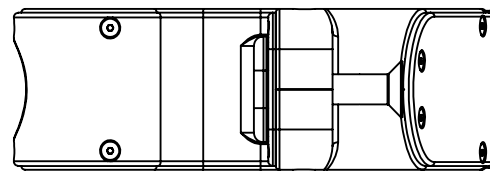

M16 SOCKET CSK HEAD SCREW - DIN 7991
MATERIAL A4-70
LOCKING TORQUE 120Nm
LUBRICATED

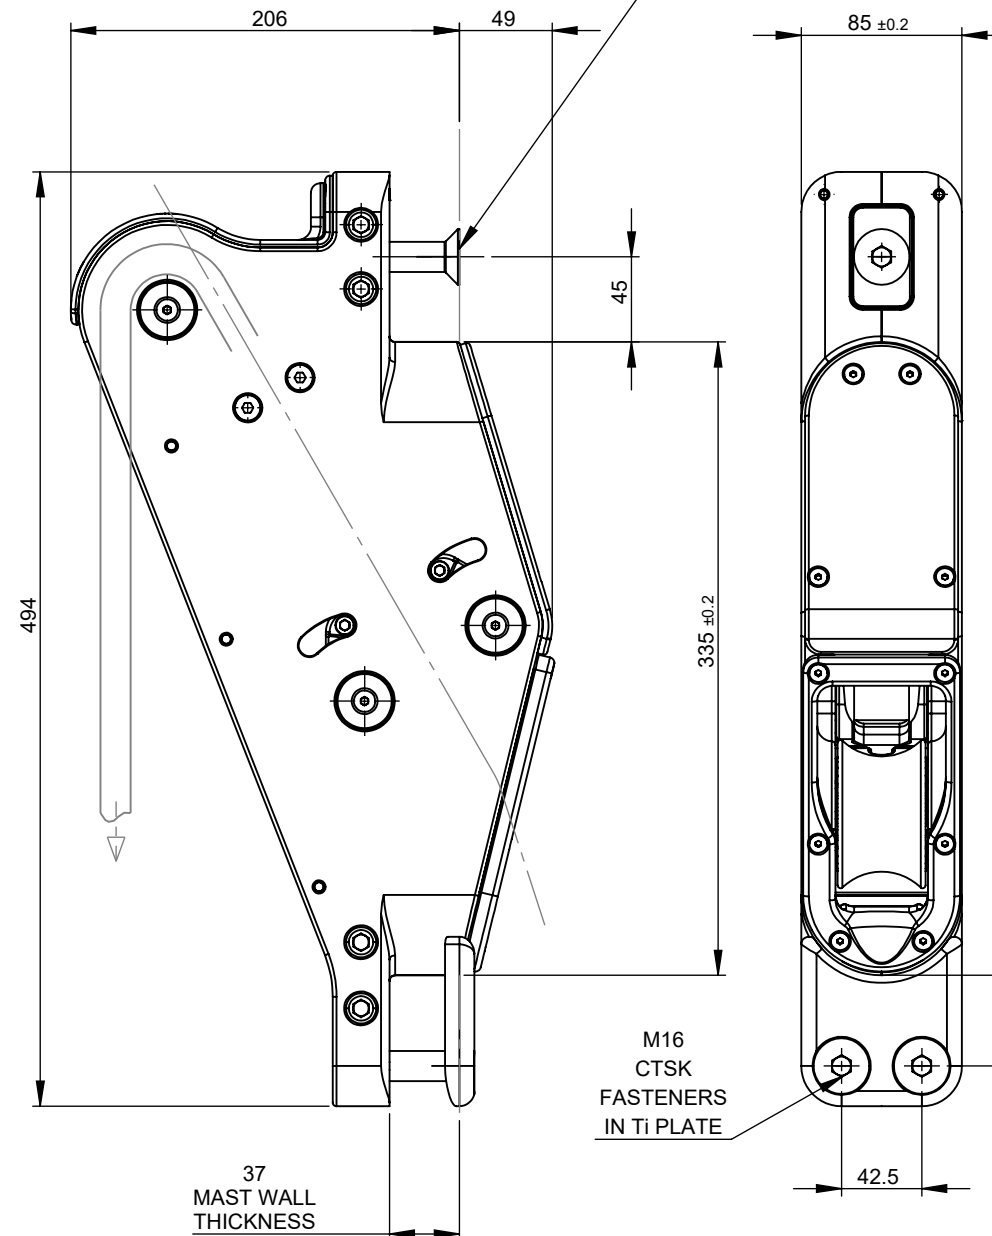


M16
CTSK
FASTENERS
IN TI PLATE

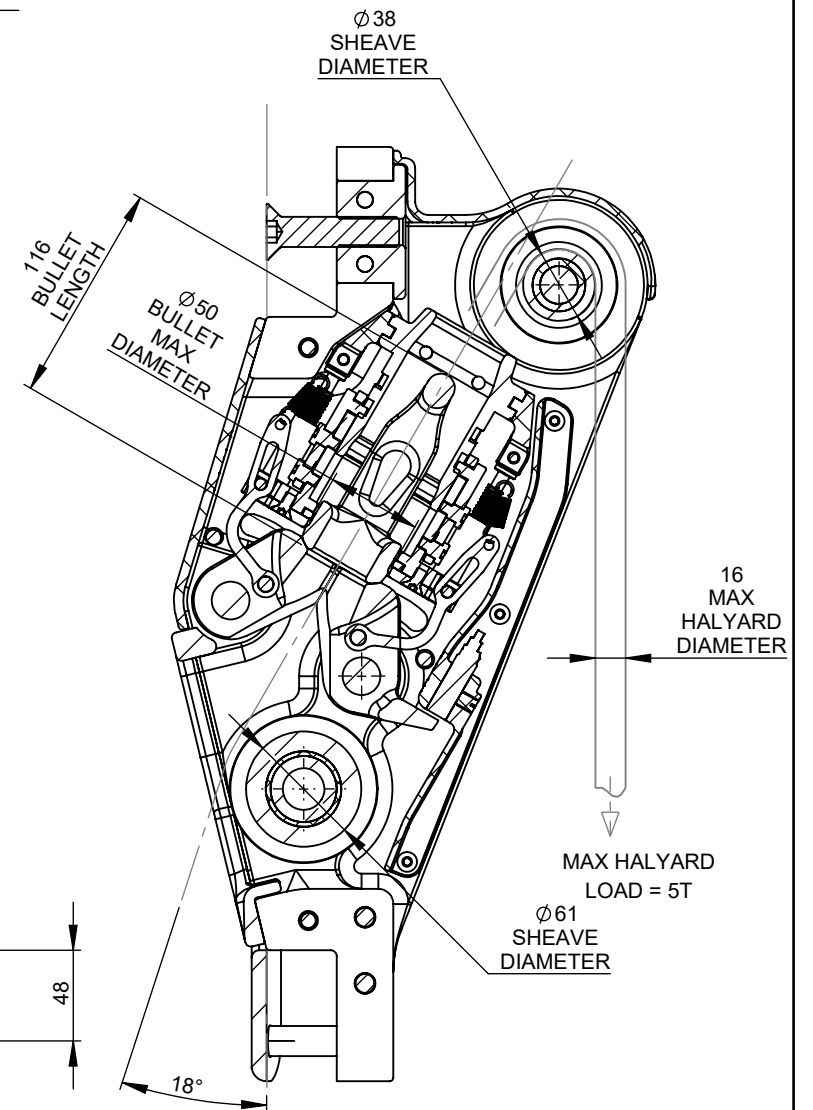

LOCKED CONFIGURATION

LOCK MWL = 20T
MAX HALYARD DIAMETER = 16mm
MAX HALYARD LOAD = 5T

1.0	30/06/2023	FIRST PRODUCTION REVISION			AD	AD
REV	DATE	DESCRIPTION			DRAWN	APPROVED
REVISIONS						
 DRAWN IN THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING IF IN DOUBT ASK !		JOB NUMBER RP5598		
		ALL DIMENSIONS IN mm TOLERANCES STANDARD ISO DIN 2768 mK		DESCRIPTION 20T IDLER SHEAVE LOCK - AUTO		
		MATERIAL SEE TABLE		MASS (kgs) 10.53	DRAWN BY ANTOINE DELAPERRIERE	
		FINISH -		SCALE 1:4	PRINT SIZE A3	SHEETS 3 of 3
		E: info@riggingnews.com W: www.riggingnews.com W: www.riggingnewsprojects.com				
THIS DRAWING IS THE PROPERTY OF RIGGING PROJECTS AND MUST NOT BE REPRODUCED OR USED FOR ANY PURPOSE, OTHER THAN IN CONJUNCTION WITH THE PROJECT OR DESIGN FOR WHICH IT WAS DRAWN, WITHOUT RIGGING PROJECTS' PRIOR WRITTEN CONSENT. COPYRIGHT - © RIGGING PROJECTS						