



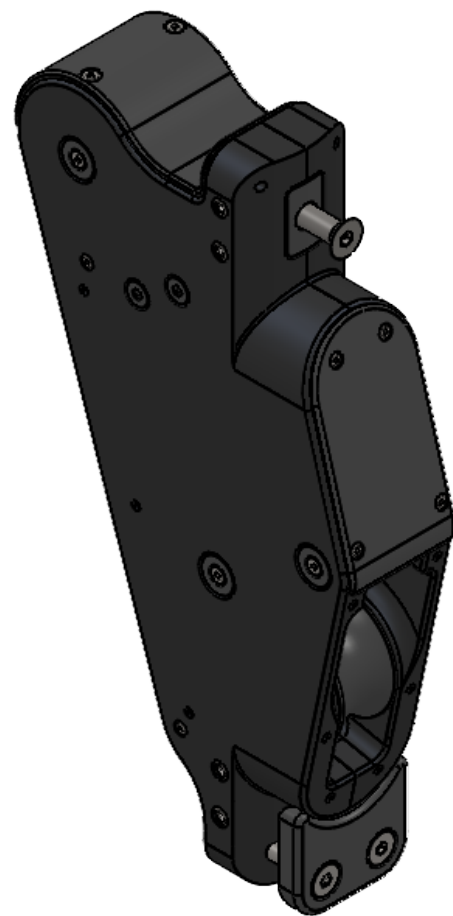


ISOMETRIC VIEW
SCALE 1:6

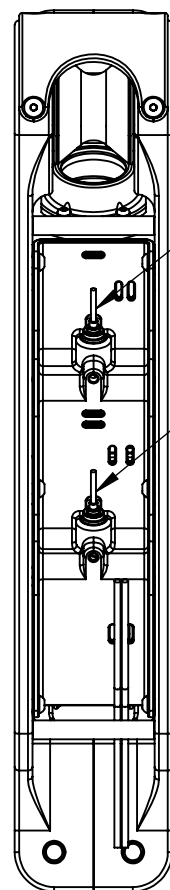


OVER-HOIST
INDUCTIVE SENSOR
IGC261 (IFM)

ON/OFF
INDUCTIVE SENSOR
IGC261 (IFM)

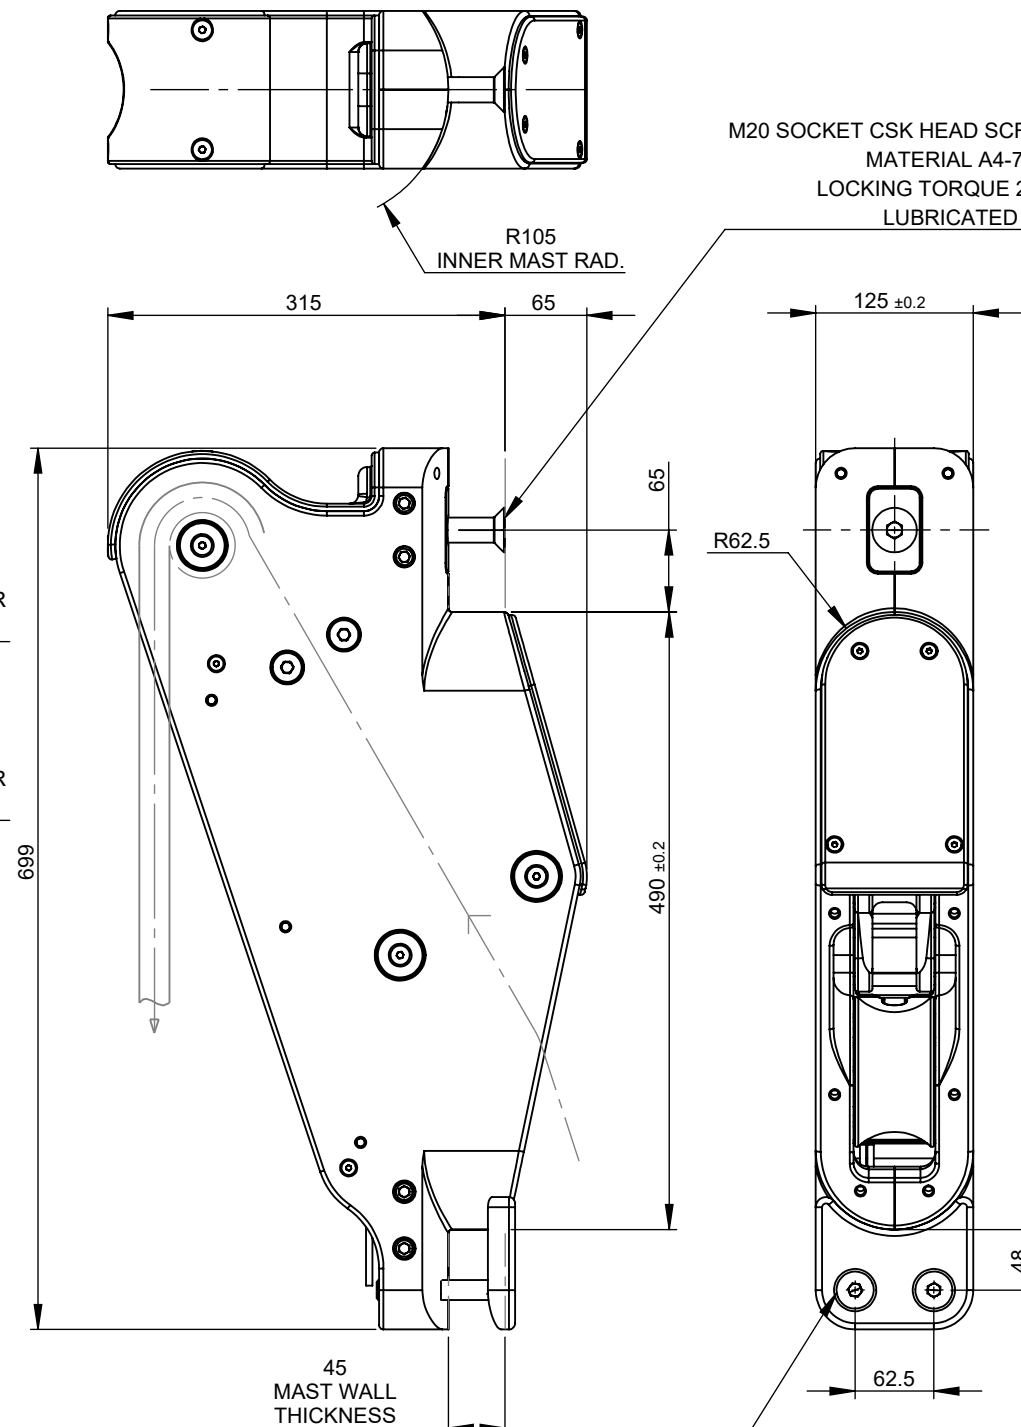


M20 SOCKET CSK HEAD SCREW - DIN 7991
MATERIAL A4-70
LOCKING TORQUE 230Nm
LUBRICATED

M16 SOCKET CSK HEAD SCREW - DIN 7991
MATERIAL A4-70
LOCKING TORQUE 120Nm
LUBRICATED

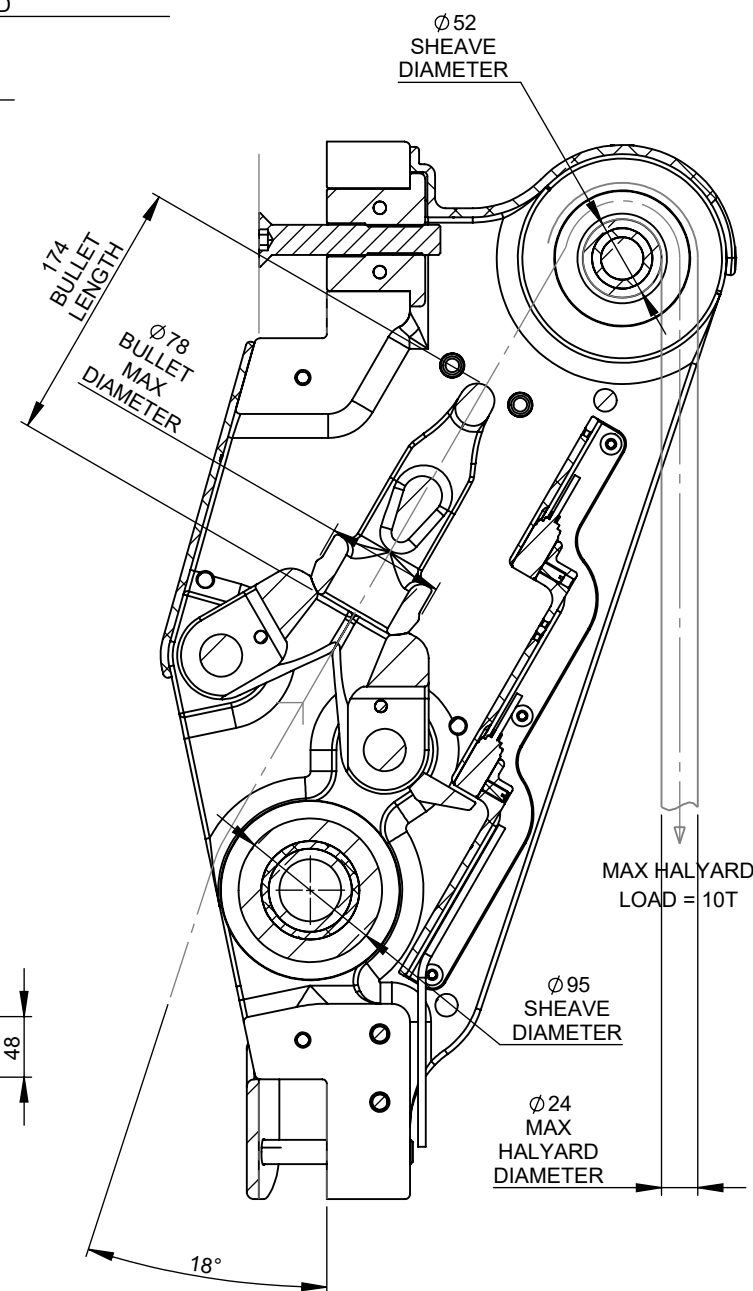

LOCK MWL = 40T
MAX HALYARD DIAMETER = 24mm
MAX HALYARD LOAD = 10T

MAST INNER RADIUS = 105mm

1.0	13/06/2024	FIRST PRODUCTION REVISION			AD	AD
REV	DATE	DESCRIPTION			DRAWN	APPROVED
REVISIONS						
DRAWN IN THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING IF IN DOUBT ASK !	JOB NUMBER	RP3141		
		ALL DIMENSIONS IN mm TOLERANCES STANDARD ISO DIN 2768 mK	DESCRIPTION	40T IDLER SHEAVE LOCK - AUTO		
 Rigging Projects		MATERIAL		SEE TABLE	MASS (kgs)	32.25
		FINISH			SCALE	1:6
					DRAWN BY	ANTOINE DELAPERIERE
					PRINT SIZE	A3
					SHEETS	3 of 4
E: info@riggingnews.com W: www.riggingnews.com W: www.riggingnewsprojects.com						
THIS DRAWING IS THE PROPERTY OF RIGGING PROJECTS AND MUST NOT BE REPRODUCED OR USED FOR ANY PURPOSE, OTHER THAN IN CONNECTION WITH THE PROJECT OR DESIGN FOR WHICH IT WAS DRAWN, WITHOUT RIGGING PROJECTS PRIOR WRITTEN CONSENT. COPYRIGHT - © RIGGING PROJECTS						