



# FOOD & BEVERAGE MANUFACTURING

Technological advancements, consumer behaviour and regulatory challenges are changing the landscape of the food & beverage manufacturing industry.

RS is here to help you navigate these opportunities and challenges, while keeping your production line running smoothly.



[www.rsonline.co.za](http://www.rsonline.co.za) / [www.rsonline.africa](http://www.rsonline.africa)

FOOD & BEVERAGE

# Contents

- 04 PRODUCT HIGHLIGHTS
- 05 BRAND LINECARD
- 06 OUR SOLUTIONS
- 12 IP67 HIGHLIGHTS
- 14 IOT HIGHLIGHTS
- 16 PERSONAL PROTECTION
- 21 TEST & MEASUREMENT
- 34 SITE SAFETY
- 42 FACILITIES CLEANING & MAINTENANCE
- 51 CABLES & CONNECTORS
- 66 SENSORS
- 76 ELECTRICAL, AUTOMATION & PROCESS CONTROL
- 89 PLUMBING & PIPELINE
- 91 PNEUMATICS, HYDRAULICS & POWER TRANSMISSION
- 96 TOOLS & CONSUMABLES

## Solutions for the food & beverage industry.

The challenges facing the food & beverage industry are varied and complex. Failure to comply with national safety and quality standards can be time-consuming, expensive, and can result in accidents or contamination. Demands for shorter production times put increasing pressure on a need for reliable and continuous operations. Extreme temperatures and corrosive environments mean you need products which can handle extreme conditions. And this is before we even get to the latest technological and consumer trends.

From sensors to personal protective clothing, from food safe cleaners to thermal imagers, read on to discover specialist product solutions and components ideal for food and drink production.

And with the challenges you're facing in the industry we know you have better things to do than worry about your order being safe and compliant. No matter where you are, we ensure your products get delivered as efficiently and carefully as possible.

Leave the how to us.

### Join the conversation



### Terms & Conditions

To view our latest prices, charges and full terms see RS Conditions of Sale as set out online at [www.rsonline.co.za/www.rsonline.africa](http://www.rsonline.co.za/www.rsonline.africa)

Published by: RS South Africa.  
Registered office: 20 Indianapolis Street, Kyalami Business Park, Midrand, 1684.

RS are trademarks of RS Components Limited.  
An RS Group Company



[www.rsonline.co.za](http://www.rsonline.co.za) / [www.rsonline.africa](http://www.rsonline.africa)



### **Your one-stop shop**

Get access to over 750 000 products across various product categories and brands ensuring that you get the best value without having to shop around.



### **Easy Ordering**

Get free delivery on orders over R1000, no minimum order quantity required. Order online, via email and phone or visit our local trade counter.



### **Trusted Global Brands**

We source and partner with over 2500 global brands that you know and trust to give you access to the widest range of genuine parts.



### **Customer Support**

Our team is on hand to support with all your queries – contact us via phone, email or speak to us on LiveChat.



### **Shop online 24/7**

Access our website at any time on any device and shop at your own convenience. Plus you get instant access to technical datasheets that you can download.



### **Flexible Delivery Options**

Local stocked delivered within 24 - 48 hours. Global stock delivered within 4 - 6 working days.



### **RS PRO**

Try our private label brand that has been designed according to industry standards with high quality and performance – save up to 30% against other brands.



# FOOD & BEVERAGE INDUSTRY PRODUCT HIGHLIGHTS

## Food Safe Lubricants and Cleaners

A range of Food Processing Safe cleaners & lubricants available from Ambersil, including greases, penetrating oils, multi-purpose cleaners and degreasers all NSF registered and suitable where food contact may occur.

Search '**Ambersil Food**' at RS Online



## Stainless Steel Photoelectric sensors

M18 photoelectric sensors with a high grade stainless steel housing sealed to IP69K. Ideal for wash-down applications in the Food & Beverage industry, and approved for use with Ecolab and Diversey industrial cleaners.

Search '**E3FC**' at RS Online



## Radar Guided Level Probes

Guided radar level probes providing accurate and consistent level measurement, suitable for oil or water based fluids. Stainless steel probe, with options for process temperatures up to 100°C and hygienic versions up to 150°C.

Search for '**Sick Radar**' at RS Online



## Food Environment clothing

We stock an extensive range of food production environment suitable clothing. This includes gloves, aprons, coats, tabards and overshoes and hair protection, from leading brands such as Ansell, 3M and many more.

Search for '**Food Clothing**' at RS Online



## Metal Content Cable Ties

Metal Content cable ties specifically designed for use in food industries. A special metallic pigment throughout the tie enables even small 'cut-off' sections of the tie to be detected by standard metal-detecting equipment. Available in a range of sizes and colours.

Search '**Metal Content Ties**' at RS Online



# The Linecard

This linecard helps as your guide to the key technologies and brands in our offer which are most relevant to the food and beverage manufacturing sector.

PERSONAL PROTECTION	 	 	 	 		
TEST & MEASUREMENT	 	 	 	 	 	
SITE SAFETY	 	 	 	 	 	
FACILITIES CLEANING & MAINTENANCE	 	 	 	 	 	
CABLES & CONNECTORS	 	 	 	 	 	
SENSORS	 	 	 	 	 	
ELECTRICAL, AUTOMATION & PROCESS CONTROL	 	 	  	  	 	
PLUMBING & PIPELINE			 			
PNEUMATICS, HYDRAULICS & POWER TRANSMISSION	 	 	 	 	 	
TOOLS & CONSUMABLES		 	 	 	 	



# Our Solutions

## Our solutions support you across the product lifecycle through design, build and maintain.

We can also give you advice on flexible delivery options, cost-saving ways to help you manage your inventory and procurement, through to preventative maintenance and eCommerce solutions.

### Product Support

- We offer easy access to product support resources online, via email or by phone.
- Our Customer Service Team can help by understanding your needs and offering product support or directing your enquiry to our technical team.
- Speak to a live chat member on our website for help in finding products or other technical information.
- Or take a look at our technical data sheets which are available on our website at product level. This can help save time, allowing you access to technical information 24/7.



### Delivery and Invoice Options

With a range of flexible delivery and invoicing options all designed to suit you

- Local stock: 24/48 hours to main cities in SA.
- Global stock: 4-6 working days unless otherwise stipulated.
- Free delivery for orders over R1000 within SA.

### Ordering

There are four different ways that you can place an order

- **Online** - This is the easiest way to order. Products can be delivered as quickly as the next day if items are in local stock.
- **Email** - send your order/query to [sales.za@rsgroup.com](mailto:sales.za@rsgroup.com) / [africa@rsgroup.com](mailto:africa@rsgroup.com)
- **Phone** - By calling us on +27 (0)11 691 9300
- **Branch** - You can get access to locally stocked products at our location in Kyalami Business Park, Midrand, Johannesburg



## What is IOT, IIOT & Industry 4.0?

In short, IoT is a broad term used to refer to all devices which are connected to the internet beyond the familiar mix of PCs, laptops, phones and tablets.

The Industrial Internet of Things simply put, IIoT takes the concept of networking devices and connecting them to the internet to share data – locally or remotely – in factories, industrial processes and industrial buildings. Sensors collect the information, which is consolidated via a gateway to the local network, then onwards through an edge controller to the internet or the cloud – data servers within large data centres.

Industry 4.0 is when components communicate independently with the production system and, if necessary, arrange for repairs themselves or reorder materials. It's when people, machines and industrial processes network intelligently.

## What are the advantages of IOT?

A few examples of how the manufacturing industry is using IIoT:

- **Optimising the manufacturing line:** Industrial IoT sensors enable continuous monitoring of the production line from start to finished product. This enables operators to continuously fine-tune the manufacturing process, saving both time and money
- **Inventory and supply chain management:** manufacturing stands or falls on the supply of raw materials and components. RFID (radio frequency identification) tags and similar technologies allow components and supplies to be tracked continuously, in real-time, from location to location, providing continuous monitoring of inventory and compensatory adjustments
- **Packaging assessment:** Industrial IoT sensors allow manufacturers to monitor the condition of packaging during transit and storage and even assess how customers typically interact with it, enabling improvements to design
- **Real-time manufacturing data:** IIoT devices can supply real-time operational data to suppliers, enabling responsive adjustments and also allowing the remote management of factory units

## XINABOX LORAWAN IOT STARTER KIT XK70

- XinaBox produces a range of 80+ modular "xChips", which includes cores/CPU's, sensors, power, communication, output, and storage. xChips can be clipped together in seconds using a connectivity standard without wires, soldering, breadboards or any consumables: no hardware knowledge is required to build digital instruments with XinaBox.



190-6042 XK70

## IO-LINK SMART SENSOR

- Temperature and Humidity Recorder
- Combines three functions in one: sensor, interface and transmitter.
- The most recent standards of microtechnology and microsystems technology (sub areas of sensor technology and measurement technology) used in intelligent sensors of small sizes, are the basis for our CSS 01x.



## WIRELESS HARMONY XB5R SERIES RECIEVERS

- Wireless and batteryless package, containing a push-button, set of caps and receiver.
- Reduction of wiring allows for a quick and easy installation.
- Flexible due to its mobility, giving greater control to operators. Can be used to remotely control machines up to 25 m away.



739-8064 10 COLORED CAPS, METAL, 24V~240 V AC/DC

739-8067 6 COLORED CAPS, METAL, 24 V DC



189-0174 M12 CONNECTOR, 18 → 30 V DC



# FOOD & BEVERAGE INDUSTRY PERSONAL PROTECTION

PPE, protective clothing & footwear from the brands you trust to keep you safe.

## Personal Protection Range Highlights

### DISPOSABLE HAIR NET FOR FOOD INDUSTRY

- Blue nylon lightweight net which can be used alone or together with other headwear
- For use in food manufacturing, pharmaceuticals, electronics and in many other industrial applications



**215-5095** ONE SIZE (PACK OF 100)

### 3M E.A.R SOFT YELLOW NEONS UNATTACHED DISPOSABLE EAR PLUGS

- Comfortable Fit
- High Visibility
- Excellent Noise Reduction



**3M E-A-R™**

**358-4141** 36DB, 250 PAIRS

### CHEMMASTER APRON

- Green, reusable, chemical resistant apron
- 91cm long
- Protection against chemical splashes
- PVC-coated nylon material
- Resistant to acids, alkalis, oils and spirits



**419-653** 36"X24"

**419-669** 42"X36"

### RS PRO WHITE UNISEX REUSABLE LAB COAT (M, L, XL)

- Ideal white coat for engineering, medical and oil lab work
- ESD symbol on the breast pocket of the lab coat
- Unisex lab coat suitable for men and women
- Polyester, cotton and conductive fibres material



**789-8087** MEDIUM

**789-8081** LARGE

**789-8090** X-LARGE

### FACOM SLS HEIGHT SAFE TOOL CARABINERS

- Stainless steel construction with excellent corrosion resistance
- Quick and easy to attach or detach tools and other equipment
- Perfect for working at height to reduce injury and damage or loss of tools
- Available in a range of sizes to accommodate numerous tasks
- Non-lock snap design for easy access



**3M FACOM**

**910-3350** 60MM

### WHITE OVER SHOE COVER FOR USE IN FOOD

- Elasticated ankle
- PVC Sole
- Liquid splash and dust barrier properties (Type 5/6)



**756-4526** M TO L (PACK OF 10)

**756-4520** XL TO XXL (PACK OF 10)



**ANSELL HYFLEX 11-618, HYFLEX 11-618 BLUE POLYURETHANE COATED NYLON WORK GLOVES**

- 20% lighter than previous versions of the same Ansell glove
- 0.8mm thick in total
- Offers good grip in dry or slightly oily conditions
- Superior comfort and sensitivity for the most delicate handling



**Ansell**

713-4273 SIZE 9  
713-4276 SIZE 10

**ANSELL ACTIVARMR BLACK NITRILE COATED KEVLAR WORK GLOVES**

- ActivArm® Multipurpose
- Medium Duty Glove
- DuPont™ Kevlar® provides protection and durability
- Reinforced ridges offer extra palm protection
- Enhanced wet or dry grip with foam nitrile coating



**Ansell**

731-2912 SIZE 8  
484-180 SIZE 10

**ANSELL ALPHATEC BLACK NITRILE COATED NYLON WORK GLOVES**

- 5 gauge seamless nylon liner
- Retains minimal heat, reducing perspiration
- Excellent grip wherever chemicals, oil and grease are present
- Liquid proof glove
- Safety cuffs
- Colour edging for size identification



**Ansell**

749-7066 SIZE 8  
749-7060 SIZE 9  
749-7079 SIZE 10

**ANSELL HYFLEX 11-501 BLUE NITRILE COATED KEVLAR WORK GLOVES**

- Cut level 4 glove
- Superior wearer comfort and flexibility
- Heat and molten splash protection
- Versalite use



**Ansell**

667-9775 SIZE 8  
667-9778 SIZE 9  
667-9772 SIZE 10

**ANSELL HYFLEX 11-840, BLACK NITRILE COATED NYLON WORK GLOVES**

- HyFlex 11-840 Nitrile Foam Glove Extreme durability and superior fit
- The ultra-thin FORTIX™ nitrile foam coating (patent pending) lasts up to three times longer than comparable coatings
- Provides enhanced dry grip and is 20% more breathable than earlier formulations



**Ansell**

791-7514 SIZE 8  
791-7523 SIZE 9  
791-7526 SIZE 10

**ANSELL ALPHATEC GREEN NITRILE COATED WORK GLOVES**

- Excellent dry & wet grip enhance dexterity and reduce hand fatigue
- High-visibility cut liner acts as an indicator for when glove is cut as chemical protection is compromised



**Ansell**

179-3085 SIZE 8  
179-3086 SIZE 9  
179-3087 SIZE 10

**ANSELL EDGE BLACK POLYURETHANE COATED POLYESTER (LINER) WORK GLOVES**

- Good tear resistance, good grip, improved productivity
- EDGE 48-126 shows dirt less, glove is discarded less quickly
- Seamless structure, ensures comfort and encourages safety and glove usage



**Ansell**

181-3323 SIZE 8  
181-3325 SIZE 9  
181-3326 SIZE 10

## DISPOSABLE COVERALL

- Excellent barrier against dry particles and certain liquid chemical splash
- Soft and light, ultra low-linting laminated microporous material that drapes and hangs well over the body facilitating ease of movement
- 3 panel hood, 2-way zip and storm flap with sealable tape with elasticated back and ankles to reduce the risk of skin exposure
- Knitted cuffs and elasticated waist and ankles for increased comfort and freedom of movement
- Anti-static coating reduces static discharge and minimises the risk of sparks
- Nuclear particulate hold out



185-7224 WHITE AND BLUE, M

185-7222 WHITE AND BLUE, XL

185-7219 WHITE, M

## 3M 6000 FULL RESPIRATOR MASK

- Reliable, convenient, compatible respiratory protection
- The 3M™ Full Facepiece Reusable Respirator 6000 Series offers versatility for many environments and applications
- Helps provide respiratory protection against a wide variety of gases and vapors when used with approved cartridges and filters



286-7136 SMALL

## 3M HF-800SD HALF RESPIRATOR MASK

- Greater breathability and comfort provided by the world's first quad flow cartridge system
- Push-button seal check helps bolster confidence that the respirator is properly sealed to the face
- The speaking diaphragm is designed to help provide easier communication while you work



190-1913 MEDIUM

## 3M PELTOR OPTIME III EAR DEFENDER WITH HEADBAND

- Ideal hearing protection against noise arising from extremely noisy environments like airports, marine engine rooms, power stations and print works
- Double casings technology helps minimise resonance effect
- Large space inside cup helps reduce moisture and heat build-up
- Soft wide cushions help reduce pressure around the ears and improve comfort and wearability



449-6499 HI0 SERIES HEADBAND EARMUFFS

449-6528 35DB NECKBAND

## 3M PELTOR 4800AF ANTI-MIST SAFETY GOGGLES WITH CLEAR LENSES

- Panoramic vision lens
- Anti-fog coating
- Fits over spectacles
- Lens marking AOS1.B



465-9331 ANTI-MIST, CLEAR LENS

## 3M PARTICULATES FILTER FOR USE WITH 3M 6000 Series RESPIRATOR

- 3M™ Particulate Filters 2125 offer P2 R2 protection against solid and liquid particles
- Suitable for use with 3M™ all 3M™ Reusable
- Half and Full Face Masks featuring the Bayonet Filter Connection System
- Bayonet fitting allows filters to be clicked into place for ease of fitting



766-233 1 BOX OF 20



**UVEX  
UNATTACHED  
DISPOSABLE EAR  
PLUGS**

- Stored in dispenser
- Detectable metal clip at cord
- Easy and quick insertion
- Easy handling and correct insertion



**UVEX PHEOS GUARD S ANTI-MIST UV SAFETY GLASSES**

- Modern, fashionable looks
- Duo-spherical lens with wide field of vision & scratch-resistant



**uvex**

168-1687 26DB (PACK OF 250 PAIRS)

**uvex**

195-1557 GREY POLYCARBONATE LENS  
195-1554 LIGHT GRAY/GRAY FRAME, CLEAR LENS

**UVEX ULTRAVISION  
ANTI-MIST SAFETY  
GOGGLES**

- Classic, ergonomic wide-vision goggle with unrestricted side visibility
- Lenses can be replaced
- Colour of frame: transparent grey
- Clear CA lens
- Reliable UV 380 protection



**UVEX SKY-GUARD NT ANTI-MIST UV SAFETY GLASSES**

- Spectacles with all-round protection
- Frame colours: grey, orange
- PC lens in clear
- Reliable UV 400 protection



**uvex**

185-3495 CLEAR, ANTI-MIST

**uvex**

185-3506 BLUE FRAME CLEAR LENS  
185-3507 CLEAR FRAME CLEAR LENS

**UVEX ULTRASONIC, SCRATCH  
RESISTANT ANTI-MIST SAFETY  
GOGGLES**

- Goggles in sporty design, also suitable as overspecs
- Lenses can be changed
- Frame colours: black, grey
- PC lens, clear
- Protection features
- Reliable UV 400 protection



**UVEX LENS CLEANING STATION**

- 4 x 9991-000 Tissues
- Tissues are non-abrasive and absorbent
- 1 x 16 fl oz bottle cleaning fluid
- Cleaning station - 9991-000
- Unit dimensions - 340 mm wide, 480 mm long, 165 mm high



**uvex**

195-1558 ULTRASONIC SPEC

**uvex**

130-2349 LENS CLEANING STATION

**HI-VIS CONTRAST BOMBER JACKET**

- High visibility
- Weatherproof
- Studded Storm flap
- Zipped
- Detachable hood, sleeves & fur lining
- Fur lines knitted cuffs
- Reflective tape marking
- Waistband
- Taped seams
- Phone pocket
- Versatile (can be worn 3 different ways)



- 918-5983** YELLOW/NAVY BOMBER, L
- 918-5992** YELLOW/NAVY BOMBER, XL
- 918-6005** ORANGE/NAVY BOMBER JACKET, M
- 918-6009** ORANGE/NAVY BOMBER JACKET, L
- 918-6018** ORANGE/NAVY BOMBER JACKET, XL
- 918-6011** ORANGE/NAVY BOMBER JACKET, XXL

**HI-VIS WARSAW EXECUTIVE VEST WAISTCOAT**

- Warsaw executive vest waistcoat
- High visibility
- Reflective tape marking – increased visibility
- Contrast panels for dirt protection



- 141-8177** ORANGE S
- 141-8178** ORANGE M
- 141-8179** ORANGE L
- 141-8183** ORANGE XL
- 141-8292** ORANGE XXL
- 141-8168** YELLOW S
- 141-8169** YELLOW M
- 141-8170** YELLOW L
- 141-8174** YELLOW XL
- 141-8176** YELLOW XXL

**AIR TECH BUMP CAP**

- Cooling mesh fabric for increased breathability
- Shock absorption provided by the Inner ABS (acrylonitrile, butadiene and styrene) shell and soft pad
- Reflective piping for increased visibility
- CE certified that conforms with health, safety, and environmental protection standards
- Mid-length peak makes this bump cap suitable for all uses



**171-6850** ADJUSTABLE, NAVY

**LED BEANIE HAT**

- Warm and comfortable acrylic beanie hat
- Features a removable LED front light for superior visibility in low light conditions
- Rechargeable LED can be charged in a USB port



**171-6854** NAVY

**171-6853** ORANGE

**HEAVY DUTY KNEE PADS**

- Lightweight
- Waterproof coating
- Heavy-duty durable plastic cap allows the wearer to swivel and slide with little resistance
- Two strong nylon, fully adjustable straps
- Straps fasten with velcro
- Straps are partially elasticallyated for extra hold



**154-851** ADJUSTABLE, ONE SIZE FITS ALL

# FOOD & BEVERAGE INDUSTRY TEST & MEASUREMENT

Confidently measure with our extensive range from industry leading brands you trust for accuracy.

## Test & Measurement Highlights

### DPI 705E AND DPI 705E-IS HANDHELD PRESSURE INDICATORS

- 48 pressure ranges from  $\pm 25$  mbar to 1,400 bar ( $\pm 1.69$  psi to 20,000 psi)
- Total 1 year uncertainty 0.05% full scale over  $-10^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  temp range
- Remote plug + play pressure and Resistance Temperature Detector sensors
- DPI705E Safe Area pressure indicator
- DPI705EIS Hazardous Area pressure indicator



- 201-2871** 200 BAR, HAZARDOUS AREA
- 201-2877** 70 BAR, HAZARDOUS AREA
- 201-2885** 2 BAR, HAZARDOUS AREA
- 201-2870** 70 BAR, SAFE AREA
- 201-2878** 350 BAR, SAFE AREA
- 201-2867** 10 BAR, SAFE AREA

### DATA LOGGERS

- 3 data loggers for monitoring chilled goods, frozen goods and ripening goods
- No setup required. One button press-to-start logging
- Temperature measurement accuracy is  $\pm 0.5^{\circ}\text{C}$



- 910-7068** CHILLED GOODS HIGH  $8^{\circ}\text{C}$  LOW  $2^{\circ}\text{C}$
- 910-7062** FROZEN GOODS HIGH  $-16^{\circ}\text{C}$  LOW  $-20^{\circ}\text{C}$
- 910-7071** RIPENING GOODS HIGH  $14^{\circ}\text{C}$  LOW  $12^{\circ}\text{C}$
- 111-8087** WATERPROOF BAG

### NON-CONTACT INFRARED THERMOMETER

- Medical grade infrared temperature detector
- Designed with a double moulded plastic housing with ergonomic grip for ultimate user comfort and to allow continuous use over extended periods of time
- Built-in laser targeting with a 1 cm to 10 cm measurement range, allows for better and more accurate targeting to ensure optimum measurement accuracy and precise non-contact temperature readings using the Body or Surface Temperature functions
- In Body temperature range of  $+32^{\circ}\text{C}$  to  $+42.5^{\circ}\text{C}$  with an accuracy of  $\pm 0.3^{\circ}\text{C}$



**201-0210** DT-8806

### HCB INDUSTRIAL HANGING BALANCES

- Adjusting program (CAL)
- Stainless steel snap link with safety catch and 15 mm aperture
- Up to 200 kg weighing range



**700-7055** 200KG CAPACITY

### KEYSIGHT U1168A STANDARD MULTIMETER TEST LEAD KIT

- Test leads, Test probe (19-mm tips), Test probe (14-mm tips), Alligator Clips, Fine Tip Test Probes, SMT Grabber and Mini Grabber (black only)



**760-0373** 19MM AND 4MM PROBE TIPS

**FLUKE 773 MILLIAMPER PROCESS CLAMP METER**

- Measure ½ to 20 mA signals without breaking the loop
- Source/simulate ½ to 20 mA signals and 0-10V DC and provide loop power
- Best in class accuracy of 0.2% with 0.01mA resolution and sensitivity



FLUKE

669-3493

**FLUKE 62 MAX MINI INFRARED THERMOMETER**

- Fluke's MAX series are precise and designed to resist a 3 meter drop
- IP54 rated for dust and water resistance
- Absolute maximum temperature measurement +500°C



FLUKE

760-0385

**FLUKE 754 Multi Function Calibrator, 110mA dc, 300V ac/dc**

- The Fluke 750 series is a power multifunction documenting calibrator that can be used to download procedures, lists, and instructions created with software or upload data for printing, archiving, and analysis. The powerful built-in HART interface is capable of performing nearly all the day-to-day tasks you now perform with a separate communicator.



FLUKE

253-1863

**FLUKE 1738 Three Phase Power Energy Monitor & Logger**

- Colour LCD display: 4.3in active matrix TFT, 480px x 272px, resistive touch panel
- Voltage range: up to 1000V
- Current range: 4A to 6000A
- Ideal for conducting basic energy and power quality studies. The Fluke 1738 is built with Fluke Connect mobile app and desktop software compatibility gives you the data you need to make critical power quality and energy decisions in real-time.



FLUKE

900-9980

**FLUKE 377FC / 378 FC Clamp Meters**

- The Fluke non-contact voltage true rms AC/DC clamp meter with iFlex use field sense technology to make testing faster and safer, all without touching a live conductor
- Use the iFlex flexible current probe to measure ac current as high as 2500 A. The iFlex probe provides access to large conductors in tight spaces
- The Fluke 378 FC includes a power quality test that provides quick indication of whether an incoming power problem or an equipment problem exists



FLUKE

220-4445 Fluke 377FC

220-4446 Fluke 378FC

Be sure. **testo**



## Avoid food scandals by using the right measuring instruments from Testo:

- thermometers
- humidity meters
- WiFi data loggers
- cooking oil testers
- pH meters
- USB data loggers

## FOLDAWAY THERMOMETER – TESTO104

- Waterproof folding thermometer - ideal for spot check measurements in the food sector
- Ideal for use with food: HACCP compliant, EN 13485 certified
- Can be cleaned under running water – IP65 rated
- Practical folding mechanism with rugged metal joint; easy and ready to use
- Automatic final value recognition (auto-hold); min/max memory for all hold/auto-hold readings



720-3770

## ROBUST PENETRATION THERMOMETER – TESTO 105

- Designed for daily use: rugged, can be cleaned under running water (IP65 protected)
- Changeable measuring tip: standard tip for semi-solid media, i.e. meat / long 200 mm measuring tip for semi-solid media (optional) / measuring tip for frozen food (optional)
- Two adjustable thresholds, audible / visual alarm that are triggered when thresholds are crossed
- EN 13485 and HACCP compliant
- Probe thermometers are used in the food industry to measure the core temperature of semi-solid media like meat and cheese, for example. That's why they have to be especially rugged and reliable. The testo 105 food thermometer is just that. And more



479-1889

## FOOD THERMOMETER WITH TOPSAFE – TESTO 106

- The Testo 106 food thermometer is now available as a practical kit with useful accessories including a waterproof case and clip
- Ideal for measuring the core temperature of food: HACCP compliant and EN 13485 certified when used with the TopSafe protective case
- Further benefits which the TopSafe protective case has to offer: waterproof and dirt resistant, IP67 rated, dishwasherproof
- Visual and audible alarm that warn when thresholds are exceeded
- Further benefits which the kit has to offer: you have all the accessories you need, i.e. clip and sensor protective cap for safe storage




620-9758

# INFRARED - THERMOMETERS

## INFRARED & PENETRATION THERMOMETER – TESTO 104-IR

- Incoming food, food on display, food in storage: the testo 104-IR infrared probe thermometer allows you to carry out quick and reliable temperature and food safety checks in the course of your busy working day. Ideal for use in the food sector, restaurants and the retail industry
- For carrying out surface and core temperature measurements
- With integrated probe and infrared laser
- Durable and practical: rugged folding joint, waterproof housing (IP65), fits snugly in any pocket
- HACCP / EN 13485 compliant



777-0463

## 2-LASER INFRARED THERMOMETER – TESTO 831

- The Testo 831 infrared thermometer allows you to carry out quick and precise temperature measurements of whole pallets of food and smaller products from a distance. Ideal for checking the temperature of incoming goods and for use in food production
- Non-contact, non-invasive temperature measurements due to IR technology
- Precise temperature measurements also of smaller products and from a distance
- Ultra-fast: two measurements per second – allows you to scan whole pallets in the blink of an eye
- Includes 2-point laser measuring spot marking, 30:1 optics, belt clip, batteries



764-4411



## MINI DATA LOGGER SET - TESTO 174T

- The Testo 174T mini data logger for temperature is your practical support for continuous temperature measurement (e.g. the storage temperature of drugs or food). When buying these sets, you also get a USB interface for data transfer to the PC
- Measurement data memory for 16 000 temperature readings, approx. 500 days of battery life
- Advantage of the set: comes with USB interface for data transfer to the PC
- Waterproof according to IP 65, HACCP-compliant and certified according to EN 12830
- Data analysis: three different software versions available, basic software free to download



712-5468

## DATA LOGGER - TESTO 175-T1

- The Testo 175 T1 set already includes three temperature loggers along with practical accessories for you. This means you have the best possible equipment for recording the temperature in several areas - e.g. in cold, storage and sales areas, such as in butcher's shop
- Perfect for long-term measurements: memory records up to 1 million readings, battery life of up to 3 years can be achieved
- With this kit, you'll be ready to start straight away: it includes three temperature loggers, ComSoft Basic software for free download, USB interface, SD memory card, lock and wall brackets
- Practical: you can read the current measuring values, min/max values, limit values and violations of limit
- values on the logger's display
- HACCP-compliant, EN 12830 certified and protection class IP 65



732-0562

## TRANSPORT DATA LOGGER: TESTO 184-T3

- With the testo 184 T3 temperature data logger, you can now monitor the transport of sensitive products, such as pharmaceuticals, food or electronic items, both safely and conveniently. A start and stop button means the temperature data logger guarantees really easy operation for data recording. At the destination, a glance at the display or the LEDs tells you whether the configured limit values have been adhered to during transport
- Unlimited operating time
- All in one temperature data logger: PDF measurement data, configuration file, acceptance test certificate 3.1 according to DIN ISO 10204 and instruction manual
- Immediate creation of a PDF report directly after connection to a computer
- Monitoring transport in compliance with GxP, 21 CFR Part 11, HACCP and EN 12830



851-3469

## WIFI DATA LOGGER WITH INTEGRATED NTC PROBE: TESTO SAVERIS 2-T1

- The WiFi data logger testo Saveris 2-T1 allows you to monitor the temperatures in refrigerated, work- or storerooms. The temperature values measured with the integrated probe are reliably recorded over long periods, and transmitted directly to the Testo Cloud (online data store) via your wireless LAN
- You can access these readings at any time, anywhere, using your internet-enabled smartphone, tablet or PC
- Automated temperature monitoring with integrated probe
- WiFi data logger system with easy installation and operation
- Call up temperature data at any time via Smartphone, tablet or PC
- Limit value violation alarms by e-mail or (optionally) SMS



145-0234

# OIL TESTER & pH METERS

## COOKING OIL TESTER - TESTO 270

- Accuracy is  $\pm 2\%$ TPM ( $+40$  to  $+190$  °C)  $\pm 1.5$  °C
- Resolution is 0.5%TPM (10% to 37%FF) ( $+40$  to  $+190$  °C), 0.1FF / °C
- Capacitive oil sensor
- Clear, visual alarm indication via LCD, 2-line highly-visible alarm backlight in traffic light colours
- Ergonomic design



891-9167

## pH METER FOR LIQUIDS - TESTO 206-pH1

- Perfectly equipped for pH measurement in liquids: the universal testo 206-pH1 pH/temperature measuring instrument features innovative probe technology. Particularly suitable for use in the food sector
- Ideal for measuring the pH value of liquids
- The integrated temperature probe enables automatic temperature compensation
- Maintenance-free gel electrolyte
- Robust, waterproof and dishwasher-safe protective case (TopSafe, protection class IP68)



479-8492



**Take the trouble out  
of troubleshooting.**

## **MPQ1000**

### **Power Quality Analyzer**

The Megger MPQ1000 Power Quality Analyzer is Class A compliant and rated CAT IV at 600V. It can be used for a wide variety of applications including substation monitoring, equipment and breaker tripping, load studies and balancing as well as for switchgear and component failure.

Some of its features include:

- Automatic CT recognition
- Automatic connection verification
- On-board data analysis
- SD card and USB stick support
- 1000 V ac and dc range
- Scope and DMM modes
- CATIV @ 600 V
- IEC61000-4-30 Class A compliant

**Megger**<sup>®</sup>  
Power on

## DET4TC2 EARTH TESTER

- Automatic P spike and C spike check
- Choice of 2, 3 or 4 terminal measurements
- Clamp input for no-disconnect testing (requires ICLAMP)
- Clamp inputs for stakeless testing (requires ICLAMP and VCLAMP)
- Earth current range (requires ICLAMP)



**Megger.**

489-664 200KΩ CAT IV 100 V

## AVO410 HANDHELD DIGITAL MULTIMETER

- IP54 environmental protection
- Phase rotation
- True RMS
- 10A ac Max / 10A dc Max
- 750V ac Max



**Megger.**

181-5004

## AVO DCM 300E

- Fully IEC1010-1 and IEC101-2-032 compliant for circuits up to 500V phase to phase or 300V phase to earth CAT III or 600V CAT II
- 30mA and 300mA ranges for leakage current measurement
- 0.01mA resolution on 30mA range



**Megger.**

247-0142

## RCDT310-EN-BS RCD TESTER, RCD TEST TYPE AC SELECTIVE, DC SELECTIVE, RCD TEST CURRENT

- Tests 30mA, 100mA, 300mA and 500mA rated RCDs
- 1/2x, 1, 5x, 1 tests standard, DC and selective RCDs
- 0° or 180° polarity tests on all RCDs
- Selective breakers have a time delay in tripping. When selected, trip test times are extended and a 30s delay is allowed between the measurement of the fault voltage and the application of the test current
- Selectable touch voltage inhibit and touch voltage display on the analogue bargraph



**Megger.**

712-5737 500MA CAT III 300V

## TDR1000/3 TIME DOMAIN REFLECTOMETERS

- The Megger TDR1000/3 is a hand held, compact time domain reflectometer efficiently locates faults in data communication network and power cables and is perfect for making short work of fault finding on cables and will allow you to detect a range of typical fault signatures including open conductor, shorted conductor, frayed cable and water ingress.



**Megger.**

261-8015 5000M

## Weidmuller HTX LWL Mechanical Crimping Too

- The Weidmuller HTX LWL crimping tools for fibre-optic cable connectors has release option in the event of incorrect operation and ratchet guarantees precise crimping, applications with no Earth



**Weidmüller**

251-7436 1000V

## MEGGER MIT485, INSULATION TESTER

- Insulation testing up to 500 V and 100 GΩ range in a hand held instrument
- Three wire connection for tip, ring and earth connection
- Gated access to 500 V to prevent accidental damage
- Adjustable insulation test voltage from 10 V to 500 V



**Megger.**

122-6797 1000V, 200GΩ

## FLIR ONE® PRO-SERIES THERMAL IMAGING CAMERA

- The FLIR ONE Pro and FLIR ONE Pro LT give you the power to find invisible problems faster than ever.
- With robust features such as multiple temperature meters and level/span controls, FLIR ONE Pro cameras work as hard as you do.
- The revolutionary VividIR™ image processing helps you see more details, FLIR MSX® adds sharpness and perspective, and the FLIR OneFit™ adjustable connector extends up to 4 mm to fit many popular protective cases.
- Whether you're inspecting electrical panels, looking for HVAC problems, or finding water damage, the FLIR ONE Pro and FLIR ONE Pro LT are tools no serious professional should be without.
- FLIR ONE Pro has a thermal resolution of 19,200 pixels (160 x 120). Thermal sensitivity 70 mK and Object temperature range -20°C to 140°C.
- FLIR ONE Pro LT has a thermal resolution of 4,800 pixels (80 x 60). Thermal sensitivity 100 mK and Object temperature range -20°C to 120°C.



- 136-8284** FLIR ONE PRO IOS LIGHTNING CONNECTOR
- 136-8285** FLIR ONE PRO ANDROID USB-C CONNECTOR
- 136-8286** FLIR ONE PRO ANDROID MICRO-USB CONNECTOR
- 175-7362** FLIR ONE PRO LT IOS LIGHTNING CONNECTOR
- 175-7363** FLIR ONE PRO LT ANDROID USB-C CONNECTOR

## FLIR EX-SERIES INFRARED CAMERA WITH MSX & WIFI

- Easy to use: The FLIR Ex series cameras are fully automatic and focus-free with an intuitive interface for simple measurements in thermal, visual, or MSX mode.
- Compact and rugged: The FLIR Ex series cameras' low weight of 0.575 kg and the accessory belt pouch make them easy to bring along at all times. Their rugged design can withstand a 2 m drop test, and ensures reliability, even in harsh environments.
- Ground breaking affordability: The FLIR Ex series cameras are the most affordable infrared cameras on the market
- Convenient to share images and findings: Download images, create reports, and share what you've found instantly



- 184-6121** INFRARED CAMERA TEMP RANGE -20°C TO 400°C, IR RESOLUTION 160 x 120 (19,200 PIXELS)
- 184-6123** INFRARED CAMERA TEMP RANGE -20°C TO 550°C, IR RESOLUTION 240 x 180 (43,200 PIXELS)
- 184-6124** INFRARED CAMERA TEMP RANGE -20°C TO 550°C, IR RESOLUTION 320 x 240 (76,800 PIXELS)
- 135-3291** REPLACEMENT BATTERY FOR EX SERIES
- 848-1384** REPLACEMENT BATTERY CHARGER POWER SUPPLY FOR EX SERIES

## FLIR CM74 600A AC/DC CLAMP METER

- With built-in, high-power dual-LED worklights the FLIR CM74 AC/DC clamp meter provides extra illumination for environments with little or no light.
- Readings are clearly visible on the large digit backlit LCD display, ideal for dark spaces.
- Compact and lightweight the FLIR CM74 easily fits in your pocket, overalls or toolbox



- 922-6232** CM74 600A AC/DC CLAMP METER
- 123-6702** ACCESSORY - FLEXIBLE CLAMP ADAPTOR (10", 25CM)
- 123-6703** ACCESSORY - SOFTSIDED CARRYING CASE

## FLIR TG54 SPOT IR (INFRARED) THERMOMETER

- Precise, non-contact measurements of temperature
- 1.45" TFT LCD screen
- Rugged, industrial casing will withstand a drop of up to 3m
- High/low visual alarms
- Built-in laser targeting system makes it easy to identify the measurement point
- 128 x 128 pixels
- -30°C to 650°C (-22°F to 1202°F) temperature range
- 2x:1 distance-to-spot ratio
- IP56 rating



- 922-8759** SPOT INFRARED THERMOMETER

## FLIR VT8 VOLTAGE, CURRENT & CONTINUITY TESTER

- The FLIR VT8's optimized and open-jaw design allows it to fit into tight spaces and reliably measure large-diameter cables.
- Extensive measurement features make the FLIR VT8 a versatile tool - just one meter can get the job done.
- Carry the compact tester in your pocket to be ready at any moment for easy troubleshooting.



- 181-2427** 200 A, 1000 V
- 181-2426** 100 A, 600 V
- 123-6703** SOFT CASE

# Discover the RS PRO range of Test & Measurement equipment.

Your smart choice for any measurement need - from environmental to lab equipment, from electrical products to a collection of maintenance solutions.



## RS 135 MULTI FUNCTION CALIBRATOR

- Source 4–20 mA, 0–24 mA with 1  $\mu$ A resolution (1 K $\Omega$  load, 24 V loop supply), basic accuracy 0.025%
- Source 0–24,000 V with 1 mV resolution
- Source frequency 1–20000 Hz square wave with programmable duty cycle (1–99%)
- Auto step and auto ramp for sourcing mA, V
- Easy fixed 25% up and down, or programmable percentage (1–99%) increase and decrease (mAV)
- Measure DC mA with loop power (24 V output)
- Measure DC V
- Measure Temperature ( $^{\circ}$ C,  $^{\circ}$ F) of 11 types of thermocouples (K, J, E, T, R, S, N, L, U, B and C)
- Calibrator grade precision temperature measurement with 0.1 $\mu$ C 0.01 $\mu$ F resolution
- Detection of thermocouples disconnection
- Warning for overload, output open (mA) or short (V)
- Short circuit protection for output
- Battery power indication (%) when turn on the calibrator
- Battery or electrical power supply



174-9557 4-20MA LOOP CALIBRATOR + THERMOMETER

## MAGNETIC FIELD INDICATOR / SOLENOID TESTER

- Easy to use
- Powerful red light indicator
- Lightweight



375-5422 MAGNETIC STICK FIELD INDICATOR

## BLUETOOTH POWER CLAMP METER

- 10,000 count digital display
- 50 segment analogue bar graph
- Large LED backlight display
- Bluetooth connecting
- Auto store up to 1000 memories
- Data logging up to 9,999 records
- True RMS reading on AC and AC+DC mode
- Torch lightening on trigger push
- Auto Ohms/Continuity/Diode selection
- AC 600 Amps capability
- Auto AC/DC 1000 Vdc capability and selection
- AC current via flexible current probe
- Power and power factor measurement
- Total harmonics distortion and harmonics 1 to 25
- Phase rotation indication
- 100K Ohms resistance capability
- Frequency counter
- Capacitance capability
- Smart data hold, peak hold, min max hold functions
- Inrush current



162-4455 RS PRO 155 BLUETOOTH CLAMP MULTIMETER

## ATEX/IECEx MAGNET STICK INDICATOR

- Easy to use
- Powerful red light indicator
- Lightweight
- Ambient Temperature: -20 $^{\circ}$ C to +40 $^{\circ}$ C
- Weight: 40 gms



141-1996 ATEX/IECEx MAGNET STICK INDICATOR

**INFRARED THERMOMETER WITH DUAL LASER POINT**

- Ergonomic grip for ultimate user comfort and to allow continuous use over extended periods of time
- Built-in dual-laser targeting for better and more accurate targeting to ensure optimum measurement accuracy and precise non-contact temperature readings
- Temperature range of -50°C to +550°C with an accuracy of ±1% of the reading at 20°C to 300°C (includes a user-selectable option for reading in Celsius or Fahrenheit)
- Relative humidity range for this device is 0-90%RH and also features a digitally adjustable emissivity feature from 0.10 to 1.0
- LCD display with a backlight



**193-8691** RS-8861

**RS PRO IT-1 INFRARED THERMOMETER**

- Single Type K bead thermocouple supplied
- K or J-Type - thermocouple input
- Real-time stamp
- Data logging up to 16000 records
- °C, °F or °K display - so you switch between Celsius, Fahrenheit and Kelvin
- Auto Power Off with selectable time setting



**123-3217** RS5311 SERIES

**DRY-WELL TEMPERATURE CALIBRATOR**

- Suitable for checking the accuracy of RTDs (Resistance Temperature Detectors), thermocouples, and small bimetal thermometers in the field
- Fast, accurate and easy calibrations of temperature sensors for reliable measurement results
- Multiple sized sensor holes that accepts a wide range of temperature sensor diameters, for increased versatility across a wide variety of applications
- Built-in fan cooling feature allows rapid temperature changes and the temperature can be adjusted in 0.1°C increments if necessary



**193-8701** BX-150 +33°C TO +300°C

**RS PRO SURFACE TEMPERATURE PROBE**

- Maximum temperature of +1100°C
- Probe length of 210mm
- Probe diameter of 12 mm
- The disc is contained within a ceramic outer sheath



**342-8978** TEMPERATURE PROBE, TYPE K, MAX. +1100 °C

**LUX/FC LIGHT METER ILM-201L**

- Measuring range: 200, 2000, 20 000, 200 000 lux; 20, 200, 2000, 20 000 foot-candles
- Accuracy ±3% (calibrated to standard incandescent lamp 2856 oK) and corrected LED day white-light spectrum (±8% other visible light source)
- 3 digits LCD with maximum reading 1999
- Max Hold
- Manual zero adjustment
- Manual ranging
- Meter size 130 x 55 x 38 mm
- Sensor size 80 x 55 x 25 mm



**124-0938** LUX/FC LED LIGHT METER

**CONTACT AND NON-CONTACT TACHOMETER**

- Durable and robust housing for use in challenging environments while offering an intuitive and easy to use interface for optimum ease of use
- A wide measuring range and high resolution for accurate and reliable results as a contact or non-contact form of measurement
- A solution for non-invasive ways of measuring RPM and surface speed, especially in areas where it may be dangerous or difficult for the user to reach



**193-8688** AT-8

**DESKTOP INDOOR AIR QUALITY CO2 MONITOR**

- High-quality CO2 monitor with a large LCD display for easy visual identification
- Real-time readings for accurate monitoring and detection
- Also measures immediate air temperature and humidity
- Compact and ergonomic design, suitable for use in workspaces where there is limited space
- This portable CO2 monitor can be used to observe and control CO2 levels indoors
- Automatic shutdown if the device has a low battery or if it is left idle for more than 10 minutes



**174-6574** RS-967

**TACHOMETER REFLECTIVE TAPE**

- Self-adhesive reflective tape
- Suitable for use with optical tachometers and stroboscopes
- RoHS (Restriction of Hazardous Materials) compliant with EU Directives 2011/65/EU and 2015/863
- Complies with the ANSI/ESD S20.20:2014 and BS EN 61340-5-1:2007 Electrostatic Control Standards



**845-9731** PACK OF 10

**IPS SERIES MULTIPLE OUTPUT PROGRAMMABLE LINEAR DC POWER SUPPLIES**

- 2,3, and 4 independent isolated output
- User-friendly operation, coarse/fine volume control
- USB standard interface
- Low noise achieved by a smart cooling fan achieving
- Digital panel control (rotary encoder switch, rubber key with indicator)
- Tracking series and parallel mode - The tracking series mode guarantees higher output voltage, while the tracking parallel mode guarantees higher output current.



**123-3558** 2CH,180W PROGRAMMABLE LINEAR DC P/S

**DIGITAL CALIPER**

- Clear LCD display
- Stainless Steel construction
- Origin setting
- Switchable On/Off
- Thumbwheel for fine adjustment
- Knurled locking screw
- Supplied with battery



**841-2518** 150MM/6"

**841-2511** 200MM/8"

**EXTERNAL DIGITAL MICROMETER**

- External, digital micrometer
- Metric and imperial units
- Minimum measurement of 0 mm
- Maximum measurement of 25 mm
- Resolution of 0.001 mm
- Accuracy of ±0.002 mm
- Electronic LCD screen
- Battery operated



**705-1229** 0-25MM/0-1IN

**METRIC EXTERNAL MICROMETER SET**

- External metric micrometer set
- Minimum measurement of 0 mm
- Maximum measurement of 150 mm
- Resolution of 0.01 mm
- Accuracy of ±0.004 mm
- Set contains six micrometers, setting rods and adjustment tools



**705-1213** 0 MM →150 MM

**TUBULAR ROD INSIDE MICROMETER**

- Accuracies of 0.01mm.
- Ranges of 50 to 600mm.
- Non-glare satin chrome barrel and sleeve.
- Each set consists of a micrometer head with locking screw.



**785-7847** 50-250MM

**CYLINDERS WITH PRINTED GRADUATIONS (CLASS B)**

- ISO 6706 compliant cylinders in ultra-clear PP
- Enhanced pin-sharp blue-printed graduations
- Polypropylene bottles with good chemical resistance
- Stable hexagonal base with an anti-suction design that prevents the base from sticking to a wet surface



**461-0831** 10ML (PACK OF 10)

**461-0847** 25ML (PACK OF 10)

**461-0853** 50ML (PACK OF 10)

**461-0869** 100ML (PACK OF 5)

**461-0875** 250ML

**461-0881** 500ML

**461-0904** 1000ML

**461-0910** 2000ML

**PRESSOL MEASURE JUG WITH LID AND FLEX SPOUT**

- Flexible spout and lid
- Oil, acid and fuel resistant
- Ergonomic design
- Durable and stable
- German, English and American scale divisions



**703-1102** 1L

**703-1105** 2L

**703-1109** 3L

**703-1118** 5L



# FOOD & BEVERAGE INDUSTRY SITE SAFETY

All the components you need to keep your employees safe on site.

## Site Safety Highlights

### SPILL CONTROL PALLET


- Prestige, Double IBC polyethylene spill pallet
- Fully sealed, moulded bund
- Extra grip plastic grating, holds the IBC's clear of spillages.
- Plastic grating will hold 2 fully loaded IBC's Extra tough poly construction will resist knocks and direct impacts
- Will hold a combination of 205ltr drums and IBC's
- Suitable for storing 2 # IBC, 8 # 205 litre drums or a combination of both
- Safe working load capacity - 4000Kg



177-2741 SPILL PALLET

### RAMPMAT SLIP RESISTANT RUBBER FLOOR MAT

- Loose lay floor mat
- Open raised circular surface
- Moulded bevelled Edge
- Anti-fatigue
- Slip resistant tested;
- Made from NBR rubber
- Suitable for dry and wet environments
- Pile height 10mm; Temperature range -20°C to +130°C
- Easy to clean
- Economical



872-5643 0.8M X 1.2M

### BUBBLEMAT

- Interlocking tile version of bubble surface mat
- Three modules can be linked together to cover any shaped area.
- Raised bubbled surface to stimulate blood circulation.
- Soft but sturdy rubber material offers comfort from cold hard concrete floors.



159-6164 60CM X 60CM MIDDLE

### TELESCOPIC EXTENSION ACCESS POLE

- Access poles provide access to detectors which are out of normal reach.
- Lightweight and quick to extend and are made of non-conducting fibre glass construction.
- Non-whip even at height
- Certified non-conductive - protecting both the engineer and overhead live equipment from inadvertent shorts
- Designed for use with the Solo aerosol dispenser and detector removal tool.



201-3092 4.5M L

201-3115 1.13M L

201-3137 AEROSOL SMOKE DISPENSER

### DOOR RELEASE

- Green MCR double pole, surface mounted with glass Break glass operation
- Surface mounting
- Unique plug and play concept saves installation time
- Anti-tamper facility to reduce false alarms



513-6968 REPLACEMENT GLASS (PACK OF 5)

513-6974 TEST KEY (PACK OF 10)

### PE DRIP TRAY

- Ideal choice for containing spills in the work area, storing, handling smaller drums and cans.
- Compact, lightweight and fit into small area.
- Made from 100% polyethylene, they're also strong and therefore compatible with most liquids.
- Practical, simple and safe solutions for handling small liquids and spillages.



192-7769 57CM X 39CM X 5CM 10L

192-7768 79CM X 40CM X 5CM 9L



### RS PRO LED EMERGENCY LIGHTING, BULKHEAD, 3 W, MAINTAINED

- 16pcs LED - White (3500K)
- Polycarbonate frame and PVC legend
- Ni-Cad battery: 4.8V 90mAh
- Supplied with running legend



922-7267 EMERGENCY LIGHTING

### RS PRO LED EMERGENCY LIGHTING, 4 W, MAINTAINED

- 4 W SMD LED's
- Both wall and ceiling mounted
- Maintained and non-maintained
- Protection Rating: IP20
- Lifetime hours: 30 000



125-8557 4W

### RS PRO LED EMERGENCY LIGHTING, BATTEN

- LED lighting
- Single or twin tubes
- Weatherproof
- Maintained emergency lighting
- Energy savings of up to 50%, compared to fluorescent fittings



210-5493 EM 4500 LUMENS

210-5498 EM 4500 LUMENS WITH MOTION  
DETECT SENSOR

### RS PRO ROUND LED BULKHEAD LIGHT

- Beam angle is 120°
- Ceiling and wall mountable
- Charging time is 24 hours
- Light colour is warm/cool/daylight
- Luminous efficiency is 75Lm/W



188-3519 18 W, 220 → 240 V ac

188-3518 18 W, 220 → 240 V ac

### RS PRO ROUND LED BULKHEAD LIGHT

- Polycarbonate case material
- Ingress Protection (IP) rating of IP54
- Round LED (light-emitting diode) bulkhead light
- Voltage rating of 220 V AC to 240 V AC
- Wattage of 18 W (watts)



188-3517 18 W, 220 → 240 V ac, IP54

### RS PRO FLOODLIGHT, 1 LED


- PIR Sensor 10m range
- Good heat dissipation performance.
- IP65 rating
- Service life over 50000 hours



787-1313 FLOODLIGHT, 1LED, 10 W, 800 → 900 LM R 928.12

## FIRST STEP CARPET, HARD FLOOR, FLOOR PROTECTION x 450(w) 1.2m (l) 1.5mm THICK

- An economical solution to contamination control
- Manufactured from an anti-microbial agent
- Protects against the growth of organisms such as bacteria, mould and mildew
- Adhesive coated surface captures dirt and dust particles



**446-364** Blue

**446-370** White

## VYNAPLUS ANTI-SLIP, DOOR MAT, CARPET, INDOOR USE, BLACK/GREY

- Economical
- Excellent all round performance
- Slip resistant (door mat stays in place)
- Stain resistant
- Scraping surface
- PVC Backing
- Outpile surface finish
- Scrapes away and traps dirt, debris, dust



**464-990** 600m, 900m, 7mm

**465-000** 900m, 1.2m, 7mm

**464-996** 900m, 1.5m, 7mm

**464-980** 1.2m, 1.8m, 7mm

## ANTI-SLIP, DOOR MAT, CARPET, INDOOR USU

- All round high performance doormat
- Heavy-duty polypropylene loop pile surface
- Raised reinforced 'waffle' pattern scrapes dirt
- Exceptional moisture wiping properties - lipped edges retain up to 5.4 litres water/m<sup>2</sup>
- Rubber backing holds the mat in place
- Pile material: Polypropylene
- Backing: anti-slip rubber



**159-6181** Black - 900mm x 600mm x 7mm

**159-6177** Blue - 900mm x 600mm x 7mm

**159-6179** Grey - 900mm x 600mm x 7mm

**159-6178** Blue - 1.5m x 600 x 7mm

## HYGIMET HYS01 INDIVIDUAL ANTI-FATIGUE MAT

- The Cobra Plastics Hygimat is a revolutionary hygienic anti-fatigue mat.
- The mat is made of rubberised gel foam material
- Operating temperature ranges from -5°C to +80°C
- The mat is generally resistant to chemicals
- It is suitable for dry and wet environments, indoors or outdoors
- Loose lay installation method




**197-4314** 0.6M X 0.9M

**197-4315** 0.9M X 1.5M

**197-4316** 0.9M X 1.8M

## HYGIMAT HYG01 INDIVIDUAL ANTI-FATIGUE MAT

- The mat is made of rubberised gel foam material
- Operating temperature ranges from -5°C to +80°C
- The mat is generally resistant to chemicals
- It is suitable for dry and wet environments, indoors or outdoors
- Loose lay installation method



**197-4317** 0.6M X 0.9M

**197-4318** 0.9M X 1.5M

## OCP01 ROLL ANTI-FATIGUE MAT

- The Cobra Plastics Orthomat Thicker foam anti-fatigue mat for dry workplaces
- It can be used in different sectors such as Production lines, Assembly areas, Packing stations, Workbenches
- Operating temperature ranges from 0°C to +60°C
- It is suitable for dry indoor environments
- Pebble surface finish
- Enclose against cold concrete floors



**197-4320** 0.6M X 0.9M

**197-4321** 0.9M X 1.5M

## RAMPMAT INDIVIDUAL RUBBER ANTI-FATIGUE MAT

- Loose lay floor mat
- Open raised circular surface
- Moulded bevelled Edge
- Anti-fatigue
- Slip resistant tested
- Suitable for dry and wet environments
- Pile height 10mm
- Temperature range -20°C to +130°C
- Easy to clean
- Economical



**762-1522** Rubber - 900mm x 1.5m x 10mm

**872-5681** Nitrile Rubber - 850mm x 1.5m x 9mm



# COBA africa

NEW



Prevent the spread of walked in bacteria, viruses and infectious microorganisms.



## Entra-Clean HygienePlus

The washable doormat that actively kills germs


- Removes visible dirt and kills invisible microbes. • HygienePlus means the mat is treated with the EU-registered biocide, BI-OME registered with OEKO-TEX® an antimicrobial and virus reducing technology. BI-OME works by effectively killing bacteria when contact is made with the mat. • Although the treatment is a highly effective antimicrobial agent, it does not cause any skin irritations. • A new concept in entrance matting. • Improve floor level hygiene around your business - important whilst fighting Covid-19 and beyond. • More sustainable - less frequent washing required, and on lower temperatures. • Free of metals.
- Fully machine washable - with no reduction in active cleaning power for the life of the mat. • Suitable for all facilities, in particular offices, hotels and leisure, retirement homes and healthcare settings. • Reduces annoying odours caused by bacteria and fungi.



Elimination of bacteria



Cleanliness on a microbial level

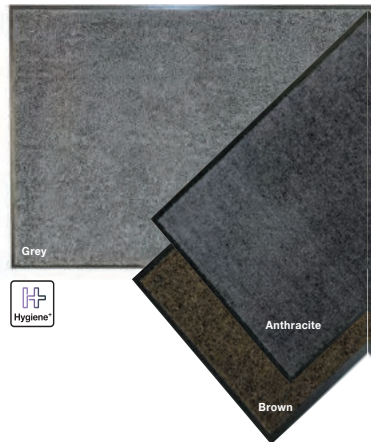

**MOFLASH  
INTRINSICALLY SAFE  
LED SOUNDER/  
BEACON – IS-SB  
SERIES**

- Suitable for fire, security, process control and general signalling applications
- The sounder/beacons incorporate a two stage alarm option
- Zones 0, 1, 2, 20, 21 and 22 ATEX and IECEx approved
- IP66 rated
- Surface Mount
- Polycarbonate housing material



**144-5953** IS-SB SOUNDER BEACON, AMBER LED  
24 V DC

**144-5954** IS-SB SOUNDER BEACON  
RED LED, 24 V DC

**32 TONE SOUNDER -  
IS-S SERIES**

- The sounders incorporate a two stage alarm with a total of 32 selectable tones
- Zones 0, 1, 2, 20, 21 and 22 ATEX and IECEx approved
- IP66 rated
- Surface Mount
- Polycarbonate housing material



**144-5950** IS-S BASE SOUNDER, 105DB, 24 V DC

**MOFLASH  
INTRINSICALLY SAFE  
BEACON – IS-B  
SERIES**

- The beacons incorporate a dip switch that allows you to change from 1 Hz flash rate to a static signal
- Zones 0, 1, 2, 20, 21 and 22 ATEX and IECEx approved
- IP66 rated
- Surface Mount
- Polycarbonate housing material



**144-5951** IS-B BEACON, AMBER LED, 24 V DC

**MOFLASH DUAL  
FUNCTION LED  
BEACON - LED80  
SERIES**

- 12 extra-bright LED's
- Continuously-rated
- UV-stable polycarbonate lens and body
- Wide operating voltage
- 180° visibility
- Easy, snap-fit installation (with base plate for surface mount option)
- May be used in general signalling applications



**721-6423** LED, MULTIPLE EFFECT BEACON  
LED 80 SERIES, AMBER, SURFACE  
MOUNT, 10 → 100 V DC

**721-6432** LED, MULTIPLE EFFECT BEACON  
LED 80 SERIES, RED, SURFACE  
MOUNT, 10 → 100 V DC

**721-6435** LED, MULTIPLE EFFECT BEACON  
LED 80 SERIES, BLUE, SURFACE  
MOUNT, 10 → 100 V DC

**721-6439** LED, MULTIPLE EFFECT BEACON  
LED 80 SERIES, GREEN, SURFACE  
MOUNT, 10 → 100 V DC

**721-6448** LED, MULTIPLE EFFECT BEACON  
LED 80 SERIES, AMBER, SURFACE  
MOUNT, 115 V AC, 230 V AC

**721-6441** LED, MULTIPLE EFFECT BEACON  
LED 80 SERIES, RED, SURFACE  
MOUNT, 115 V AC, 230 V AC

**721-6445** LED, MULTIPLE EFFECT BEACON  
LED 80 SERIES, BLUE, SURFACE MOUNT,  
115 V AC, 230 V AC

**721-6454** LED, MULTIPLE EFFECT BEACON  
LED 80 SERIES, GREEN, SURFACE  
MOUNT, 115 V AC, 230 V AC

**MOFLASH INDUSTRIAL  
ECO LED BEACONS  
WITH PIEZO BUZZER -  
LEDA100 SERIES**

- Dual function, flashing or continuous (static) mode
- 80 dB piezo buzzer which only activates with the flashing mode
- Continuously rated
- LED long life
- Low current consumption
- Suitable for surface, conduit box or wall mounting
- 3 point fixing
- 360° light output around the vertical axis
- Dustproof and weatherproof
- UV stable polycarbonate lens
- UV stable ABS plastic base
- 160 flashes per minute (FPM)
- IP65 protection
- RoHS compliant
- CE Marked



**865-1625** LEDA100 BUZZER BEACON,  
AMBER LED, 8 → 20 V, AC/DC

**865-1634** LEDA100 BUZZER BEACON,  
RED LED, 8 → 20 V AC/DC

**865-1637** LEDA100 BUZZER BEACON,  
GREEN LED, 8 → 20 V, AC/DC

**865-1631** LEDA100 BUZZER BEACON,  
AMBER LED, 20 → 30 V, AC/DC

**865-1647** LEDA100 BUZZER BEACON,  
AMBER LED, 40 → 380 V, DC, 85 → 285 V AC

**865-1659** LEDA100 BUZZER BEACON,  
GREEN LED, 40 → 380 V, DC, 85 → 285 V AC

**721-6479** LEDA125 SOUNDER BEACON, 90DB,  
CLEAR LED, 24, V DC

**MOFLASH TLM  
MODULAR SIGNAL  
TOWER**

- Beacon units are dual function, flashing or continuous (static) mode
- Sounder unit output: 80 - 120 dB
- Continuously rated
- LED long life
- Low current consumption
- Suitable for surface mounting
- 360° light output around the vertical axis
- Dustproof and weatherproof
- UV stable polycarbonate lens
- UV stable ABS plastic base
- 60 flashes per minute (FPM)
- IP65/65 protection
- RoHS compliant
- CE Marked



**865-1722** LED-TLM BEACON UNIT, AMBER LED,  
STEADY LIGHT, EFFECT, 24 V DC

**865-1726** LED-TLM BEACON UNIT, RED LED,  
STEADY LIGHT, EFFECT, 24 V DC

**865-1744** LED-TLM SOUNDER UNIT, 24 V DC

**865-1757** LED-TLM TERMINAL UNIT,  
TERMINATION UNIT

**901-0722** LED-MINI BEACON UNIT, AMBER LED,  
STEADY LIGHT, EFFECT, 12 → 24 V DC

**901-0747** MOUNTING BRACKET & POLE FOR  
USE WITH LED-MINI

**901-0738** MOUNTING FOOT & POLE  
FOR USE WITH LED-MINI



## SAFE DISTANCING BUNDLE

- Introducing the RS PRO Social Distancing Kit that includes everything needed to set up and manage social distancing within a variety of environments
- It includes an infrared thermometer, a 2 m safety barrier and footprint-shaped floor labels as clear markers to indicate the correct distance



201-3047 SAFE DISTANCING BUNDLE

## LOCKOUT STARTER KIT

- An essential addition to any workplace, this starter kit is from our high-quality own brand RS PRO, offering machine, electricals and worker protection
- Basic lockout for valves and electrical panels



862-5247 24 PRODUCTS

## AREA SIGNAGE BUNDLE

- This RS PRO area signage kit is essential to ensure clear and consistent floor markings to highlight walkways, safe spacing and working areas in a variety of environments



201-3589 AREA SIGNAGE KIT

## SHADOW BOARDS KITS

- The RS PRO cleaning shadow board kit contains all the essential tools to maintain exceptional hygiene standards in a range of different environments
- Using a shadow board also helps quickly identify missing equipment, whilst providing a neat and tidy storage place when not in use



201-3132 STYLE A (BLUE)


201-3133 STYLE A (RED)

201-3134 STYLE B (BLUE)

201-3135 STYLE B (RED)

## ZONE WORKING BUNDLE

- The RS PRO zone working kit is an ideal solution to use for establishing clearly marked work zones for individual workers and removing the potential health and safety risk of employees being in close proximity of each other while working in busy manufacturing or industrial environments



201-3136 ZONE WORKING KIT

**FULL DOME MIRROR 360 DEGREE VIEWING**

- 4 way intersection
- Panoramic viewing
- Edge is rubber material
- Excellent visibility



**RS PRO**  
773-9714 DIA 60 CM

**ANGLES PROTECTION WITH TAPE**

- Angles protection for protecting people, vehicles or equipment
- Ideal for warehouses, factories, parking
- Double Adhesive backed tape
- Nitrile Butadiene Rubber doubleface tape for fixing oil and grease resistant
- High visibility
- Black/Yellow
- Available in square, rounded or flat



**RS PRO**  
724-9782 ANGLE PROTECTION 30X30X8MM  
724-9766 ANGLE PROTECTION Ø40MM 750MM  
724-9779 ANGLE PROTECTION Ø40MM 750MM  
724-9808 PLATE PROTECTION 60X10MM 5M  
724-9798 PLATE PROTECTION 60X10MM 750MM

**HEAVY DUTY RUBBER WHEEL CHOCK**

- Stops wheels from moving during critical maintenance work.
- Made from a thick rubber to ensure a long life.
- Integrated handle for easy removal and carrying.
- Ideal for all types of automotive work. Trucks, vans and cars are all supported.



**RS PRO**  
125-2183 HEAVY DUTY WHEEL CHOCK FOR TRUCKS

**WARNING CONES**

- Class 1 reflective cone
- Made of polypropylene - very durable
- Two reflective stripes - highly visible even in the dark
- Colour: orange and white
- General use cone - optional chain or hook can be attached
- Easy to use - just place them where you want them, no need to connect them
- Can be stacked when not in use - convenient storage



**RS PRO**  
503-681 30 CM

**WALL MOUNT BARRIER**

- Centrifugal braking - prevents belt retracting at excessive speed
- Flexible retractable barrier - doesn't take up valuable floor space
- 48 mm webbing
- Closes off service or entry points



**RS PRO**  
829-9075 CAUTION-DO NOT ENTER WEBBING

**FORKLIFT TRUCK AREA FLOOR SIGN**

- Permanent adhesive fixing
- Graphics printed on the underside of clear PVC film to withstand everyday warehouse traffic
- Material PVC



**RS PRO**  
873-5921 430MM DIA

**ISO 7010 VINYL PICTOGRAM SIGNS**

- 100X100MM



**RS PRO**  
813-4454 CRUSHING OF HANDS SIGN  
813-4423 ELECTRICITY SIGN  
813-4463 FLAMMABLE MATERIAL SIGN  
813-4445 HOT SURFACE SIGN  
813-4502 NO SMOKING SIGN  
813-4473 WEAR EAR PROTECTION SIGN



# FOOD & BEVERAGE INDUSTRY FACILITIES CLEANING & MAINTENANCE

Essentials to keep your work space and equipment to the highest of hygiene standards.

## Facilities Cleaning & Maintenance Highlights

### FOODLUBE

- Specialist food grade lubricants
- Technically advanced lubricants developed by chemists and engineers to meet customer needs.
- Reduce production downtime
- Avoid costly product recalls
- Support audit compliance



- 691-353** SPRAY LUBRICANT, 300ML AEROSOL
- 146-2963** ANTI-SEIZE AND THREAD COMPOUND FOR FOOD PROCESSING MACHINERY 500G
- 375-8285** UNIVERSAL 2 LUBRICANT, 380GM
- 375-8279** UNIVERSAL 2 LUBRICANT, 4KG TIN
- 448-0719** SUGAR DISSOLVING FLUID, 500ML
- 512-6062** EXTREME MULTI-PURPOSE EP GREASE, 380G
- 512-7784** FOOD GRADE WATER DISPLACING AND LUBRICANT SPRAY, 300ML
- 733-5029** ULTRA NLGI NO. 2, 380G

### AEROSOL ELECTRICAL CONTACT CLEANER

- Leaves no residue
- No ozone-depleting action
- Non-corrosive
- Contains corrosion inhibitor
- Provides long-lasting lubrication
- Safe on all metal surfaces does not stain
- Safe on most rubbers, plastics, and coatings.
- Convenient 360° (including inverted position) spray valve for aerosols
- High purity CO2 propellant, giving an active product content of 95%



**823-2633** 500ML

### FOOD SAFE LUBRICANT

- Non-toxic white grease
- Excellent resistance to water and high temperatures
- Excellent compatibility with rubbers and plastics
- Good operating temperature range -20°C to +180°C



**344-0344** 400 ML

### CLEANING SOLVENT

- Excellent degreasing properties
- Ideal for efficient cleaning
- Removes flux residues and acrylic conformal coatings
- Versatile in use
- Fast evaporation rate
- Efficient cleaning processes
- CO2 propellant aerosol version available
- 20% more active cleaner



**379-4994** 400 ML

### KARCHER VACUUM BAKERY KIT

- Accessory kit for vacuuming and cleaning bakeries, equipment, shelves, etc.
- Ideal for bakeries, cake shops, etc.
- The kit includes: 4 m electrically conductive suction hose (6.906-546.0), electrically conductive plastic bend (5.032-427.0), 2x 0.5 m metal suction tube (6.900-275.0), crevice tool (6.903-033.0), floor tool (6.906-554.0), car vacuuming tool (6.906-108.0), all-purpose brush (2.863-447.0), suction brush with natural bristles (6.903-862.0), reducer (5.407-109.0).



**707-3645** FOR NT 55/1 ECO BS

## Tapered Roller Bearings

- Designed to accommodate combined loads
- Low friction and long service life
- Enhanced operational reliability



<b>286-8280</b>	17mm I.D.; 40mm O.D.; 13.25mm W; 18.6kN static load rating
<b>506-236</b>	20mm I.D.; 42mm O.D.; 15mm W; 27kN static load rating
<b>286-8296</b>	20mm I.D.; 47mm O.D.; 15.25mm W; 28kN static load rating
<b>286-8303</b>	25mm I.D.; 52mm O.D.; 16.25mm W; 33.5kN static load rating
<b>506-230</b>	25mm I.D.; 47mm O.D.; 15mm W; 32.5kN static load rating
<b>506-202</b>	25mm I.D.; 62mm O.D.; 18.25mm W; 43kN static load rating
<b>286-8319</b>	30mm I.D.; 62mm O.D.; 17.25mm W; 44kN static load rating
<b>506-785</b>	30mm I.D.; 62mm O.D.; 21.25mm W; 57kN static load rating
<b>286-8325</b>	35mm I.D.; 72mm O.D.; 18.25mm W; 56kN static load rating
<b>506-781</b>	35mm I.D.; 72mm O.D.; 24.25mm W; 78kN static load rating
<b>506-763</b>	35mm I.D.; 62mm O.D.; 18mm W; 54kN static load rating
<b>506-769</b>	40mm I.D.; 68mm O.D.; 19mm W; 71kN static load rating

## Deep Groove Double Shielded Ball Bearings

- Versatile self-retaining bearings
- Solid outer rings, inner rings and ball and cage assemblies
- Durable in operation and easy to maintain
- Cap seals on both sides, and greased using a high-quality grease, lubricated for life and suitable for high speeds



<b>137-1582</b>	10mm I.D.; 26mm O.D.; 8mm W; 1.97kN static load rating, C3
<b>137-1646</b>	12mm I.D.; 32mm O.D.; 10mm W; 3.1kN static load rating
<b>137-1591</b>	15mm I.D.; 32mm O.D.; 9mm W; 2.85kN static load rating, C3
<b>137-1596</b>	17mm I.D.; 35mm O.D.; 10mm W; 3.25kN static load rating
<b>137-1601</b>	20mm I.D.; 42mm O.D.; 12mm W; 5kN static load rating
<b>137-1719</b>	25mm I.D.; 62mm O.D.; 17mm W; 11.7kN static load rating
<b>137-1667</b>	30mm I.D.; 62mm O.D.; 16mm W; 11.3kN static load rating
<b>137-1671</b>	35mm I.D.; 72mm O.D.; 17mm W; 15.3kN static load rating
<b>137-1450</b>	40mm I.D.; 90mm O.D.; 23mm W; 26kN static load rating

## Metric Shielded Ball Bearings

- A range of common metric ball bearings, fitted with two metal shields to prevent ingress of dirt and foreign matter
- Suits high and very high speeds
- Accommodates both radial load and axial load in both directions
- Require very little maintenance
- Primarily intended for use where the inner ring rotates



<b>619-0064</b>	10mm I.D.; 19mm O.D.; 5mm W; 685N static load rating
<b>619-0216</b>	12mm I.D.; 32mm O.D.; 10mm W; 3.1kN static load rating
<b>619-0250</b>	15mm I.D.; 42mm O.D.; 13mm W; 5.1kN static load rating
<b>619-0395</b>	17mm I.D.; 47mm O.D.; 14mm W; 6.55kN static load rating
<b>619-0402</b>	20mm I.D.; 32mm O.D.; 7mm W; 1.5kN static load rating
<b>619-0812</b>	25mm I.D.; 37mm O.D.; 7mm W; 2.6kN static load rating
<b>619-0698</b>	30mm I.D.; 72mm O.D.; 19mm W; 16kN static load rating
<b>619-0682</b>	35mm I.D.; 62mm O.D.; 14mm W; 10.2kN static load rating

## Miniature Roller Bearings

- Small radial section height
- Withstands very high loads
- Efficient at high speeds
- Large grease reservoir
- Price each, supplied in a pack of 2



<b>198-9320</b>	4mm I.D.; 8mm O.D.; 8mm W; 1.01kN static load rating
<b>198-9342</b>	5mm I.D.; 9mm O.D.; 9mm W; 1.6kN static load rating
<b>198-9364</b>	8mm I.D.; 12mm O.D.; 10mm W; 3.67kN static load rating
<b>198-9370</b>	10mm I.D.; 14mm O.D.; 10mm W; 4.74kN static load rating
<b>198-9392</b>	12mm I.D.; 16mm O.D.; 10mm W; 5.81kN static load rating
<b>198-9415</b>	14mm I.D.; 20mm O.D.; 12mm W; 8.84kN static load rating
<b>198-9421</b>	15mm I.D.; 21mm O.D.; 12mm W; 9.52kN static load rating
<b>198-9443</b>	16mm I.D.; 22mm O.D.; 12mm W; 10.2kN static load rating
<b>198-9465</b>	20mm I.D.; 26mm O.D.; 20mm W; 24.7kN static load rating

## Tapered Roller Bearings

- High radial and axial load carrying capacity
- Large usable speed range
- Ensures a precise and rigid shaft guidance system



<b>137-1488</b>	20mm I.D.; 47mm O.D.; 15.25mm W; 27kN static load rating
<b>137-1497</b>	25mm I.D.; 52mm O.D.; 16.25mm W; 48kN static load rating
<b>137-1501</b>	30mm I.D.; 55mm O.D.; 17mm W; 93kN static load rating
<b>137-1499</b>	30mm I.D.; 62mm O.D.; 17.25mm W; 35.5kN static load rating
<b>137-1485</b>	35mm I.D.; 72mm O.D.; 18.25mm W; 59kN static load rating
<b>137-1500</b>	40mm I.D.; 80mm O.D.; 19.75mm W; 67kN static load rating
<b>137-1502</b>	50mm I.D.; 80mm O.D.; 20mm W; 46kN static load rating

## Sealed Deep Groove Bearings

- Fitted with rubber seals to prevent leakage and provide protection against dust, water and other harmful material
- Accepts radial and axial loads
- Both standard and C3 clearance available



<b>285-0504</b>	10mm I.D.; 19mm O.D.; 5mm W; 590N static load rating
<b>667-1122</b>	10mm I.D.; 26mm O.D.; 8mm W; 1.96kN static load rating, C3
<b>441-9981</b>	15mm I.D.; 32mm O.D.; 9mm W; 2.85kN static load rating
<b>667-1138</b>	17mm I.D.; 35mm O.D.; 10mm W; 3.25kN static load rating, C3
<b>285-1074</b>	25mm I.D.; 62mm O.D.; 17mm W; 11.6kN static load rating
<b>667-1248</b>	30mm I.D.; 72mm O.D.; 19mm W; 16kN static load rating, C3
<b>667-1194</b>	35mm I.D.; 72mm O.D.; 17mm W; 15.3kN static load rating, C3

## Food Line Deep Groove Bearings

- Stainless steel bearings suitable for a wide range of food and beverage applications
- Corrosion resistant and can accommodate radial loads and axial loads in both directions
- Pre-lubricated with grease registered by NSF as category H1 - compliant with FDA and EC recommendations



<b>125-1229</b>	10mm I.D., 26mm O.D
<b>125-1230</b>	12mm I.D., 28mm O.D
<b>125-1238</b>	15mm I.D., 35mm O.D
<b>125-1232</b>	17mm I.D., 35mm O.D
<b>125-1233</b>	20mm I.D., 42mm O.D
<b>125-1240</b>	20mm I.D., 47mm O.D
<b>125-1241</b>	25mm I.D., 52mm O.D
<b>125-1235</b>	30mm I.D., 55mm O.D







Be Smart - GO "GREEN"



# SmartWasher<sup>®</sup>

Environmentally friendly parts washer

The SmartWasher<sup>®</sup>  
Bioremediating Parts  
Washing System is  
both self-cleaning and  
non-hazardous

- Non-toxic
- Non-polluting
- Non-corrosive



Be Smart  
GO "GREEN"



## CRC 60L PARTS WASHER, 180KG MAX LOAD

- Compact footprint for maximum versatility
- Dolly with foot step for easy relocation
- Extra long hose with angled brush to reach hard to get at spaces
- UV Stabilised sink and body



217-2478

## CRC 95L PARTS WASHER, 225kg MAX LOAD, 1080L/h FLOW RATE

- Flexible faucet
- Flow through brush
- UV Stabilised sink and body



217-2479

## CRC 95L PARTS WASHER, 225KG MAX LOAD, 1080L/h FLOW RATE

- Dual flow through brushes for side by side cleaning
- UV Stabilised sink and body
- Larger fluid capacity for higher bio-remediation capacity



217-2480

## CRC 95L PARTS WASHER, 450KG MAX LOAD, 1080L/h FLOW RATE

- Dolly for easy relocation
- UV Stabilised sink and body
- High capacity fluid reservoir for bio-remediation on the highest cleaning throughput



217-2481

## CRC PART WASHER FILTER MAT

- Reduces excess clogging during its 30 day or 1 month use
- The OzzyMat FL-4 has 4 white layers and 1 blue layer
- Recommended for normal to heavy parts cleaning applications



217-2477

## CRC 20L PART WASHER CLEANER

- Optimised for automotive workshops
- Suitable for use in abattoirs with cleaning of animal fat
- Safe for users and environment
- Non-aoustic, non-toxic and non-flammable



217-2475

217-2476

## HAND BRUSHES FOR THE FOOD INDUSTRY

- Hand brush with soft bristles is ideal for sweeping fine particles such as flour from conveyor belts, food preparation surfaces, tables and equipment



**775-6303** BLUE

**775-6319** YELLOW SOFT HAND BRUSH

**775-6315** WHITE

**176-7547** HAND BRUSH LARGE, 200MM, STIFF, BLUE

## BOTTLE BRUSHES

- Tube Brush suitable for cleaning bottles, tubes and gaps between lines on conveyor belts
- Material: Polypropylene, Polyester, Stainless Steel
- Dimensions (Ø x L): 20 x 500 mm



**188-8940** PINK

**884-7557** GREEN

**884-7551** BLUE

**884-7563** WHITE

**884-7567** YELLOW

## TUBE BRUSH

- Clean pipes, tap outlets and narrow spaces between machine parts.
- The filaments are attached to a twisted stainless steel rod which makes chemical resistant and strong.



**176-7660** 10MM, 480MM, STIFF, YELLOW

**176-7662** 10MM, 480MM, STIFF, RED

**176-7664** 10MM, 480MM, STIFF, GREEN

**176-7609** 40MM, 510MM, MEDIUM, RED

**176-7643** 60MM, 510MM, MEDIUM, WHITE

**176-7674** 60MM, 510MM, MEDIUM, BLACK

## HYGINE BUCKET

- Hand brush with soft bristles is ideal for sweeping fine particles such as flour from conveyor belts, food preparation surfaces, tables and equipment
- 12 Litre



**884-7642** GREEN

**188-9754** GREY

**188-9752** LIME

**884-7652** YELLOW

## MEDIUM FLOOR BROOM

- 50 x 400mm, 56mm bristle length
- Polyester stock and bristle
- Application: sweeping medium sized particals/dust



**390-4927** GREEN

**390-4961** YELLOW

**390-4933** BLUE

## ULTRA HYGIENIC PP HANDLE, 1300MM

- Ultra Hygienic Handle of polypropylene
- Manufactured according to the European and American regulations for food contact materials
- Rounded grip
- Chemical resistant, withstands the most aggressive cleaning chemicals



**823-4734** BLUE

**823-4737** RED

**823-4740** YELLOW

**823-4725** GREEN

## SQUEEGEES FOR FOOD INDUSTRY

- Polypropylene stock, rubber blade
- Application: containment of liquids in cleaning



**390-4416** BLUE

**390-4460** YELLOW

**390-4422** RED

## TABLE AND FLOOR SCRAPER

- Table and floor scraper with stainless steel blade.
- This scraper is suitable for removing stubborn food debris from floors and other surfaces.
- Can be used with any handle from the Vikan colour coded range.



**177-4060** 260MM, WHITE

**177-4059** 260MM, YELLOW

**177-4064** 260MM, GREEN

## ERGONOMIC SHOVEL

- Use this durable shovel to move large amounts of food waste or food ingredients.
- Ergonomically designed with the user's working position in mind, this product is ideal for working at floor level as well as shovelling from container to container.



**188-8945** 380 X 340 X 90 MM, 1310 MM HANDLE



## SCOTT® Solutions for high traffic facilities where efficiency is a must

Make smart simple with SCOTT®,  
Think smart, Think SCOTT®

Maximise productivity:

- ▶ SCOTT® toilet tissue dispenses over 1km of toilet tissue
- ▶ SCOTT® Hard Roll towel dispenses 2X more hand dries when compared to SCOTT® Optimum Towel<sup>3</sup>

## Efficient Washroom Solutions

nearly  
**600**  
hand dries

### SCOTT® Hard Roll Towel System

Nearly 600 hand dries per dispenser<sup>2</sup>

**JUMBO**  
over 1km

### Outrun runouts with SCOTT® Toilet Tissue Compact Jumbo roll

So simple you can load over 1km of tissue in about a minute!

up to  
**2,500**  
hand washes

### SCOTT® Luxury Foam with Moisturisers

Up to 2,500 hand washes from a single SCOTT® cartridge

**less waste**

### SCOTT® Hand Towels

Use fewer towels and create less waste with SCOTT® Brand paper towels

1. Compared to SCOTT® toilet tissue 4760 and 3 roll dispenser 4975

2. 1 roll of SCOTT® hard roll towel dispensers 1197 sheets. Based on average usage of 2 towels per hand dry.

3. Based on average usage of 2 towels per hand dry. SCOTT® Optimum Towel dispenses 276 hand dries vs SCOTT® 1005 dispenses 598 hand dries







# WYPALL® REACH™ CENTREFEED SYSTEM




**WYPALL®**  
BRAND

*Helping drive hygiene standards  
throughout your workplace environment*

## WypAll® Reach™ Centrefeed System

- Fully enclosed system – designed to help prevent transmission of foodborne bacteria caused by handling of exposed blue rolls
- Always at hand - convenient and portable
- Ideal for wiping up spills and drying hands
- Good for space restricted environments with a convenient wall mounted bracket for storage
- Reduces paper consumption by 18%<sup>1</sup>
- Cuts paper waste by 18%<sup>1</sup>

Product	Colour/Code	Name	Sheet size (L x W)	Sheets per roll	Roll diameter (cm)	Case Contents	Plies	Certifications/ Features	Dispenser
	6222	<b>Food &amp; Hygiene Centrefeed – for Reach™ Dispenser L10</b>	38 cm x 18.3 cm	430	15	6 Rolls x 163 m	1	 	6221
	6220	<b>Service &amp; Retail Centrefeed – for Reach™ Dispenser L10</b>	38 cm x 18.3 cm	280	15	6 Rolls x 106 m	1	 	6221

	6221	<b>WypAll® Reach™ Centrefeed System</b>	1 dispenser (L25.4 x W18 x D22.4cm)	 	<b>Black nozzle</b> use with 6220  <b>Red nozzle</b> use with 6222 / 6223	Bracket included for wall mounting 	
--	------	---	-------------------------------------	--	---	---	--



Ensures wood products are sourced from responsibly managed forests.



Made with AIRFLEX® Technology.



HACCP certified "fit for purpose" in food handling or processing applications.

<sup>1</sup> Sapio Wiper Preference Research Aug 2018.

**WYPALL® Wipers– The  
right tool for every task**

### UNIDIRECTIONAL GOOSENECK MICROPHONE

- Unidirectional;
- Frequency: 10 Hz to 16,000 Hz;
- Lightweight and flexible;
- 3-pin XLR connector;
- All metal case with non-glare black finish



699-7304 600OHM

### METAL HORN SPEAKER

- High-quality sound in public spaces or industrial settings such as factories or workshops.
- Made from hard-wearing, weather-resistant metal and is suitable for both indoor and outdoor use.
- IP66 rating – dust-tight, withstands powerful water jets



535-0316 30W

535-0300 15W

### WHITE WALL CLOCK

- Excellent for indoor usage
- Incredibly good value for money and is suitable for commercial, health, educational, industrial applications and countless public spaces
- AA batteries are included
- 300 mm diameter x 40 mm depth, weight 740 g
- The viewing distance during a day is up to 25 metres
- Water-resistant clock, which means it is suitable for damp and humid conditions.



706-4773 WHITE, 300MM DIA

### WRITE-ON SELF-ADHESIVE

- Self-adhesive vinyl cloth labels.
- Pre-printed labels come with a space to write your own text on using a ballpoint pen or any other spirit-based ink.
- The labels can be used in different industries for all labelling requirements such as organising and performing quality control processes.



450-6164 LABEL 'TESTED FOR ELECTRICAL SAFETY' (PACK OF 140)

### LCD STOPWATCH 309

- Stylish black water resistant plastic case, making it ideal for use in a range of applications
- Clear LCD screen to display results with ease
- Large 12mm and 10mm digit heights
- Normal time, calendar, alarm and lap facility
- Accuracy within 2 second over 24 hours
- 5 year battery life under normal use, providing a long lasting and reliable device
- 1/100 second resolution
- Counts up to 40 minutes in 1/100 second and then to 24 hours in 1 second intervals



811-1814 DIGITAL STOPWATCH BLACK

### SILENT SECOND HAND WALL CLOCK

- Quartz movement and continuously moving second hand for silent operation.
- The timeless design makes it a reliable wall clock, which can be used in any commercial and non-commercial spaces.
- This plastic-cased wall clock has been architected with a shatterproof front lens to protect the Clock in case of the unexpected fall.



440-9568 WHITE, 300MM DIA

### VISIBLE AND PARTIALLY LAMINATED

- Partially laminated write – on label
- Text can be written or typed on label
- Leaves checkboard pattern when removed
- High-quality printing on the labels which is ideal for conformance labelling to Safety and Quality standards



496-401 BLK WRITE-ON LABEL 'CALIBRATED', 40X15MM (PACK OF 120)

### SILVER WALL CLOCK

- LCD digit heights 52 and 24 mm
- Wall Clock dimensions 220x250x23 mm
- Digital monitor displays hours, minutes, calendar and the temperature in both C/F



811-1820 RS LCD CALENDAR CLOCK

**SILICONE GREASE**

- Silicone grease is a water repellent, non-melting silicone grease lubricant;
- Commonly used to lubricate plastic and polythene water pipes, rubber washers and other fluid pipework during assembly;
- Working temperature range is between -50°C to 200°C;
- This item is non-toxic;
- Acting as waterproof or air tight seal



**494-124** 100G TUBE

**COTTON BUDS**

- 150mm long - great for cleaning hard to reach areas
- Tightly wrapped cotton wool head - absorbs and lifts detritus with minimal lint separation
- Rigid wooden stick - provides control and precision
- Can be used wet or dry - solvent can be applied to tip for more effective cleaning



**558-802** SINGLE ENDED, 200/BOX

**FIBRE OPTIC CLEANING PRODUCTS**

- Optonics 1.25mm Microfibre Clean Stick



**121-4194** 100 PCS

**ISO-PROPYL ALCOHOL (IPA)**

- An alternative to CFC-based solvents which are said to destroy the earth's ozone layer
- Leaves no residue meaning you are left with a smooth surface
- Non-aggressive so does not destroy your parts
- Removes flux residues from PCBs
- Safe on most plastics



**227-4427** 1L BOTTLE

**PLATEN CLEANER**

- Dissolves toughest ink marks, as well as oil or grease
- Restores grip after cleaning and leaves no residue
- Does not damage rubber - extends the lifetime of rubber rollers therefore preventing costly replacement
- Easy to apply
- Supplied in a 100ml pump spray



**217-3891** 100ML PUMP SPRAY

**AIR DUSTER**

- Inert, pure compressed gas for dust removal
- Ideal for removing particulates from inaccessible areas on delicate equipment



**168-1644** 400ML

**168-1642** 300ML

**50 LITRE PLASTIC FLIP TOP BIN**

- Durable plastic design that's easy to clean and maintain
- Flip lid for easy access
- Lightweight and portable
- Can be used for a range of waste needs
- Waterproof



**178-7702** YELLOW

**178-7699** RED

**350CC BRUSH OILER**

- Nylon Pump System
- 135 mm Spout
- 120 g in weight
- 140 mm high



**801-0746** 300CC BRUSH OILER

# FOOD & BEVERAGE INDUSTRY CABLES & CONNECTORS

High quality, extensive range of cables & associated products from leading global brands.

## Cables & Connectors Highlights

### LPC C FG STAINLESS STEEL FOOD FITTINGS

- Flexicon LPC (C-FG) conduit fitting is Stainless Steel with an external thread suitable for LPC conduits. This fitting has a Polyester elastomer compression face and nut seal.
- External thread
- High tensile strength
- Corrosion resistant
- For use with all LPC conduits
- Temperature Range: -50°C to +135°C
- Type of Protection: IP66, IP67, IP68 [2 bar] and IP69 with Stainless Steel food grade fittings



### ENERGY CHAIN® - E2

- Chains for various applications
- Large pins for long service life; Smooth interior for long cable life
- Dirt-repellant exterior (fully enclosed tubes only)
- Tapered insertion point for easy assembly
- Chain supplied in 1 m lengths



**FLEXICON**  
CONDUIT SYSTEMS

124-0060	16MM M16
124-0062	25MM M25
124-0061	20MM M20

**igus**

720-2745	116X50MM, RAD 100MM
720-2749	91X50MM RADIUS 75MM

### HIROSE U.FL SERIES ULTRA SMALL COAXIAL CABLE ASSEMBLIES

- Supports high frequencies of up to 6 GHz
- Terminated with ultra fine coaxial cable for secure and stable connection
- LED operation and function indicator
- Tactile click for mating assurance
- Range of mated heights can be achieved
- Available as single and double ended cable assemblies
- Wide range of cable lengths and plug sizes



**HRS**  
HIROSE ELECTRIC  
EUROPE BX

685-1047	1.37MM DIA, 300MM L, TIN (PACK OF 5)
----------	---

### M12 CORDSETS FOR THE FOOD INDUSTRY

- M12 Single ended sensor cordset
- Female right angle connector
- Self locking threaded joint and moulded cable
- Hexagon screw-in stainless steel, especially designed for use in food processing equipment



**Hamburg**  
INTERNATIONAL

508-5292	FEMALE, LED, 25M
508-5286	FEMALE, LED, 10M



# Metal detectable plastic cable accessories



**Undetected contamination of a production batch with a foreign object is a costly concern for any food or beverage manufacturer. To help control the risk from stray bits of plastic around the processing of foodstuffs, HellermannTyton manufactures cable accessories from special high-grade metal detectable plastic resin.**

## Magnetic plastic?

Plastic resin with metal content can be detected by the metal detection and x-ray equipment commonly installed in hazard control points. The even dispersion of metal particles throughout these plastic products means that even tiny fragments of cable ties, fixing mounts, ID tags or cable covers, which might be cut or dropped during maintenance, can be reliably detected.



Detectable plastic parts can reduce the risk of costly contamination for food and beverage

The metal particles are embedded in the special high grade plastic resin. Consequently, there is no surface corrosion in humid production environments. The blue colour added to the compound also makes this plastic visually distinctive when compared with the majority of foodstuffs and liquids. Alternative colours are available on request.

In response to scenarios frequently encountered by production plant engineers, HellermannTyton's cable management accessories include two types of cable ties, one of which is releasable and reusable and two types of screwable cable tie mounts in various sizes. Printable TipTag markers and two types of spiral wrap cable covers in different dimensions complete this portfolio of detectable plastic products.

## Better safe than sorry

The special materials HellermannTyton uses to manufacture its products for food and beverage processing are of the highest quality. HellermannTyton's detectable plastic products with metal content are free of Bis(2-ethylhexyl) phthalate (DEHP), considered to be dangerous to health.

### MCTPP SERIES METAL DETECTABLE CABLE TIES

- Magnetic and X-Ray detectable
- Will float to the surface of most liquids, allowing them to be easily removed
- High chemical resistance
- Remain flexible and elastic in high temperatures
- Metallic compound dispersed throughout the entire body of the tie
- Coloured to assist in detection
- Used as part of HACCP process
- Self-extinguishing (UL94 HB rating)



**891-9523** 200MM X 4.6 MM, MCT SERIES (PACK OF 100)

**891-9536** 387MM X 7.6 MM, MCT SERIES (PACK OF 100)

**891-9511** 100MM X 2.5 MM, MCT SERIES (PACK OF 100)

**891-9527** 390MM X 4.6 MM, MCT SERIES (PACK OF 100)

## 6000 SERIES CIRCULAR POWER CONNECTORS

- 2 - 22 Contacts
- Plastic or Metal Housing
- IP66, IP67, IP68 & IP69K protection
- Secure, quick mating / release
- cULus, UL, VDE Approvals



**765-9652** FLEX CONNECTOR, 2 WAY PIN CONTACTS

**765-9757** CHASSIS CONNECTOR, 2W, SOCKET CONTACTS

**765-9775** CHASSIS CONNECTOR, 16W, PIN CONTACTS

## BUCANEER SERIES IN-LINE CONNECTORS

- Screw termination
- Straight body orientation
- Cable acceptance ranges between 6mm and 8mm
- Easy assembly, no special tools required
- IP68



**483-966** 6WAY IN-LINE CABLE COUPLER SOCKET, 3A

## 4000 SERIES CABLE CONNECTORS

- Mates with flex cable and panel mount versions
- In-Line cable connection
- Contacts supplied separately



**912-4868** 3 POLE MALE

**912-4950** 3 POLE FEMALE

**912-4931** 12 POLE FEMALE

**912-5072** 12 POLE FEMALE, REAR

## 900 SERIES CIRCULAR POWER CONNECTORS

- 32A, 600V ac/dc max rating
- 2, 3, 4, 5, 7 & 10 contacts
- IP66, IP67, IP68 & IP69K protection
- Single or 3 phase applications
- CCC, UL, CSA & VDE approvals



**344-3999** 3 WAY

**841-8932** 10 WAY

**344-4021** 5 WAY

## BUCANEER 900 SERIES FEMALE PANEL MOUNT CONNECTORS

- Water and dustproof
- Leading earth pin
- Scoop proof contacts



**344-4223** 4 CONTACTS

**344-4245** 5 CONTACTS

## PANEL MOUNTING SOCKET / COUPLER

- Supplied cable glands accommodate cable diameters 3.5 to 8mm
- Shielded connectors maintain required screening
- Overall diameter 38.1mm,
- Overall length 77.5mm



**468-6232** PANEL MOUNTED COUPLER

**468-6226** CABLE CONNECTOR

## BUCANEER STANDARD SEALED POWER CONNECTORS

- IP68
- UL94HB Housing
- Insulation Resistance of >10<sup>4</sup> MΩ @ 500 V dc



**275-5342** SCREW TERMINAL PLUG

**275-5364** SCREW TERMINAL SOCKET

**275-5392** IN-LINE COUPLER PLUG

**275-5409** IN-LINE COUPLER SOCKET

## BUCANEER SERIES 2-POLES CIRCULAR FLEX CABLE CONNECTORS

- Screw termination
- Straight body orientation
- Easy assembly, no special tools required



**483-893** MALE

**489-532** FEMALE

# M8/M12 CONNECTORS

TE's M8/M12 connectors continues to fill the ongoing needs for sensor connection in Industrial Machinery and Factory Automation. A connection standard for many years, these products also find applications outside of their traditional industries where a compact reliable connection system with environmental protection is required. TE's M8/M12 connector portfolio includes A, B, D, S, T, and X-coded (up to 10 Gb/s) versions to serve various customer needs. The connectors are also available in shielded and unshielded versions, to support Gigabit Ethernet applications.

## M8/M12 - THE CODINGS

**A-coding:** Actuator-sensor plug connections for DeviceNet, IO link and Profibus



**B-coding:** Fieldbus connections for Profibus and Interbus



**D-coding:** Industrial Ethernet, Profinet, Ethernet/IP and EtherCat



**S-coding:** Motor, Frequency-convertors, motor operated switches, PSUs for Power, 620 V, 12 A



**T-coding:** Fieldbus comp, passive distribution boxes, motors, PSUs for Power, 63 V, 12 A



**X-coding:** Cat6A, high-speed 10Gbit rugged industrial Ethernet applications IEC 61076-2-109



**Ambient temperature for M8:**  
-40°C to 85°C

**Ambient temperature for M12:**  
-40°C to 85°C

**Current rating:**  
4 and 5 pins: 4 A per pin  
8 and 12 pins: 2 A per pin

**IP rating:** IP67/IP68

As specifications vary for different parts, please refer to your TE contact for detailed information.

**Application Specifications for M8 M12 Connectors and Cable Assemblies:**  
114-32127, 114-137008, 114-137144

**Product Specifications:**  
Connectors: 108-3641, 108-19483,

108-106140

X-coded: 108-137008

Size	Pins	Rated	Maximum Current per pin	Pollution grade
M8	3	60V	4A	3
M8	4	30V	4A	3
M12	3	250V	4A	3
M12	4	250V	4A	3
M12	5	125V	4A	3
M12	8	60V	2A	3
M12	12	30V	2A	3



### HE CABLE HOODS

- Hoods are made from aluminium alloy casting and available in top, angled or side entry. Hoods provide IP65 sealing when fitted. PG variants are supplied complete with cable sealing glands.
- Available in 6, 10, 16, 24, 40 and 64 way.
- Rated to 380V a.c. or 450V d.c. and suitable for Group C applications.



300-3800 16WAY SIDE ENTRY,PG21 SIZE6

300-3787 10WAY SIDE ENTRY,PG16 SIZE4

### HE INSERTS

- Male and female inserts will fit either cable hood housings or base housings.
- The inserts is supplied without contacts.
- Each insert has a separate earth contact. If 32 way connectors are required both the 1-16 pole (16 way) and 17-32 pole inserts should be purchased.
- These inserts will fit alongside each other in size 10 HE housing.



300-3715 16 WAY SCREW TERMINAL FEMALE

300-3709 10 WAY SCREW TERMINAL FEMALE

300-3658 10 WAY SCREW TERMINAL MALE

### HE THROUGH PANEL HOUSINGS

- Bases made from aluminium alloy casting and in top entry only.
- Supplied with panel seating gaskets.



300-3967 10 WAY THROUGH PANEL BASE,SIZE 4

### HE/HD SURFACE MOUNT HOUSINGS

- All surface mount bases are made of case aluminium alloy.
- PG variants are supplied complete with cable gland.
- Available in 6, 10, 16, 24, 40 and 64 way.
- Rated to 380V a.c. or 450V d.c. and suitable for Group C applications.



300-4005 6 WAY BASE,PG16 SIZE 3

300-4033 16 WAY BASE,PG21 SIZE 6

### FLEXLITE HIGH TEMPERATURE UL WIRE

- UL Style 3557, UL recognised component
- Operating temperature range of -55°C to +200°C
- 600 V rating
- Meets requirements of VW-1 flammability
- Flexible and tough
- Thin wall insulation
- Lightweight and small easy to handle



253-2098 1.00SQ.MM

### UNIVERSAL CRIMP TOOL FOR DEUTSCH CONNECTORS

- Adjusting screw includes jam nut
- Compatible with a wide range of Deutsch connector crimps
- Lightweight and comfortable to use



425-973

### SOLDER SLEEVES AND KIT

- Solder Sleeves provide insulated, environmentally sealed; strain-relieved soldered connections
- Temperature range -55°C to +125°C
- Terminate bare or tin plated conductors
- Supplied in a storage case with locking lid
- Refills available - see Solder Sleeves, as well as other High-Spec Solder Sleeves and Wire to wire Splices.



542-5583 SOLDERSLLEEVE KIT

## HARTING HAN F+B FOOD AND BEVERAGE CONNECTOR SYSTEM

- Consisting of housings, hoods, inserts and covers has been designed specifically for use within the demanding food and beverage industry



**201-8862** INSERT MALE, 4 CONTACT, 20A

**201-8864** INSERT FEMALE, 4 CONTACT, 20A

**885-6097** INSERT FEMALE, 4+4 CONTACT, 16A

**885-6088** INSERT MALE, 4+4 CONTACT, 16A

**885-6066** BULKHEAD HOUSING

**885-6075** BULKHEAD HOUSING

**885-6078** PROTECTIVE COVER FOR USE WITH HOUSING BULKHEAD MOUNTING

**885-6072** PROTECTIVE COVER FOR USE WITH HOOD

**201-8865** CONNECTOR HOOD

## HAN A SIZE 3 A STANDARD METAL HOODS AND HOUSINGS

- Slim, space saving design;
- Robust diecast zinc construction;
- Locking levers for a secure connection;
- Range of mounting options and cable entry angles;
- IP67 protection using seal screw



**473-1714** M20 METRIC TOP ENTRY HOOD

**181-0729** STRAIGHT PANEL MOUNT HOUSING

## HOOD CABLE PLUG + MALE INSERT

- Two-part packs that provide towards the assembly of Harting Han E® metal-bodied cable plugs, cable coupling hoods, bulkhead/panel mounting housings, and surface mounting housing sockets, screw terminal connection.
- Each pack contains a hood or housing, and male or female insert.
- All the individual components are available separately from within the relevant Ranges of inserts, hoods, and housings. All are rated at 450 – 500V, and 16A.
- Suitable cable glands are available separately



**492-5458** 6 WAY, 16.0A, 500.0 V

## HAN A® INSERTS


- Slim construction
- Poles: 3-16 (screw connection)



**181-0870** 3P+E SOCKET INSERT, 10A 230/400V

## HAN E HEAVY DUTY POWER CONNECTOR INSERT

- Han Thermocouple insert connectors for temperature measurement conductors, ideal for use within injection moulding machines.
- These inserts allow mixed loading of thermocouple crimp contacts and standard contacts within one insert.

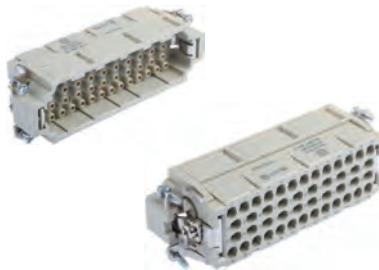

**842-7756** 10 CONTACTS, 16A, FEMALE

**512-5261** 46 CONTACTS, 16A, MALE

## HAN E® INSERTS

- Poles: 6-48 (screw connection – wire csa 2.5mm<sup>2</sup>)
- The 32 and 48 pole versions require two contact inserts per connector half; a standard insert numbered '1 to 16' or '17 to 32' pole insert (m) or (f) together with one numbered '17 to 32' or numbered '25 to 48' insert (m) or (f)



**114-8175** 6P+E PLG INSERT, 16A 400-500VAC

# SKINTOP®

ECOLAB® approved  
glands for food  
& beverage



## Tired of worrying about long term water ingress?

*Put your trust in SKINTOP, tested for every possible application.*

LAPP test their SKINTOP glands for many different application. IP66 for water spray, IP67/68 for immersion, and IP69K for high pressure water blasting. LAPP have you covered from basic IP rated glands, to high performance FDA & Ecolab approved glands for food and beverage areas.

- Corrosion-resistant
- Sea water-resistant
- Smooth surfaces
- Compact design
- Variable clamping ranges

## ÖLFLEX® ROBUST 210

- ECOLAB® certified harsh environment control cable.
- Outstanding UV, ozone, organic oil & chemical resistance.
- 300-500V rated with number coded cores



## ÖLFLEX® CLASSIC 115 CY

- Screened PVC control cable with small outer diameter.
- EMC compliant with tinned copper braiding.
- 300-500V rated with number coded cores



## ÖLFLEX® SERVO FD 796 CP

- Highly flexible screened servo cable with PUR outer sheath.
- Extended line performance - long travel lengths or high acceleration.
- 600-1000V rated with a temperature range from -40°C to +90°C



**800-3271** 3 CORE+EARTH 1MM

**800-3287** 2 CORE+EARTH 1.5MM

**800-3265** 6 CORE+EARTH 0.75MM

**800-3303** 4 CORE+EARTH 2.5MM

**444-0632** 6 CORE+EARTH 1.5MM

**444-0525** 2 CORE+EARTH 1MM

**445-0212** 3 CORE+EARTH 0.75MM

**444-0604** 4 CORE+EARTH 1.5MM

**800-3221** 3C+E 1.5MM + 2X(2X0.75MM)

**800-3192** 3C+E 1.5MM + (2X1.5MM)

**800-3195** 3C+E 2.5MM + (2X1.5MM)

## ETHERLINE® CAT.6A

- Industrial Ethernet cable Cat.6A for fixed installation.
- PUR halogen free outer sheath.
- For PROFINET applications with 4 pairs



## SKINDICHT® SM-M INOX

- Stainless steel metric counter nuts.
- Stainless steel 303.
- Temperature range -60°C to +200°C



## SKINTOP® INOX SC

- Stainless steel version with compact design.
- Low-resistance screen contact, optimum EMC protection.
- Wide, variable clamping ranges



**807-9587** 4 X 2 X AWG22/1

**796-0069** M16

**796-0063** M20

**796-0072** M25

**796-0075** M32

**136-8526** M16

**136-8527** M20

**136-8528** M25

**136-8529** M32

## EPIC® LS1 SERIES

- Circular connectors for servo motors & power supply.
- High power at smallest installation space.
- EMC-optimised design.



## EPIC® SIGNAL M23 SERIES

- Circular connectors for servo motors & encoders.
- Robust metal connector with integrated EMC cable gland.
- Inserts included



## EPIC® H-B SERIES KITS

- Flexible & robust 16A industrial connectors.
- IP65 rated.
- Numerous additional connector kit options available online



**727-6235** ANGLED 6 PIN

**219-138** FRONT MOUNTED 6 PIN

**727-6232** ANGLED 8 PIN

**219-059** FRONT MOUNTED 8 PIN

**218-949** D6 CONNECTOR 17 CONTACTS

**219-144** F6 COUPLER 12 CONTACTS

**218-983** F6 COUPLER 9 CONTACTS

**219-453** D6 CONNECTOR 9 CONTACTS

**396-1532** 24 WAY

**396-1475** 6 WAY

**396-1526** 16 WAY

**486-735** 10 WAY

## COMMUNICATION CABLES

RANGE	SHEATH	NO OF CORES	AWG	OUTER DIAMETER	VOLTAGE RATING	COLOUR	STANDARDS AVAILABLE	REEL LENGTH
 Twisted 8 Multipair Industrial Cable	PVC, LSZH (Shield: Foil, Tinned Copper Braid)	1 → 19 (pairs)	18 → 24	2.4 → 11.5mm	300 → 600V	Blue, Grey, White	CE, CSA Certified, CSA FT4, EN 2235, EN 2714-013, EU Low Voltage Directive 2006/95/EC, Euroclass Eco, FAR 25-869, RS 232, UL, UL 2919	50 → 500m
RANGE	SHEATH	CATEGORY	MAX BANDWIDTH	MAX TRANSMISSION SPEED AT 100M	SHIELD TYPE	COLOUR	CONNECTOR TYPE	REEL LENGTH
 LAN Cables	PVC, LSZH, PE	Cat5, Cat5e, Cat6, Cat6a, Cat7, Cat7a, Cat8	250 → 2000MHz	10/100Mbps/100MHz (Cat5) 1Gbps/100MHz (Cat5e) 1Gbps/250MHz (Cat6) 10Gbps/500MHz (Cat6a) 10Gbps/600MHz (Cat7) 40Gbps/2000MHz (Cat8)	F/UTP, FTP, S/FTP, U/UTP, UTP	Black, Blue, Green, Grey, Orange, Purple, Red, White, Yellow	Unterminated, RJ45	1 → 500m
RANGE	CONDUCTOR TYPE	TERMINATION	COAX TYPE	OUTER DIAMETER	VOLTAGE RATING	COLOUR	IMPEDANCE	REEL LENGTH
 Coaxial Cables	Solid, Stranded	Terminated, Unterminated, BNC, SMA, SMB, NCK, N	CT, KX, RF, RG, RGW, Twin RC, URM	1.1 → 10.8mm	170 → 1000V	Black, Brown, Green, Grey, White	50 → 93Ω	1 → 500m

### Communication Cable Highlight

#### GREY PVC CAT5E CABLE

- Meets or exceeds all Cat5e standards
- 24 AWG with bare copper conductors
- Colour coded pairs for identification



812-4801 4 PAIR SHIELDED CAT5E FTP PATCH 100M

## WIRING & CONNECTIVITY CABLE ASSEMBLIES

### 4K - HDMI TO DVI-D CABLE

- Male-to-male cable
- 19-pin HDMI connector
- Maximum resolution of 4K



182-9879 2MTR

### USB 2.0 MICRO B TO USB A USB CABLE, MALE TO MALE

- Allows easy connection of a mobile device to host computer or charger
- Moulded connector



876-2403 1.2M, BLACK

### TAINLESS STEEL SADDLE CLAMP

- Strong and secure
- Corrosion resistant
- Easy to install



471-1300 S/STEEL CONDUIT DISTANCE SADDLE,20MM



## EQUIPMENT WIRE

RANGE	SHEATH	AWG	OUTER DIAMETER	VOLTAGE RATING	COLOUR	REEL LENGTH
<b>British Standard</b> 	PVC	17 → 24	1.2 → 2.65mm	300 → 1000V	Black, Blue, Brown, Green, Grey, Orange, Pink, Red, Violet, White, Yellow, Green/Yellow, Yellow/Green	100m → 500m
<b>Tinned Copper Wire</b> 	PVC	18 → 24	1.58 → 2.79mm	300 → 600V	Black, Blue, Green, Red, White	100m
<b>DEF STAN</b> 	ETFE	12 → 24	1.15 → 2.99mm	600V	Black, White	100m
<b>Harmonised</b> 	PVC	13 → 20	2.4 → 4.1mm	300 → 750V	Black, Blue, Brown, Grey, Red, White, Yellow, Green/Yellow	100m
<b>UL Standard</b> 	PVC, PTFE, MPPE	12 → 28	0.9 → 4.2mm	150 → 600V	Black, Blue, Brown, Green, Grey, Orange, Purple, Red, White, Yellow	100m
<b>Tri-Rated</b> 	PVC	4 → 22	2.6 → 10.6mm	600 → 1000V	Black, Blue, Brown, Dark Blue, Green, Green/Yellow, Grey, Light Blue, Mid-blue, Orange, Pink, Purple, Red, White, Yellow	100m

## Equipment Wire Highlight

### TRI-RATED CABLE - 4 MM<sup>2</sup> CSA, 1 KV, 41 A

- High quality range of Tri Rated cables
- Voltage rating of 600 / 1000 V
- Class 5 flexibility
- A HR PVC (Heat Resistant PVC) insulation enabling the cable to be used in high temperature applications



**811-1442** BLACK (100 METRE REEL)

**906-2713** DARK BLUE (100 METRE REEL)

**815-8611** PINK (100 METRE REEL)

**811-1454** YELLOW (100 METRE REEL)

## CONTROL CABLES

RANGE	SHEATH	NO OF CORES	AWG	OUTER DIAMETER	VOLTAGE RATING	SCREEN/SHIELD	COLOUR	REEL LENGTH
<b>CY</b> 	PVC	2 → 18	13 → 26	4.1 → 15.6mm	300 → 500V	Braid, Tinned Copper Braid	Grey	50 → 100m
<b>SY</b> 	PVC	2 → 25	9 → 18	7.3 → 19.7mm	300 → 500V	Braid, Galvanised Steel	Grey	50m
<b>YY</b> 	PVC	2 → 15	9 → 24	3.7 → 20.8mm	300 → 500V	Galvanised Steel	Grey	25 → 100m

## POWER CABLES

RANGE	SHEATH	NO OF CORES	AWG	OUTER DIAMETER	VOLTAGE RATING	COLOUR	STANDARDS AVAILABLE	REEL LENGTH
<b>Mains Power</b> 	PVC, Rubber Silicone, TPE	1 → 7	9 → 20	3.2 → 19.1mm	300 → 1000V	Black, Blue, Brown, Green/Yellow, Grey, Orange, Red, Red/Brown, White, Yellow	EN 50525-2-11, EN 50525-2-21, H03VV-F, H03VH2-F, H05RR-F, H05VV-F, H05Z1Z-F, H07BN4-F, H07RN-F, H07V-K, H07ZZ-F	25 → 100m
<b>Armoured Cables (SWA)</b> 	PVC+SWA [Steel Wire Armoured]	2 → 5	5 → 15	12.6 → 26.3mm	600 → 1000V	Black	BASEC	50m
<b>Conduit &amp; Trunking Cables</b> 	LSZH, PVC	1	2 → 15	2.7 → 11.3mm	450 → 750V	Black, Blue, Brown, Green/Yellow, Grey, Orange, Purple, Red, White	H07V-R, H07V-U, H07Z-R, H07V-R, H07V-U, H07Z-R	50 → 100m
<b>Multicore Industrial Cables</b> 	PE, PVC, XLPE	2 → 36	9 → 30	2.4 → 22.8mm	250 → 1000V	Black, Green Grey White	BASEC, Defence Standard 61-12 Part 4, Defence Standard 61-12 Part 5, Euroclass Eco	25 → 500m

## BLUE METAL-DETECTABLE NYLON 66 CABLE TIES

- Industry-standard blue colour for easy visual identification
- Metal powder particles offer full magnetic and x-ray detection, even if parts have been trimmed to fit



**172-1766** 150X3.6MM BLUE

**172-1769** RELEASE 250X4.5MM BLUE

**172-1767** 400X4.6MM BLUE

**172-1765** 200X4.6MM BLUE

**172-1768** 380X7.6MM BLUE

## NYLON NON-RELEASABLE CABLE TIES

- High quality
- Suitable for a multitude of uses
- Easy to thread



**233-499** 100 X 2.5, PACK 1000

**233-493** 380X7.6MM, PACK 100

**233-487** 300X4.8MM, PACK 100

**233-471** 203X4.6MM, PACK 100

## CABLE TIE MOUNT NYLON 66

- Fast installation
- Strong adhesive base
- Simple cable mounting - provides secure fastening
- Available in black and natural and comes in a range of sizes
- Self-extinguish



**811-1726** CABLE TIE MOUNT 19.5X19.5 BLACK NYLON 66

## ZERO HALOGEN HEATSHRINK TUBING KIT

- Highly flame retardant with a flame temperature index of over 350°C
- Totally halogen free
- Very low smoke, meets LUL requirements



**397-4263** 2:1 SHRINK RATIO

## PORTABLE HEAT SHRINK KIT

- Portable heat shrink kit consisting of a range of high-quality heat shrink tubing
- Includes range of colours, (including harmonised colours) and diameters to suit a range of different applications



**487-3852** 2:1, 3:1 SHRINK RATIO

## HEAVY DUTY CABLE PROTECTORS

- Weather and skid proof
- Black base and yellow cover provide good visibility
- High-strength cable grooves, can withstand up to 20 tons per axle



**136-5423** H/D CABLE PROTECTOR DUAL 2 CHNL 32/38MM

## OPEN SLOT PVC

- Cable protection
- Slotted construction
- Significantly lower fire risk, due to self-extinguishing nature



**758-9276** STANDARD 8MM 25WX60H 2M

**758-9210** NARROW 4MM 25WX80H X2M

**758-9285** STANDARD 8MM 25WX80H 2M

**758-9282** STANDARD 8MM 40WX60H 2M

**758-9294** STANDARD 8MM 60WX40H 2M

**758-9216** NARROW 4MM 25WX60H X2M

**879-3741** NARROW 4MM 40WX60H X1M

**758-9279** STANDARD 8MM 25WX30H 2M

**879-3738** STANDARD 8MM 40WX80H 1M

**879-3744** STANDARD 8MM 60WX80H 1M

## EMPTY CABLE REEL

- Features a removable side flange that you can cut to accept panel-mount connectors
- Mounted on a rugged tubular steel frame that has a friction brake with an integral winding handle



**379-3727** YELLOW PLASTIC AUDIO CABLE DRUM,240MM

## AWG vs mm<sup>2</sup>

AWG NUMBER	CABLE CROSS SECTION IN MM <sup>2</sup>	OUTER DIAMETER Ø MM	CONDUCTOR RESISTANCE IN OHM/KM	MAX CURRENT AMP
1000 MCM	507	29.3	0.036	-
900	456	27.8	0.04	-
750	380	25.4	0.048	-
600	304	22.7	0.061	-
550	279	21.7	0.066	-
500	253	20.7	0.07	-
450	228	19.6	0.08	-
400	203	18.5	0.09	-
350	177	17.3	0.1	-
300	152	16	0.12	-
250	127	14.6	0.14	-
4/0	107.2	11.68	0.18	302
3/0	85	10.4	0.23	239
2/0	67.4	9.27	0.29	190
0	53.4	8.25	0.37	150
1	42.4	7.35	0.47	119
2	33.6	6.54	0.57	94
3	26.7	5.83	0.71	75
4	21.2	5.19	0.91	60
5	16.8	4.62	1.12	47
6	13.3	4.11	1.44	37
7	10.6	3.67	1.78	30
8	8.34	3.26	2.36	24
9	6.62	2.91	2.77	19
10	5.26	2.59	3.64	15
11	4.15	2.3	4.44	12
12	3.31	2.05	5.41	9.3
13	2.63	1.83	7.02	7.4
14	2.08	1.63	8.79	5.9
15	1.65	1.45	11.2	4.7
16	1.31	1.29	14.7	3.7
17	1.04	1.15	17.8	2.9
18	0.823	1.024	23	2.3
19	0.653	0.912	28.3	1.8
20	0.519	0.812	34.5	1.5
21	0.412	0.723	44	1.2
22	0.324	0.644	54.8	0.92
23	0.259	0.573	70.1	0.73
24	0.205	0.511	89.2	0.58
25	0.163	0.455	111	0.46
26	0.128	0.405	146	0.36
27	0.102	0.361	176	0.29
28	0.0804	0.321	232	0.23
29	0.0646	0.286	282	0.18
30	0.0503	0.255	350	0.14
31	0.04	0.227	446	0.11
32	0.032	0.202	578	0.09
33	0.0252	0.18	710	0.07
34	0.02	0.16	899	0.06
35	0.0161	0.143	1125	0.04
36	0.0123	0.127	1426	0.04
37	0.01	0.113	1800	0.03
38	0.00795	0.101	2255	0.02
39	0.00632	0.0897	2860	0.02
40	-	-	-	0.01



RS PRO is continually expanding the range to meet your every need, making this choice the simplest and most cost effective of all.

Browse the complete RS PRO range of Wiring & Connectivity related products available online.

CABLE GLAND, STRAIN RELIEF & GROMMETS



CABLE ACCESSORIES, TIES & TOOLS



TERMINAL BLOCKS



WIRE TERMINAL & SPLICES



TOOL KITS



ELECTRICAL TEST EQUIPMENT



CIRCULAR CONNECTORS



POWER CONNECTORS



ENCLOSURES



CABLES, CONNECTORS & CRIMPING TOOLS



NETWORK TEST & MEASUREMENT



WIRE STRIPPERS



## METAL BACKSHELL PANEL MOUNT CONNECTORS

- Multipole audio/video connectors manufactured for professional use.
- The 'AXR'/'XLR' compatible connectors are precision made with zinc die-cast bodies and silver-plated, solid brass turned contacts
- A benefit of these connectors is the 'squeeze' release clip, which enables plugs and sockets to be unplugged quickly by means of a simple push-down device.



**548-9105** 3 WAY

## MALE FIELD RJ45 CONNECTOR

- Shielded male RJ45 connector
- IP68 waterproof rating
- Suitable for a temperature range of -40°C to +80°C



**111-6743** RJ45 FULL METAL C3 FIELD INSTALLABLE

## INSULATED FRENCH COLOUR CODED BOOTLACE FERRULES

- Nylon insulated collar for reduced leakage, creepage and gas intrusion
- Tin plated copper tube for excellent conductivity
- Crimped terminal can be repeatedly inserted and removed without degrading end of the wire



**458-724** GREY,8MM PIN

**458-695** BLUE,8MM PIN

**458-702** RED,8MMPIN 1MMSQ.

**458-718** BLK,1,5MMSQ. WIRE

## BRASS CABLE GLAND WITH LOCKNUT

- Completely sealed against dust
- Excellent water resistance
- Locknut and seal supplied



**831-9062** PG36, IP68, 22-32MM

## IP68 METRIC DOME TOP GLAND

- Metric threaded
- Completely sealed against dust
- Excellent water resistance
- Black and white versions available
- Made with high quality Nylon 66\*



**669-4670** M32

**669-4689** M40

**669-4676** M25

**669-4667** M16

## IP68 METRIC DOME TOP GLANDS

- Metric threaded
- Completely sealed against dust
- Excellent water resistance



**669-4654** M12, 3-6,5MM

**669-4660** M20, 4-9MM

**669-4664** M20, 6-12MM

**669-4673** M20, 10-14MM

**669-4686** M63, 34-44MM

## COUPLER CABLE CONDUIT FITTINGS

- Coupler cable conduit fitting
- Nominal conduit diameter of 25 mm
- Corrosion-resistant 316 stainless steel material
- Satin finish
- IP67 rating for protection in 1 m of water for up to 30 minutes



**471-1350** 25MM

**471-1344** 20MM

## CAT.5E INLINE COUPLERS RJ45 ADAPTORS

- Cat5e RJ45 coupler
- 8P8C socket to 8P8C socket
- 50µ gold plated contacts
- Wired straight contact 1 to contact 1, etc.
- For shielded twisted pair (STP) cables and patch leads
- Meets C5e EIA/TIA 568B Standard
- Dimensions: 25 x 25 x 45 mm



**340-9630** CAT.5E RJ45 STP SOCKET-SOCKET COUPLER

## THROUGH HOLE JACK SOCKET

- Stereo jack socket
- Robust nylon body
- Switched contacts



**449-348** 3 WAY STEREO PCB MOUNT JACK SOCKET,1/4IN

# FOOD & BEVERAGE INDUSTRY SENSORS

Wide selection of sensors from general purpose RFID to IO-Link models.

## Sensor Highlights

### W2S-2 SERIES PHOTOELECTRIC SENSORS

- WTB2S-2 miniature photoelectric with PinPoint LED for rugged and reliable detection of all object types
- Choice of diffused background suppression, retro-reflective or through-beam - with sensing ranges up to 2m
- All sensors have PNP output and 10-30Vdc supply, retro-reflective sensors can use a range of reflectors - see 265-2754



**SICK**

842-8572

842-8560

842-8585

842-8579

### REFLECTORS FOR RETROREFLECTIVE PHOTOELECTRIC SENSORS

- A range of reflectors from Turck Banner suitable for use with retroreflective photoelectric sensors.
- Various shapes and size available.



**BANNER**

764-3878 FOR USE WITH Q45B8611 SERIES, 51 X 51 MM SQUARE

### THREADED BARREL BLOCK BODY SENSOR

- Extended sensing ranges
- Sense all metals at the same distance - with no reduction factor
- IP67 rating (Barrel is IP68)
- High switching frequency
- No load current 15mA max.
- Operating Temperature Range -25 → +85°C
- Short circuit protection Overload protection
- Reverse polarity protection
- Inherent weld field immunity



**TURCK**

794-8671 M18 X 1 INDUCTIVE SENSOR, 12 MM DETECTION, IP68, PG9 GLAND TERMINAL

### GUIDED RADAR LEVEL PROBES

- Guided radar level probes using TDR radar technology and a cuttable level probe to achieve precise level detection which is immune to deposit formation
- Analog outputs include 4 mA-20 mA / 0-10V, & more, plus digital outputs
- Suitable for process temperatures up to 100°C with IP67 / IP69K protection



**SICK**

794-3389 500MM PROBE

794-3383 1000MM PROBE

### IP69K OSISENSE XUK PHOTO-ELECTRIC SENSORS

- OsiSense XU offers a full range of diffuse, Background Suppression (BGS), polarized reflex, laser reflex & thru-beam in the 4 most popular form-factors worldwide
- Applicative sensors for material handling, packaging, labeling (fork sensors technology), assembly, food & beverage
- Compact 50x60mm



**SICK**

179-9952 DIFFUSE

## BARREL INDUCTIVE PROXIMITY SENSOR

- Twice nominal sensing distance
- Flush mount
- Fast switching frequency



**Telemecanique Sensors**

**444-3271** M12, SR 4MM, PNP, IP69K


**444-3293** M18, SR 8MM, PNP, IP69K

**444-3287** M18, SR 8MM, PNP, 2M

**444-3366** M30, SR 15MM, IP69K

## TELEMECANIQUE SENSORS REFLECTOR

- A range of square reflectors for use with the OsiSense XU series of Photoelectric sensors



**Telemecanique Sensors**

**281-1739** DIM: 24 X 21MM

**281-1751** DIM: 50 X 50MM

**324-1585** DIM: 100 X 100MM

## INDUCTIVE PROXIMITY SENSORS OSISENSE XS SERIES GLAND TERMINAL

- Flat form (block) 40 x 40 x 112
- Best in class quality and immunity
- IP45, IP67, IP69K to harsh industrial environments.



**Telemecanique Sensors**

**179-9936** 15MM DETECTION 24 24V0

**179-9939** 20MM DETECTION 24 24V0

**179-9940** 20 MM DETECTION 12 48V D

## INDUCTIVE PROXIMITY SENSORS OSISENSE XS SERIES CABLE TERMINAL

- Forms part of the OsiSense XS range of products
- Cylindrical M18 sensor design
- 62mm size
- 8mm nominal sensing distance
- Frontal detection face
- Sensor type - inductive proximity sensor



**Telemecanique Sensors**

**444-3344** AC/DC SENSOR, M18

## M8, M12 AND M18 INDUCTIVE SENSORS

- LED status display
- Plastic body
- Operating temperature range -25° → +70°C
- Reverse polarity and short circuit protection (dc types only)
- Flush or non flush mount versions



**Telemecanique Sensors**

**324-1226** M8, SR 2.5MM, PNP, 2M

**324-1248** M12, SR 4MM, PNP, 2M

**324-1254** M12, SR 4MM, PNP, M12

**324-1311** M18, SR 8MM, PNP, 2M

**609-7331** M18, SR 15MM, PNP, 2M

**609-7230** M18, SR 5MM, PNP, M12

**609-7280** M18, SR 8MM, PNP, 2M

**772-9874** M18, SR 20MM, M12, SS

## CYLINDRICAL ULTRASONIC SENSOR

- IP67 rated
- M18 cylindrical body
- PNP switched output
- Precise object detection of any material



**Telemecanique Sensors**

**612-2229** M18 PNP NO, 0.5M

## MULTIMODE PHOTOELECTRIC SENSOR WITH COMPACT SENSOR

- Four modes of detection in one unit
- Easy set-up at the touch of a button
- Self teach preset set-up 'multi-mode detection'
- Sensing distance dependent on mode of operation
- Through Beam Functionality using additional light source ( thru-beam accessory)
- Programmable NO/NC switching
- Connection: pre-cabled or plug-in connector (M12 4 pin male)
- IP67 Protection rating
- Operating temperature range -15 → +55 °C



**Telemecanique Sensors**

**455-4983** COMPACT 50 X 50 PLASTIC BODY

## XS INDUCTIVE PROXIMITY SENSORS - NICKEL PLATED BRASS

- General purpose.
- Cylindrical (barrel) M18.
- Size 51 mm.
- Fixed body, Flush mountable.
- Nickel plated brass, PPS Front.
- Discrete signal, 4-wire.
- Output 1 NO + 1 NC, DC circuit, PNP.
- Male connector M12, 4 pins.



**Telemecanique Sensors**

**133-6320** M18 SR 5MM

**144-9711** M30 SR 30MM

**E3S-DB TRANSPARENT OBJECT SENSOR**

- E3S-DB sensor provides most reliable detection of all kinds of transparent objects such as PET bottles, glass bottles or transparent trays
- Choice of Smart Teach enable up or trimmer sensitivity adjust
- Narrow beam types detecting smallest gaps
- Proven for environments in the Food & Beverage industry



- 831-5971** 0.7M, PNP, M12, SMART TEACH
- 831-5969** 4.5M, PNP, M12, SMART TEACH
- 831-5975** 0.7M, PNP, M12, TRIMMER ADJ.
- 831-5978** 4.5M, PNP, M12, TRIMMER ADJ.

**ER SERIES STAINLESS STEEL ROPE PULL**

- The ER series stainless steel bodied safety rope pull is designed to be tough and durable for even the most demanding applications
- Rope pull switches eliminate the need for numerous E-stop buttons reducing installation time and costs
- Supports spans up to 80m and integral tension indicator makes system setup & maintenance easy
- IP67 (NEMA 6) enclosure enables the switch to withstand water wash down cleaning



- 757-9121** STAINLESS STEEL ROPE PULL + RESET & E-STOP

**F3S-TGR HYGIENIC DOOR SAFETY SWITCHES**

- Non-contact switches for interlock hinge, sliding or removable guard doors
- IP67 Stainless steel construction ideally suited to high hygiene demands in the food industry
- Long sensing range to avoid false signals due to mis-aligned door
- Hall effect coded switch have LED indication, electronic output and up to 3 can be connected in series
- Reed switches can switch 1mA, 10 VDC and up to 6 can be connected in series



- 820-3847** SMALL CODED SWITCH, 2NC/1NO, 10M CABLE
- 820-3840** SMALL CODED SWITCH, 2NC/1NO, M12 CONN.
- 820-3844** SMALL REED SWITCH, 2NC/1NO, 10M CABLE
- 820-3853** SMALL REED SWITCH, 2NC/1NO, M12 CONN.
- 820-3856** MINIATURE CODED SWITCH, 2NC/1NO, 10M CABLE
- 820-3869** MINIATURE REED SWITCH, 2NC/1NO, 10M CABLE
- 820-3862** MINIATURE REED SWITCH, 2NC/1NO, M12 CONN.

**E2FM STAINLESS STEEL INDUCTIVE SENSORS**

- One-piece 303 stainless steel body resists damage caused by impact or harsh chemicals
- Thicker sensing face for superior mechanical durability, wear resistance
- 20% greater sensing range (10mm) on M30 versus the CENELEC standard 8mm
- Surge suppressor, load short-circuit protection, choice of connection format



- 615-8290** M8, SR 1.5MM, PNP M12
- 617-0587** M12, SR 2MM, PNP M12
- 617-0593** M18, SR 5MM, PNP M12
- 617-0616** M30, SR 10MM, PNP M12

**E3ZM-V COLOUR MARK SENSOR - STAINLESS STEEL**

- A detergent & corrosion resistant colour mark sensor in a robust stainless steel 316L housing
- Designed to provide reliable detection of all common print marks in packaging applications
- White LED for stable detection of differently colored print marks
- Easy-to-use teach-in button or remote dynamic teach
- Fast response time of 50µs



- 458-222** PNP 2M CABLE



An inductive sensor provides non-contact detection of metallic objects, with some sensors being able to target both ferrous and non-ferrous metals, while others specialise in sensing only one type. Inductive proximity sensors are suitable for use in virtually any industry with some types also able to be used in hazardous environments.

Inductive sensors can also be affected by interaction with other sensors and ambient environmental influences. Careful installation will be required to ensure the sensor is effective and is not adversely affected by any surrounding sensors or metallic objects.

## Inductive Sensor



Image for illustrative purposes only

DETECTION RANGE (MM)	OUTPUT TYPE	HOUSING MATERIAL	TERMINAL TYPE	THREAD SIZE	IO LINK	STOCK NO
0.6	PNP NO	Stainless Steel	2m Cable	M4×0.5	N	206-6124
0.8	PNP NO	Stainless Steel	M8	M5×0.5	N	206-6126
0.8	PNP NO	Stainless Steel	2m Cable	M5×0.5	N	206-6127
1.5	PNP NO	Stainless Steel	M8	M5×0.5	N	206-6128
1.5	PNP NO	Stainless Steel	2m Cable	M5×0.5	N	206-6129
2	PNP NO	Stainless Steel	M12	M8×1	Y	206-6130
2	PNP NO	Stainless Steel	M8	M8×1	Y	206-6132
2	PNP NO	Stainless Steel	M8	M8×1	Y	206-6133
2	PNP NO	Stainless Steel	2m Cable	M8×1	Y	206-6134
2	PNP NO	Stainless Steel	2m Cable	M8×1	Y	206-6135
4	PNP NO	Stainless Steel	2m Cable	M8×1	Y	206-6136
4	PNP NO	Stainless Steel	M12	M12×1	Y	206-6137
4	PNP NO	Stainless Steel	M12	M12×1	Y	206-6138
4	PNP NO	Stainless Steel	2m Cable	M12×1	Y	206-6139
4	PNP NO	Stainless Steel	2m Cable	M12×1	Y	206-6140
8	PNP NO	Stainless Steel	M12	M18×1	Y	206-6141
8	PNP NO	Stainless Steel	M12	M18×1	Y	206-6142
8	PNP NO	Stainless Steel	2m Cable	M18×1	Y	206-6143
8	PNP NO	Stainless Steel	2m Cable	M18×1	Y	206-6144



Image for illustrative purposes only

DETECTION RANGE (MM)	OUTPUT TYPE	HOUSING MATERIAL	TERMINAL TYPE	THREAD SIZE	IO LINK	STOCK NO
38	PNP NO	Brass Nickel Plated	M12	M30×1.5	N	206-6166
38	PNP NO	Brass Nickel Plated	2m Cable	M30×1.5	N	206-6167
2	PNP NO	Plastic Vistal®	M8	-	N	206-6168
2	PNP NO	Plastic Vistal®	2m Cable	-	N	206-6170
3	PNP NO	Plastic Vistal®	M8	-	N	206-6171
3	PNP NO	Plastic Vistal®	2m Cable	-	N	206-6172
4	PNP NO	Plastic Vistal®	M8	-	N	206-6173
4	PNP NO	Plastic Vistal®	2m Cable	-	N	206-6174
20	PNP NO/NC	Plastic PA 66	M12	-	N	206-6176
20	PNP NO/NC	Plastic PA 66	Terminal	-	N	206-6177
20	PNP NO	Plastic PA 66	M12	-	N	206-6178
20	PNP NO	Plastic PA 66	Terminal	-	N	206-6179
40	PNP NO/NC	Plastic PA 66	M12	-	N	206-6180
40	PNP NO/NC	Plastic PA 66	Terminal	-	N	206-6181
40	PNP NO	Plastic PA 66	M12	-	N	206-6182
40	PNP NO	Plastic PA 66	Terminal	-	N	206-6183



Photoelectric sensors detect and measure physical objects or quantities by emitting a field or beam of electromagnetic radiation. An object is detected by measuring alterations in the return signal.

Through-beam sensors rely on two separate housings, one for the transmitter and one for the receiver. Retro-reflective photoelectric sensors have both the transmitter and receiver contained within the same housing but require a reflector opposite to the sensor. Diffuse sensors are easier to install as only one device has to be mounted. This is because the transmitter and receiver are contained within one housing.

**Background Suppression**



Image for illustrative purposes only

DETECTION TYPE	DETECTION RANGE (MM)	OUTPUT TYPE	TERMINAL TYPE	STOCK NO
Background Suppression	100	NPN NO/NC	2m Cable	202-4467
Background Suppression	100	PNP NO/NC	2m Cable	202-4470
Background Suppression	100	PNP NO/NC	M12	202-4471
Background Suppression	350	NPN NO/NC	2m Cable	202-4448
Background Suppression	350	NPN NO/NC	M8	202-4449
Background Suppression	350	PNP NO/NC	2m Cable	202-4450
Background Suppression	350	PNP NO/NC	M8	202-4451
Background Suppression	2000	PNP+NPN	2m Cable	202-5446
Background Suppression	2000	PNP+NPN	M12	202-5447

**Diffuse**



Image for illustrative purposes only

DETECTION TYPE	DETECTION RANGE (MM)	OUTPUT TYPE	STOCK NO
Diffuse	800	Relay	202-5452
Diffuse	2000	NO+NC, NPN	202-5448
Diffuse	2000	NO+NC, PNP	202-5450
Diffuse	2000	Relay	202-5451

**Through Beam Emitter / Receiver**



Image for illustrative purposes only

DETECTION TYPE	HOUSING MATERIAL	DETECTION RANGE (MM)	OUTPUT TYPE	TERMINAL TYPE	THREAD SIZE	STOCK NO
Through Beam (Emitter)	Brass Nickel Plated	5000	-	2m Cable	M12x1	204-3990
Through Beam (Receiver)	Brass Nickel Plated	5000	NPN NO	2m Cable	M12x1	204-3991
Through Beam (Receiver)	Brass Nickel Plated	5000	PNP NO	2m Cable	M12x1	204-3993
Through Beam (Emitter)	Brass Nickel Plated	10000	-	2m Cable	M18x1	204-3994
Through Beam (Receiver)	Brass Nickel Plated	10000	NPN NO/NC	2m Cable	M18x1	204-3995
Through Beam (Emitter)	PBT	10000	-	2m Cable	M18x1	204-4000
Through Beam (Receiver)	PBT	10000	NPN NO/NC	2m Cable	M18x1	204-4001

**Through Beam Emitter / Receiver**



Image for illustrative purposes only

DETECTION TYPE	DETECTION RANGE (MM)	OUTPUT TYPE	STOCK NO
Through Beam (Emitter)	30000	Relay	202-5460
Through Beam (Receiver)	30000	Relay	202-5462

Fibre optic sensors are a type of proximity sensor that have an optical fibre connected to a light source to allow for detection in tight spaces or where a small profile is beneficial. The optical fibre is a transparent fibre made of glass [silica] or plastic with a diameter slightly thicker than a human hair, this fibre transmits light between the two ends to produce an electrical signal.

## Fibre Optic Sensors



Image for illustrative purposes only

FIBRE OPTIC TYPE	OUTPUT TYPE	SUPPLY VOLTAGE	IP RATING	POWER CONSUMPTION	DETECTION RANGE	STOCK NO
Plastic	NPN	24V DC	IP64	1.44W	with 896-7298 = 110 - 290mm	204-0681
Plastic	PNP	24V DC	IP64	1.44W	with 896-7285 = 300 - 800mm	204-0682

Load cells, often called load cell transducers, are crucial components in most industrial weighing systems. They are available in many different configurations and standards, depending on the intended application and environment.

Among the various different types of load cells available, models and styles can be differentiated in two key ways:

1. By the specific method they use to detect weight (compression load cells, tension load cells and other measurement types).
2. By the type of output signal generated (hydraulic load cells, piezoelectric load cells and various other configurations).

## Load Cell Sensors



Image for illustrative purposes only

FORCE MEASURED	MEASUREMENT RANGE MIN/MAX (KG)	OUTPUT TYPE	IP RATING	MAX VOLTAGE	STOCK NO
Compression	0.3 - 3	PNP	IP67	15V	204-2767
Compression	5 - 20	PNP	IP66	10V	204-2772
Compression	5 - 500	PNP	IP68	15V	204-2765
Compression	10 - 100	PNP	IP67	15V	204-2770
Compression	50 - 1000	PNP	IP66	15V	204-2768
Compression	50 - 1000	PNP	IP68	10V	204-2764
Compression	60 - 1200	PNP	IP67	15V	204-2771
Compression	500 - 3000	PNP	IP68	15V	204-2766
Compression & Tension	1 - 500	PNP	IP66	10V	204-2773

Capacitive proximity sensors feature a pair of parallel plates, similar to a standard capacitor. They work when an object produces changes in capacitance, triggering the sensor. Capacitive sensors are designed for use with non-ferrous materials and are ideal for close-range applications such as level detection and monitoring.

Capacitive sensors can be affected by their environment and possible interaction with other sensors. This could include anything from the ambient temperature to other objects in the vicinity. As a result of this, precautions should be taken when installing these sensors to avoid interference from other objects or sensors.

## Flush Mount



Image for illustrative purposes only

THREAD SIZE	DETECTION RANGE (MM)	TERMINAL TYPE	OUTPUT TYPE	IP RATING	STOCK NO
M12×1	2	2m Cable	NPN-NO	IP67	184-5578
M12×1	2	2m Cable	NPN-NO	IP67	184-5582
M12×1	2	2m Cable	PNP-NO	IP67	184-5584
M12×1	2	M12	NPN-NO	IP67	184-5579
M12×1	2	M12	NPN-NO	IP67	184-5583
M12×1	2	M12	PNP-NO	IP67	184-5585
-	5	2m Cable	NPN-NO	IP67	184-5569
-	5	2m Cable	PNP-NO	IP67	184-5570
M18×1	5	2m Cable	NPN-NO/NC	IP67	184-5593
M18×1	5	2m Cable	NPN-NO/NC	IP67	184-5604
M18×1	5	2m Cable	PNP-NO/NC	IP67	184-5596
M18×1	5	2m Cable	PNP-NO/NC	IP67	184-5606
M18×1	5	2m Cable	NO	IP67	184-5591
M18×1	5	M12	NPN-NO/NC	IP67	184-5594
M18×1	5	M12	NPN-NO/NC	IP67	184-5605
M18×1	5	M12	PNP-NO/NC	IP67	184-5607
M18×1	5	M12	NO	IP67	184-5592
M18×1	5	M12	NO	IP67	184-5603
M30×1,5	10	2m Cable	NPN-NO/NC	IP67	184-5615

## Non-flush Mount



Image for illustrative purposes only

THREAD SIZE	DETECTION RANGE (MM)	TERMINAL TYPE	OUTPUT TYPE	IP RATING	STOCK NO
M12×1	4	2m Cable	NPN-NO	IP67	184-5580
M12×1	4	2m Cable	NPN-NO	IP67	184-5586
M12×1	4	2m Cable	PNP-NO	IP67	184-5588
M12×1	4	M12	NPN-NO	IP67	184-5581
M12×1	4	M12	NPN-NO	IP67	184-5587
M12×1	4	M12	PNP-NO	IP67	184-5590
-	8	M12	NPN-NO	IP67	184-5571
M18×1	8	2m Cable	NPN-NO/NC	IP67	184-5599
M18×1	8	2m Cable	NPN-NO/NC	IP67	184-5609
M18×1	8	2m Cable	PNP-NO/NC	IP67	184-5611
M18×1	8	2m Cable	NO	IP67	184-5597
M18×1	8	M12	NPN-NO/NC	IP67	184-5600
M18×1	8	M12	NPN-NO/NC	IP67	184-5610
M18×1	8	M12	PNP-NO/NC	IP67	184-5601
M18×1	8	M12	PNP-NO/NC	IP67	184-5612
M18×1	8	M12	NO	IP67	184-5598
M18×1	8	M12	NO	IP67	184-5608
-	10	2m Cable	NPN-NO	IP67	184-5577
M30×1,5	15	2m Cable	NPN-NO/NC	IP67	184-5622

## FOOD & BEVERAGE INDUSTRY

# ELECTRICAL, AUTOMATION & PROCESS CONTROL

Essential components for managing your complex process, automation and electrical environments.

## Electrical, Automation & Process Control Highlights

### MECHANICAL COUNTER

- 5-digit, manual reset and surface mount device.
- Pivoting control lever and automatic return.
- Count mode of 1 stroke is equal to 1digit/ drive.
- Maximum speed of the shaft is 500spm.
- Reset by knurled knob and reset button at left
- Stroke angle is between 38° and 60°



**Baumer**

**150-467** MECHANICAL COUNTER WITH LEVEL

### XCS-DMC/XCS-DMP CODED MAGNETIC SWITCHES, RECTANGULAR

- Actuation on 3 sides: face to face and face to side
- 8mm tolerance to misalignment (5mm for XCS-DMC)
- LED versions have an LED in series with one N/C giving indication when guard is closed
- Coded reed technology - switch cannot be totally defeated by a simple magnet
- Rectangular plastic housing
- Dimensions: compact: H51 x W16 x D7mm, standard: H88 x W25 x D13mm
- Available pre-cabled or with connector on flying lead
- IP66/67 protection in accordance with EN/IEC 60529
- ROHS compliant



**Telemecanique**

**133-0072** 2NC/1NO, 5M

### DIN RAIL MOUNT - DRA1- CMX SERIES

- 10mm single channel DIN rail mount SSR assembly
- DC ratings up to 200 Vdc and 8 A
- 3-10 and 20-28Vdc control
- SPST-NO function
- Cage style screw terminals for easy connection
- Fits standard 35mm DIN rail
- Includes LED Status indicator



**crydam**  
C C CRYDAM 1000E-100

**701-8483** 6A, 100 VDC

### CONNECTING CABLE

- A range of connecting cables for the SIMATIC 170 series of mobile panels supporting a Profibus or Profinet environment.
- 10M length



**SIEMENS**  
Ingenuity for life

**746-5372** FOR USE WITH 277 SERIES MOBILE PANEL



# Industrial Switchgear

Plugs and Sockets



Providing the strength, reliability and durability demanded of today's industry

Life Is On



## CONTACT BLOCKS

- Short-circuit protection via a 10 A cartridge fuse, providing excellent circuit protection
- Lightweight, easy to fit and configure
- Easily removable and adjustable
- Front mounting
- Operating temperature of between -40 to 70 °C



**Schneider Electric**

331-0473 1NO

331-0489 1NC

## HARMONY EMERGENCY STOP HEAD ZB4B

- Easy mountable, using a single installer (Self-maintaining of the head in its cut-out)
- Clip-together component system (head, body, contact blocks)
- Chromium plated metal, durable and easy to recycle
- The switch has great resistance to electric shock, conforming to the machine safety standards of the IEC (Class 1)
- Single locking screw, making the button easy to mount, reliable and secure



**Schneider Electric**

330-9388 TWIST TO RELEASE

## HARMONY XB4 EMERGENCY STOP PUSH BUTTONS

- Effortless to use "turn to release" functionality for easy reset once activated
- Chromium plated metal panel with prominent red round push button, easily alerting to the eye
- 2 NC contacts, for simple configuration
- Short-circuit protection using a 10 A cartridge fuse which conforms to EN/IEC 60974-1



**Schneider Electric**

795-1306 40MM TURN RELEASE RED 1NC

## HARMONY XALK CONTROL STATIONS

- Easy to use "turn to release" functionality for easy reset once activated
- Light grey RAL 7035 base enclosure, with a yellow RAL 1021 cover colour and a prominent, bold red push button for easy identification to its function
- Durable Polycarbonate material, easy to clean and maintain with added durability for extended use (mechanical durability of 300,000 cycles)



**Schneider Electric**

795-1295 EMERGENCY STOP STATION 1NC TURN RELEASE

## XAL CONTACT BLOCKS

- Slow break contact operation in conjunction with pushbuttons for quicker action (depending on the speed of the operator)
- 1,000,000 cycles of mechanical durability, robust and reliable to ensure continuous operation
- Lightweight, easy to fit and configure Easily removable and adjustable
- Front mounting



**Schneider Electric**

331-0580 CONTACT BLOCK 1NC SCREW TERMINAL

## EMERGENCY STOP HEAD - TURN TO RELEASE / KEY SWITCH

- An instantaneous disconnect of your circuit upon alarm & activation of this emergency stop control unit
- Modular system, nearly all shapes and functions are compatible with each other (if you need to switch the push buttons head you can do so without changing the other parts)
- Conformity with IEC, UL, CSA standards - giving you the reassurance of reliability and safety in your industry




**Schneider Electric**

426-2808 E STOP 40MM TRIG ACTION TURN RELEASE RED

## HEADS FOR SELECTOR SWITCHES ZB4-B (2)

- Low-load electrical contact
- Screw clamp connection, pins for printed circuit
- Ingenious locking system
- Flexible and robust
- -40°C to 70°C operating temperature



**Schneider Electric**

330-9041 2 POSITION STAYPUT TWIST SELECTOR SWITCH

330-9057 3 POSITION STAYPUT TWIST SELECTOR SWITCH

330-9142 2 POSITION STAYPUT TO LEFT KEY SWITCH

## BODY/FIXING COLLAR ZB4-B

- The collar weighs 0.003 g
- The mounting hole size of 22 mm
- It is a green premium product
- Designed to be used with the Harmony XB4 series of push-button switches
- Comprised of a strong metal material enabling the component to hard-wearing and long-lasting



**Schneider Electric**

331-0142 MOUNTING BLOCK FOR PUSHBUTTON SWITCH

## ELECTRIC HARMONY XB SERIES LIGHT BLOCK

- Screw clamp terminals provide a secure connection and make installation, removal and adjustments simple
- IP20 (Ingress protection) rating near it's touch-proof for safe handling and protection against electric shocks
- Surge protection of up to 1kV for great electrical safety
- Broad operating temperature range : -40°C to +70°C for use in a variety of demanding environments



**Schneider Electric**

610-2815 24V, White Light

## ILLUMINATED RING E-STOP CONTROL BOX 24VDC

- Ring lights up while in normal operation, and turns red when the stop is activated - 24VDC Only
- 1 NO + 1 NC contacts IP66/IP67/IP69/IP69K



195-8731

## WIRELESS AND BATTERY-LESS PUSHBUTTON TRANSMITTER

- Fits onto existing XB4/XB5 range of Harmony pushbutton heads
- Communicates 100m , can increase with antenna



815-1755

## PROGRAMMABLE RECEIVER FOR WIRELESS PUSHBUTTON

- A 3 phase monitoring relay with configuration via FREE Zelio NFC Android App
- Monitors phase asymmetry, phase failure, undervoltage, overvoltage, over & under frequency
- 2 C/O outputs with adjustable on/off delay & voltages thresholds



828-3008



## TeSys D GREEN CONTACTORS

- The TeSys D range now has AC/DC coils (energized with either AC or DC), lower energy usage and keeps the same dimensions as the original TeSys D range
- Low control current allows direct PLC control for contactors up to 80A
- Dual AC/DC coils reduces the amount of spares or components you need to keep in stock



<b>135-3940</b>	9A 3P 24-60VAC/DC - LCID09BNE
<b>135-3942</b>	9A 3P 100-250VAC/DC - LCID09KUE
<b>135-3943</b>	12A 3P 24-60VAC/DC - LCID12BNE
<b>135-3945</b>	12A 3P 100-250VAC/DC - LCID12KUE
<b>135-3946</b>	18A 3P 24-60VAC/DC - LCID18BNE
<b>135-3948</b>	18A 3P 100-250VAC/DC - LCID18KUE
<b>135-3949</b>	25A 3P 24-60VAC/DC - LCID25BNE
<b>135-3951</b>	25A 3P 100-250VAC/DC - LCID25KUE
<b>135-3952</b>	32A 3P 24-60VAC/DC - LCID32BNE
<b>135-3954</b>	32A 3P 100-250VAC/DC - LCID32KUE
<b>135-3955</b>	38A 3P 24-60VAC/DC - LCID38BNE
<b>135-3957</b>	38A 3P 100-250VAC/DC - LCID38KUE
<b>135-3959</b>	40A 3P 24-60VAC/DC - LCID40ABNE
<b>135-3961</b>	40A 3P 100-250VAC/DC - LCID40AKUE

## 3-PHASE MONITORING RELAY WITH NFC

- A 3 phase monitoring relay with configuration via FREE Zelio NFC Android App
- Monitors phase asymmetry, phase failure, undervoltage, overvoltage, over & under frequency
- 2 C/O outputs with adjustable on/off delay & voltages thresholds



179-0019 RMNF22TB30 (120-480Vac)

## MULTIFUNCTION TIMER RELAY WITH NFC

- A timer relay configured via NFC (near field communication) technology available current Android smartphones
- Using the FREE Zelio NFC App the timer can be configured or adjusted precisely, without opening the panel
- Offers 28 functions, 22.5mm profile and DPDT 8A relay output



914-5070 RENF22R2MMW (24-240VAc/dc)

## ALTIVAR MACHINE 320

- The Altivar Machine ATV320 variable speed drive improves machine effectiveness in a wide variety of applications
- Altivar Machine ATV320 was designed to improve the effectiveness and efficiency of machines, while optimizing design and engineering costs



<b>125-3237</b>	ATV320U04N4C	ATV320 0,37KW 400V 3PH COMPACT - 105 x 143 x 158
<b>125-3241</b>	ATV320U06N4C	ATV320 0,55KW 400V 3PH COMPACT - 105 x 143 x 158
<b>125-3245</b>	ATV320U07N4C	ATV320 0,75KW 400V 3PH COMPACT - 105 x 143 x 158
<b>125-3249</b>	ATV320U11N4C	ATV320 1,1KW 400V 3PH COMPACT - 105 x 143 x 158
<b>125-3253</b>	ATV320U15N4C	ATV320 1,5KW 400V 3PH COMPACT - 105 x 143 x 158
<b>125-3257</b>	ATV320U22N4C	ATV320 2,2KW 400V 3PH COMPACT - 140 x 184 x 158
<b>125-3259</b>	ATV320U30N4C	ATV320 3KW 400V 3PH COMPACT - 140 x 184 x 158
<b>125-3261</b>	ATV320U40N4C	ATV320 4kW 400V 3PH COMPACT - 140 x 184 x 158
<b>125-3230</b>	ATV320D1N4C	ATV320 11KW 400V 3PH COMPACT - 180 x 330 x 198

## MODICON CONTROLLER

- High degree of flexibility lets you add additional modules easily
- SD card and USB port
- Run/stop switch and cartridge extension
- Ethernet and serial line ports
- Free programming software



<b>806-6831</b>	TM221CE16T
<b>806-6821</b>	TM221CE24T
<b>806-6837</b>	TM221CE16R

## REGULATED SWITCH MODE POWER SUPPLIES

- Power supplies for industrial use, rail mounting
- Reliable efficiency
- Diagnostics via front panel LED's



<b>210-8398</b>	ABL51A24050
<b>210-8396</b>	ABL51A24031



**E5CC DIGITAL TEMPERATURE CONTROLLERS (48 X 48MM)**

- Large white LCD display
- 15.2 mm characters
- Dual PV/SV 4-digit display
- 50 ms high-speed sampling
- Short 60 mm housing case
- Easy connection to PLC with communications that require no programming
- Component communications can be used to link temperature controllers to each other
- Easy set up with CX-Thermo software (Windows XP, 7) without additional power supply via USB conversion cable



**760-4599** CURRENT OUTPUT 100-240V  
**760-5299** CURRENT OUTPUT 100-240V  
**760-5390** CURRENT OUTPUT 100-240V

**2 CHANNEL DIGITAL DIN RAIL TIME SWITCH**

- Independent Day Keys provide easier operation.
- Temporary holiday setting function makes it easy to turn OFF output for holidays and non-operating days
- Settings can be made even with the Time Switch turned OFF
- Test mode enables easy program checking
- Complies with EMC Directives, UL/CSA, and other safety standards
- Includes summer time (DST) adjustment. Yearly models also offer automatic switching to DST



**177-0111** 100 → 240 V AC

**ZEN LOGIC MODULE PROGRAMMABLE RELAYS**

- Increased functionality in a compact body (70 mm wide × 90 mm high).
- This single Unit easily provides relay, timer, counter, and time switch functions.
- Economy-type and Communications-type CPU Units have been added to series.
- Increased timing accuracy with a monthly deviation of ±15 s max.
- Multiple-day operation and pulse output operation have been added.
- Select from two power supply options: 100 to 240 VAC or 12 to 24 VDC.



**650-2984** ZEN I/O 12-24VDC

**H7EC COUNTER**

- Large totaliser display
- Self powered by internal battery which can also be replaced
- Key protected switch to prevent accidental reset switch operation
- Dual operation mode
- Short body of only 48.5mm
- Finger touch protection



**348-1929** BEIGE CASE  
**348-1913** BLACK CASE

**F3SG-RE Series Light Curtain**

- Protective height of 430mm
- Torsion-resistant for fast and simple alignment
- Smart-clic 1/8 turn quick-connect M12 cable connection for fast setup and correct torque



**125-0683** Sender & Receiver, 20 Beam(s)

**E5C2 ON/OFF TEMPERATURE CONTROLLER**

- Supply voltage rating ranging from 100VAC to 240VAC.
- This controller has a width of 48mm and a height of 48mm. It has a K-type (0°C to 400°C) thermocouple input and relay output for ON-OFF control.
- It has thermocouple element lead wires that make soldering difficult due to its inability to sticking to the solder.



**635-0710** 48 X 48MM, 100 → 240 V AC

**VITAL SAFETY CONTROLLER, BASE UNIT**

- Cost-effective cable routing/connections
- Information output with two functions
- LED indication of power supply, dynamic signal and outputs
- Detachable connector blocks
- Two NO safety outputs
- Manually supervised or automatic reset
- Can accommodate long cable lengths
- Standard width: 22.5 mm



- 733-2483** TINA 7A ADAPTOR FOR OUTPUTS
- 733-2464** TINA 2A ADAPTOR FOR OUTPUTS
- 733-2468** TINA 3A ADAPTOR FOR OUTPUTS

**PLUTO SAFETY PLC, BASE UNIT**

- Simple and easy programming facilities
- Easy to configure and install
- Up to 640 I/O's



- 733-2461** TINA 1A BLANK PLUG FOR TINA 4A AND 8A **R 1 032.95**

**JOKAB INTERLOCK SWITCH**

- Reduce downtime
- No wear
- No mechanical breakage
- Easy to install
- Local reset function
- Operating temperature ranges between -40°C and +70°C
- Suitable in harsh environments



- 176-0019** ADAM DYN-INFO M12-5 CONTACT

**JOKAB EVA GENERAL CODE**

- 4 pieces of DA 2B spacer rings included
- Yellow in colour.



- 176-0036** FOR USE WITH ADAM DYN, OSSD

**SELECTOR HANDLES AND SHAFTS**

- Shaft fitted to the disconnecter to enable operation, used in conjunction with a handle
- Handles available in black or yellow/red



- 686-7373** HANDLE, SELECTOR TYPE, OT100 TO 126FT
- 686-7376** HANDLE, SELECTOR TYPE, OT16 TO 80FT

**JSTD1 SERIES ONE-HAND CONTROL SWITCH**

- INO/INC contact configuration
- Cable length is 0.2m
- Ergonomic
- Low activation force
- Flexible mounting
- Several grip possibilities
- Highest safety level (category 4)
- Two-channel switching in each hand
- High mechanical life of 106 cycles
- Operating force is 2N
- Actuator travel of 1.3 ±0.6mm



- 733-2332** JSTD1-B SAFEBALL W/ 0.2M WIRES

**JOKAB CABLE WITH CONNECTOR**

- Shielded cable with connector is PVC coated.
- The conductor size is 22AWG.
- Black oxide colour.
- Length is 20m
- M12 female molded 8-pin connector



- 176-0060** M12-C203 20M CABLE

**STAINLESS STEEL PUSH BUTTON ENCLOSURES**

- ABB Compact Series
- 22mm Cutout Diameter
- IP65 rating



- 730-650** 3 WAY
- 730-644** 2 WAY 152 X 92 X 55MM
- 730-638** 1 WAY 90 X 90 X 55MM

**EMERGENCY STOP FOOT SWITCH**

- Snap action switch with cover
- Visible operation
- Electrically separated contacts
- Rated impulse withstand voltage is 6kV
- Rated operational current at 230VAC is 3.1A
- Operating temperature ranges between -10°C and 70°C



- 825-1720** IPS E-STOP FOOTSWITCH, YELLOW

**PLC-RSC SERIES**

- Relays and opto-couplers for inputs and outputs with "pluggable" switching devices
- Four bridging slots to reduce wiring; bridging of up to 80 modules is possible
- Screw terminal connections
- LED indicators and diodes for coil suppression
- 250V versions have a switched power rating of 1500VA
- Dimensions (WxDxH) 6.2 x 80 x 94 mm (Single pole, double pole 14mm wide)
- Operating temperature range -40 to +55°C
- Mechanical life (relays) 1 x 10<sup>7</sup> operations
- Wide range of accessories also available



**290-1422** SINGLE RELAY REL-MR- 60DC/21

**290-1416** SINGLE RELAY REL-MR- 24DC/21

**306-6592** MINIATURE SOLID-STATE RELAY - OPT24DC/ 24DC/ 2

**358-8301** RELAY MODULE - PLC-RSC- 24DC/21

**4-WAY ISOLATED SIGNAL DUPLICATOR**

- Configurable 4-way isolating amplifier
- Thin 6.2mm housing width
- Exzone 2 approval
- DIP switch allows configuration of up to 8 signal combinations
- Duplication of a standard analog signal on two current outputs



**489-2881** SIGNAL DUPLICATOR - MINI MCR-SL-U1-1NC

**RIF-0 POWER RELAY MODULES**

- Easy wiring due to push in connection technology
- Easy handling and extension of range
- Plug in display/suppressor module
- 1 and 2 contact options



**794-3761** 24DC/1

**794-3765** 12DC/ 1

**794-3771** 24DC/21

**794-3780** 12DC/21

**INTERFACE RELAY, SERIES PR1**

- Pluggable miniature relays, with power contact for high continuous current
- Varied switching current dependant on the relay chosen from the REL-MR series
- Pluggable miniature relay - compact in size
- Additional hard gold plating
- AC and DC coil voltages
- Robust and hard wearing



**508-0023** SINGLE RELAY - REL-MR- 24DC/21-21

**MINI MCR Series Signal Conditioner**

- Power supply possible via the foot element (T<sub>BUS</sub>)
- Automatic potentiometer detection without manual adjustment
- Error indication via diagnostic LED and analog signal
- For 100 Ω to 100 kΩ potentiometers



**616-8944** Resistance Input, Current, Voltage Output

**PSRMINI SAFETY RELAY**

- Compatible with all important signal transmitters and safety-relevant systems
- Screw and push-in spring connection
- Automatic reset, Automatic/Manual reset, Automatic/Manual/Monitored reset, Manual/Monitored reset options available
- Up to 70% space saved
- Easy and quick diagnosis given means shorter downtime



**893-7701** PSR-MC#0-3NO-1DO-24DC-5C

**OPTO-COUPLERS WITH SOLID STATE RELAY OUTPUT**

- Dc in/Dc out, Dc in/Ac out and Ac in/Dc out versions available
- Versions with switching speeds up to 100kHz available
- 2.5kVac input to output isolation
- LED status indication
- Module width 6.2mm
- Operating temperature range: -20 to +60°C



**533-0019** TERMINAL BLOCK - DEK-CE- 24DC/ 24DC/100KHZ

## AE COMPACT ENCLOSURES

- The AE series from Rittal is a compact stainless steel enclosure with an all-round foamed-in PU seal offering IP66 protection to IEC 60 529
- Protection category: IP66 to IEC 60 529, NEMA 4X and IK08
- Stainless steel 1.4301 (AISI 304) enclosure and door
- Door opening angle approx. 130°



**784-6125** 300 X 300 X 210MM

## TOPTHERM FILTER FAN

- Easy to assemble, highly efficient and a versatile unit that provides airflow of 66m<sup>3</sup>/h and supply voltage of 230VAC.
- It does not require any tools during assembly, exchange or maintenance.
- The fan module and power connection are simple to position to suit the needs of the application.



**756-9767** 66CUM/H 230V

**756-9777** 120CUM/H 230V

**756-9802** 250CUM/H 230V

## FAN FILTER MAT

- Temperature-resistant, up to 100°C
- Reliable filtering of dust from a particle size of 10µm
- Thickness is 17 mm
- Filter class G3
- Air throughput is 105m<sup>3</sup>/h to 120m<sup>3</sup>/h



**756-9887** 177X177MM

**756-9878** 124X124MM

**756-9880** 224X224MM

**756-9884** 292X292MM

## TOPTHERM SIDE AIR CONDITIONERS

- Mounting on or in doors and side panels of enclosures with standardized mounting cut-outs.
- Integrated automatic condensate evaporation (except SK 3303.500). Nano coating condenser for easy cleaning and constant cooling capacity and efficiency.
- These air conditioners also use an intelligent operating system, turning fans on and off as needed to maintain precise temperatures while saving energy.



**764-4127** WALL MOUNTED 230V 1600W

**764-4124** WALL MOUNTED 230V 1100W

## FAN FILTER EXHAUST

- Used for ventilation by convection.
- The outlet filter can be installed in the upper and lower sections of the enclosure.
- The filter frame is made of ABS material.
- The filter is made of chemical fibre material. The filter is available with a length of 255mm and a width of 255mm. It is suitable for 177mm x 177mm and 224mm x 224mm fan size.



**756-9865** 224X224MM

**ACi 4400 SERIES AC AXIAL FAN**

- Energy efficient AC fan with EC technology
- Conversion and drive electronics fully integrated
- Long service life
- Fan speed not dependent on line frequency
- Electronic locked rotor protection
- Operating temperature range: -20 to +75 °C



**SLEEVE BEARING AXIAL FANS**

- Electronic protection against reverse polarity
- Impedance protected against blocking and overloading
- Fibreglass-reinforced plastic
- Integrated electronic commutation



912-6110 230 V ac, AC Operation



322-4445 40,9CUM/H2WDC

**HIGH PERFORMANCE BALL BEARING FANS**

- Material: fibreglass-reinforced plastic
- Fully integrated electronic commutation
- Protected against reverse polarity and locking
- Connected via single strands AWG 24, TR 64, Bared and tin-plated.



222-294 360CUM/H 2WDC

**CENTRIFUGAL FANS AND BLOWERS - BACKWARD CURVED BLADES**

- A solution to a wide range of application requirements and are ideally suited for intake suction use.
- Used for intake suction using backward curved blades, do not require a scroll housing - increasing ease of use and versatility.



825-7686 220MM DIA, 11EV

825-7670 220MM DIA, 230V

**RadiCal SERIES CENTRIFUGAL FAN**


- Low-pressure centrifugal solutions
- Fitted with highly efficient GreenTech EC motor
- Aerodynamic shape reduces noise emissions
- Hybrid construction makes impellers highly corrosion-resistant
- EC control options available



802-9456 230 V ac, 1430m³/h

**AXIAL FAN FINGER GUARDS**

- Industrial standard size zinc plated steel finger guards for axial fans
- 4 standard fixing points except 172 x 172 which has 2 points



233-9401 225HX225WMM

581-470 127HX127WMM

**BACK DRAUGHT SHUTTERS**

- To prevent back draughts
- Lightweight blades and square opening provide maximum free area when the fan is operating
- Blades close under gravity when the fan airflow ceases
- All components are light grey and UV stabilised to provide a long life



414-1802 630MM

## IP66 STAINLESS STEEL WALL BOX WITH CHASSIS PLATE

- AISI 304 Stainless Steel
- IP66 rating
- Fully wall mountable
- Lockable



<b>842-8399</b>	200X200X150MM
<b>842-8412</b>	240X180X150MM
<b>842-8419</b>	240X240X150MM
<b>842-8434</b>	240X360X150MM
<b>842-8406</b>	300X300X150MM
<b>842-8370</b>	300X300X200MM
<b>842-8361</b>	300X400X150MM
<b>842-8342</b>	300X400X200MM
<b>842-8421</b>	360X180X150MM
<b>842-8380</b>	400X300X150MM
<b>842-8383</b>	400X300X200MM
<b>842-8409</b>	400X400X200MM
<b>842-8346</b>	400X500X200MM
<b>842-8374</b>	500X500X200MM



## IP66 WALL BOXES

- Body material is AISI 304 stainless steel sheets
- IP66 rating
- Double lipped edges to ensure higher strength and ease of installation
- Easy to use, including removal of the door
- Door is fitted with a polyurethane gasket



<b>758-6986</b>	300X300X200MM
<b>758-6974</b>	300X400X150MM
<b>758-6958</b>	300X400X200MM
<b>758-6999</b>	400X300X200MM
<b>758-6961</b>	400X500X200MM
<b>758-6992</b>	500X500X200MM



## IP66 SHEET STEEL WALL BOXES

- Steel structure, coated with an epoxy polyester powder
- IP66 rating
- Enclosure and the door is made from sheet steel
- Fully wall mountable
- Pebble grey finish



**776-5791** MS WALL BOX WITH BRACKETS/CHASSIS PLATES

## METAL LOCK

- An effective enclosure locking device with a 5mm Double Barb lock configuration. The cam is designed to provide a slide compression fit and operate through an angle of 90°
- Bright chrome plated finish
- Cam lead-in ensures compression of sealing gasket
- Max panel thickness 6mm
- Grip length 25mm



**842-8478** RONIS TYPE KEY  
**842-8469** T TYPE KEY

## GRP WALL BOXES WITH GLAZED DOOR


- Fibre glass reinforced polyester construction offering excellent durability, long life and self extinguishing properties up to 960oC
- Glazed door, ideal for viewing the contents of the wall box without unlocking
- Neutral light grey colour ideal for use in a range of applications
- Electromagnetic compatibility eliminating electrical contact risks
- High impact and harsh atmosphere resistance



**192-7123** 400X400X200MM

## CLEAR MAKROLON® FRONT

- Transparent lid with visibility to internal components
- Two-part, modular glass fibre enclosures offering excellent protection
- Removable chassis plates included
- Self extinguishing, resistant to ozone, most oils, acids, bases and salts
- Temperature range -50°C to +160°C

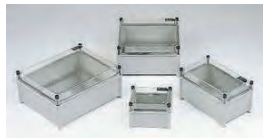

**501-496** IP66 370X300X175MM

# FOOD & BEVERAGE INDUSTRY PLUMBING & PIPELINE

We supply a wide range of pipes, tubing, hoses and more to suit your requirements.

## Plumbing & Pipeline Highlights

Browse and shop the entire range of plumbing & pipeline products online at [za.rs-online.com](http://za.rs-online.com)

### POWER-ASSISTED CONTROL NORMAL MODULE

- Power-assisted control 2/2 NC and NO solenoid valves with floating diaphragm.
- No minimum control pressure.
- 238 series solenoid valves designed to eliminate water hammer when water is turned off.
- Brass body.
- Pluggable PG 11P connection.



306-1581 SOLENOID VALVE 2/2

### DS6281-EV 2/2 SOLENOID VALVE - BRASS BODIED

- 0.1 - 1/4 second response time (dependant upon pressure)
- IP65 Rated (with cable protection)
- Brass body
- Quiet operation
- Water hammer free design
- Compact installation length
- NPT / Rc connection ports
- 0.2 - 16 Bar pressure range



**bürkert**

816-3168 3/4" SOL VALVE 20MM ORIFICE 24VDC

### PERISTALTIC PUMP

- The Verderflex peristaltic, electric operated, self-priming, positive displacement pump has a maximum flow rate of 2200ml/minute.
- The supply voltage is 24VDC
- Input power is 30W
- 2 roller design
- Cycology resin pump head with support bearing
- Tough ABS casing
- Thermally protected motor and cooling fan
- Repeatability is  $\pm 0.5\%$
- Metering accuracy is  $\pm 2\%$  (dependant on size of dose)



**VERDERFLEX**

125-4041 8MM TUBE

### RS PRO Diaphragm Electric Operated Positive Displacement Pump

- Input connection size of 2.4 mm
- Output connection size of 2.4 mm
- Nylon body
- Maximum working pressure of 1 bar



**RS PRO**

702-6894 250-300ml/min, 1 bar, 1.5 → 4.5 V

### ADVANCED POLYETHYLENE (APE) TUBING

- 50% reticulated material
- Balance between flexibility and pressure/temperature resistance
- Resistant to a wide range of aggressive chemicals
- UV-stabilised: ideal for outdoor applications
- Approved for contact with foodstuff and beverages



**legris**

144-7831 BLACK 8X5,75 DRUM 150M

144-7829 BLACK 6X4 DRUM 150M

144-7828 INCOLOR 6X4 DRUM 150M

**SINGLE PIECE REDUCED BORE BALL VALVE**

- Reduced port, 1/4" - 3" (DN8 - DN80)
- W.P: 1000WOG (PN63)
- W.T: -20°C to 200°C (-4°F to 392°F)
- Investment casting
- Blow-out proof stem
- Anti-static device (option)
- Locking device
- Thread type: ASTM B1.20.1 (NPT) DIN2999 & BS21 ISO7/1 & EN10226



**499-2789** 1/4IN BSPP F-F

**499-2795** 1/2IN BSPP F-F

**499-2802** 3/4IN BSPP F-F

**499-2818** 1IN BSPP F-F

**499-2824** 1 1/4IN BSPP F-F

**499-2830** 1 1/2 INCH BSPP F-F

**499-2846** 2 INCH BSPP F-F

**STAINLESS STEEL BALL VALVE WITH ELECTRIC ACTUATOR**

- Body - CF8M - 316 S/S
- Ball - 316 S/S
- Stem Seal - PTFE
- Ball Seal - PTFE
- 1,000 PSI Rated
- Enclosure Rated Weather proof IP67
- Motor: 24Vdc
- Multi voltage 24Vdc, 95-240Vac
- Limit Switches 2 x open/close SPDT, 250Vac 6A rating
- Auxiliary Limit Switches 2 x open/close SPDT, 250Vac 6A rating
- Indicator LED lamp Indicator (Open/Close)



**760-5700** 1/2IN. BSP S/STEEL

**760-5687** 1IN. BSP BRASS

**FLOAT AND THERMOSTATIC STEAM TRAP**

- Connections are female screwed
- Modulating discharge
- Discharges condensate at steam temperature
- Unaffected by sudden or wide load and pressure changes
- Excellent air discharge (by thermostatic air vent)



**720-9229** 3/4IN. 14BAR FLOAT STEAM TRAP BSP

**720-9232** 1IN. 10BAR FLOAT STEAM TRAP BSP

**REMOTE READING EXPANSION THERMOMETER**

- 100 mm centigrade dial Dry Thermometer with bi-metal movement
- Supplied with a surface mounting back flange
- Acrylic window with steel cover



**431-5586** -20 TO +60DEGC&F

**431-5592** 0 TO +120DEGC&F

**INDUSTRIAL SOLENOID VALVES**

- Made from forged brass
- Pilot operated
- Choice of 230 V ac or 24 V dc operation
- 2 port, normally open (NO) and normally closed (NC)
- Liquid or gas use
- Full range of sizes from 3/8 in to 2 in



**144-0812** SOLENOID VALVE 1/2" NO 220VAC

**HEAVY DUTY SELF-RETRACTING HOSE**

- 180° pivoting wall bracket
- Includes carrying handle and 1.5m feed pipe
- 1/2inch BSPT male connector
- Auto lock fitted with rollers for smooth retraction



**911-9447** 10MM ID, 15M

**911-9443** 8MM ID, 9M

**SPRAY GUN**

- Adjustable screw to vary cone width from 0° to 60°
- Covered by semi housings of non-stainable shockproof plastic, entirely sealed and with 3 rubber protective rings
- Ergonomic construction
- Gun is suitable for use up to 24 bar, 2.4 MPa rated pressure pumps
- Inlet swivel connection
- Internal structure in made of brass and stainless steel
- Plastic trigger protected by hand guard



**175-6264** 1/2" BSPF

**SILICONE TRANSPARENT TUBING**

- Flexible silicone tubing is suitable for use in most peristaltic pumps
- Length of 3 m
- Bore size of 3.2 mm
- Suitable for contact with food
- Peristaltic pump compatible
- Density of 1.16 g/cm<sup>3</sup>
- Shore A hardness of 62
- Elongation of 385% (approx)



**667-8444** 3.2MM BORE

**667-8448** 4.8MM BORE

**667-8457** 6.4MM BORE

**667-8450** 8MM BORE





# FOOD & BEVERAGE INDUSTRY

## PNEUMATICS, HYDRAULICS & POWER TRANSMISSION

A wide range of pneumatic and hydraulic parts, components and solutions you need for creating a purpose-built system or parts to update, maintain or repair your current system.

### Pneumatics, Hydraulics & Power Transmission Highlights

#### SKF FOOD LINE STAINLESS STEEL DEEP GROOVE BALL BEARINGS

- Pre-lubrication with high-quality grease registered by NSF as category HI A nitrile rubber seal material that is coloured blue for optical detectability and is compliant with FDA and EC recommendations
- Stainless steel (430C) for inner ring, outer ring, rolling elements and cage
- Stainless steel backing plate for the seal



- 125-1229** 10MM DEEP GROOVE BALL BEARING 26MM O.D.
- 125-1240** 20MM DEEP GROOVE BALL BEARING 47MM O.D.
- 125-1236** 8MM DEEP GROOVE BALL BEARING 22MM O.D.
- 125-1241** 25MM DEEP GROOVE BALL BEARING 52MM O.D.
- 125-1242** 30MM DEEP GROOVE BALL BEARING 62MM O.D.

#### SMT/SME-8M SERIES T-SLOT PROXIMITY SENSORS

- Compatible with all Festo T-Slots
- 24 V dc Operating Voltage
- Non-contacting or contacting sensing



**121-5824** 3 WIRE 0.3M

#### SHAFT COLLAR TWO PIECE CLAMP SCREW

- The clamp style design does not mar the shaft, is easy to remove, and is indefinitely adjustable.
- Is commonly used for guiding, spacing, stopping, mounting, and component alignment.
- Equipment manufacturers benefit from the tightly controlled face to bore perpendicularity of Ruland shaft collars, TIR of  $\leq 0.05$ mm.



#### SKF CAHB-10 SERIES LINEAR ACTUATOR

- Compact design
- Robust and reliable
- Designed for harsh environments
- High load capacity
- Lubricated for service life
- Durable, lightweight and corrosion resistant



**764-3477** LINEAR ACTUATOR CAHB-10 STROKE 50MM 24V



**174-6784** 40MM OD 60MM W 15MM

**CLEAN DESIGN CYLINDER FOR FOOD INDUSTRY**

- Hygienic and self-adjusting PPS cushioning
- Easy-to-clean cylinder profile without corners and indents
- Corrosion-resistant cylinder surface
- Standard dimensions and mounting accessories to ISO 15552
- NSF-H1 lubricant and special wiper seal (characteristic A3) suitable for contact in the food area. Long service life even with insufficient lubrication due to frequent cleaning processes



**FESTO**

Search 'dsbf' or scan QR code for over 100 product options

**COMPRESSED AIR FILTER-REGULATOR**

- Vertical assembly position
- Manual rotary condensation drain
- Standard nominal flow rate of 5,600 l/min
- Optional mounting type of ether front panel or line installation
- G1/2 pneumatic connection
- Aluminium die cast housing material
- Rotary knob with lock actuator



**FESTO**

121-5670

**COMPRESSED AIR FINE FILTER**

- Fully automatic monitoring and regulation of compressed air supply
- Automatic shut-off of the compressed air in stand-by mode
- Detection and notification of leakages
- Condition monitoring of relevant process data



**FESTO**

Search 'ms6-1fm' or scan QR code for over 30 product options

**COMPRESSED AIR ACTIVATED CARBON FILTER**

- Fully automatic monitoring and regulation of compressed air supply
- Automatic shut-off of the compressed air in stand-by mode
- Detection and notification of leakages
- Condition monitoring of relevant process data



**FESTO**

202-3518 3/8-R

202-3354 1/2-U

202-3353 CARTRIDGE

202-3404 AKI CARTRIDGE

202-3398 1/2-R

202-3377 1/2-R-Z

202-3327 1/4-R

202-3362 1/4-U

**SOLENOID CONTROL VALVE**

- In-line valve - designed to be used without pneumatic linking. All pneumatic connections are on the valve and can be equipped with fittings/tubing.
- Piston spool with sealing ring design principle
- 5/2 Way Monostable valve function
- Internal pilot air supply
- G1/4 thread pneumatic connection



**FESTO**

121-5898 5/2 WAY

**FOOD GRADE PNEUMATIC FITTINGS**

- Effortless selection of the right fitting.
- Festo offers a secure solution for every connection.
- The convenient push-in fitting system includes well over 1000 types of standard and function fittings.



**FESTO**

Search 'npqh' or scan QR code for over 150 product options

**HYDROLYSIS RESISTANT TUBE**

- Hydrolysis-resistant and suitable for water applications.
- Combination suitable for use in cleanrooms, FDA-compliant and corrosion-resistant as it is made of 100% polymer.
- Very easy to install thanks to the "one click principle"



**FESTO**

Search 'pun-h' or scan QR code for over 50 product options

**ANGLE SEAT MEDIA VALVE**

- Modular, hygienic design, insensitive to dirt
- Quick and easy maintenance
- Control of medium flows (gaseous and liquid) in closed and open circuits
- The angle seat valves VZXA are simple and sturdy and are thus perfectly suitable for almost all media with a viscosity of up to 600 mm<sup>2</sup>/s
- The angle seat valves VZXA made from stainless steel with PTFE seals have high chemical and thermal resistance
- Also suitable for vacuum applications
- Temperature of medium -30 ... +200°C



**FESTO**

Search 'vzxa' or scan QR code for over 20 product options

**FDA APPROVED PINCH VALVE**

- The pinch valve is a 2/2-way valve used to control liquid and powdery media, solids as well as a mixture of substances.
- Easy-to-clean housing (clean design)
- Open or closed in normal position
- Shut-off element made of elastomer



**FESTO**

Search 'vzqa' or scan QR code for over 30 product options

## CFM PNEUMATIC CABINET COOLER

- Uses compressed air at 5-7 bar
- Fits into a 3/4" in BSPP (British Standard Parallel Pipe) clearance hole in the cabinet wall
- Maximum flow rate of 35 CFM
- Maximum cooling capacity of 1,500 Btu/h
- Fed through 1/4" in BSP air inlet
- Pressure relief valve
- Height of 196 mm
- Diameter of 45 mm
- Stainless steel body
- Control device not included
- Conforms to ANSI/ESD S20.20:2014 and BS EN 61340-5-1:2007 Electrostatic Control Standards



**RS PRO**  
291-5386 1500BTU/H 35CFM

## PNEUMATIC CABINET COOLER

- Pressure range of 5-7 bar
- Cools cabinet volumes of up to 2 m<sup>3</sup>
- Maximum flow rate of 35 CFM
- Maximum cooling capacity of 1,500 Btu/h
- Diameter of 45 mm
- Height of 333.5 mm
- Stainless steel body
- Control device not included
- Conforms to ANSI/ESD S20.20:2014 and BS EN 61340-5-1:2007 Electrostatic Control Standards



**RS PRO**  
445-3060 1500BTU/H 35CFM

## VACUUM PRESSURE GAUGE OBAR

- Maximum Pressure Measurement Obar
- Vacuum Pressure Gauge Type
- Gauge Outside Diameter 100mm
- Stainless Steel Case Material
- Minimum Operating Temperature -40°C
- Maximum Operating Temperature +60°C



**RS PRO**  
188-986 0-30HG

## ELECTRIC LINEAR ACTUATOR

- Input voltage 24V DC
- Max. load 500N (push/pull)
- Speed: 13.5 mm/s (full load) 14.6 mm/s (no load)
- Stroke length: 100 mm
- Aluminium grey in colour
- Quiet yet powerful
- Preset limit switches
- Minimal operational costs
- Energy efficient



**RS PRO**  
177-4490 24V DC, 100MM STROKE

## AUTOMATIC DRAIN VALVE - 240V 50HZ

- Precise self-activated control of fluids and air to a specified programme (media: air, gases, oo, oil etc.)
- Automatically opens for a set time to drain condensation
- Length of time open (0.5 to 45 minutes) and frequency both adjustable
- Discharge time 0.5 to 10 seconds
- Minimal risk of internal blockages due to increased internal tolerances
- LED indicator for operational status



**RS PRO**  
725-125 AUTOMATIC DRAIN VALVE

## F4 SERIES ADJUSTABLE PRESSURE SWITCH

- Fitted with a mechanical stop to prevent damage from over pressurisation
- Can be mounted in any orientation
- 90 Cycles/min switching frequency
- Long mechanical life [10<sup>6</sup> cycles at 70bar]
- 0.5A maximum load (at 250 VAC)
- Accuracy 4% of set pressure
- Fixed Hysteresis 10-25% (Dependent upon version)
- DIN 43650 Electrical connection



**RS PRO**  
297-0052 1-12 BAR  
297-0046 0.2-2.5 BAR

## K3 SERIES ADJ HYDRAULIC PRESS SWITCH

- Adjustable via a screw located in the centre of the instrument
- Incorporates a mechanical stop providing over-pressure protection for spring and microswitch
- DIN 43650 connector



**RS PRO**  
363-5968 1-10 BAR K3 SERIES  
296-9989 2-40 BAR K SERIES

## STANDARD DUTY POLYURETHANE TUBE

- Highly flexible, cut and abrasion resistant
- Silicone free
- Ideal for pneumatic control and chemical transfer lines



**RS PRO**  
917-2381 BLUE, 5MM ID, 8MM OD  
917-2397 BLUE, 9MM ID, 12MM OD  
917-2400 CLEAR, 4MM ID, 6MM OD  
917-2371 BLACK 75MM ID 10MM OD

**DOUBLE UNIVERSAL JOINT WITH NEEDLE BEARING**

- Carbon steel universal joints for connecting equipment where there is a misalignment greater than 5 degrees up to an angle of 90 degrees.
- Fitted with needle bearings lubricated for a lifetime and requiring no maintenance, suitable for applications with speeds of up to 4000 rpm.
- Smooth and silent operation, suitable applications include connection of conveyers, line shafts and drive shafts.



**790-6807** 10MM BORE  
**790-6813** 16MM BORE  
**790-6823** 25MM BORE

**SHAFT SEALS**

- Replaceable without damage to the housing bore
- No need for circlips, sealants or retaining plates



**211-9005** 25X35X7MM  
**211-9011** 25X47X7MM  
**211-9027** 25X52X10MM  
**211-9055** 30X40X7MM  
**211-9061** 30X42X7MM  
**211-9162** 40X55X7MM  
**211-8967** 20X35X7MM

**NITRILE O-RING CORD**

- An economical and versatile solution for creating seals on the job.
- You can use it for applications as diverse as engines and beer taps.
- Length of 8.5 m



**138-1600** DIA. 2MM  
**138-1602** DIA. 3.5MM  
**138-1604** DIA. 4.0MM  
**138-1605** DIA. 4.5MM  
**138-1607** DIA. 5.33MM  
**138-1606** DIA. 5MM  
**138-1608** DIA. 6MM  
**138-1610** DIA. 8MM

**CHAIN TENSIONER CTC**

- Considerably reduces drive vibration and noise.
- Is truly "fit and forget" enabling high drive reliability and very low maintenance costs



**901-0053** DIN CODE 128-1, 420N  
**901-0047** DIN CODE 088-1, 250N

**O-RING KIT VITON®**

- Essential for all workshops and onsite service engineers
- Range of sizes - no need to purchase individual O-Rings
- Quick identification and easy storage for multiple O-Ring sizes
- Robust casing suitable for transport
- The kit contains 510 pieces in 18 different sizes
- 75 Shore A
- The material of the rings are resistant to petrol, oil and hydraulic oil
- Viton® A O-rings have a high chemical and temperature resistance alongside a low compression set



**756-040** IMPERIAL  
**245-9628** METRIC

**STAINLESS STEEL SHAFT COLLARS**

- Industry standard
- Interchangeable
- Common type
- Anti-corrosion finish



**122-3452** BORE 12MM  
**122-3453** BORE 14MM  
**122-3455** BORE 16MM  
**122-3456** BORE 18MM  
**122-3457** BORE 20MM  
**122-3460** BORE 25MM  
**122-3461** BORE 30MM  
**122-3449** BORE 6MM  
**122-3450** BORE 8MM

**STAINLESS STEEL DEEP GROOVE BALL BEARINGS**

- Shielded
- Good radial load capacity
- Ideal for high speeds
- Long operating life



**188-3293** 15X35X11MM  
**188-3295** 20X47X14MM  
**188-3281** 15X32X9MM  
**188-3331** 25X52X15MM  
**893-7272** 25MM ID 47MM OD  
**893-7323** 8MM ID 22MM OD

**DELRIN SPUR GEARS**

- Tensile strength 94N/mm<sup>2</sup>
- Hardness (Rockwell R) 110-120  
 20° Pressure angle



**521-6991** SPUR GEAR - 0.5 MODULE 15 TEETH  
**521-7231** SPUR GEAR - 0.8 MODULE 12 TEETH  
**521-7465** SPUR GEAR - 0.8 MODULE 80 TEETH  
**521-6064** MITRE GEAR, 1.5 MODULE

**GREEN ROUND POLYURETHANE BELT**

- Hardness of 88 Type A
- Minimum operating temperature of -30°C
- Maximum operating temperature of +80°C
- Not food certified



**309-8123** 5M L X 5MM DIA  
**309-8139** 5M L X 6MM DIA  
**309-8145** 5M L X 8MM DIA

# FOOD & BEVERAGE INDUSTRY TOOLS & CONSUMABLES

Quality tools, fasteners & fixings, adhesives, sealants, tapes and more to get the job done.

## Tool & Consumables Highlights

### NIPPER CABLE CUTTER

- Black corrosion resistant pliers Polished head
- Plastic coated handles
- Length 280 mm



136-7418 END CUTTING

### FX600 SOLDERING IRON

- Lightweight, ergonomic handlepiece
- Compact size
- Suitable for SMD and Through hole applications



768-8985 60W

### XCELITE FINE POINT DIAGONAL KNIFE BLADE

- Scalpels for delicate work
- Knurled end for more secure handling and a firm grip



675-6709 FINE POINT DIAGONAL (PACK OF 5)

### TRANSPARENT LIQUID SUPER GLUE FOR ELASTOMER

- Low viscosity instant adhesive
- Ensures uniform fast-fixturing of 'difficult' rubbers and elastomers
- Bonds polyethylene, polypropylene and polyolefin plastics when used with Loctite 770 Primer



514-600 20 G

### TEMFLEX 1755 RUBBER BLACK CLOTH TAPE

- PVC insulation tape with good electrical and mechanical properties
- High dielectric strength 40 KV/mm
- Self extinguishing
- Good resistance to abrasion, moisture, alkalis, acids, corrosio, varying weather conditions and ultraviolet exposure



840-9026 19.1MM X 18M, 0.33MM THICK

### FOOD SAFE SILICONE SEALANT PASTE

- Conforms to BS5889 Type B
- Fast cure
- High modulus-acetoxo cure type



459-0232 310 ML CARTRIDGE

**PALLET WRAP**

- Stretch and seal food grade film supplied with re-usable handle



329-5920 100MMX 100M (PACK OF 10)

**COIN/BUTTON CELLS, SILVER OXIDE**

- Higher the capacity the longer life time
- Non-Rechargeable
- Wide operating temperature range
- Resistant to vibration, shock and acceleration
- Stable and steady performance and feature low internal resistance



593-423 RS SR44 COIN CELL BATTERY, 1.55V

**LEAD ACID RECHARGEABLE BATTERY**

- 5 years standby design
- Float Standby use
- Low gas emissions 99% plus recombination
- Excellent recovery from deep discharge
- Leak-proof - Sealed lead acid (SLA) battery
- ABS resin case to UL94-HB fire resistance (Horizontal Burning Test)
- Road transport to UN2800 (Batteries, Wet, Non-Spillable)
- Air Transport to Special Provision 'A67' 'ATA 6' 'CAO'. (Batteries, Wet, Non-Spillable)



537-5488 RS SEALED LEAD-ACID BATTERY, 12V 7AH

**TRANSLUCENT SQUEEZE BOTTLE**

- Squeeze bottle for use with cleaner, oil, solvent and other liquids
- Capacity of 225 ml
- Translucent colour
- Made from polypropylene (PP)
- Can release single drops or fine streams



548-4289 225ML

**BLACK PVC SEALING STRIP**

- High strength adhesive to keep foam in place during assembly
- Excellent resistance to weather, fungi and oxidation ensures a long seal life
- Closed cell construction gives a positive seal at only 30% compression and requires less material to seal than open cell foams
- Easy peel liner prevents stretching during installation
- Single-Sided Tape
- Various applications, air conditioning, telecommunications, aircraft, marine and automotive industries



205-0906 25MM X 10M, 10MM THICK

**A4 STAINLESS STEEL HEX NUTS - METRIC**

- Ideal for use in chemical processing equipment and marine environments due to its higher resistance to tarnish and corrosion.
- Metric hex nuts
- To DIN934
- A4 grade 18/8 stainless steel (Type 316 316) - long lasting
- Good resistance to corrosion and saltwater
- Due to the hexagon nut having six sides it makes it easier to work with and is very versatile
- Easy to tighten and loosen



189-591 M6

189-585 M5

**BLACK SELF AMALGAMATING TAPE**

- Easy unwind
- Extremely flexible
- Resistant to water, ozone and UV
- Excellent low and high temperature performance
- Excellent conformability to awkward shapes
- Breaking load is 20.0N/cm
- Elongation is 600%



146-8998 25MM X 10M

**A4 STAINLESS STEEL PLAIN WASHER - METRIC**

- RS PRO washers are an essential part of any fastener assembly, as they serve to incorporate spacing and distribute load when placed between a nut and bolts.
- These washers will help prevent wear and distortion of installation surfaces over time.



189-664 M8

**COLOPHONY-FREE TIN/ LEAD SOLDER WIRE**

- Versatile soldering wire that can be used for a wide range of soldering tasks
- Alloy used consists of 60% tin and 40% lead
- Melting point between 183-188°C
- Low odour formulation with 1.1% flux content
- Soldering iron typical tip temperature for this solder wire is 320-360°C



800-7661 0.7MM

756-8871 0.4MM

### METRIC WORKSHOP RANGE JOBBERS DRILLS

- 5% Cobalt High-Performance HSS-E Drill bits.
- High-Temperature strength without sufficient coolant
- 135° non-slip split point for precise centring
- Direct drilling without the need for prior centring or drilling a pilot hole
- Cuts faster and lasts longer than regular HSS drill bits
- 0.5 mm increments



**RS PRO**  
216-690 1-13MM  
216-678 1-10MM

### UNIVERSAL CABINET CROSS WRENCH KEY

- Multifunctional tool - convenient and easy to use on many utility systems
- Unique adapter that converts to an emergency screwdriver
- 8 different key types
- Solid die-cast construction
- Double-ended screwdriver bit with PH1 and 1 x 7mm Slotted ends
- Adaptor attached to create a pocket screwdriver
- 6 and 8mm square, 9mm triangular and 5mm double-pin type keys



**RS PRO**  
841-7005 70MM X 14MM X 70MM

### HYDRAULIC PULLER SET

- High quality, forged steel provides superior reliability and service
- Precise hydraulic control allows fast, efficient and safe pulling
- Comes in a carrying case
- 8-ton hydraulic power unit
- Portable



**RS PRO**  
349-7261 25 PIECE

### VDE ELECTRICIANS TOOL KIT

- Ergonomic multi-component handles
- Optimum balance of torque and control
- High quality and professional tools
- VDE approved for electrical safety
- Made from chrome vanadium steel
- Ideal for a wide range of applications
- Sturdy tool case



**RS PRO**  
734-8885 88PC 1/2IN. SOCKET & VDE TOOL KIT

### TUBE CUTTER

- Easy to handle
- Polyacetal body stainless steel blades
- Precise design
- Ruggedness
- Simple to use



**RS PRO**  
172-8969 3MM - 15MM

### LATCH CLAMP

- Large and quick opening
- Galvanized and passivated
- Rivets made of stainless steel
- Bearings are pre-lubricated
- Ergonomic, oil-resistant handle with large grip surface and soft components
- The design of the clamp enables speed of operation and release, combined with high holding force



**RS PRO**  
254-800 200NM

### SWITCH KEY UNIVERSAL WRENCH

- Multi-purpose enclosure key wrenches designed for use within maintenance & service applications
- The four arms of the tool offer five differing drive possibilities
- Available with either a bright chrome or zinc plated finish



**RS PRO**  
439-3025 ZINC FINISH  
439-3019 CHROME FINISH

### RETRACTABLE AUTOMATIC KNIFE STANDARD BLADE

- Aluminium-bodied safety knife with automatic blade retraction
- When cutting, the blade remains outside the body, but when pressure is relaxed the spring loaded blade retracts into the handle
- Supplied with one blade



**RS PRO**  
615-9164 AUTOMATIC

### AUTOMATIC WIRE STRIPPER STANDARD BLADE

- Precision carbon steel laminated stripping blades
- Compact pistol grip design for increased control and a smooth stripping action
- Adjustable sliding wire stop to preset exact stripping lengths
- Shielded cutter for safety
- Constructed from high grade polymers and Carbon Steel for durability and long tool life



**RS PRO**  
243-257 197 MM 0.2-6SQ.MM



**Do you need any  
product support?**

**CONTACT US TO DISCUSS HOW WE CAN HELP YOU:**



[sales.za@rs-components.com](mailto:sales.za@rs-components.com) | [africa@rs-components.com](mailto:africa@rs-components.com)



**+27 11 691 9300**

**RS**