



DATA CENTER SOLUTIONS



COMPONENTS

| | |
|---------------------------------------|----------|
| CABLES & WIRES | 5 |
| Cable Glands & Fittings | 5 |
| Cable Joints & Cable Sleeving | 5 |
| Cable Management | 6 |
| Cable Ties & Fixings | 6 |
| Cable, Connector & Crimping Tools | 7 |
| Clips & Springs | 8 |
| Electrical Power & Industrial Cables | 8 |
| Labelling | 10 |
| Networking & Coaxial Cables | 11 |
| Pneumatic Connectors, Fittings & Hose | 11 |
| Wire to Board Cables & Ribbon Cable | 12 |
| Single Core Cable | 12 |

CONNECTORS 13

| | |
|--------------------------------------|----|
| AV Connectors | 13 |
| Cable, Connector & Crimping Tools | 13 |
| Circular Connectors | 13 |
| Electrical Power & Industrial Cables | 14 |
| Mains & DC Power Connectors | 14 |
| Network & Telecom Connectors | 15 |
| Networking & Coaxial Cables | 15 |
| Networking & WiFi | 16 |
| PCB Connectors & Wire Housings | 16 |
| Power Connectors | 16 |
| RF Coaxial Connectors & Adapters | 17 |
| Terminal Blocks | 17 |
| USB, D Sub & Computing Connectors | 18 |
| Wire Terminals & Splices | 18 |

POWER SUPPLIES & TRANSFORMERS 19

| | |
|----------------|----|
| Power Supplies | 19 |
|----------------|----|

COMPUTING & PERIPHERALS 26

| | |
|--------------------------------|----|
| Computer Components & Software | 26 |
| Keyboards & Mice | 26 |
| Labelling | 26 |
| Networking & WiFi | 26 |

HVAC, FANS & THERMAL MANAGEMENT 27

| | |
|--|----|
| Air Conditioning & Fans | 27 |
| Air Conditioning & Heating Accessories | 27 |
| Fan Accessories | 27 |

TEST & MEASUREMENT 28

| | |
|--------------------------------|----|
| Engineering Test & Measurement | 28 |
| Lab Equipment | 28 |
| Speed Test & Measurement | 28 |

TOOLS AND ACCESSORIES

ENCLOSURES & SERVER RACKS 29

| | |
|---------------------------------|----|
| 19-Inch Racking | 29 |
| Enclosures | 30 |
| Enclosures & Racking Components | 32 |

ACCESS, STORAGE & MATERIAL HANDLING 35

| | |
|-----------------------------------|----|
| Storage & Shelving | 35 |
| Transit & Equipment Cases | 36 |
| Trucks, Trolleys & Lifting Tables | 36 |

HAND TOOLS 37

| | |
|-------------------------------|----|
| Measuring & Marking | 37 |
| Pliers & Cutters | 37 |
| Sanding, Filing & Polishing | 38 |
| Screwdrivers, Hex & Torx Keys | 38 |
| Spanners, Sockets & Wrenches | 40 |
| Tool Kits & Tool Storage | 40 |

POWER TOOLS, SOLDERING & WELDING 42

| | |
|--------------------|----|
| Drill Bits & Parts | 42 |
| Power Tools | 42 |
| Soldering | 42 |
| Workshop Tools | 42 |

LIGHTING 43

| | |
|----------------------------|----|
| Torches & Inspection Lamps | 43 |
|----------------------------|----|

CONSUMABLES & ACCESSORIES

ADHESIVES, SEALANTS & TAPES 44

| | |
|-------------------|----|
| Adhesives & Glues | 44 |
| Tapes | 44 |

BATTERIES & CHARGERS 46

| | |
|----------------------------|----|
| Non-Rechargeable Batteries | 46 |
| Rechargeable Batteries | 46 |

ESD CONTROL 47

| | |
|--------------------------|----|
| ESD Control & Clean Room | 47 |
|--------------------------|----|

FACILITIES CLEANING & MAINTENANCE 48

| | |
|-------------------------------|----|
| Floor Cleaning | 48 |
| Washroom Equipment & Supplies | 48 |
| Wipes & Cloths | 48 |

OFFICE SUPPLIES 49

| | |
|----------------------------|----|
| Office Equipment | 49 |
| Writing & Drawing Supplies | 49 |

SECURITY & IRONMONGERY 50

| | |
|---------------|----|
| Locks & Bolts | 50 |
|---------------|----|

SITE SAFETY 51

| | |
|-----------------|----|
| Fire Safety | 51 |
| Lockout Tagout | 51 |
| Safety Flooring | 51 |
| Safety Signs | 51 |

LAPP SKINTOP SERIES METALLIC NICKEL PLATED BRASS CABLE GLAND

- Crafted from nickel-plated brass for enhanced corrosion resistance
- Designed for quick contact with screened cables for improved performance
- Special elastomer seals withstand extreme temperatures
- Lightweight kit includes cable gland suitable for various



136-8522 M40 Thread, 19mm min., 28mm max., IP68

LAPP SKINTOP SERIES METALLIC STAINLESS STEEL CABLE GLAND

- Wide operating temperature range of -40°C to +100°C for use in demanding conditions
- Offers strain relief to prevent wear and tear on cable ends and connectors



796-0044 M20 Thread, 7mm min., 13mm max., IP69K

LAPP SKINTOP SERIES METALLIC STAINLESS STEEL CABLE GLAND

- Silicone O-ring ensures a tight seal that won't loosen over time, minimising the need for maintenance
- IP68 (ingress protection) rating indicates total protection for your wiring against dust and water submersion
- Wide clamping range handles cable diameters between 6 and 10mm to simplify installation



796-0053 M20 Thread, 6mm min., 10mm max., IP69K

TE CONNECTIVITY HEAT SHRINK TUBING

- SCL tubing is a semi-rigid heat shrinkable tubing with a meltable inner wall, designed to provide one-step moisture proof encapsulation of a wide variety of electrical parts including wire splices, breakouts, and electronic components. Manufactured from radiation cross linked polyolefins, the outer wall shrinks when heated to above 135°C, while the inner wall (which melts at 100°C) flows into the crevices and interstices by the shrinking action of the outer tubing. When cooled the entire mass becomes a rigid, tough, homogenous covering with a controlled wall thickness. SCL® shrinks to between 17% and 40% of its supplied diameter according to size, and therefore few sizes are required to cover a range of irregular shapes with widely varying dimensions. Unaffected by most solvents and chemicals and non-corrosive in contact with electrical joints, SCL also has high dielectric strength (240-410 kV/cm dependent on wall thickness). Colour: Black., Sizes quoted are as supplied.



397-815 Black 4.8mm Sleeve Dia. x 300mm Length 3:1 Ratio, SCL Series
397-843 Black 12.7mm Sleeve Dia. x 300mm Length 3:1 Ratio, SCL Series

RS PRO ADHESIVE LINED HEAT SHRINK TUBING

- This range of high-quality RS PRO heat shrinks are flexible and versatile for a range of general-purpose heat shrink applications and offer have a high shrinkage ratio, shrinking to 3 or 4 times its original diameter, making them ideal for larger, irregular shapes
- Thanks to the Polyolefin material, they are flame-retardant and offer excellent electrical insulation with waterproof and chemically resistant properties, suitable for harsh environments
- It's a cost-effective and all in one solution for technicians who require access to different types of heat shrinks
- Operating temperature range of -45 to +110°C
- Low heat shrink temperature of 80°C (minimum)
- Available in a selection of different sizes to work with a wide range of applications



234-5895 Black 8mm Sleeve Dia. x 1.22m Length 4:1 Ratio

TE CONNECTIVITY HEAT SHRINK TUBING

- Approximately 40 percent thinner walls than most general purpose tube
- Highly flame retardant
- Modified fluoropolymer
- Protects electronic components while permitting their identification and inspection
- Recommended maximum temperature for use as a primary insulator is 135°C
- Shrink ratio is 2:1
- Shrunk diameter is 12.7mm
- Sleeve diameter is 25.4mm
- Temperature ranging between -55°C to 150°C



288-5263 Clear 25.4mm Sleeve Dia. x 1.2m Length 2:1 Ratio, RT-375 Series

TE CONNECTIVITY HEAT SHRINK TUBING

- Excellent all round performance
- Shrink ratio 2:1
- Available in a wide range of sizes and colours
- Flame retardant
- Flexible



396-4654 Black 19mm Sleeve Dia. x 60m Length 2:1 Ratio, RNF-100 Series

DYMO HEAT SHRINK TUBING

- Heat shrink ratio of 3:1 meaning when heated the tubing shrinks to one third of its original diameter
- Polyolefin material - commonly used insulating material, flexible and durable
- Print does not fade or smudge
- Print remains legible even after exposure to abrasion, cleaning solvents or industrial fluids
- Flame retardant
- Supplied in lengths of 1.5m



515-6805 Yellow 9mm Sleeve Dia. x 1.5m Length 3:1 Ratio, DYMO Series
515-6827 Yellow 12mm Sleeve Dia. x 1.5m Length 3:1 Ratio, DYMO Series

RS PRO 1000MM BLACK/YELLOW CABLE COVER IN RUBBER

- Weather and skid proof
- Made of rubber and polypropylene (PP)
- Black base and yellow cover provide good visibility
- Rigid straight element
- High-strength cable grooves can withstand up to 1 tonne per axle
- Parts fit into one another for a strong connection
- Fixed to the ground via fixing holes, Ø 6 mm
- Suitable for use with heavy road crossing traffic
- RoHS compliant



136-5423 Thermoplastic, 38 x 35mm Inside dia.

THOMAS & BETTS CABLE TIES

- Remains flexible in cold & dry environments
- Ideal for use outside
- Halogen free
- Flammability rating UL94V-2



622-098 335.28mm x 6.86 mm, Black Nylon, Pk-100

HELLERMANN TYTON CABLE TIE

- Self-extinguishing, only burning for a maximum of 60 seconds in the event of a fire
- High yield strength to withstand forces up to 225N
- Suitable for challenging environments with an operating temperature range between -40°C and +85°C



170-3902 200mm x 4.6 mm, Black Polyamide 6.6 (PA66), Pk-100

HELLERMANN TYTON CABLE TIE

- The HellermannTyton metal content cable tie have been specifically developed to be used in the food and beverage as well as in the pharmaceutical industry. Ideally suited for electrical cabling both on plant and within areas adjacent to manufacturing proc
- Total metal dispersion throughout the tie
- Can support quality assurance in the production of food stuffs
- Blue color for easy visual detection
- Greatly reduces risk of contamination
- Magnetic detectable
- MCTS ties have very good corrosion resistance



251-1920 202mm x 4.7 mm, Blue Metal Detectable, Pk-100

HELLERMANN TYTON SPIRAL WRAP

- Flexible spiral cable wrap made from PA 6 material
- Self-extinguishing properties for enhanced safety
- Cable diameter range of 4 to 5 mm for versatile application
- High temperature resistance up to +120°C
- Black colour for a sleek finish
- Effective cable protection and management solution



519-624 I.D 4mm, 20mm PA 6 nylon SBPAV0 Series

HELLERMANN TYTON NATURAL NYLON CABLE CLIP

- Self-adhesive design for easy installation
- Holds wires, cables, or hoses without the need for cable ties
- Available in different sizes to accommodate various bundle diameters
- Made from high-quality Nylon 66 for durability and reliability
- Natural colour for discreet mounting



170-5330 5mm Max. Bundle

HELLERMANN TYTON CABLE TIE

- High tensile strength of 225N to handle heavy bundles
- Halogen-free, so doesn't give off toxic fumes when heated
- Nylon construction resists wear and abrasion for compatibility with harsh settings



396-2175 390mm x 4.6 mm, Blue Polyamide 6.6 (PA66), Pk-100

THOMAS & BETTS CABLE TIES

- Made from flame-retardant material to improve fire safety
- Manufactured to military specifications for use in defence applications
- Non-releasable style fastening to prevent loosening in permanent and long-lasting cable routing



484-9354 Stainless Steel Barb Locking, 92mm x 2.3 mm, Natural Nylon, Pk-1000

THOMAS & BETTS CABLE TIES

- Tensile strength of 133.4N for securing suspended cables
- Low-profile head and rounded edges to minimise snags and damage to cables
- Angled, non-slip tail for easy handling during installation
- Flame-retardant material to improve fire safety in workplace and domestic installations



484-9433 Weather Resistant, 281.94mm x 3.56 mm, Black Nylon, Pk-1000

HELLERMANN TYTON BLACK CABLE TIE MOUNT 10.3 MM X 25M

- Protective Channel for Stainless Steel Ties 10.3mm wide black



364-6542 10.3mm Max. Cable Tie Width

HELLERMANN TYTON CABLE TIE

- Non-releasable design ensures permanent fastening
- High tensile strength of 225N accommodates heavy loads
- UL 94V2 rating indicates improved fire protection
- Maximum bundle diameter of 50mm enables versatility in usage



418-616 200mm x 4.6 mm, Green Polyamide 6.6 (PA66), Pk-100

HELLERMANN TYTON CABLE TIE

- Made from Polyamide 6.6 for strength and durability
- Inside serrated design for secure fastening
- T18RSF series for high performance
- UV resistant for outdoor use
- 100mm length for versatility



613-410 Inside Serrated, 100mm x 2.5 mm, Natural Polyamide 6.6 (PA66), Pk-25

RS PRO CABLE TIE


- Excellent UV resistance
- Flame retardant: UL 94V-2 Flammability Standard
- Suitable for a multitude of uses
- Easy to thread and install
- Ideal for use outdoors



811-1527 750mm x 7.5 mm, Black Nylon, Pk-100

RS PRO CABLE TIE

- Heat resistant - for use in continuous or extended exposure to high temperatures (105°C)
- Easy to use and fast to install
- UL 94V-2 Flammability rating
- Available in black and natural colours
- Suitable for a multitude of uses

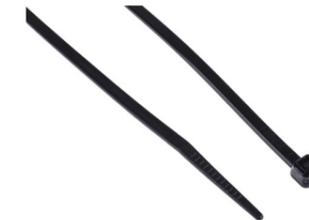

811-1599 Heat Stabilised, 292mm x 3.6 mm, Black Nylon, Pk-100

THOMAS & BETTS CABLE TIE GUN

- Anti-recoil mechanism to stop cable ties from forcefully rebounding for improved operator safety
- Cuts a cable tie flush to its head to help prevent snagging
- Made from a high polymer plastic material that's durable, resistant to chemicals and suitable for use in harsh conditions
- Adjustable handle span for customisation according to your grip size



384-327 2.4 → 4.8mm Capacity

HELLERMANNTYTON MK9SST CABLE TIE GUN

- Fast and easy cable tie installation
- Durable metal construction ensures long-lasting performance
- Suitable for use with cable ties up to 16 mm
- Provides a secure fastening for cables
- Ergonomic design for comfortable use



255-2711 4.5mm Capacity

HELLERMANNTYTON EVO9IHT CABLE TIE GUN

- Heavy-duty construction provides long-lasting reliability for demanding tasks
- Adjustable settings accommodate diverse cable tie sizes for versatility
- Lightweight design simplifies handling without compromising strength
- Effective cable tie installation enhances efficiency in workflows
- Professional-grade tool suitable for industrial requirements



288-0456 4.6 → 13.5mm Capacity

HELLERMANNTYTON EVO7I CABLE TIE GUN

- Oneway installation allows for quick on-site replacement
- Permits easy tie insertion to finish projects faster
- Easily tension and cut cable ties in cramped spaces
- Contoured design for small and standard hand sizes, with reduced slippage
- Durable housing for harsh environments, upgraded components for reliability



789-8071 4.8mm Capacity

LAPP ÖLFLEX CLASSIC 110 CONTROL CABLE

- Non-wicking filler material to prevent water getting inside
- 300V/500V nominal voltage rating to support high-power connections



812-4533 2 Cores, 1 mm², YY, Unscreened, 50m, Grey PVC Sheath, 17 AWG

RS PRO CONTROL CABLE

- Unscreened design facilitates straightforward installations
- Flame retardant properties enhance safety in installations
- Good oil resistance increases durability over time
- Flexible construction allows for manoeuvrability in tight spaces



827-4243 2 Cores, 0.75 mm², YY, Unscreened, 50m, Grey PVC Sheath, 18 AWG

RS PRO CONTROL CABLE

- Flexible design allows for easy installation in tight spaces
- Unscreened construction avoids unwanted interference
- Flame retardant properties enhance safety in critical areas
- Bare copper conductors ensure efficient electrical conductivity
- Minimum operating temperature of -40°C facilitates usability in extreme environments



827-4313 25 Cores, 0.75 mm², YY, Unscreened, 50m, Grey PVC Sheath, 18 AWG

HELLERMANNTYTON 9.5MM BLACK

- 9.5 mm closed inside diameter for secure cable management
- High-strength polyamide material ensures long-lasting performance
- Black colour for a sleek and professional look
- 10mm width provides ample space for wire organisation
- Fixing hole diameter of 4.2mm for easy installation



474-543 Polyamide P Clip

ALPHA WIRE ALPHA ESSENTIALS COMMUNICATION & CONTROL CONTROL CABLE

- The Alpha Wire Communication and Control Cable can help you get control of your communication and control applications by offering you a comprehensive collection of insulation or jacketing materials, shielding options, and conductor counts. It provide precise signal transmission in computers and control applications.
- Satisfy rigorous requirements of EMI performance
- Satisfy rigorous requirements of transmission distances
- Flexibility
- Satisfy rigorous requirements of temperature extremes



277-4384 15 Cores, 0.34 mm², Screened, 1000ft, Grey PVC

LAPP UNITRONIC BUS LD DATA CABLE

- Wide operating temperature range between -30°C and +70°C for safe use in harsh environments
- Oil-resistant for added durability
- Bare copper conductor has high electrical conductivity
- Bright purple colour for easy colour-coding in crowded setups



444-0070 0.22 mm², Screened, 100m, Purple PUR Sheath, 24 AWG

RS PRO CONTROL CABLE

- Grey PVC outer sheath provides excellent environmental protection
- Rated for 300/500 V operation to accommodate various usage
- Bare copper conductor offers superior conductivity and lower resistance
- Good chemical resistance ensures durability in harsh conditions



827-4322 25 Cores, 1 mm², YY, Unscreened, 50m, Grey PVC Sheath, 17 AWG

RS PRO 15M 4 SOCKET TYPE G - BRITISH CABLE REEL OPEN REEL

- 4x 13A UK shutter sockets with UK plug
- 240 V
- Power on/off switch
- Power LED indicator
- Safety Thermal Cutoff
- 15m extension lead
- Easy wind handle
- Standards: BS EN 61242, ASTA Approved
- Maximum Load: 720W/240V - Fully Wound 3120W/240V - Fully Unwound



889-2488 240 V

RS PRO 25M 4 SOCKET TYPE G - BRITISH CABLE REEL OPEN REEL

- Robust open cable extension reel with 4 British Standard UK sockets
- Space saving style
- Thermal cut-out protection
- High visibility cable
- Power on/off switch
- Power LED indicator



889-2490 240 V

LAPP ÖLFLEX CLASSIC 100 CONTROL CABLE

- Wide operating temperature range between -40°C and +80°C for use in harsh conditions
- Maximum voltage rating of 500V for use in high-power applications
- Compact outer diameter of 6.7mm to fit into complex setups



727-1423 3 Cores, 1.5 mm², YY, Unscreened, 50m, Grey PVC Sheath, 16 AWG

LAPP ÖLFLEX SERVO FD CONTROL CABLE

- 50m length means it suitable for large-scale applications
- 7.6mm outer diameter makes it a compact solution that's easy to handle and won't add bulk to your cabling



807-9127 8 Cores, 0.25 mm², CY, Screened, 50m, Green PUR Sheath, 24 AWG

LAPP ÖLFLEX CONTROL TM CONTROL CABLE

- Bare copper conductors enhance conductivity and flexibility
- Thermoplastic polymer sheath provides excellent protection
- Unscreened design suitable for diverse installation environments
- Oil-resistant for reliability in harsh conditions
- Low minimum bending radius allows for easy routing



807-9600 5 Cores, 10 mm², YY, Unscreened, 50m, Grey Thermoplastic Polymer Sheath, 7 AWG

RS PRO 50M 4 SOCKET TYPE G - BRITISH CABLE REEL OPEN REEL

- Robust case reel with 4 shuttered BS sockets
- Safety thermal cut-out
- Power on/off switch
- Power LED indicator



889-2504 240 V

RS PRO 10 MM² 3 CORE POWER CABLE PVC

- Galvanised steel wire armour for optimum protection against damage and impact
- Thermosetting XLPE insulation offering excellent dielectric strength and corrosion resistance at high temperatures
- PVC bedding and sheathing to protect the cable in a wide range of environments
- Wide operating temperature range providing flexibility
- Available in a wide range of sizes and cores
- Suitable for use in underground heavy duty applications both indoors and outdoors



185-3999 3 Core Steel Wire Armoured Cable, XLPE Insulated, PVC Sheathed

LAPP ÖLFLEX COILED 1.5 MM² 3 CORE POWER CABLE

- Slim cable diameter of 6.7mm for flexibility
- Polyurethane outer sheath for resistance to impact and abrasion
- Copper conductors are highly conductive to ensure a reliable connection
- Extended length of 1.5m for easy movement of connected equipment



451-6767 Grey Polyurethane PUR, 0.5m

LAPP ÖLFLEX POWER 1.5 MM² 4 CORE POWER CABLE

- Flame retardant and halogen-free for safety and minimal smoke density in the event of a fire
- Minimum bend radius of 4 times its 8.8mm diameter for flexibility
- Brown sheath for easy identification in busy setups



714-2319 Brown/Red Silicone, 50m

RS PRO 1.5 MM² 3 CORE POWER CABLE

- Meets Eca copper network Cable regulations, which is essential for any construction sites
- The core of 3 comes with EPR insulation parameters (high dielectric strength, excellent ozone and weathering resistance)
- The CPE sheath material is giving protection against heat or oil
- Copper provides flexibility and straight-forward installation process thanks to the natural ability to bend and twist and does not require any special tools during installation
- The Mains Power Cable minimum operating temperature oscillates around -25°C whereas the maximum operating temperature is up to +60°C



773-9045 H07RN-F, Black CPE, 100m

RS PRO 4 MM² 3 CORE POWER CABLE

- This flexible mains cable is made from materials with unique qualities that make it suitable for use in demanding environments.
- The cable jacket has the following benefits
- Durable and long lasting
- High resistance to abrasion
- Good weathering stability
- Good tensile strength
- Flame resistant and and self extinguishing
- Resistance to oils and other chemicals



773-9051 H07RN-F, Black CPE, 100m

TE CONNECTIVITY T2212-PRINTER LABEL PRINTER

- The TE Connectivity T2212-Printer is designed to print on a wide range of TE Connectivity identification marker sleeves, cable markers, and labels. This light weight, low cost printer supersedes the T200-IDENT-printer. The T2212-printer is now also available bundled, with the latest version of TE Connectivity printing software, win total.
- High accuracy printing
- Easy to use
- Light weight
- Small footprint



265-7048 105.7mm Max Label Width

BELDEN TINNED COPPER COAXIAL CABLE, 2.8MM OD - MRG1740 SERIES

- Wide operating temperature of -40°C to +70°C for use in harsh environments
- Flexible black PVC sheath ensures easy cable identification
- Unterminated ends for quick and simple installation



521-8206 50m, RG174/U Coaxial, Unterminated50 Ω

BELDEN TINNED COPPER COAXIAL CABLE, 2.8MM OD - MRG1740 SERIES


- Wide operating temperature range of -40°C to +70°C for use in harsh environments
- Low attenuation of 11dB (decibels) to ensure a strong signal
- Capacitance of 101pF/m (picofarads per metre) allows a high level of stored electrical charge
- Compact outer diameter of 2.8mm makes it suitable for installation in tight circuits



521-8341 500m, RG174/U Coaxial, Unterminated50 Ω

RS PRO 6 MM² 5 CORE POWER CABLE

- This flexible mains cable is made from materials with unique qualities that make it suitable for use in demanding environments.
- The cable jacket has the following benefits
- Durable and long lasting
- High resistance to abrasion
- Good weathering stability
- Good tensile strength
- Flame resistant and and self extinguishing
- Resistance to oils and other chemicals



773-9092 H07RN-F, Black CPE, 100m

LAPP 2.5 MM² 3 CORE POWER CABLE

- Withstands voltages of up to 1,000V when used in fixed and protected installation, providing reliable power even at the top end of light industrial demands
- Comes on a 100m reel, so you can cut the exact cable length needed for each job
- Robust rubber sheath resists moisture, making the cable suitable for damp and outdoor conditions



817-9000 H07RN-F, Black Rubber, 100m

LAPP TWISTED PAIR CABLE

- Screened design provides effective protection against electromagnetic interference
- Twisted pairs ensure minimal crosstalk between conductor circuits
- Operates across a wide temperature range from -40°C to +80°C
- Outer sheath of PVC ensures durability and flexibility in use
- High voltage rating of 1.5kV makes it suitable for demanding usage



280-5086 4 Pairs, 8 Cores, 1 mm², Screened, 17 AWG, 50m, LiVCY Cable

CAEMMC, 305M CAT6A, BLACK, S/FTP SHIELDED, UNTERMINATED PVC SHEATH

- Excellent signal transmission
- Double shielding
- Used for the transmission of digital and analogue voice, data and video signals



136-7982 305m Cat6a, Black, S/FTP Shielded, Unterminated PVC Sheath

HELLERMANNTYTON CONNECTIVITY ETHERNET CABLE

- Support for PoE applications enhances versatility
- Straight male RJ45 connectors provide easy connectivity
- Durable LSZH outer sheath ensures safety in various environments
- Designed for reliable gigabit speeds, ensuring fast data transfer
- Ideal for high-speed LAN setups and streaming needs



269-5113 10m Cat6a, Grey RJ45 to Male RJ45 Male, Shielded Shielded, Unterminated LSZH Sheath

RS PRO, 5M CAT5E, GREY RJ45 TO MALE RJ45 MALE, U/FTP SHIELDED, TERMINATED PVC SHEATH

- Booted strain relief gives cable support and latch protections



400-9663 5m Cat5e, Grey RJ45 to Male RJ45 Male, U/FTP Shielded, Terminated PVC Sheath

LAPP UNITRONIC LIYY SERIES DATA CABLE

- Space-saving installation
- DIN colour code
- Transparent outer sheath made from special PVC-based mixture
- Flame-retardant in accordance with VDE 0472, part 804, test type B (IEC 332.1)
- Operating temperature with occasional flexing: -5°C to +70°C
- Operating temperature in fixed installation: -40°C to +80°C



491-8999 3 Cores, 0.5 mm², Unscreened, 20 AWG, 100m, LiYY Cable

LAPP UNITRONIC SERIES DATA CABLE

- Flame-retardant material limits the spread of fire
- Tinned copper braided screen stops EMI from disrupting performance
- Durable PVC sheath resists abrasion and corrosion for a long service life
- Supplied in reels of 50m so you have plenty of stock



807-9060 10 Pairs, 20 Cores, 0.5 mm², Screened, 20 AWG, 50m, Screened Shield, Li2YCY Cable

TE CONNECTIVITY RPS ON WHITE HEATSHRINK LABELS

- Ready print markers are designed to meet the wire identification needs of commercial and industrial manufacturers.
- 3:1 shrink ratio
- Flame-retardant
- Resistance against abrasion, aggressive cleaning solvents and industrial fluids



382-223 22.86 mm Width, 50.8mm Label Length, 90.18mm Label Width
382-239 38.1 mm Width, 50.8mm Label Length, 90.18mm Label Width

RS PRO, 2M CAT5E, BLACK RJ45 TO MALE RJ45 MALE UNSHIELDED, TERMINATED PVC SHEATH

- IP67/68 rated
- Fully shielded
- No specialist tooling required
- Easy screw connection, saves time
- Suitable for outdoors



111-6737 2m Cat5e, Black RJ45 to Male RJ45 Male Unshielded, Terminated PVC Sheath

RS PRO, 5M CAT6, BLUE RJ45 TO MALE RJ45 MALE, S/FTP SHIELDED, TERMINATED PVC SHEATH

- These Category 6 cable is a double twisted pair cable shielded with aluminium laminated foil. These cables are ready made with RJ-45 plug and a click lock. RS Pro supply these Cat 6 cables in a varied of lengths and colours, they also feature a moulded kink to encourage durability and protection. The plugs have gold plated contacts and are ready to use.



411-172 5m Cat6, Blue RJ45 to Male RJ45 Male, S/FTP Shielded, Terminated PVC Sheath

HELLERMANNTYTON TUBE CLIP

- Designed to hold wires, cables or hoses without a cable tie
- Quick and easy installation
- Self-adhesive affixing method



190-3405 Nylon (PA66), 9 mm Bundle Diameter, 19x12.5x19 mm

RS PRO BRAIDED WIRE

- High flexibility braid for high vibration areas
- The Wire supplies with metric terminals at each end
- Fully annealed tinned copper wire
- For use in normal ambient conditions
- Meets BS 4109, British specification for copper for electrical purposes
- Reel of 25 m long practically always in stock
- 63A version - nom. size 10 x 2 mm. Basic construction 24'10/0.2 mm (approx. 7 mm²)



365-543 10 x 2 mm, 25m, 63 A, BS4109

TE CONNECTIVITY FLEXLITE SERIES WHITE 1 MM² EQUIPMENT WIRE

- Flexible with non-melting insulation
- Enables bundles to be routed through areas where conventional wires cannot be used
- UL style 1385
- CSA Class 5851
- Dual wall insulation (Class 2 equipment)
- Meets requirements of VW-1 Flammability
- Excellent fluid and chemical resistance
- 150°C spec WCD645
- 600 V rated
- Lightweight and small size



208-5766 17 AWG, 19/0.25 mm, 100m, Polyolefin Insulation,

NEUTRIK CABLE MOUNT XLR CONNECTOR

- Additional ground spring contacts for better shell ground continuity
- Boot with polyurethane gland gives high protection to cable bending stress
- Branded with unique hologram guarantees genuine and authentic Neutrik product
- Coloured rings and boots available for coding or identification
- Female connector with improved solid metal latch which is larger and easier to handle
- Female contact incorporates a solder barrier to prevent the solder running into contact mating area



166-254 Female, 50 V, 3 Way, Silver Plating

166-260 Male, 50 V, 3 Way, Silver Plating

JAE HAND CRIMP TOOL

- Lightweight
- Wire size: 12-26 AWG
- 8-step selector knob for crimp depth selection
- Ratchet mechanism
- Interchangeable positioner compatible



372-2135 Wire size: 12-26 AWG

AMPHENOL COMMUNICATIONS SOLUTIONS HAND RATCHETING CRIMP TOOL FOR D-SUB CONTACTS

- This Crimp Tool is for crimping Series 8656 D-Sub contacts. This FCI crimper covers 20-28 awg crimp contacts see stock numbers: 673-4954 , 673-4958 , 237-211 and 237-227.



727-5901 20-28 AWG

RS PRO RED 1.5MM² HOOK UP WIRE


- 100m in length
- Flexible Plain Annealed Copper Class 5
- Low Carbon Copper (1.7kg CO2/kg)
- Heat Resisting PVC
- Tri-rated
- Operating temperature of -20 to 105°C
- Minimum bending radius 6 x diameter



256-7031 16 AWG, 27/0.25 mm, 100m, PVC Insulation

RS PRO BLACK 4MM² HOOK UP WIRE

- This Tri Rated cable with its triple rating of BS6231, UL and CSA means it has the following features
- A plain copper conductor
- Can operate in temperatures up to 90°C for continuous use or 105°C for a limited period of time
- A voltage rating of 600 / 1000 V
- Class 5 flexibility
- A HR PVC (Heat Resistant PVC) insulation enabling the cable to be used in high temperature applications

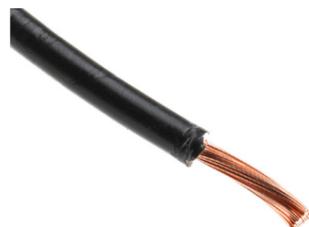

811-1442 12 AWG, 52/0.3 mm, 100m, PVC Insulation

TE CONNECTIVITY

- Affixing method is screw
- Shell size is 23
- Lightweight
- Polarized for proper mating of connector halves
- Removable contacts and replaceable coupling ring make field repair easy



709-9723 CPC Cable Clamp

TE CONNECTIVITY CPC DUST CAP

- Sealing caps for Series 1, 2, 3 and 4 CPC connectors made from black 94V-1 rated thermoplastic with neoprene sealing gaskets fitted with plastic straps or a metal bead chain. These sealing caps are for use with CPC receptacle connectors with the exception of stock number 745-5750 which is for use on a socket connector.
- TE Connectivity CPC Plastic Series 1, 2 and 3



718-2792 Shell Size 11, Thermoplastic

AMPHENOL INDUSTRIAL CIRCULAR CONNECTOR


- Circular connectors with 3+PE and 6+PE contacts
- Panel plugs mate with cable receptacles
- Quick and easy to assemble
- IP67 when mated
- Pre-loaded ground contact
- Ergonomic design for easy handling
- A rapid threaded coupling system
- Wide temperature range - 40 to + 125°
- UV Resistant
- Corrosion resistant



540-1818 6 + PE Contacts, Panel Mount, Plug, Male, IP67, Ecomate M Series

RS PRO LIGHT BLUE 6MM² HOOK UP WIRE

- Maximum operating temperature of 105°C
- A voltage rating of 600 / 1000 V
- 100m length
- Single-core cable design
- Meets CSA C22.2 Type TEW, UK BS6231 and UL 1015 standards
- Flame retardant

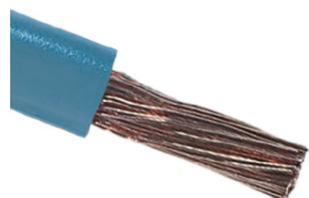

815-8621 10 AWG, 84/0.3 mm, 100m, PVC Insulation

3M 3759 SERIES ROUND RIBBON CABLE

- Round design simplifies routing and installation
- 28 AWG wire optimised for mass termination
- Continuous bonded wire enhances ease of fabrication
- Unscreened type ensures easy integration in uncomplicated settings
- Capable of operating between -20 °C to +80 °C for versatile applications
- Compliant with UK regulations for electrical safety



192-4991 25-Way, 1.27mm Pitch, 30m Length, IDC to IDC

AMPHENOL INDUSTRIAL CIRCULAR CONNECTOR

- Quick and easy assembly
- Keyed orientation
- Robust and ergonomic design
- Internal strain relief connector
- Screwed cable gland with a clamping ring
- Straight body orientation
- Pre-loaded ground contact
- Operating temperature ranges between -40°C and 100°C
- Waterproof when submerged in 15cm to 1m of water for 30 minutes
- Dustproof



540-1903 3 + PE Contacts, Cable Mount, Socket, Female, IP67, Ecomate M Series

AMPHENOL INDUSTRIAL CIRCULAR CONNECTOR

- Screw lock connection
- Quick and Easy Assembly
- Keyed Orientation
- Robust, ergonomic design
- Pre-loaded ground contact
- IP 65/67 rated



696-1591 6 + PE Contacts, Cable Mount, Socket, Female, IP67, Ecomate M Series

696-1623 6 + PE Contacts, Cable Mount, Socket, Female, IP67, Ecomate M Series

BINDER CIRCULAR CONNECTOR

- Plugs and Sockets M8 x 1, 768 Series
- Compatible with 718 Series



807-2851 3 Contacts, Cable Mount, M8 Connector, Plug, Male, IP67, 768 Series

PHOENIX CONTACT CIRCULAR CONNECTOR

- A high degree of protection, rated at IP 65 & IP 67. Operates at an ambient temperature between -5°C to +50 °C, ideal for industrial environments.
- Dependable signal transmission, featuring 360° halogen-free shielding, protecting the signal against electromagnetic interference.
- Straight & angled orientations can be adjusted, ensuring your application is covered.
- Cat6a 10Gb/s data transfer.
- Swift installation thanks to the SPEEDCON fast locking system.
- An innovative, time-saving assembly insulation displacement connection means you can assemble without having to stripe the wire.
- Overvoltage category 2 degree of protection
- IEC 61076-2-109 & EN 50155:2001 standard designations



893-7749 8 Contacts, Cable Mount, M12 Connector, Plug, Male, IP65, IP67, SACC Series

PHOENIX CONTACT RIGHT ANGLE MALE 5 WAY M12 TO SENSOR ACTUATOR CABLE

- Wide operating temperature range of -25°C to +90°C for use in demanding environments
- IP68 (ingress protection) rating means it can withstand dust and immersion in up to 1.5m of water for 30 minutes
- Green connector colour makes it easy to identify
- M12 Plug with free conductor end



721-1143 3m

MENNEKES IP67 RED, WHITE WALL MOUNT

- X-CONTACT
- Due to a completely new manufacturing process, the X-CONTACT® sleeve obtains resilient properties based solely on its material characteristics, without the need to use any additional spring elements. Thanks to the shape of the X-CONTACT® sleeve, a particularly safe contact closure can be achieved.
- The special design of the X-CONTACT® reduces the effort of insertion and withdrawal by up to 50%. An advantage that simplifies work processes and improves safety especially with high electrical currents. With X-CONTACT®, MENNEKES creates a safe contact closure and easy handling at a new, equally high level.
- But how does X-CONTACT® achieve these benefits even with currents of 63 A or 125 A? A glance into the opening of an X-CONTACT® sleeve reveals the intelligent functional principle: the X-shaped slot and groove in the inner wall provides four advantages of the new design: innovative, simple, durable and safe. We call it the X principle
- Wall Mounted Receptacles



111-5517 White Wall Mount, Rated At 63A, 400 V

HIRSCHMANN, ST IP54 GREY CABLE MOUNT

- 16A power plug for efficient high-current transfer
- Cable mount power socket ensures secure installations
- IP54 rated connector protects against dust and moisture
- Designed for high-temperature operation from -30°C to +90°C
- Screw termination connector allows for easy assembly
- Unshielded design supports straightforward connections



190-2371 2P + E Heavy Duty Power Connector Plug, Rated At 16A, 250 V

ANDERSON POWER PRODUCTS

- Mechanical keyed housings – prevents accidental mating of components operating at different voltages
- Flat wiping contacts – this system allows for minimal contact resistance at high current, the wiping action cleans contact surface during disconnection, insures better conductivity and longer life
- Rugged material
- Assembly fast and easy
- Available in 50A, 120A, 175A and 350A
- Operating temperature range -20°C to +105°C
- Flammability rating UL94 V-0



612-0071 SB Series 2 Way Battery Connector, 120A, 600 V

612-0093 SB175 Series 2 Way Battery Connector, Feed Through, 175A, 600 V

RS PRO C19 CABLE MOUNT IEC CONNECTOR SOCKET

- 16 Amp rated
- Constructed from polyamide 6
- ENEC and VDE approved
- CE and UKCA compliant
- Manufactured in Germany



282-5492 16A, 250 V

APC IEC C13

- The APC NetShelter Metered Rack PDU provides active metering for energy optimization and circuit protection. With user-defined alarm thresholds and real-time alerts, it helps mitigate risks associated with potential circuit overloads. The Metered Rack PDU offers power utilization data to allow Data Centre Managers to make informed decisions to lower total cost of ownership.
- Real-time monitoring and alerts for circuit protection
- Power utilization data for informed decision-making
- Temperature/humidity sensor port for monitoring environmental conditions
- Locking IEC receptacles for secure connections
- Compact design with ultra low profile circuit breakers



287-7187 IEC C19 20 Gang Power Distribution Unit, 16A, 230 V

MOLEX PREMISE NETWORKS MALE ETHERNET CONNECTOR

- Supports 10GB networks and accommodates conductors from 22 to 26 AWG
- Ideal for high-bandwidth wireless access points and IP-enabled devices
- Easy termination using parallel jaw pliers for quick and reliable terminations
- Tool-free installation with no punch down tool required



261-3322 Snap-In, Cat6a 1 Port 1 -Way

MENNEKES RIGHT ANGLE SWITCHABLE IP67 INDUSTRIAL INTERLOCK SOCKET 3PN+E

- 16A surface mounting switched socket outlets.
- Two M25mm conduit entries on top (one closed) and two at the bottom (closed)
- IP44 or IP67 options available



679-7038 Earthing Position 6h, 32A, 400 V

SCAME, ADVANCE 2 IP67 RED WALL MOUNT

- Interlocked and RCD (Residual-current device) protected
- IP67 Rated
- Manufactured from self-extinguishing & shock resistant thermoplastic
- Wall mountable
- Red and blue colours offered in this range of power connectors
- Voltage ratings of 415V and 230v offered in this range
- Angled socket, allowing a more convenient connection
- All models offered in the range are highly reliable and excellent quality



410-028 3P + N + E RCD Industrial Power Connector Socket, Rated At 63A, 415 V

TELEGARTNER MALE N TYPE TO MALE N TYPE

- A series of 50 Ω straight N plug to N plug coaxial cable assemblies. The coaxial cable assemblies utilise black RG213 and RG214 cable. The cables also feature shrink sleeve protection at each end.
- Stock number 914-0374 RG213 2.0m
- Stock number 914-0378 RG213 5.0m
- Stock number 914-0393 RG214 0.5m
- Stock number 914-0387 RG214 1.0m
- Stock number 914-0380 RG214 2.0m
- Stock number 914-0396 RG214 2.5m
- Stock number 914-0384 RG214 3.0m



914-0374 2m, RG213 Coaxial, Terminated50 Ω

HUBER+SUHNER LC TO LC DUPLEX MULTI MODE OM4 FIBRE OPTIC CABLE

- Excellent grip for mating and unmating
- Convenient identification tab
- Push-pull mechanism
- Single piece design
- LSZH jacket
- Polarity flipping without tool
- Compatible to standard (6.25 mm) and mini LC (5.25 mm) adapters and transceivers
- -25°C to + 70°C operating temperature range
- Licensed LC connector



144-2437 2.1mm, Violet, 1m

PHOENIX CONTACT FIBRE OPTIC PATCH PANEL FOR ALL COMMON CABLE TYPES

- Flexible DIN rail mounting options, thanks to its three positioning directions
- IP20-rated enclosure is protected against touch and objects larger than 12mm
- Robust sheet-steel housing withstands the demands of harsh industrial environments
- Resists flames, so there's minimal risk of it contributing to a fire



175-1798 6 Port LC Single Mode Duplex Fibre Optic Patch Panel With 2 Ports Populated

RJ PATCH PANEL MODULES

- 360° shielding for EMI protection
- Easy and fast termination process
- Ability to attach the cable in either 568A or 568B wiring
- Zinc alloy plated bright Ni/Cu jack connector housing for durability
- Tin matte finish IDC contact plating for reliable connections



261-3321 UTP Shielding & Mounting Aid

EPIC H-A HEAVY DUTY POWER CONNECTOR HOUSING

- Four contacts for the connection of multiple conductors
- Lever is made of zinc-plated steel for resistance to impact and corrosion



284-6836 4 Contacts

EPIC PANEL KIT

- Copper alloy contacts are plated in silver for resistance to corrosion
- Screw terminals ensure a stable wire connection
- Tough metal alloy body resists hard impacts so takes the strain in demanding settings



396-1582 3 Way, 10A, Female to Male, H-A, 250 V

TELEGARTNER STRAIGHT 50Ω RF ADAPTER BNC SOCKET TO BNC SOCKET 4GHZ


- Bayonet coupling
- Up to 4 GHz



112-2527 50Ω RF Adapter BNC Socket to BNC Socket 4GHz

HIROSE DF11 SERIES FEMALE CRIMP TERMINAL


- 2mm Double-Row Connector
- Space-saving on Board Realized
- Broad Variation
- Applicable Wire Covers Wide Range
- The ID Type Connector Achieves Connection Work

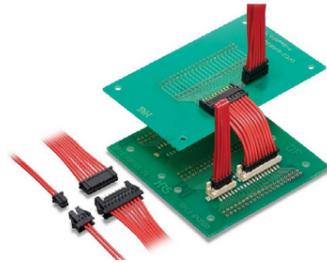

184-9958 28AWG Min, 24AWG Max

AMPHENOL COMMUNICATIONS SOLUTIONS 6-WAY IDC CONNECTOR SOCKET FOR CABLE MOUNT

- Cable mount IDC ribbon cable receptacle connectors with a 2.0mm pitch. These 2.0mm IDC ribbon cable connectors have a black PBT glass filled UL 94V-0 housing with a central polarizing key, friction locking and gold plated socket contacts that accept AWG 28 stranded wire.
- 2.0mm Amphenol FCI Basics+ Connectors, Headers and Minitek™
- 2.0mm Amphenol FCI Basics+ Connectors, Headers and Minitek™ Basics+ Connectors, Headers and Minitek™ is a 2 mm system range offering up to 38% space saving compared to 2.54 mm connector systems.
- Fully intermateable across the Minitek™ Headers and Connectors range

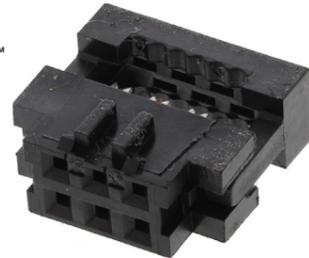

673-7739 2-Row

AMPHENOL RF STRAIGHT 50Ω RF ADAPTER SMA SOCKET TO SMA SOCKET 18GHZ

- 50 ohm SMA jack to SMA jack RF coaxial adapters with a gold plated brass body and teflon insulator.
- Stock number 700-9616 - SMA Jack to RP-SMA Plug Adapter 50 Ohm Straight
- Stock number 700-9603 - SMA Jack to SMA Jack Adapter 50 Ohm Straight
- Amphenol SMA Connectors



700-9603 SMA Jack to SMA Jack Adapter 50 Ohm Straight

HUBER+SUHNER STRAIGHT 50Ω RF ADAPTER N SOCKET TO N SOCKET

- A range of 50 Ohm N series RF coaxial adapters with a variety of configurations including N plug to N plug, N jack to N jack and N plug to N jack with straight, elbow and T orientations and bulkhead mount options. Stock number 716-4811 is a N series T adapter with a jack-jack-plug configuration. These 50 Ohm N series RF coaxial adapters include N-precision to N-precision adapters for use in test and measurement applications (stock numbers 716-4849, 716-4855, 716-4877 and 716-4892. These N series precision adapters have an interface standard according to IEC 60169-16_MIL-STD-348A/402_CEEC 22210.
- N Series Huber+Suhner



716-4735 50Ω RF Adapter N Socket to N Socket 12.4GHz
716-4791 50Ω RF Adapter N Socket to N Socket 11GHz

MOLEX

- Wide operating temperature range of -40°C to +105°C for use in harsh industrial environments
- Straight body orientation ensures wires are simply laid out and organised
- Maximum current of 50A per contact for use in high-current applications
- Terminal back-out prevented by terminal position assurance (TPA) locking device for a secure connection
- Compact dimensions of 23.5 (length) x 14.8mm (width) for use on PCBs where space is limited



342-4106 Mini-Fit Sr Female Connector Housing, 10mm Pitch, 2 Way, 1 Row

HARTING PROTECTIVE COVER

- HARTING standard hoods and housings for industrial connectors
- Locking levers: Han-Easy Lock®
- Field of application: for excellent mechanical and electrical protection in demanding environments, for example, in the automobile and mechanical engineering industries also for process and regulation control applications
- Distinguishing feature: hoods/housings colour-coded grey (RAL 7037)
- Many variations: for precise industrial applications



175-1249 Han B Series , For Use With Hoods

AMPHENOL RF

- The Amphenol RF UG-931/U MHV coaxial flange panel mount jack cable connectors for with a lightweight, compact design ideal for use in applications where space is limited. The threaded coupling mechanism of these RF coaxial cable connectors provides a secure vibration proof connection. These RF coaxial cable connectors are constructed from brass with Nickel silver finish.
- Contact Material Beryllium Copper
- Insulator Material PTFE
- RoHS (EU) compliant



253-0053 Jack Panel Mount MHV Connector, Solder Termination, Straight Body

WEIDMULLER 2-CONTACT FEMALE TO FEMALE INTERFACE MODULE

- Compact dimensions of 60 (L) x 45 (W) x 17.5mm (D) for installation in tight spaces
- Simple plug-in connection style for ease of installation
- IP20 rating means it's finger-safe and protected against objects larger than 12mm in size
- Light weight of 49g to place minimal strain on your equipment



741-7357 RJ45 Connector, DIN Rail Mount, 1A

**AMPHENOL COMMUNICATIONS SOLUTIONS
ECONOMICAL SERIES DIE CAST ZINC RIGHT
ANGLE D SUB BACKSHELL**

- Amphenol FCI's D-Subminiature (D-Sub) connectors are part of industry standard and are one of the most popular Input/Output interconnects, addressing a wide variety of applications including telecommunications, industrial and medical.
- Prevents accidental mismatching
- Hoods available in 9 to 50 positions for different connector pin configurations
- Metal hoods available in straight and angled terminations for EMI/RFI shielding
- Dust caps available in metal and plastic versions
- Locking screws comes with UNC 4-40 and M3 thread options
- Hoods available in plastic, metalized and metallic form with locking screws
- Hoods available in 9 to 50 positions



137-2658 15 Way, Strain Relief

**AMPHENOL COMMUNICATIONS SOLUTIONS
8655MH SERIES DIE CAST ZINC D SUB
BACKSHELL**

- Shielded EMI/RFI metal hood for use with d-type subminiature connectors. These cable mount shielded metal hoods are made from die cast zinc with a nickel plating, have a straight cable exit and a polycarbonate cable clamp strain relief. The jack screws for these d-sub metal hoods are available with a UNC 4.40 thread (part numbers suffixed with '01BKLF') or an M3 thread (part numbers suffixed with '02BKLF')



740-1223 9 Way, Strain Relief

**PHOENIX CONTACT SUBCON 25 WAY RIGHT
ANGLE D-SUB CONNECTOR PLUG**

- Knurled screws for easy tightening by hand
- Copper-alloy contacts for efficient signal transfer
- IP20 rating means it's touch-proof and resistant to objects bigger than 12.5mm
- Protected against harmful EMI and ESD to ensure reliable performance



220-5207 2.77mm Pitch

**AMPHENOL COMMUNICATIONS SOLUTIONS
HD 26 WAY THROUGH HOLE D-SUB
CONNECTOR PLUG**

- SD series high density D-Sub plug connectors with solder cup terminals and precision stamped and formed contacts. These SD series HD d-sub plug connectors have a tin plated steel shell with dimples, a glass-filled thermoplastic UL 94V-0 insulator with closed entry contact cavities, gold flash plated pin contacts and 3.05 holes for front mounting. Typical applications for these SD series high density d-sub plug connectors include industrial, telecom and any industry standard I/O applications.



691-9020 26 Way Through Hole D-sub Connector Plug

BULGIN STRAIGHT

- High-temperature tolerance from 0°C to +70°C
- Screw coupling ensures a secure and durable connection
- Compliant with USB 2.0 for versatile connectivity options



468-6311 Panel Mount, Socket- Single Port Type A 2.0 IP68, IP69K USB Connector

**HELLERMANN TYTON 630 PIECES
INSULATED TERMINAL CRIMP TERMINAL
KIT**

- Cable ties are made of durable PA for strength and resistance to abrasion
- Compartmentalised steel box with a clip closure and drop-down handle for safe storage and easy carrying
- Colour-coded terminals for quick cable size identification



441-5535 630 Pieces Insulated Terminals Crimp Terminal Kit

TE CONNECTIVITY

- Highly conductive electrolytic copper
- Bright tin finish for resistance against oxidation and corrosion
- Funnel entry barrel for easy wire insertion
- Inspection window in barrel



311-9804 XCT Uninsulated Ring Terminal, 8mm Stud Size, 50mm² to 50mm² Wire Size

SOCOMEK POWER SUPPLY ACCESSORY

- The Socomek STATYS XS 1 STAXS 32A 2W2P 230V provides redundant power supply to single corded IT equipment with Ethernet connection capability for remote monitoring. Features fast and secure module replacement with no load interruption. Complies with IEC 60950-1 CEI EN 62310-2 WEEE ROHS and CE standards.
- Ensured power continuity
- Easy rack integration
- Hot-swappable version
- Agility and ease of use
- Flexible remote management



588-738 For use with STATYS XS 1STAXS 32A, STATYS XS Series

SOCOMEK MOUNTING BRACKET

- The Socomek Rail for rack mount, designed to meet the specifications required by installation engineers, design engineers, and engineering consultants.
- Information to choose the correct UPS for the application
- Information to prepare the system and installation site



588-759 For use with NETYS RT UPS, NETYS RT Series

SOCOMEK COMMUNICATION INTERFACE

- The Socomek Net Vision is a communication interface designed for enterprise networks that enables a direct and secure connection between the UPS and the Ethernet network. This connection provides a wide range of network services, including UPS monitoring, event notifications, the automatic shutdown of servers powered by the UPS and many other services. Net Vision also serves as an IoT gateway, granting access to a comprehensive array of digital services. It is compatible with all UPS ranges equipped with a communication slot.
- Simplified equipment management
- Secure access and encrypted connections
- Access to digital services



588-758 For use with Enterprise Network, NET VISION Series

APC UPS NETWORK MANAGEMENT CARD

- Integrated battery management feature lets you know when it's time for maintenance or replacement
- Wide operating temperature range between 0°C and +45°C for use in demanding environments
- Included USB cable to achieve a quick connection to compatible devices



205-0450 For use with smart-UPS® devices with a SmartSlot

EATON UPS CABLE

- The Eaton cable adapter is mainly designed for 9SX 9130 tower.
- Does not come with rack mounting kit



206-4751 For use with 9SX, MGE UPS Systems Series

APC BATTERY PACK

- The Schneider Electric APC Smart-UPS SRT 192V 5kVA and 6kVA RM Battery Pack has 192 V battery voltage. The battery is of lead-acid type.
- Installation guide, warranty card is provided
- Available in black colour
- Weight is 91 kg
- Operating temperature range 0 °C to 40 °C



215-3248 For use with APC Smart-UPS SRT 192V 5kVA and 6kVA

APC BATTERY PACK

- The Schneider Electric APC Smart-UPS SRT 72V 2.2kVA RM Battery Pack has 72 V battery voltage. The battery is of lead-acid type.
- Documentation CD, rack mounting brackets and installation guide is provided
- Available in black colour
- Weight is 33.9 kg
- Operating temperature range 0 °C to 40 °C



215-3256 for use with APC Smart-UPS SRT

APC UPS RAIL KIT

- The Schneider Electric APC Smart-UPS SRT 19" Rail Kit for Smart-UPS SRT 5/6/8/10kVA has 8.9 cm depth.
- Available in grey colour
- Weight is 2.73 kg
- Installation guide and mounting hardware is provided



215-3264 for use with Smart-UPS SRT 5/6/8/10kVA

RIELLO UPS BYPASS SWITCH

- 16A rack version
- Standard back-feed protection
- Automatic switching during mains failure
- Configuration software provided as standard
- Mains power present LED indicator
- Available with different socket standards (IEC, British socket and terminal boards)



768-8941 for use with Dialog Dual 3k3VA-4kVA, Dialog Plus 200ER, DLP 300S/300ER

EATON 160 → 294V INPUT RACK MOUNT UNINTERRUPTIBLE POWER SUPPLY

- 650VA rating handles multiple devices
- Four outlets for versatile connectivity options
- C14 plug type for easy integration
- Adjustable input voltage range accommodates different environments
- Cold-start capability ensures operation even when off-grid



207-463 650VA (520W), 5P Gen2

EATON UPS NETWORK MANAGEMENT CARD

- The Eaton Industrial Relay Card-MS provides communication through voltage free relays. It provides the dry-contacts needed to enable communication throughout your management and UPS systems.
- Terminal connectors, 250 VAC/5A rating
- UPS Supported: EX, 5P, 5PX, 5SC, 5130, 9PX, 9SX, 9E.



250-0361 for use with 5P, 5PX, 5SC, 9E, 9PX, 9SX, 5130, EX

RIELLO UPS BATTERY

- The Riello sentinel dual/tower battery extension pack for use with the SDU/STW 10000 ER.
- 40Ah battery extension pack



255-8462 for use with Sentinel Dual SDU, BB SDU Series

EATON 160 → 294V INPUT RACK MOUNT UPS POWER SUPPLY

- The Eaton UPS features automatic voltage regulation for energy efficiency, reducing energy and cooling costs. It delivers clean sinewave output and includes 1 slot for an optional communication card. Compatible with virtual environments like VMware, Hyper V, Citrix Xen and Redhat. And it integrates with Eaton bright layer software. It has 1 USB and 1 serial port, plus advanced battery management to extend battery life and improve prediction accuracy. The sleek black and silver enclosure is designed for reliable, high performance power backup.
- Next generation graphical LCD display
- Hot swappable batteries
- Remote reboot and runtime optimization thanks to 2 manageable outlet groups



212-850 850VA (680W), 5P850IRG2

RIELLO 220 → 240V AC INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- Simple plug and play installation
- Fanless design minimises noise disruption
- Compact design
- Minimal power waste thanks to up to 99% efficiency
- User-friendly LED display panel
- Minimise power consumption during periods of inactivity
- Auto restart following a power failure
- Eligible for Riello UPS 5 year extended warranty



459-819 800VA (480W), iDialog

RIELLO POWER SUPPLY ACCESSORY

- The Riello multi pass manual bypass cuts out ups in the event of a malfunction or fault, ensuring connected devices switch to mains power before the ups shuts down, useful during planned maintenance. available for rack or wall installations.
- 16 A rack version
- 10 A and 16 A wall mounted version
- Standard back feed protection
- Mains power present LED indicator
- Available with different socket standards



287-5402 MULTIPASS Series

APC UPS SOURCE TRANSFER SWITCH

- The APC NetShelter Rack Automatic Transfer Switch is a reliable and efficient solution for managing power supply in data centres or IT environments. With its automatic transfer capabilities and multiple power socket outlets, this switch ensures uninterrupted power distribution to connected devices, providing peace of mind for critical operations.
- Automatic transfer switch for seamless power supply management
- Provides 8 IEC 60320 C13 outlets and 1 IEC 60320 C19 outlet for flexible connectivity
- Compact 1U design for easy installation in server racks
- Provides a load capacity of 3700 VA for powering multiple devices
- Comes with mounting hardware and brackets for convenient installation



287-7171 for use with AP9335T, AP9335TH, AP Series

SOCOMEK 110 → 276V INPUT RACK MOUNT

- The Socomec NETYS RT4 UPS 5 Kilovolt-Ampere 230 Volt is the fourth generation of single-phase rack-tower uninterruptible power supply, ensuring the protection and availability of information technology infrastructure while meeting the demands of both power reliability and installation flexibility.
- Best-in-class design
- Up to 5-year warranty
- Ease of use
- Optimum battery management
- IoT and cybersecurity



588-749 Stand Alone UPS, 5000VA (5KW), NRT4-050K

APC 230V INPUT RACK MOUNT UNINTERRUPTIBLE POWER SUPPLY

- The APC Smart Uninterruptible Power Supply is an on-line model designed to deliver continuous, clean 230V power with a pure sine wave output, ensuring optimal performance for sensitive equipment. It is CE marked, indicating compliance with European safety and quality standards.
- IP20 protection rated
- CE certification
- USB compatible



597-175 1500VA (1.35kW)

APC 240V INPUT RACK MOUNT UNINTERRUPTIBLE POWER SUPPLY

- The APC Smart Uninterruptible Power Supply is an on-line model designed to provide continuous and clean power with zero transfer time. It features a sine wave output for high-quality power suitable for sensitive equipment. The UPS includes a network card for remote monitoring and management but comes without a rail kit. This ensures reliable power protection and easy integration into networked environments.
- IP20 protection rated
- CE UKCA certifications
- EN/IEC 62040 2 2018 standards



648-039 6kVA (6kW), SRTG6KXLI

APC 230V INPUT RACK MOUNT UNINTERRUPTIBLE POWER SUPPLY

- The APC Smart Uninterruptible Power Supply is equipped with a lithium-ion battery, offering longer lifespan and faster charging compared to traditional batteries. It delivers a clean sine wave output, ensuring stable and high-quality power for sensitive devices. Additionally, the UPS features an internal bypass that allows continuous power supply during maintenance or in case of internal faults.
- IP20 protection rated
- CE UKCA certifications



648-052 3000VA (3kW), SRTL3KRM1UINC

APC 240V INPUT FRONT UNINTERRUPTIBLE POWER SUPPLY

- The APC Smart Uninterruptible Power Supply is a line-interactive model designed to provide reliable power backup and protection against voltage fluctuations. It features automatic voltage regulation (AVR) to maintain stable output voltage and prevent damage to connected equipment. The UPS includes both USB and serial communication ports for easy monitoring and management. Additionally, a graphic LCD display offers clear, real-time information on the UPS status, load, and battery conditions, ensuring users stay informed about power quality and system health.
- USB compatible
- CE EAC certifications
- Line interactive UPS type



648-059 3kVA (2.1kW), SMC3000I

APC 240V INPUT RACK MOUNT UNINTERRUPTIBLE POWER SUPPLY

- The APC Smart Uninterruptible Power Supply is a line-interactive model featuring a versatile rack/tower convertible design for flexible installation. It includes a network card for remote monitoring and management, enhancing system control and accessibility. Additionally, the UPS offers extended runtime capabilities, providing longer backup power during outages to ensure continuous operation of critical equipment.
- USB compatible
- CE EAC certifications
- EN/IEC 62040 2 2018 standards



648-070 3kVA (2.7kW), SMX3000HV

EATON 100 → 276 (WITH DERATING) V

- Meters energy consumption down to the managed outlet groups for accurate readings
- Monitor kWh (kilowatt hour) values instantly using the LCD or Eaton's Intelligent Power software
- Load segment control enables maximised battery runtime
- UPS bypass mode allows service continuity in case of internal fault
- Superior energy efficiency helps reduce cooling overheads for critical systems



125-3909 176 → 276 (Without Derating) V Input Rack Mount, Stand Alone

APC 240V INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- Audible and visible alarms mean you won't miss important changes
- RJ45 and USB ports get you connected
- Automatic frequency sensing makes networking a doddle
- Smart-Slot lets you customise and upgrade computer cards
- LCD panel is user-friendly and highly visible



169-1869 3000VA (2700W), Smart

APC 160 → 286V INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- Sealed lead-acid battery that's leak-proof for low maintenance
- Compact dimensions of 138 (L) x 363 (W) x 161mm (H), so needs minimal mounting space
- Supplied with CD and software to make installation and configuration straightforward
- Thermal dissipation keeps the unit's operating temperature cool



188-0195 750VA (500W), Smart-UPS SMT

APC 160 → 286V INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- Comprehensive electrical protections shield against power sags, surges, brownouts and lightning strikes for user safety
- Pure sine wave power gives you a supply with minimal noise that's stable for critical electronics during outages
- Includes a SmartSlot that lets you connect to the cloud for remote management



188-0191 3000VA (2.7kW), Smart-UPS SMT

APC 230V INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- LCD interface makes it easy to read and programme
- Line-interactive technology means you get quick switchovers from mains to battery power
- A SmartConnect port allows cloud-based remote power monitoring
- Multi-pole noise filtering helps keep electrical disturbances to a minimum



201-0844 1500VA (900W), Smart-UPS

EATON 176 → 276V AC INPUT RACK MOUNT

- Advanced battery management (ABM) prevents accelerated battery ageing and overcharging, as the battery is only charged when needed
- Deep discharge protection prevents the battery from being discharged too far, for a longer battery life
- Runtime can be extended by up to eight hours by adding up to four external battery units
- Suitable for rack mounting and tower mounting for flexibility of installation, with the rail rack kit supplied



201-9770 Stand Alone Uninterruptible Power Supply, 1500VA (1.5kW), 9PX

APC 230V INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- The Schneider Electric Back UPS Pro BR 1300VA, AVR, LCD Interface has 8 socket outlets. It includes 1 lead-acid battery.
- CE, EAC, RCM & TISI certified
- Operating altitude up to 10000 ft
- Operating temperature range from 0 °C to 40 °C



215-3203 1300VA (780W), Back UPS Pro BR

RIELLO 220 → 240V INPUT TOWER UNINTERRUPTIBLE POWER SUPPLY

- High efficiency 95%
- Parallel able up to 3 units
- 3 level inverter
- High quality output voltage



255-8487 6000VA (6kW), Extended recharger for Sentinel Tower

APC 230V INPUT STAND ALONE UPS

- The APC reliable APC Back-UPS with a power capacity of 2200 VA, designed to provide uninterrupted power supply for your devices. With a lead-acid battery type, this UPS offers a rated power of 1200 W and a battery life of 3 to 5 years. It is equipped with 6 IEC C13 outlets for easy connectivity and comes with a user manual for convenient setup and operation.
- Lead-acid battery type for reliable power backup
- 6 IEC C13 outlets for easy connectivity
- User manual included for convenient setup
- Run time curve fit for accurate battery life estimation
- Line interactive UPS type for efficient power delivery



287-7240 2200VA (1.2kW), BX2200MI

APC 208V INPUT RACK MOUNT

- The Schneider Electric APC Smart-UPS X 2200VA Rack/ Tower LCD 200-240V has 12 socket outlets. It includes 1 lead-acid battery.
- CE, CSA, IRAM, RCM, VDE & EAC certified
- Includes 2 m length cable
- Available in black colour
- Operating temperature range from 0 °C to 40 °C



215-3233 Stand Alone Uninterruptible Power Supply, 2200VA (1.98kW), Smart-UPS X

SOCOMEK 230V INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- Embedded dry-contact interface
- Input mains switch breaker
- Connection for battery extension modules
- Power off the UPS remotely
- Internal temperature sensor
- One slot for communication options
- USB port for UPS management based on HID protocol
- LOCAL VIEW software for local UPS monitoring and shutdown for Windows, Linux, and MAC Osx
- Clear and uncluttered LCD interface for easy UPS monitoring, even for fewer specialist users



231-2884 1000VA (1kW), ITY3

APC 230V INPUT STAND ALONE UPS

- The APC powerful 2200VA Tower UPS with 230V input voltage and 1200W rated power. It features a lead-acid battery with a battery life of 3 to 5 years, providing reliable backup power for your electronic devices. With a compact design and user-friendly interface, this UPS is ideal for both home and office use.
- 2200VA capacity for reliable backup power
- Lead-acid battery with a long battery life of 3 to 5 years
- Compact tower design for easy placement in various settings
- Easy-to-use interface for hassle-free operation
- Provides surge protection and filtering for connected devices



287-7241 2200VA (1.2kW), BX2200MI-FR

EATON 176 → 276V INPUT RACK MOUNT UNINTERRUPTIBLE POWER SUPPLY

- Online/Double-conversion topology for reliable power protection
- 1500 VA power rating with 1500 W wattage
- Hot-swappable internal batteries and extended battery modules
- Energy Star certified for high efficiency, reducing energy costs
- Advanced Battery Management technology to increase battery lifetime
- Network card included for easy monitoring and management
- Compatible with virtual environments like VMware, Hyper-V, Citrix Xen, Redhat



287-7966 1500VA (1.5kW), 9PX

SOCOMEK 230V INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- The Socomec's NETYS PL series is a 1000VA 700W Single Phase Line Interactive Sine Wave UPS. It is designed for applications professional technology the inverter, sine wave guarantees full compatibility with any type of load and food. The AVR system (Automatic regulation voltage) integrated, stabilizes the voltage of exit and limit the number of tipping in battery mode, thus preserving the battery life to cope with critical power cuts.
- Ideal high performance solution for protect small servers and stations CAD or graphics work
- Ensures continuity of service for critical applications



233-2985 1000VA (700W), NETYS PR

EATON 230V AC INPUT RACK MOUNT

- The Eaton UPS Systems is Secured connected power protection with extended runtime designed for distributed IT which is ideal for servers, switches, storage and other distributed IT loads that keep your business running.
- Increased standard runtime by at least 25%
- Enhanced surge protection
- Reduced number of fans



246-9902 Stand Alone Uninterruptible Power Supply, 1000VA (1kW), 5PX G2

RIELLO 220 → 240V AC INPUT STAND ALONE UNINTERRUPTIBLE POWER SUPPLY

- Simple plug and play installation
- Fanless design minimises noise disruption
- Compact design
- Minimal power waste thanks to up to 99% efficiency
- User-friendly LED display panel
- Minimise power consumption during periods of inactivity
- Auto restart following a power failure
- Eligible for Riello UPS 5 year extended warranty



768-8767 1200VA (720W), iDialog Plus

APC 208V INPUT RACK MOUNT

- Automatic self-test function means there's one less thing on your to-do list
- Intelligent battery management squeezes maximum life from the battery
- LCD interface provides clear info and is easy to navigate
- Nominal output voltage of 230V makes it suitable for use with devices designed to run on the UK mains supply
- Supplied with rack-mounting brackets to help you fit it easily



779-3756 Stand Alone Uninterruptible Power Supply, 3000VA (2.7kW), Smart-UPS X

RS PRO RS232 USB A MALE TO D-SUB

- Connectors: USB-A to RS232
- Plug & Play - no additional software required
- Supports RS-232 Serial Interface
- Supports 12 MBPS data transfer rate
- USB suspend condition
- Plug & Play compatible
- USB host device drivers available
- Draws its power from USB connection – no extra power adapter required
- Supports Windows 2000, Windows XP, Windows Vista 32/64-bit, Windows 7, Windows 10 and Mac OS 10.12.1.



144-5699 9 Pin Male Converter Cable

STARTECH.COM 2 PORT PCIE RJ45 NETWORK CARD

- Legacy supportAs the product works with speeds of 10, 100 and 1000Mbps, it supports a wide variety of networks.
- Ease of installationThanks to its included low-profile mounting bracket, it's a breeze to fit the unit into your setup.
- Hard-wearing steel body to shrug off wear
- Low input voltage of 12V DC for use in low-power systems



123-8093 10/100/1000Mbit/s

STARTECH.COM 7 PORT USB 3.0 USB A HUB

- Fast data transferA maximum data transfer rate of 5Gbps lets you quickly send information between devices.
- Hot-swappableYou can plug in and remove the device without having to shut down your computer, for an uninterrupted workflow.
- Compact dimensions of 172 (W) x 70 (D) x 23mm (H) mean it's easy to move between hybrid working setups
- Compatible with USB 2.0 and 1.x variants for versatility



898-8425 AC Adapter Powered, 172 x 70 x 23mm

CHERRY WIRED USB COMPACT TRACKBALL KEYBOARD

- The Cherry "XS Trackball Keyboard" (G84-5400) combines comfortable mouse control with compact dimensions. Via the optical trackball with two mouse keys, the cursor can be controlled easily and precisely
- Optical trackball with two mouse buttons for easy control of the cursor
- High degree of reliability and precise keystroke feel thanks to individual keys with Gold Crosspoint contacts
- Long operating life in excess of 20 million key confirmations per individual key
- Compact dimensions:374x139x20mm
- Ideal for19" applications
- Lightweight
- Plug and Play
- Supports Code Set 3 and UnifiedPOS



773-9213 QWERTY (US), Black

BRADY B-499 BLACK ON BLACK ON WHITE LABEL PRINTER TAPE

- Abrasion-resistant
- Adheres to surfaces, even in autoclave, freezer and liquid nitrogen environments
- Chemical-resistant
- Humidity-resistant
- Matte finish
- Roll length is 4.8m
- Roll width is 19.05mm
- UV-resistant
- Weather-resistant



694-9100 4.88 m Length, 19.05 mm Width

BRADY M210 HANDHELD LABEL PRINTER

- Engineered long lasting material quality: prints durable true-sized 6 - 19 mm wide identification to maximise amount of data
- Adjust the length of the labels using the high performance continuous material
- Fulfill your requirements with up to 7 different industry specified materials that last
- Extremely rugged and durable: drop tested printer, super rugged with moulded rubber bumpers provide optimal protection from falls
- Ergonomic cutter and label grabber, holding the label after cutting, preventing it from falling out



242-5225 19.05mm Max Label Width

NETGEAR PROSAFE GS105

- VLAN support for traffic segmentation
- Quality of Service (QoS) for traffic prioritization
- Auto "denial-of-service" (DoS) prevention
- Troubleshoot connection issues via cable test
- Loop detection and broadcast storm controls
- IGMP snooping v1, v2 and v3 support for multicast optimization
- Rate limiting for better bandwidth allocation
- Jumbo frame support Traffic Prioritization
- Bandwidth 10Gbps



121-8125 Unmanaged 5 Port Ethernet Switch, Type G - British 3-Pin

NETGEAR PROSAFE GS108

- VLAN support for traffic segmentation
- Quality of Service (QoS) for traffic prioritization
- Auto "denial-of-service" (DoS) prevention
- Troubleshoot connection issues via cable test
- Loop detection and broadcast storm controls
- IGMP snooping v1, v2 and v3 support for multicast optimization
- Rate limiting for better bandwidth allocation
- Port mirroring for network monitoring
- Jumbo frame support Traffic Prioritization
- Bandwidth 16Gbps



121-8128 Unmanaged 8 Port Ethernet Switch, Type G - British 3-Pin

TP-LINK UNMANAGED 8 PORT ETHERNET SWITCH

- The TP-Link Gigabit Unmanaged Switch TL-SG108 provide an easy way to expand your wired network. With all ports support Auto-MDI/MDIX, there's no need to worry about the type of cable to use. Featuring full duplex mode, it can send and receive data at a rate up to 2000Mbps, making it an ideal choice for expanding your high performance wired network. Moreover, with innovative energy-efficient technology, it can save power consumption, making it an eco-friendly solution for your home or office network.
- Green Ethernet technology saves power
- Steel housing, desktop or wall-mounting design
- Plug and play, no configuration needed



255-8443 Type G - British 3-Pin

NVENT HOFFMAN S162046G031 2000BTU/H PORTABLE AIR CONDITIONING UNIT

- Designed with dust resistant coils for effective filter less performance
- Includes mounting hardware and gaskets for user convenience
- Active condensate management system minimizes the risk of leaks
- Optimized for energy efficiency with a rotary compressor
- Equipped with a terminal block for straightforward power input
- Functionally tested prior to shipping to ensure reliability



275-615 2000Btu/h

BELIMO OPEN/CLOSE DAMPER ACTUATOR

- Operation life is minimum 60000
- Pushbutton manual override
- Direction change switch
- Cable length is 1m
- Ambient temperature ranges between -30°C and 50°C
- Rated impulse voltage is 0.8kV
- Maintenance free
- Power consumption is 1W
- Maximum damper area is 1m²
- Damper spindle compatibility is between 6mm and 20mm



504-1214 5Nm, 24 V ac/dc

EBM-PAPST D3G SERIES CENTRIFUGAL FAN

- The ebm-papst Compact EC centrifugal fan engineered for efficient air movement in ventilation and HVAC systems. It features a backward curved impeller, integrated electronics, and intelligent speed control, making it ideal for applications requiring precise airflow regulation and energy savings. Its vibration damped motor mounting and wide operating temperature range ensure reliable, quiet performance in demanding environments.
- IP00 and IP20 protection
- Ball motor bearing
- Cooling hole on rotor and stator sides
- Counter clockwise direction



624-687 230 → 460 V, 1155m³/h, ac Operation, 272 x 272mm

EATON XEFFECT E-FAN SERIES FAN FILTER

- Constructed for optimal air circulation to enhance equipment lifespan
- IP55 rating ensures superior protection against dust and splashes
- Compact design allows for efficient use of space within electrical setups
- Manufactured to conform with RoHS regulations, promoting sustainability
- Compatible with a range of filter mats designed for enhanced filtration
- Durable materials provide long-lasting reliability and performance



240-209 166 x 156mm

RS PRO 150MM

- Hardened stainless-steel frame and measuring jaws
- Metric / Inch Conversion Button
- Knurled Locking Screw
- LCD Display
- Depth Measuring Blade
- Caliper Beam
- Thumb-roll Fine Adjustment
- Battery Cover
- Zero Set Button
- Power Button ON/OFF



243-6615 6in Digital Caliper 0.0005 in, 0.01 mm Resolution, Imperial, Metric

MITUTOYO 150MM


- AOS (Advanced Onsite Sensor)
- Electromagnetic induction type ABS encoder
- Slider provides smooth operation
- ABS (ABSOLUTE) scale requires no origin setting after power-on and has no limit to response speed
- Character height: 9 mm (150 and 200 mm), 11 mm (300 mm)
- Step-measurement capable
- Battery life of approximately 3.5 years has been achieved under normal use through the adoption of Mitutoyo's absolute scale
- The slider configuration features an ergonomic, thumb-friendly shape
- Resolution of 0.01mm
- Accuracy of ± 0.001 in



245-5676 6in Digital Caliper 0.01 mm Resolution, Imperial, Metric

EATON METAL CABLE DUCT FOR USE WITH XENERGY MAIN LV SWITCHGEAR

- The Eaton auxiliary cable duct is an essential component of the xEnergy Main LV switchgear. Designed to be closed and measuring 425mm in width, this grey duct is perfect for cable management in electrical cabinets.
- Product height is 120 millimetres for easy installation in cabinets
- RoHS Compliance
- Provides durability and longevity
- Global Marketability

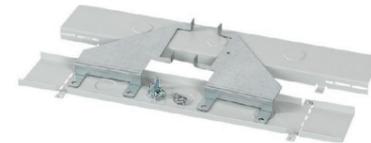

125-945 418 x 120 x 22mm

STARTECH.COM STEEL CABLE MANAGEMENT PANEL FOR USE WITH CM SERIES

- The StarTech.com 1U High-Density Brush Strip Cable Management Panel is a sturdy steel horizontal organizer designed for data centers and server racks. It features dense nylon bristles that allow cables to pass through while preventing dust and debris, helping to maintain clean airflow and a tidy setup. Compact and durable, this panel efficiently manages high volumes of cables in a space-saving 1U rack unit.
- High-density nylon brush
- Takes up only 1U of rack space
- Sturdy steel construction



630-301 48.2 x 1.7 x 4.4cm

RS PRO ILLUMINATED MAGNIFIER

- Magnification power of 10x
- Lens diameter of 30 mm
- Illumination provided by 2 LEDs
- Selectable white and UV illumination
- Powered by two CR2016 batteries, which are included
- Overall length of 100 mm
- Rigid plastic body
- Includes leatherette pouch for protection and storage



123-0925 10X x Magnification, 30mm Diameter

RS PRO USB DIGITAL MICROSCOPE

- This RS PRO digital microscope is a state-of-the-art and versatile device that can be used across a wide range of environments from inspection and research to detailed assembly applications
- Designed with a high-resolution 5-megapixel image sensor, a wide magnification ratio, and built-in LEDs for adjustable brightness, this digital device ensures that accuracy and quality are at the forefront of the design
- It is easy to use and install, thanks to the plug and play USB driver, saving in precious time and effort
- Compatible with Windows XP / Vista / 7, Mac 10.5 and above
- Supplied with: Digital Microscope, Metal Stand, Software CD and User Manual



196-4075 5M pixels, 20x → 200x Magnification

APC MILD STEEL CABLE ORGANISER FOR USE WITH SERVER RACK

- The APC 1U easy rack horizontal cable manager has 19" rack width.
- Easy rack accessory
- Colour is black



238-7207 48.3 x 4.45cm

STARTECH.COM CABCA SERIES CAGE NUT FOR USE WITH RACK MOUNTING HARDWARE

- The StarTech.com 50 Pack of M6 Cage Nuts for Server Racks and Cabinets is ideal to have on hand for installing servers, network equipment, AV equipment and other rackmount devices securely into your storage cabinet or server rack. Each pack includes a cage nut installation tool to ensure a fast and simple installation of each cage nut.
- RoHS compliant
- 2 Years warranty
- Hassle free installation
- Nickel plated finish to prevent rust



280-4541 M6 Thread, 50 Piece(s)

RS PRO TACHOMETER BEST ACCURACY $\pm 0.05\%$ - NON CONTACT LCD

- This RS PRO non-contact tachometer has been designed with a durable and robust housing for use in challenging environments while offering an intuitive and easy to use interface for optimum ease of use
- The handheld device offers a wide measuring range and high resolution for accurate and reliable results
- A non-invasive way of measuring RPM and surface speed, especially in areas where it may be dangerous or difficult for the user to reach
- The tachometer has a clear and easy to read backlit LCD display, allowing it to be used in environments with low lighting or where visibility may be poor
- Built-in memory allows the maximum, minimum and last value read to be stored
- The tachometer unit is powered by a 9V battery (included) or a 6V exterior DC mains power supply
- Supplied with a 9V battery and convenient carry case for easy storage and device protection when not in use



193-8687 Non-Contact Tachometer

RS PRO TACHOMETER BEST ACCURACY $\pm 0.05\%$ + 1 DIGIT - CONTACT

- This RS PRO tachometer has been designed with a durable and robust housing for use in challenging environments while offering an intuitive and easy to use interface for optimum ease of use
- The handheld device offers a wide measuring range and high resolution for accurate and reliable results as a contact or non-contact form of measurement
- It offers a solution for non-invasive ways of measuring RPM and surface speed, especially in areas where it may be dangerous or difficult for the user to reach
- Equally, it comes with a variety of accessories that can be fitted to take precision contact measurements for added versatility across a wide range of applications
- The digital tachometer has a clear and easy to read backlit LCD display, allowing it to be used in environments with low lighting or where visibility may be poor
- Built-in memory allows 40 reading memories to be stored
- Supplied with a 9V battery and convenient carry case for easy storage and device protection when not in use



193-8688 Non Contact LCD

ABB RACK MOUNT CASE

- Supports modular installations for enhanced flexibility
- Seamless integration with System pro E Power boards
- Built for long-lasting durability and reliability
- Compact dimensions optimise space efficiency



200-536 XT5, 250 x 800 x 30mm

STARTECH.COM RK3 SERIES 32U-RACK SERVER CABINET

- The StarTech.com 4-Post 32U Server Rack Cabinet is a lockable 19 inch data rack designed to securely house computer, AV, and IT equipment. It features adjustable mounting rails, casters for easy mobility, and sturdy construction ideal for office or home network setups.
- Enclosed 32U data rack cabinet ships compact flat-packed to avoid damage and facilitate installation
- Include wheels & levelling feet to offer more stability
- Home server rack cabinet is only 63.8in in height
- Computer cabinet rack is EIA/ECA-310-E Compliant



630-256 155.2 x 60cm

APC NETSHELTER SERIES 6U-RACK CABINET

- 6U rack enclosure suitable for servers, network switches, and patch panels
- Wall mountable design with a depth range of 2.87 to 12.95 inches
- Reversible door compatible with APC's security upgrade for remote access
- Optional 120V fan tray for top or bottom mounting
- Knockouts for 1/2U accessories on top and bottom
- Compatible with several APC Smart-UPS models for easy integration
- Ventilated design with 19" rack width and 200lb weight capacity
- Ships fully assembled for convenience and ease of installation



287-7211 35.5 x 60 x 40cm

STARTECH.COM BLACK 8U STEEL SERVER RACK

- Lightweight at 11.1kg to place minimal strain on the wall
- Open frame design promotes ventilation to prevent overheating
- Built-in shelf to accommodate non-rack-mounted equipment for easy access



222-8345 with 2-Post Frame

BERKER INTEGRO ANTHRACITE GREY BACK BOX

- The Berker Surface-mounted device box 41 mm for FLOW and PURE High-gloss plastic in versions with and without strain relief. Paint Black
- Surface protection Untreated
- Product type Box



433-170 Wall Mount, 1 Gangs, 59.5 x 59.5mm

HAGER WNA GREY PP BACK BOX MOUNTING FRAME

- Hager Cubyko series light and plate switch accessories. The accessories range includes back boxes and LED indication strips to assist with mounting the Cubyko series of switches.



144-4572 IK07, IP55, 2 Gangs, 154 x 23 x 83mm

RS PRO 304 STAINLESS STEEL SATIN SQUARE ADAPTABLE ENCLOSURE BOX

- 304 stainless steel adaptable enclosure box
- Brushed satin finish
- Length of 100 mm
- Width of 100 mm
- Depth of 50 mm
- Weather-proof gasket seal
- IP66 rating for protection from dust and water jets
- IP69K rating for protection from sprayed water at up to +80°C
- Conduits meet BS 4568:1:1970 wiring regulations



121-9691 100mm x 100mm x 50mm

LEGRAND POLYPROPYLENE SQUARE ADAPTABLE BOX

- Extension box size is 170 x 170 x 50
- Cover size is 195 x 195
- Bright galvanised steel and nickel-plated steel screws for better durability and rust protection
- Self-extinguishing feature for hazards
- Service temperature ranges between -5°C and 40°C
- White polypropylene cover
- Yellow polypropylene case



145-8319 170mm x 170mm x 50mm, Size:20/25mm

MK ELECTRIC LOGIC PLUS WHITE GLOSS BACK BOX

- Surface Mount Back Boxes
- Knockouts provided for ease of installation
- Height 87mm
- MK Logic Plus Flush Mounting
- Stylish, quality, reliable and safe products that incorporate a host of design features which make the installers job easier and quicker. Logic Plus products are made from a high grade thermoset material which has an inherent antimicrobial property. In recent independent tests, the Logic Plus products were equal to, or exceeded, competitor 'Anti-Bac' products when tested for resistance to MRSA, E-Coli, Salmonella and Klebsiella Pneumoniae.



222-8115 BS, IP20, 2 Gangs, 148 x 87 x 30mm

PHOENIX CONTACT OUTDOOR HOUSING ENCLOSURE TYPE EGS SERIES

- Proven PCB connection technology ensures reliability in connectivity
- Effective thermal and mechanical protection significantly extends product longevity
- Tailored for both outdoor and indoor use meeting various application requirements
- Optional accessories support various mounting configurations
- Designed to withstand a broad temperature range for optimal performance



488-355 164 x 120 x 64mm, Polycarbonate Electronic Housing

LEGRAND DISTRIBUTION BLOCK

- Direct, tool-free connection after simply stripping rigid conductors from 0.75 to 2.5 mm².
- Transparent housing for complete visibility of connections.
- Test slot for tester screwdriver or tip Ø
- 4 mm maxi.
- Colour coding for easy product identification.
- Current 24 A – Voltage: 450 V.



620-2448 24 A, 450 V

PHOENIX CONTACT UPPER HOUSING PART ENCLOSURE TYPE 1069 SERIES

- Constructed to withstand harsh environments with a wide operational temperature range
- Fulfills stringent safety standards including UL recognition for peace of mind
- Offers efficient space usage with compact yet functional dimensions
- Compliant with EU RoHS substance requirements, promoting environmentally friendly practices



498-017 90.1 x 75.27 x 36.95mm, ABS, Polycarbonate DIN Rail

PFANNENBERG ENCLOSURE HEATER


- Fan heaters of the newest generation
- High heating performance in compact housing 200-1200W
- Very compact design, particularly suitable for smaller electrical cabinets
- Plastic housing protects against injuries
- Heating performance is available quickly due to use of PTC elements
- Electrical connection via spring-type terminal
- Fixed value thermostat can be retrofitted (5C, 15C or 25C)
- Quick installation everywhere where there is space with screws or DIN-profile bars
- Approvals: cURus, EAC, CSA



460-346 200-1200 W

LEGRAND 2 GANG FACEPLATES & MOUNTING PLATES


- This plate clips onto the Batibox support 2x6, 2x8 or 2x3x2 modules reference 080266 or onto 6 x Batibox support 2 modules references 080251
- The notches on each side of the plate allow quick and easy disassembly using of a tool.

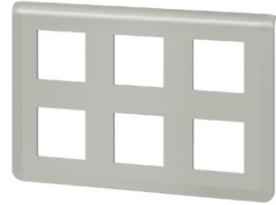

192-5320 Mosaic cover plate for 2x3x2 aluminum modules

SIEMENS WHITE THERMOPLASTIC KOAXIAL SWITCH MECHANISM

- The Siemens sealing set IP44 for switch and button rockers for two-circuit switch and double pushbutton.
- Used for single and double rockers

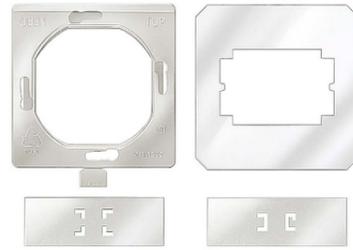

203-2290 For two-circuit switch and double pushbutton

UNISTRUT STEEL

- L' bracket 41x57
- 2-hole L-bracket 90°



176-113 41x57, 2-hole L-bracket 90°

RS PRO STEEL

- Angle bracket with 3.7 mm fixing holes
- Thickness: 1.2 mm
- Width: 10 mm
- Zinc plated finish
- Supplied in packs of 10



427-991 14.6 x 15mm

LEGRAND HANDLE FOR USE WITH ENCLOSURES AND CABINETS

- The Legrand door handle is XL³, spare parts for maintenance of enclosures and cabinets, it from the power cabinet to the distribution board, the Legrand XL³ enclosure offer can be integrated into all technical rooms.
- For maintenance of XL 160, XL 400 and XL 800 enclosures and cabinets



266-1409 For maintenance of XL 160, XL 400 and XL 800 enclosures and cabinets

SCHNEIDER ELECTRIC PRISMASET S SERIES WHITE METAL

- Modular enclosure with 7 x 24 modules for flexible configurations
- Includes label protector, blanking plate strip, cable clips, and modular plate for convenience
- Symmetrical DIN rail and screw/push-in terminals for easy wiring
- Keylock option for enhanced security
- Front plate made of technoplastic for durability
- IP30 protection without door and IP41 protection with door for safety
- IK08 protection without door and IK09 protection with door for impact resistance



119-535 Plastic General Purpose Enclosure, IP30, IK08, IK09, White Lid, 1256

FIBOX GREY POLYCARBONATE ENCLOSURE

- Base with screws for mounting plate/DIN-rail, cover with PUR gasket and stainless steel cover screws.
- Euronord range is designed to house DIN-rail mounted terminal block and various types of sensors. Euronord enclosures are available in polycarbonate, ABS and polyester. There are more than 140 different off-the-shelf versions available.



194-3153 IP66, IP67, Grey Lid, 250 x 160 x 150mm

SCHNEIDER ELECTRIC MULTIFIX SERIES PC/ABS BOX

- The Schneider Electric Multifix Air 3 gangs apparatus box comes in green colour and it's designed for airtight installation. Its fixing mode is by supplied screw. This apparatus box is sold in 10 pieces. It reaches IP40 degree of protection which is very high.
- Sustainable
- Toxic heavy metal free



275-8778 67 x 40mm

EATON 1329 SERIES GALVANISED STEEL MOUNTING PLATE

- The Eaton Mounting plate is a cutting-edge solution designed for seamless integration with IZMX16 and IZM26 enclosures. Crafted for versatility, this mounting plate ensures that your switchgear and control gear systems are securely installed while optimising space.
- Reliable weight capacity to support essential equipment securely
- Streamlined dimensions to facilitate easy installation and fit
- Complies with RoHS standards for environmentally responsible use



241-415 115mm H, 370mm W, 530mm L for Use with IZM26, IZMX16

PHOENIX CONTACT OCS SERIES LIGHT GREY POLYCARBONATE JUNCTION BOX

- Features an effective IP69 rating for optimal water and dust protection
- Accommodates various mounting types for enhanced versatility
- Provides additional accessories to expand functionality as needed
- Includes environmental compliance meeting EU RoHS directives



494-671 IP69, 223 x 204 x 134mm

PHOENIX CONTACT ME-MAX POLYAMIDE PCB MOUNTING ENCLOSURE

- New standard for electronic housing for rail mounting
- Rail bus connector optional
- Simple module exchange without interrupting the contact chain
- Electronic housing consists of housing shells on left and right, panel, transparent cover, metal mounting foot and spring



284-1240 Transparent front cover, Polyamide Housing

WAGO STEEL TOP HAT DIN RAIL

- The WAGO Steel carrier rail is measuring 35 x 7.5 mm in dimensions with a thickness of 1 mm. This 2 meter long rail is unslotted, adhering to the standards set by EN 60715. It has silver colored finish.
- RoHS compliant



278-3859 35mm x 8mm x 2000mm

1946 SERIES RAL 7035 PLASTIC COVER

- Engineered for optimal thermal management enhancing performance durability
- Incorporates secure sealing mechanisms to prevent dust and moisture ingress
- Provides effective protection against mechanical impacts and electrical hazards
- User-friendly design for easy access and maintenance of internal components
- IP65 rating guarantees exceptional protection against dust and water ingress



253-123 500mm H, 375mm W, 70mm L for Use with Basic Enclosure

SCHNEIDER ELECTRIC PANELSET SERIES LOCKABLE POLYESTER REINFORCED WITH FIBREGLASS RAL 7035 PLAIN DOOR

- The Schneider Electric Ribbed door with lock system for Thalassa PHD enclosure, finished in grey (RAL 7035). The Anti-posting door is reversible with a 120° opening angle, offering flexible access and secure closure for outdoor or industrial applications.
- IK10 conforming to IEC 62262
- Polyester material



444-221 1593mm H, 750mm W

EATON XEFFECT CS SERIES KEY LOCK

- Offers exceptional durability with a metal lock and latches
- Features a high-grade, impact-resistant construction to enhance security
- Compatible with standard latches for easy integration
- Includes comprehensive installation instructions and technical resources
- Designed with user convenience in mind, including a key with two keys
- Provides a sleek appearance with its powder-coated surface finishing



240-070 For Use With 22.5 X 20.4 mm Door Cutouts

HAGER KEY LOCK WITH RONIS 405E BARREL

- The Hager 405E key lock for 18 module wide Vega transparent door with high quality, reliability and ease of installation used with Orion enclosures.
- Transparent door type
- Total 18 modules
- Excellent quality product
- Highly durable



252-2638 Key Lock

RS PRO 30 DRAWER UNIT

- Ideal for storing all small components
- Available with 30 or 40 box drawers
- Can be used as a free standing or wall mounted storage unit (wall fixings are not included)
- Black plastic cabinet
- Semi-clear plastic drawers
- Cabinet and drawers made from polypropylene



877-6803 Plastic, 420mm x 270mm x 130mm, Black

SCHNEIDER ELECTRIC PRISMASET SERIES CYLINDER LOCK WITH 405 BARREL FOR USE WITH DOOR

- The Schneider Electric product is a key lock number 405 for locking the door. It is compatible with PrismaSet S or XS door. It has 2 keys and it can be mounted on door of an enclosure of 13, 18 or 24 modules.
- Weight 100 gram



272-7488 2 keys

W.L. GORE POLYVENT HYSI SERIES SNAP-IN

- The Wl Gore & Associates Protective Vents Snap-In Series effectively equalize pressure and reduce condensation in sealed enclosures, while keeping out solid and liquid contaminants. They improve safety, reliability and service life of outdoor electronic device. Protective Vents Snap-In Series delivers robust venting performance and consistent, long-lasting protection, even in very harsh environments. Engineered for use in high-throughput (semi- or fully-automated) production lines, they also allow quick and easy manual installation.
- Fast installation on any production line such as automated and semi-automated or manual
- Reduces condensation by allowing air exchange



425-404 For Use With Enclosures and Cabinets

RS PRO 40 DRAWER UNIT

- Ideal for storing all small components
- Available with 30 or 40 box drawers
- Can be used as a free standing or wall mounted storage unit (wall fixings are not included)
- Black plastic cabinet
- Semi-clear plastic drawers
- Cabinet and drawers made from polypropylene



877-6812 Plastic, 420mm x 270mm x 130mm, Black

SCHNEIDER ELECTRIC NSYPC SERIES RAL 7035 VENTILATED ROOF PLATE

- The Schneider Electric Thalassa PHD outdoor heavy-duty roof ventilation module, measuring H95 x W500 x D420 mm, with IP55 protection. It ensures effective ventilation while protecting enclosures from dust and water ingress in harsh outdoor environments.
- Material is steel with anti-corrosive coating
- Surface finish is polyester powder



444-363 95mm H, 420mm D, 500mm W, For Use With Thalassa PHD

EURO-LOCKS A LOWE & FLETCHER GROUP COMPANY SILVER LOCKING HANDLE

- 200 different key combinations
- Key removable in locked/unlocked position
- Certifications
- ANSI/ESD S20.20:2014
- BS EN 61340-5-1:2007



195-9559 T-Handle

ACCURIDE TELESCOPIC RAIL

- This slide has been designed for heavy duty applications.
- Load rating up to 290 kg
- 100% extension
- 26.5 mm slide thickness
- Corrosion resistant
- Material specification: Aluminium slide, stainless steel ball bearings and retainer
- Vertical (side) mounting only



876-5916 250kg Max Load

RS PRO 20 DRAWER STORAGE UNIT

- Ideal for storing all small components
- Available with 30 or 40 box drawers
- Can be used as a free standing or wall mounted storage unit (wall fixings are not included)
- Black plastic cabinet
- Semi-clear plastic drawers
- Cabinet and drawers made from polypropylene



909-7000 PP, 210mm x 270mm x 130mm, Black

RS PRO WATERPROOF METAL EQUIPMENT CASE


- RS PRO equipment case
- Internal dimensions – height of 380 mm, width of 750 mm and depth of 550 mm
- External dimensions – height of 410 mm, width of 780 mm and depth of 585 mm
- Lightweight aluminium construction offers strength and durability
- Stainless-steel hinges
- Robust ribbed body design
- Weight of 10 kg
- No wheels or dividers
- Showerproof with rubber-sealing around the lid and body contact point
- Stacking locators on each lid corner for easy stacking and inter-stacking



914-4077 410 x 780 x 585mm

RS PRO 150MM STAINLESS STEEL METRIC RULER

- Available in either 15 cm (RS Stock no. 1923660) or 30 cm (RS Stock No. 1923661)
- Metric measurements
- Durable stainless steel design ensuring a durable and long lasting product
- Photoengraved measurements ensuring accuracy at all times
- Anti-glare finish offering excellent visibility
- High-quality class II rulers
- Straight end ensures the rule remains steady when working against surfaces
- Hole at one end for safe storage

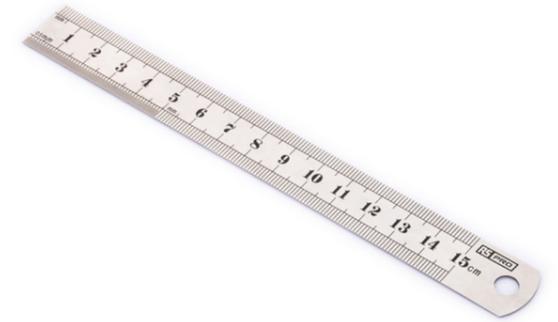

192-3660 150 mm

RS PRO FOLDABLE FLATBED STEEL PLATFORM TROLLEY

- 300 kg load capacity
- Length 907 x Width 608 x Height 870 mm
- Steel platform material
- Flatbed trolley style
- 1 platform
- Foldable saving on storage space and making the trolley easy to transport
- Medium Duty Trolleys
- These platform trolleys offer an ideal solution to assisting with the transportation of various sized goods and materials from one location to another.
- Highly manoeuvrable and safe to handle for the user
- Practical and affordable



251-946 608 x 907 x 870mm, 300kg Load

STANLEY TYLON 8M TAPE MEASURE

- Compact design enhances user comfort during measurements
- Non-reflective matt finish reduces glare for easy reading
- Tru zero end hook adjusts for precision in all measurement scenarios
- Integrated belt clip allows for convenient carrying and storage
- Heavy-duty construction supports reliable performance in demanding tasks



776-9787 Metric & Imperial

RS PRO SIDE CUTTERS

- Semi-flush cut
- Stainless steel tool Moulded plastic grips
- Lightweight quick return springs



536-420 Stainless steel tool Moulded plastic grips

RS PRO FOLDABLE FLATBED STEEL PLATFORM TROLLEY

- 150 kg load capacity
- Length 730 x Width 470 x Height 810 mm
- Steel platform material
- Flatbed trolley style
- 1 platform
- Foldable saving on storage space and making the trolley easy to transport
- Medium Duty Trolleys
- Highly manoeuvrable and safe to handle for the user
- Practical and affordable
- Very sturdy



251-952 810 x 470 x 730mm, 150kg Load

STANLEY DYNAGRIP 3-PIECE PLIER SET

- Induction hardened blade ensures long-lasting performance
- Precision milled cutting edges enhance cutting efficiency
- Sanded steel surfaces prevent corrosion for longevity
- Compact design allows for ease of handling in tight spaces



125-2039 150 mm Overall

RS PRO LONG NOSE PLIERS

- Made from chrome vanadium steel (Cr-V metal)
- Overall length of 140 mm
- Straight tip, long nose pliers type
- VDE 1000 V approved



847-3756 140 mm Overall, Straight Tip

RS PRO WIRE STRIPPER

- Zinc alloy body and handle
- Medium carbon steel sheet for stripping mechanism
- PVC injection soft grip
- High carbon steel for the cutting and stripper knife blades.
- Spring steel for auto-return tension spring.
- Suitable for use with PVC, silicone rubber and others



663-617 22 AWG Min, 8AWG Max, 165 mm Overall

RS PRO 160MM

- From RS PRO, this comprehensive file set features engineers and needle files suitable for professional applications. With bastard cut files for rough working and shaping, and need files for more delicate work, this kit is highly versatile. They feature ergonomic soft-grip bi-material handles to reduce fatigue.
- Both high-quality sets are supplied in a durable EVA foam tool module for use in the RS range of roller tool cabinets and chests



833-5953 Bastard Engineers File Set

RS PRO PHILLIPS SLOTTED PRECISION SCREWDRIVER SET

- Three year warranty
- Supplied with a professional, hardwearing and water-resistant case to keep the tools dry and safe when not in use
- Revolving heads for precision and accuracy
- Long lasting, durable material



537-883 11-Piece

RS PRO SLOTTED: PHILLIPS INSULATED SCREWDRIVER SET

- Single pole voltage tester is both VDE and CE certified ensuring reliable and accurate measurement
- All tools are individually tested to 1000V and comply with stringent VDE standards offering maximum safety when working on live circuits
- Made from high-strength chromium-vanadium steel for outstanding longevity
- TPE insulated handles provide not only high-voltage protection but also comfort and control reducing hand fatigue and the risk of accidental slips



552-506 10-Piece

WERA 70 MM BLADE 3MM BLADE TIP MAINS TESTER SCREWDRIVER WITH NEON INDICATOR

- Hexagonal handle prevents it from rolling away
- Light weight of 28g for ease of handling



828-022 70 mm, 3 mm Blade Tip

RS PRO 12 PIECE HSS SCREW EXTRACTOR SET

- Hardened steel construction
- Suitable for various sizes of screw or bolt
- Suitable for use with appropriately sized tap wrenches
- Supplied in a plastic case
- Set contains extractor sizes 1-6 plus appropriate HSS drills



446-863 HSS Fully Ground Jobber Drills (x6); 2.5; 3.3; 4.2; 5; 6.8 mm

KRAFTFORM KOMPAKT 62

- Pouch with 89-mm long bits. Includes 816 R Kraftform holder with Rapidaptor quick-release chuck and multi-component Kraftform handle for low-fatigue working. Suitable for manual and power tool operations
- 33-piece.
- Pouch with 89 mm-long bits
- Kraftform holder with Rapidaptor quick-release chuck
- Rapidaptor quick-release chuck allows rapid bit change
- Tough viscous bits for universal use
- Suitable for manual and power tool operations
- 1x Kraftform Kompakt 62, 33 pieces
- 1x 816 R Bitholding screwdriver with Rapidaptor quick-release chuck, 1/4" x 119 mm
- 3x 851/4 Z bits: PH 1x89, PH 2x89, PH 3x89



468-4157 33-Piece

RS PRO PHILLIPS SLOTTED PRECISION SCREWDRIVER SET

- ESD safe handle with 10⁹ - 10¹⁰ Ohm resistance
- Rotating cap
- Material handle: PP/TPR
- Steel material: 8660
- Finish: Nickel chromed, phosphonium manganese
- Hardness: 56-58



864-0861 6-Piece, ESD-Safe

RS PRO 10-PIECE SPANNER SET

- Manufactured from high-quality carbon steel
- Flat type, Chrome Plated fully polished ignition spanners
- Heat Treated to HRC 38 - 55 degrees
- Supplied in a black vinyl storage roll



184-8033 4 → 11 mm, Carbon Steel

RS PRO POLYESTER TOOL BAG WITH SHOULDER STRAP 310MM X 200MM X 210MM

- 12in Hard Bottom Tool Bag
- Tough Waterproof Polyester
- Top Opening with Zipper
- Padded Shoulder Strap Included
- Removable Base Board
- Multiple Pockets



788-7205 310mm x 200mm x 210mm

RS PRO 88 PIECE ELECTRICIANS TOOL KIT WITH CASE

- 100V VDE approved tool kit
- 88 piece set
- Ergonomic multi-component handles
- Constructed from Chrome Vanadium Steel
- Ideal for a wide range of applications
- Supplied un a sturdy tool case
- Closed dimensions of 470mm x 370mm x 85mm



734-8885 VDE Approved

RS PRO 94 PIECE MECHANICAL TOOL KIT WITH CASE

- Chrome vanadium construction with chrome molybdenum steel sockets
- Tool storage - supplied in a handy blow moulded tool box carry case
- Product Application Information
- This tool kit has been specially designed to be used by mechanics but also contains handy tools that are ideal for use in the home.



734-8889 94 Piece Mechanical Tool Kit with Case

RS PRO 7 DRAWER HIGH CARBON STEEL WHEELED TOOL TROLLEY TOOLS INCLUDED

- This rolling tool chest features 7 drawers with movable wheels, allowing for flexible mobility and use as a detachable, linkable mobile tool case, catering to various storage and carrying needs.
- The locking tool chest with drawers ensures tool security, while the drawers operate smoothly thanks to the ball-bearing design, providing users with a convenient user experience.
- Tool cabinets on wheels is constructed from robust and powder-coated steel, this garage tool box offers excellent wear resistance, ensuring a long service life and stable storage environment.
- The 7 drawer tool box on wheels equipped with 4 swivel wheels, including 2 with parking brakes, the tool cart can be freely moved within the garage and securely fixed in place, offering convenient operation
- and control.
- The tool chest on wheels suitable for garage, warehouse, workshop, and repair shop use, meeting the diverse storage and carrying needs of professional users, enhancing work efficiency and convenience.



214-727 252 Pieces Engineering Tool Kit with Trolley

RS PRO STEEL TOOL TRAY

- The RS Pro Roll Paper Stand measuring 256 x 180 x 3 mm is a sturdy and practical accessory designed for secure storage and easy dispensing of roll paper and lightweight tools in professional work environments. Made from durable A3 steel with a sand-blasted finish, it offers compact yet strong support and integrates seamlessly with Tool Trolley. This stand keeps rolls organized and protected from damage or accidental unrolling while providing a convenient surface to hold small tools, ensuring essential items remain accessible and securely stored at your workstation.
- Good support Accessories
- Measurement 256x180x3mm
- Be used to prevent the use of lightweight tools and roll paper
- A3 steel made and sand blast surface



552-502 inner Dimensions 256 x 180 x 3mm, W 256mm, L 180mm, H 3mm

FACOM 5 DRAWERS METAL TOOL BOX

- Steel construction
- Foam-covered compartment bottoms - helps to protect tools from damage
- Maximum load: 30 kg.
- Dimensions: 475 x 220 x 238 mm
- Supplied without tools
- Maximum handle opening: instant access to all compartments when open - making it easy to select the tool or item you need
- Weight: 4.5 kg
- Capacity: 25 kg
- Can be locked for added security (padlock not supplied)



611-4183 475 x 220 x 475mm

RS PRO 11 PIECE ELECTRICIANS TOOL KIT WITH POUCH

- VDE approved for electrical safety
- Constructed from high-grade steel
- Comfort grip handles
- Tool storage: supplied in a hard-wearing polyester fabric zippered wallet
- Long lasting and hard wearing tools
- Product Application Information
- This tool set has been specially designed to be used by electricians and for use in any electrical application.



161-221 VDE Approved

RS PRO STEEL TOOL TRAY

- The RS Pro Computer Stand measuring 400 x 260 x 12 mm is a robust and practical support accessory designed to provide a stable platform for computers and lightweight equipment. Made from strong A3 steel with a sandblasted surface finish, it offers excellent durability and a non-slip base to protect valuable devices. This stand prevents direct contact between sensitive electronics and work surfaces, reducing the risk of mechanical damage, dust, and workplace contaminants.
- Good support Accessories
- Measurement 400x260x12mm
- Be used to prevent the use of computer or lightweight tools
- A3 steel made and sand blast surface



552-503 inner Dimensions 400 x 260 x 12mm, W 400mm, L 260mm, H 12mm

RS PRO STEEL TOOL TRAY

- Good support Accessories
- Measurement 256x180x22mm
- Be used to prevent the use of paper
- A3 steel made and sand blast surface



552-505 inner Dimensions 256 x 180 x 22mm, W 256mm, L 180mm, H 22mm

RS PRO 25-PIECE TWIST DRILL BIT SET FOR METAL

- 25 piece drill bit set sizes 1 to 13mm
- 5% Cobalt High-Performance HSS-E Drill bits.
- High-Temperature strength without sufficient coolant
- 135° non-slip split point for precise centring
- Direct drilling without the need for prior centring or drilling a pilot hole
- Cuts faster and lasts longer than regular HSS drill bits
- 0.5 mm increments



216-690 13mm Max, 1mm Min, HSS-E Cobalt Bits

DEWALT XR KEYLESS 18V CORDLESS HAMMER DRILL LI-ION

- 18V XR Li-Ion compact hammer drill driver featuring 5.0Ah XR Li-Ion battery technology
- Brushless Motor Technology for excellent efficiency
- Ultra compact, lightweight design allows use in confined spaces
- Two speed all metal transmission for increased runtime and longer tool life
- Drill Driver and Hammer feature for multiple applications
- 15 position adjustable torque control for consistent screw driving into a variety of materials
- Intelligent trigger design allows for total control of application
- Improved ergonomic design with rubber grip over mould improving users comfort
- Li-Ion battery packs allow for superior insertion and removal with state of charge indicator
- Steel belt hook and magnetic bit holder ensures strong storage solutions



826-8015 Type G - British 3-Pin

RS PRO LED TORCH BLACK

- 4 P8 LEDs to offer a bright light beam with a 200 m reach
- Compact design ideal for illuminating small and confined spaces
- Sturdy metal pocket clip
- Strong Magnet on the base for hand free use
- Lightweight aircraft grade Aluminium housing
- Maximum lumen output 1800 lm
- Supplied with rechargeable 18650 Li-ion battery
- Charging indicator
- 1m impact resistant



219-8132 Red - Rechargeable 1800 lm, 120 mm

STANLEY FMHT66719-0 4V ELECTRIC SCREWDRIVER

- The Stanley power assisted screwdriver allows 300 rpm high speed and reduce fatigue in low torque applications. It has balanced the speed with a torque of 0.9 Nm.
- Easy to grip with its bi-material handle
- Optimised for hard-to-reach places
- Easy screwing or unscrewing with push button



278-3591 USB

WELLER 0.5OZ LEAD FREE SOLDER FLUX CANISTER

- Ideal for cleaning oxidised soldering tips in a hot state
- Lead-free formulation supports environmentally friendly practices
- Provides effective solder flux for electronics requirements
- Contained in a 0.5oz canister for easy use



251-7685 0.5oz

RS PRO LED TORCH BLACK

- SMD LED Penlight torch
- magnet within the torch base
- 375 Lumen white SMD LED 6500k
- Re-chargeable
- 3 x AAA Alkaline batteries supplied
- Weight is 57 g
- Battery charging indicators
- High, Mid, Low mode switching sequence
- Penlight torch housing is Die cast aircraft grade Aluminium and aluminium rear pocket clip
- Size is 154 mm x 15 mm x 21 mm
- Running time from 3 to 16 hours
- Water resistant, 1 m drop resistance



255-4204 Red 275 lm, 154 mm

WELLER WE 1010 SOLDERING STATION 85W

- Temperature accuracy of ±9°C
- 70W Power station 40% more powerful compared to 50W stations
- Ergonomic and fast heating soldering iron
- Features digital display for easy temperature readings
- Heat resistant silicon cables
- Standby mode for efficiency
- Easy tip changes
- EU Plug and UK Plugs



173-7303 230V, 100°C to 450°C

RS PRO INSPECTION MIRROR PROBE

- RS PRO telescopic inspection mirrors which have a fully chromed telescopic shaft and articulated mirror mount. These inspection mirrors are adjustable and can be set in any position for the best possible viewing.
- These hand held mirrors are perfect for the inspection of inaccessible areas and hard to reach places for general inspection purposes.
- Options include:
 - 394-156 - Telescopic Mirror 32 mm
 - Mirror diameter 32 mm
 - Fully extended length: 500 mm
 - Fully folded length: 120 mm
 - Handle: Chrome plated 7.5 mm diameter x 105 mm long
 - Complete with pocket clip
 - 394-172 - Telescopic Mirror 50 mm



394-172 50mm mirror dia. , Adjustable , Telescopic

RS PRO LED HAND LAMP BLACK

- 1300 lumen 6500k white spot beam LED
- 800 lumen 6500k COB LED floodlight
- Tough polycarbonate ABS & Aluminium construction
- Dual switches for easy mode selection
- Convenient shoulder carry strap
- Threaded hole in the base for tripod attachment
- Multiple USB power bank outputs - 5V 3A / 9V 2A / 12V 1A
- Intelligent multiple USB-C charging inputs - 5V 3A / 9V 2A
- Faster 2A and 3A charging
- IPX6 water resistance
- Battery: Rechargeable 3.7v 10400mAh Li-ion battery
- Dimensions: 108 x 200 x 131mm
- Weight: 730 g without batteries



239-7023 Red - Rechargeable 1300 lm, 200 mm

LOCTITE LOCTITE 5145 TEMPFLEX PASTE ADHESIVE

- Skin over time 30 minutes
- Non-corrosive curing mechanism
- Does not corrode or tarnish tracks
- Meets MIL A46/46B Group II Type I
- Hardness is (BS Shore A) 33
- Elongation at break is 750%
- Maximum performance capability reaches after 72 hours
- Tensile strength 7N/mm2 (1000 Psi)



198-7166 40 ml

LOCTITE LOCTITE 243 BLUE THREADLOCKING ADHESIVE

- Cure time is 2 hours
- Medium strength
- Medium viscosity, thixotropic
- Oil tolerant
- Operating temperature ranges between -55°C and 150°C
- Permits disassembly with hand tools for servicing
- Torque tension grade



693-848 10 ml, 2 h Cure Time

3M PERFORMANCE PLUS 8979 DUCT TAPE

- Hand-tearable, so you don't need cutting tools
- Backing resists wear and water for compatibility with harsh settings
- Flame-retardant to reduce the risk of a fire spreading



763-8848 55m x 48mm, Blue

3M SCOTCH SUPER 33+ BLACK PVC ELECTRICAL TAPE

- Offers exceptional resistance to moisture, abrasion, and chemicals
- Suitable for indoor and outdoor applications
- Compatible with various dielectric cable insulations
- Provides high-temperature stability up to 105°C
- Pressure-sensitive adhesive ensures a secure, long-lasting bond
- Flexible for application in cold weather down to -18°C



170-1192 19mm x 20m

VELCRO BLACK HOOK & LOOP TAPE

- Hook-loop lamination without the use of adhesives
- Strong self-engaging.
- Plastic Hooks extruded onto back side of loop material at full width
- Average peel strength : 2.1 N/cm
- 25 ties per roll



198-5458 16mm x 25m

3M SCOTCH 2120E BEIGE MASKING TAPE

- Great for indoor applications such as:
- Painting work
- Fixing masking materials
- Sealing, packing and marking
- Bundling



787-3237 24mm x 50m

3M 425 CONDUCTIVE ALUMINIUM TAPE

- High tensile strength of 49 N/cm ensures durability
- Adhesive offers a strong bonding power of 5.1 N/cm
- Withstands temperatures from -54 °C to +149 °C
- Conductive properties suitable for a range of applications
- Utilises acrylic as the adhesive material for long-lasting performance
- Ideal for electrical insulation and heat-resistant requirements



175-7814 50mm x 55m

RS PRO WHITE PTFE TAPE

- RS PRO thread seal tape
- Made from PTFE (polytetrafluoroethylene)
- Non-adhesive
- Operating temperature range of -190°C to +230°C
- Length of 12 m
- Width of 12 mm
- Thickness of 0.075 mm



183-3490 12m x 12mm x 0.075mm

RS PRO WHITE PTFE TAPE

- Extra thick PTFE tape designed for sealing threads in just one wrap
- Only requires 50% overlap on the thread for BS21 thread up to 2 inches.
- Suitable for more aggressive environments where acids, gases or solvents may be present
- Easy to apply and handle
- Robust pressure resistant



231-964 5m x 12mm x 0.2mm

3M 7661 BLACK

- Polyvinyl chloride backing is resistant to most common solvents found in factory settings
- Supplied on a 33m roll, so you have plenty on hand
- 180% elongation at breaking, so it's tough when put under strain
- Thickness of 0.13mm means it's easy to cut and doesn't pose a trip hazard



399-7575 Yellow PVC 33m Lane Marking Tape, 0.13mm Thickness

ENERGIZER INDUSTRIAL ALKALINE AA BATTERIES 1.5V

- 1.5 V
- AA Batteries
- Mercury and Cadmium free
- 7-year shelf life
- Guaranteed leak proof
- High energy density
- Carton packed
- Standard dimensions: Dia.14.5 mm x Height 50.5 mm



760-5031 AA, 1.5 V

ENERGIZER INDUSTRIAL ALKALINE AAA BATTERIES 1.5V

- Lasts up to seven times longer than ordinary zinc carbon batteries
- Guaranteed leak proof
- High Energy Density



760-5037 AAA, 1.5V

RS PRO 250ML ANTI-STATIC SPRAY

- Capacity of 250 ml
- Non-foaming
- Not dissipative
- Non-conductive
- Spray dispenser
- pH of 7 to 9
- Not suitable for cleanrooms
- Non-flammable to British Aerosol Manufacturers' Association (BAMA) tests
- Restriction of Hazardous Substances (RoHS) compliant
- Complies to ANSI/ESD S20.20:2014 and BS EN 61340-5-1:2007 Electrostatic Control Standards



514-486 250ml

ELECTROLUBE 250ML ANTI-STATIC GLASS CLEANER

- Non smearing
- Non flammable, alcohol free
- Safe to use on coated glass (including TFT and LCD screens)
- Can be used on mirrors, lenses and optical equipment
- Long lasting effect



432-5836 250ml

RS PRO LR44 BUTTON BATTERIES

- 1.5V button cell battery
- LR44 coin cell
- Dimensions 11.53 x 5.43mm
- Zinc Manganese Dioxide chemistry
- High capacity
- Low discharge levels
- Non-Rechargeable



775-7233 1.5V, 11.6mm Diameter, 5 Pack

ANSMANN MAXE AA NIMH RECHARGEABLE AA BATTERIES

- High capacity of 2500mAh supports longer usage
- Low self-discharge rate preserves charge for months
- Compatible with a wide range of electronic devices
- Fast charge capability reduces downtime
- Robust temperature range enhances performance in different conditions
- Eco-friendly construction reduces environmental impact



703-3515 2.5Ah, 1.2V - Pack of 4

RS PRO BLACK FLOOR ESD-SAFE MAT

- ESD rubber floor mat
- Manufactured from black rubber
- Supplied with one stud 10 mm diameter
- Easy to clean
- Smooth surface
- Grounded via a 10 mm male stud fitted to the mat
- Protects sensitive components and operatives from static electricity



787-3120 1.2m x 600mm x 3mm

RS PRO ESD GROUNDING WRIST STRAP & CORD SET WITH 10 MM SOCKET

- Comfortable & adjustable wristband - Premium feel fabric along with a easy to use adjustable clip makes taking on & off easy.
- 1.8m coiled cord - lots of movement & flexibility with a 1.8m length cord.
- Exterior & interior cuff to comply with standards.
- Dark blue band & yellow cap.
- Easy adjustability for any wrist size.



287-7385 10 mm Stud

KARCHER 14285680 FLOOR VACUUM CLEANER WET AND DRY VACUUM CLEANER FOR CLEANING

- Concept Easy Service
- Strong suction power
- Cartridge filter or permanent filter basket



425-391 6.5m Cable, 220 → 240V

RS PRO WHITE DIGITAL DESKTOP TIMER 99 MIN 59 S

- Jumbo LCD display to clearly display time elapsed
- Audible alarm at the end of the count down period
- Operated by 1 x AAA battery (included)
- Compact design with clip allowing you to easily transport it
- Built-in stand ensuring the timer can be displayed up right on a flat surface
- Count up or down, making it a versatile timer suitable for a range of applications



557-610 Timer 99 min 59 s

RS PRO AUTOMATIC STEEL 1150W HAND DRYER

- Hand Dryer measuring 152 (depth) x 260 (height) x 180 (width) mm
- The Dryer is made of steel and white powder coated
- IP-X1 – protection from water that drips vertically onto the product
- Quiet and automatic operation
- Cost-effective and eco-friendly alternative to paper
- Automatic with no touch operation
- 10-12 seconds drying time



136-9557 152mm x 260mm x 180mm

SHARPIE FINE TIP BLACK MARKER PEN

- 5 high quality markers per pack- black
- Flexible fine point tip
- Long lasting pens
- Permanent markers with fine tips, ideal for accuracy
- Ideal for writing on a range of different materials
- Resilient ink doesn't smudge, is quick to dry and is resistant to water



179-4024 Black Sharpie Fine Tip Marker Pens

ELECTROLUBE IPA ELECTROWIPES WET ISOPROPANOL WIPES

- Solvent-soaked cleaning pads in sealed disposable pouches for cleaning and treating edge connector contacts on PCBs. The pads consist of special, non-woven material that is clean and soft and yet lint-free. Solvent based on isopropyl alcohol (IPA) for removing thin layers of flux residue, dirt and grease, including fingerprints and airborne silicone. Ideal for installation and maintenance work on equipment with PCBs: significantly reduces contact resistance between gold-plated/tin-plated contacts and eliminates intermittent interference over extended periods. Especially useful when commissioning and servicing equipment with edge connections. Not electrostatic. Also suitable for numerous cleaning applications, including scanning heads, pressure wheels and other computer components. Supplied in packages of 100 pouches, each containing 3.5 ml IPA in deionised water.



118-1835 Box of 100, 134 x 60mm

EDDING EXTRA FINE TIP BLACK MARKER PEN

- Low Corrosion
- Water-Based
- Non-Porous Surfaces
- Approved by British Aerospace to ABP-9-3323 Class A



231-4531 Permanent

RS PRO COMBINATION ALUMINIUM COMBINATION PADLOCK

- Combination Safety Padlock
- Aluminium body for increased weather durability and strength
- Resettable code
- Solid aluminium body with anodised coating
- 4-Digit code which can be set freely
- Convenience and security



196-3973 6mm Shackle, 40mm Body

MASTER LOCK COMBINATION COMBINATION PADLOCK

- The Master Lock combination padlock features a 40mm wide solid aluminium body for durability with a black lacquer painted finish. The 4 dial combination security offers keyless convenience.
- Chrome plated steel shackle for cut resistance
- Maximum shackle length for more uses



244-8357 6mm Shackle

RS PRO RED 1-LOCK ABS

- Chrome-plated Steel Shackle for increased corrosive resistance of 5 mm for superior physical strength.
- Resistant to extreme temperature changes with ranges between - 130 F to + 1940 F.
- Compact and easy to store
- Insulated body, resistant against heat, dust and debris
- The solid aluminium body of the lockout padlock is encased by a red coloured plastic cover for easy identification.
- Body and shackle insulated against electric shock
- 6 pin brass cylinder



175-1180 Steel Safety Lockout Padlocks, 5mm Shackle, 46mm Attachment

NO CLIMB SOLO SERIES SMOKE AND HEAT DETECTOR KIT

- Storage bag for convenient storage and protection of accessories
- Extension and access poles are non-conductive to ensure safe use



146-6806 9m Reach, Battery-Powered, Cordless

NO CLIMB SOLO SERIES SMOKE DETECTOR TEST KIT

- Solo test kit for testing and maintenance of smoke detectors at heights of up to 6 metres.



384-6922 6m Reach, Cordless

RS PRO LOCKOUT KIT

- Portable kit
- Basic lockout for valves and electrical panels
- 24 products



862-5247 Lockout Kit

RS PRO ANTI-SLIP ELECTRICAL SAFETY MAT

- These Electrical Safety Mats are the perfect upgrade for enhanced safety, efficiency and reliability in a range of environments where electrical safety is paramount
- The matting offers a non-slip high grip surface that prevents slips and falls, and offers secure and stable footing
- The natural rubber offers ultimate durability for long-lasting performance, as well as providing enhanced safety by protecting against electrical shocks for a safer working environment and peace of mind
- These mats are ideal for use in a wide range of electrical environments and applications like industrial workspaces, electrical rooms, laboratories and maintenance areas



245-794 1000V IEC 61111 Class 0 1m x 1000mm x 4mm

RS PRO ANTI-SLIP ELECTRICAL SAFETY MAT

- Specialist electrical insulating matting to protect operatives from electrical shocks.
- Conforms to the most recent internationally recognised safety standard IEC 61111:2009 /BS EN 61111:2009.
- Designed specifically for use in front of switchboards and for other areas with high voltage equipment.
- Three thicknesses available to meet the different classes of working voltage, Class 0, Class 2 and Class 4.
- Colour coded on the reverse clearly identifying the working voltage classification.
- Ribbed surface helps to provide a firmer footing, reducing the risk of slips while improving standing comfort.



819-9108 1000V EN61111 Class 0 1m x 10m x 3mm

POLYPROPYLENE FIRE SAFETY SIGN

- Environmentally friendly polyester film ensures sustainability
- Photoluminescent material enhances visibility in darkness
- Easy peel self-adhesive backing allows for quick installation
- Flexible design is ideal for curved surfaces
- Simple and fast application saves time



146-390 Fire Extinguisher With English Text Self-Adhesive

PLASTIC FIRE SAFETY SIGN

- Emergency Assembly Point sign
- White on green
- English language and assembly pictogram
- Constructed from 1.2mm Polypropylene
- Dimensions of 594 x 420mm
- Suitable for indoor and outdoor use



763-1503 Emergency assembly point With English Text Self-Adhesive



CONTACT US



RS Components Pty Ltd
25 Pavesi Street
Smithfield, NSW 2164
Australia

T +61 1300 656 636
E SupportAU@rs.rsgroup.com
W <https://au.rs-online.com/>



Singapore
133 Cecil Street
#14 - 01
Keck Seng Tower
Singapore 069535

T +65 6865 3400
E Orders.SA@rs.rsgroup.com
W <https://sg.rs-online.com/>



Malaysia
Suite 12-9, The Office Club,
Level 12, Menara Mudajaya,
No 12A, Jalan PJU 7/3,
Mutiara Damansara,
47810 Petaling Jaya, Selangor, Malaysia

T +603 5021 5888
E MY@rs.rsgroup.com
W <https://my.rs-online.com/>



Hong Kong
P.O. Box 80108 Cheung Sha Wan Post
Office Hong Kong

T +852 2421 9898
E HKEnquiry@rs.rsgroup.com
W <https://hken.rs-online.com/>



Vietnam

T +65 6865 3433
E Orders.VN@rs.rsgroup.com



RS Components Ltd
Māngere, Auckland 2022,
New Zealand

T +64 800 888 780
E SupportNZ@rs.rsgroup.com
W <https://nz.rs-online.com/>



Phillippines
21/F Multinational
Bancorporation Centre
6805 Ayala Avenue
Makati City Philippines 1226

T +632 8888 4030
E Orders.PH@rs.rsgroup.com
W <https://ph.rs-online.com/>



Thailand
50 GMM Grammy Place, 19th Floor,
Unit 1901-1904, Sukhumvit 21 Road
(Asoke), Klongtoey Nua, Wattana,
Bangkok, Thailand 10110

T +66 2 648 6868
E Orders.TH@rs.rsgroup.com
W <https://th.rs-online.com/>



Taiwan
8F.-2, No.1, Zhongzheng Rd., Tucheng
Dist., New Taipei City 23670, Taiwan

T +886 800 088 238
E RTWEnquiry@rs.rsgroup.com
W <https://twen.rs-online.com/>



Indonesia

T +65 6865 3433
E Orders.ID@rs.rsgroup.com