


NAVARA



NVR- 001

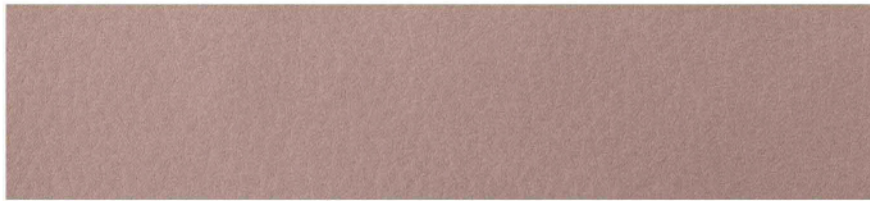

NVR- 002



NVR- 003




NVR- 004



NVR- 005



NVR- 006

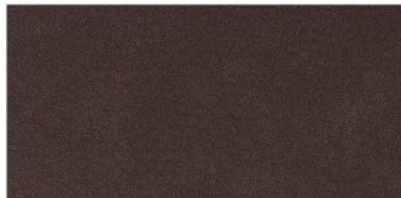

NVR- 007




NVR- 008




NVR- 009




NVR- 010

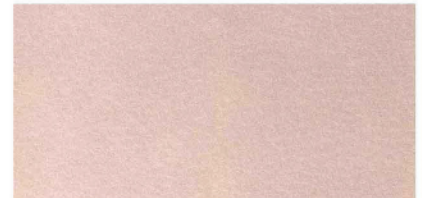


NVR- 011

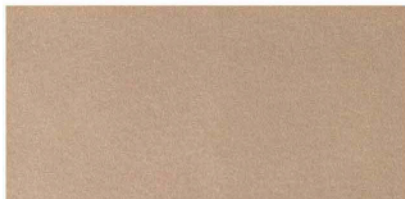

NVR- 012

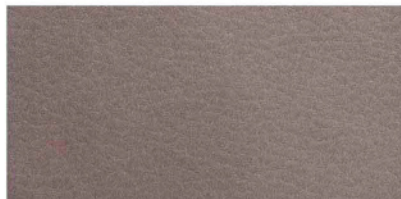

NVR- 013

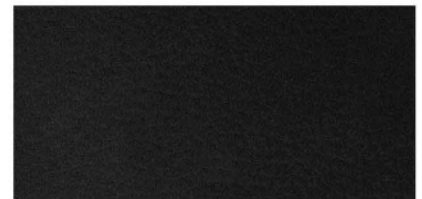

NVR- 014



ANTI
MICROBIAL



FIRE
RETARDANT



QUICK
SHIP

*Colors shown are indicative references only and will vary dependent on screen resolution

PATTERN ILLUSTRATION



APPLICATIONS



Dining Chair



Office Chair



Sofa

NAVARA

DESCRIPTION

Navara, derived from the Spanish word for "defender," embodies strength with an elegant, classic aesthetic. Though it resembles soft suede, this synthetic leather is tough, repelling water and dirt for easy maintenance. Its realistic suede-like appearance can be deceiving, but Navara is designed for durability and long-lasting use. The collection's darker tones enhance the commanding presence of any furniture piece, combining sophistication with resilience.

SPECIFICATIONS

Thickness	1.20 mm
Width	137 cm
Special Surface Finish	Nubuck
Composition	PVC & Knitted Polyester
Usage	Indoor Upholstery
Repeat	No

PERFORMANCE

Abrasion	30.000 rubs
Flammability	CA-117
Anti Microbial	AATCC - 147

ENVIRONMENTAL SUSTAINABILITY

AZO Dye Free	ISO 14362-1
Formaldehyde Free	ISO 14184-1
Hexavalent Chromium Free	ISO 17075-1

Abrasion	ASTM - D4966	30.000 rubs
Tensile Strength	ASTM - D751	Warp: 30 kg/3 cm, Weft: 11 kg/3 cm
Elongation	ASTM - D751	Warp: Max. 46%, Weft: Max. 240%
Tear Strength	ASTM - D4704	Warp: 2.20 kg/4 cm, Weft: 2.88 kg/4 cm
Adhesion Strength	ASTM - D751	Warp: 2.58 kg/3 cm, Weft: 2.44 kg/3 cm
Flexibility Strength	ASTM - D6182	20.000 Cycles
Bursting Test	ASTM - D751	13 kg/cm ²
Blocking Test	ASTM - D6116	Pass
Color Fastness Test (Rubbing Test)	AATCC 8	Grade 3.5-4

** The above tests mentioned are guidelines for synthetic leather used in upholstery but do not necessarily indicate its lifespan. When used in different applications, factors such as the quality of craftsmanship, cleaning methods, proper placement, and handling will all impact its durability.*



THE LEATHER SPECIALIST

HOW TO CARE FOR SYNTHETIC LEATHER

DO's

What you **SHOULD** do



Use a soft, damp cloth to clean the surface of the material



Rub the surface slowly with intense



If it is stained with a fairly intense dye, try to clean the area with a damp cloth as soon as possible



If there are stains that are still left behind, use a special cleaner for synthetic leather to help remove the stains

DONT's

What you **SHOULDN'T** do



Do not use rough/sharp materials (such as a brush) to clean the surface



Do not use harsh (chemical) cleaning products such as: bleach, detergent, thinner, and others

Note:

Ink, permanent marker, denim and other strong textile dyes may be difficult or cannot to remove perfectly, especially on light colored synthetic leather



Test Report

Applicant: PT BERKAT UNGGUL PRATAMA
KOMPLEK CITTA GRAHA
JL. PANJANG NO. 26 BLOK 2L, KEDOYA
SELATAN, KEBON JERUK, JAKARTA BARAT
ATTN: ENDANG MAWARNI S

Number : TWNC01344957

Date Issued : Mar 14, 2025

Sample Description:

One (1) group of submitted samples said to be :

Sample Description	: (IKAT, VIVA, SOLARA, NAVARA) - SYNTHETIC LEATHER
Order/Style No.	: ALL STYLE
Buyers Company Name	: PT BERKAT UNGGUL PRATAMA
Country of Destination	: All Country
Country of Origin	: Taiwan
Testing Stage	: Production Sample
Date Sample Received	: Mar 04, 2025
Date Test Started	: Mar 04, 2025

Test Conducted:

As requested by the applicant, for details please refer to attached pages.

Authorized By:
On behalf of Intertek Testing Services
Taiwan Limited

Anna Jing
Assistant General Manager



Signed by:

Thomas Chou
Thomas Chou
Manager



Page 1 of 3

Intertek Testing Services Taiwan Ltd.

8F., No. 423, Ruiguang Rd., Neihu District, Taipei 114690, Taiwan, R.O.C.

全國公證檢驗股份有限公司

114690 台北市內湖區瑞光路 423 號 8 樓

Tel: (+886-2) 6602-2888 · 2797-8885 Fax: (+886-2) 6602-2405



Test Conducted :

1. Antibacterial Activity Test

As per AATCC TM147-2011(2016)e

Test Organism : *Staphylococcus aureus* (ATCC 6538)
Klebsiella pneumoniae (ATCC 4352)

Sterilization Of Sample Before Test : No Sterilization

Incubation Temperature : 37±2°C

Incubation Period : 18 - 24 Hours

Agar Medium : Nutrient Agar

Tested Sample Size : 25×50mm

Result :

<u>Test Organism</u>	<u>Test Side</u>	<u>Result</u>
<i>Staphylococcus aureus</i> (ATCC 6538)	Blue side	Inhibition of growth beneath the specimen only. (Without clear zone)
<i>Klebsiella pneumoniae</i> (ATCC 4352)	Blue side	Inhibition of growth beneath the specimen only. (Without clear zone)

Remark : Clear zone = Clear area of no growth of a microorganism

<u>As per applicant's provide Reference Rating</u>	
<u>Result</u>	<u>Anti-Bacterial Activity</u>
Growth of test microorganism was observed directly underneath the tested specimen	Not Acceptable
No growth of test microorganism was observed directly underneath the tested specimen	Acceptable

Comment:

<i>Staphylococcus aureus</i> (ATCC 6538)	Acceptable
<i>Klebsiella pneumoniae</i> (ATCC 4352)	Acceptable



Number : TWNC01344957



End of Report

Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our standard Terms and Conditions which can be obtained at our website: <http://www.intertek-twn.com/terms/>. Intertek's responsibility and liability are limited to the terms and conditions of the agreement.

This report is made solely on the basis of your instructions and / or information and materials supplied by you and provide no warranty on the tested sample(s) be truly representative of the sample source. The report is not intended to be a recommendation for any particular course of action, you are responsible for acting as you see fit on the basis of the report results. Intertek is under no obligation to refer to or report upon any facts or circumstances which are outside the specific instructions received and accepts no responsibility to any parties whatsoever, following the issue of the report, for any matters arising outside the agreed scope of the works. This report does not discharge or release you from your legal obligations and duties to any other person. You are the only one authorized to permit copying or distribution of this report (and then only in its entirety). Any such third parties to whom this report may be circulated rely on the content of the report solely at their own risk.

Reporting Statements of Conformity: Please note that the test results contain statement of conformity with the decision rules which are based on the specifications of customers, regulations and standards, and does not consider measurement uncertainty.



Page 3 of 3

Intertek Testing Services Taiwan Ltd.

8F., No. 423, Ruiguang Rd., Neihu District, Taipei 114690, Taiwan, R.O.C.

全國公證檢驗股份有限公司

114690 台北市內湖區瑞光路 423 號 8 樓

Tel: (+886-2) 6602-2888 · 2797-8885 Fax: (+886-2) 6602-2405



TEST REPORT

APPLICANT : PT BERKAT UNGGUL PRATAMA
KOMPLEK CITTA GRAHA
JL. PANJANG NO.26 BLOK 2L, KEDOYA
SELATAN, KEBON JERUK, JAKARTA BARAT

DATE : APRIL 17, 2023

ATTN: ENDANG

SUBMITTED SAMPLE SAID TO BE:

SAMPLE DESCRIPTION : FABRIC OF NUVRINO
BUYERS COMPANY NAME : PT BERKAT UNGGUL PRATAMA
COUNTRY OF ORIGIN : CHINA, TAIWAN, INDONESIA
TESTING STAGE : PRODUCTION SAMPLE

TESTS CONDUCTED:

AS REQUESTED BY THE APPLICANT, FOR DETAILS REFER TO ATTACHED PAGES.


CONCLUSION:

<u>TESTED SAMPLE</u>	<u>STANDARD</u>	<u>RESULT</u>
SUBMITTED SAMPLE	CALIFORNIA TECHNICAL BULLETIN 117-2013 SECTION 1 FOR TESTING OF COVER FABRIC MATERIAL USED IN UPHOLSTERED FURNITURE	PASS

Remark:

Test was conducted with red color as top surface per client confirmation. (See EXH. #1-2)

PREPARED AND CHECKED BY:
FOR INTERTEK INDONESIA



TAUFIQ URAKHMAN
HARDLINE LAB MANAGER

RT/AK/IA/RM/IS/DN

The report shall not be reproduced wholly or in parts without written approval of the laboratory.
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

PT. Intertek Utama Services

Citrabuana Indoloka Building
Jl. Cikini IV No.2, Gondangdia
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345
Hardline Laboratory:
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325
Email : hardlines.indonesia@intertek.com Website: www.intertek.com

Page 1 of 4



Tests Conducted:

1 Flammability Test (California Technical Bulletin 117-2013 Section 1: Cover Fabric Test):

Test Method

The apparatus and method of testing were those described in California Technical Bulletin 117-2013, Section 1, for measuring the tendency of upholstery cover fabric to smolder and contribute to fire propagation, when subjected to a smoldering ignition source.

Pass/Fail Criteria

A cover fabric is considered pass or fail based on following criteria:

1. A single mock-up test specimen fails to meet the requirements of this test procedure if any of the following criteria occurs:
 - a) The mock-up test specimen continues to smolder after the 45 minutes test duration;
 - b) A vertical char length (measured as described in step 11.9 of ASTM E1353-08a $\epsilon 1$) of more than 1.8 inches (45 mm) develops on the cover fabric.
 - c) The mock-up test specimen transitions to open flaming.
2. The cover fabric passes the test if three mock-up specimens pass the test. i.e., the cigarettes burn their full length and the mock-ups are no longer smoldering.
3. If more than one specimen fails, the cover fabric fails the test.
4. If any one of the three initial specimens fails, repeat the test on additional three specimens.
5. If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.

Test Result:

Initial Test				
	Vertical Char length (Inches)	Mock-up specimen continues to smoulder After 45 Minutes	Mock-up test specimen transitions to open flaming	Test Result
Specimen 1	0.4	No	No	Pass
Specimen 2	0.4	No	No	Pass
Specimen 3	0.5	No	No	Pass

Conditioning: At least 24 hours in an atmosphere having a temperature of $21^{\circ} \pm 3^{\circ} \text{C}$ ($70^{\circ} \pm 5^{\circ} \text{F}$) and less than 55% relative humidity

Conditioning : Temp 20°C, RH 50%

Air Flow Rate Prior to test : 0.1 m/s

Air Flow Rate After test : 0.1 m/s

Remark: No = Was not observed

The report shall not be reproduced wholly or in parts without written approval of the laboratory.
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

Date Sample Received : April 11, 2023
Date Modified : April 17, 2023
Testing Period : April 11, 2023 to April 17, 2023

END OF REPORT

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct.

The report shall not be reproduced wholly or in parts without written approval of the laboratory.
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

PT. Intertek Utama Services

Citrabuana Indoloka Building
Jl. Cikini IV No.2, Gondangdia
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345
Hardline Laboratory:
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325
Email : hardlines.indonesia@intertek.com Website: www.intertek.com

Page 3 of 4



Product Photo



The report shall not be reproduced wholly or in parts without written approval of the laboratory.
Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our General Terms and Conditions.
For the complete term and condition, please visit : <http://www.intertek.com/terms/>

IUS – TR.HL – 001

PT. Intertek Utama Services

Citrabuana Indoloka Building
Jl. Cikini IV No.2, Gondangdia
Jakarta 10330, Indonesia

Telp. (62-21) 391 8584 (Hunting), 391 8574 (Direct), Fax. (62-21) 391 8345
Hardline Laboratory:
Jakarta (62-21) 391 8574, Semarang (62-24) 762 7107 / 762 7325
Email : hardlines.indonesia@intertek.com Website: www.intertek.com

Page 4 of 4



TEST REPORT

Report No. : HL30029/2025

Page : 1 of 2

Date : MAR. 12, 2025

PT BERKAT UNGGUL PRATAMA

KOMPLEK CITTA GRAHA, JL. PANJANG NO.26 BLOK 2L, KEDOYA SELATAN, KEBON JERUK,
JAKARTA BARAT**The following merchandise was submitted and identified by the applicant as:**Product Description: NUVRINO(*)-SYNTHETIC LEATHERStyle/Item No.: ALL STYLE**We have tested the submitted sample(s) as requested and the following results were obtained:**Test Requested: For compliance with California Technical Bulletin 117-2013 Requirements,
Test Procedure and Apparatus for Testing the Smolder Resistance of Materials
Used in Upholstered Furniture -
Section 1 Cover Fabric TestTest Method & Result: ---See following sheet(s)---Date of Receipt: Mar. 04, 2025Testing Period: Mar. 04, 2025 ~ Mar. 12, 2025Conclusion: The submitted sample(s) **complies with** the requirements of Section 1.4 for
Cover Fabric Test of California Technical Bulletin 117-2013.Signed for and on behalf of
SGS Taiwan Ltd.
Lawrence Yang
Asst. Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

Test Method & Result:

TB 117-2013 Requirements, Test Procedure and Apparatus for Testing the Smolder Resistance of Materials Used in Upholstered Furniture -

SEC. 1 Cover Fabric Test

Pass

Criteria	Test 1	Test 2	Test 3
1.4.1a) The mock-up test specimen continues to smolder after the 45 minute test duration;	No	No	No
1.4.1b) A vertical char length of more than 1.8 inches (45 mm) develops on the cover fabric.	No	No	No
1.4.1c) The mock-up test specimen transitions to open flaming.	No	No	No
1.4.2. The cover fabric passes the test if three initial mock-up specimens pass the test, i.e., the cigarettes burn their full length and the mock-ups are no longer smoldering.	Yes	Yes	Yes
1.4.3. If more than one initial specimen fails, the cover fabric fails the test.	N/A		
1.4.4. If any one of the three initial specimens fails, repeat the test on additional three specimens.	N/A		
1.4.5. If all three additional specimens pass the test, the cover fabric passes the test. If any one of the additional three specimens fails, the cover fabric fails the test.	N/A		

N/A = Not Applicable

Note: 1. The content of this report is invalid if it is not presented as the entire report.

2. The decision rule of the statements of conformity is following the ILAC G8:09/2019 by using the simple acceptance decision rule.

– Picture(s) –



Photo A: Appearance of the sample

--- End of Report ---

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.