



Ranger 2 4MP

4MP H.265 Wi-Fi Pan & Tilt Camera

With 4MP QHD live monitoring and 0~355° pan & -5~80° tilt features, Ranger 2 4MP ensuresevery corner of your home completely covered. Human Detection quickly findshuman targetsin imagesand immediately sendsa notification to you. Privacy Mode helpsprotect your personal privacy when you are home, and Smart Tracking function lets the camera follows moving objects when it detects motion.



H.265 4MP QHD See more than 1080P



Smart Tracking



PrivacyMode

Hide the lensto protect your personal privacy



Human Detection

Quickly find human targetsin you home



Abnormal Sound Alarm

Sendsalertsto your smartphone when it detectsabnormal sound

Automatically tracksmoving objects



Alarm Notification

Sendsinstant alertsto your mobile phone when an event is detected



Built-in Siren

Scare stangersaway from your home



Diversified Storage

SupportsNVR, Cloud Storage or Micro SDcard (up to 256GB)



Two-way Talk


Communicate with family and pets easily



Stay close with what you care

With Cloud service, you willhave accessto what you care aslong as Internet is available. You can record daily or motion videos on Cloud and play back anytime anywhere.



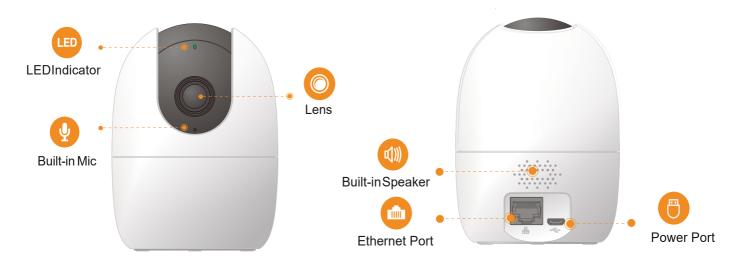

Front View **Back View**

Specifications

Camera

1/2.7" 4 Megapixel Progressive CMOS 4MP (2560 x 1440)

Night Vision: 10m(33ft) Distance

3.6mm Fixed Lens

Field of View: 92° (H), 48° (V), 109° (D)

355° Pan & -5~80° Tilt

Video & Audio

Video Compression: H.265/H.264

Up to 25/30fpsFrame Rate

16x Digital Zoom

Two-way Audio

Motion Detection Human Detection

Notice Management

Configurable Region Abnormal Sound Alarm

What' sin the box

- 1x Camera
- 1x Quick Start Guide
- -1xPowerAdapter
- 1x Power Cable
- 1x Screw Package
- 1x Mounting Plate
- 1x Installation Position Map

Network

Wi-Fi:IEEE802.11b/g/n,50mOpen Field

Imou App: iOS, Android

onvif

Auxiliary Interface

Micro SDCard Slot(up to 256GB)

Built-inMic & Speaker

Reset Button

General

DC 5V1A Power Supply

Power Consumption: < 5W

Working Environment:-10° C~+45° C, LessThan 95%RH

Dimensions:106.1× 77.4× 77.4mm (4.17× 3.04× 3.04nch)

Weight: 211g (0.47lb)

CE, FCC

