

**Tenda**



All for better networking.

**i24**

AC1200 Wave 2 Gigabit AccessPoint



# i24

## AC1200 Wave 2 Gigabit AccessPoint

### What it does

Tenda i24 is a gigabit dual-band ceiling accesspoint that compliant with IEEE802.11acWave2, and offers a concurrent data rate up to 1167 Mbps. Powered by MU-MIMO technology, a single i24 can communicate with multiple clients at one time, letting you enjoy better experience. And the built-in omni-directional antennas broaden the wireless coverage of a single AP. In addition, you are allowed to adjust its transmit power as required using the web UI, and use an IEEE802.3af-compliant PoE sourcing equipment to power on it, achieving long-distance power supply without tampering your existing grid network. You are also allowed to use Tenda access controllers (AC) to configure and manage multiple i24 in a centralized manner.

# Key Features

---

Up to 1167 Mbps dual-band data rate;  
Gigabit LANport;  
MU-MIMO;  
Supports to be centrally managed by all Tenda access controllers (AC) and enterprise routers that include AC functionality

## Product Features

---

### Gigabit internet connections for ultra-fast experience

Up to 1167 Mbps dual-band data rate, and the 1000 Mbps Ethernet port let you enjoy ultra-fast internet connections.

### IEEE802.11ac Wave 2 and MU-MIMO

A single i24 can communicate with multiple wireless clients at one time, letting you enjoy higher throughput and better experience.

### Dual-band for more connected clients

i24 allows clients that support either 2.4 GHz or 5 GHz band, or both to connect to it at the same time, tripling the quantity of connected clients of traditional single-band AP.

### Built-in omni-directional antennas

The optimized antennas make i24 outstanding in radiating wireless signals and broadening wireless coverage.

### Resource allocation fairness for reliable wireless network

Featuring air interface scheduling, i24 could evenly allocate air interface resources, thus improving your wireless network speed as a whole by preventing clients with low data rate from consuming too much network resources. What's more, i24 also allows you to customize the RSSI threshold value, so that you can disconnect clients that do not reach the RSSI.

### Multiple interference-mitigation technologies

Powered by multiple interference-mitigation technologies, i24 automatically chooses the best channel and adjusts the transmit power to a reasonable value, significantly optimizing wireless signals by mitigating co-channel interference and electro magnetic interference (EMI).

## VLANtagging for SSID

You are allowed to set multiple SSIDs, and enabled to add VLAN tags for SSIDs with the IEEE 802.11q VLAN-compliant feature so as to protect the security of your network.


## Standard PoE sourcing and DC power supply for easy deployment

You can use an IEEE 802.3at-compliant PoE sourcing equipment, or a DC power adapter to power on i24.

## Centralized management

You are allowed to configure and manage multiple i24 in a centralized manner through all Tenda access controllers (AC) and enterprise routers that include AC functionality, and enjoy simple management, configuration and monitoring of all access points.

## Specification

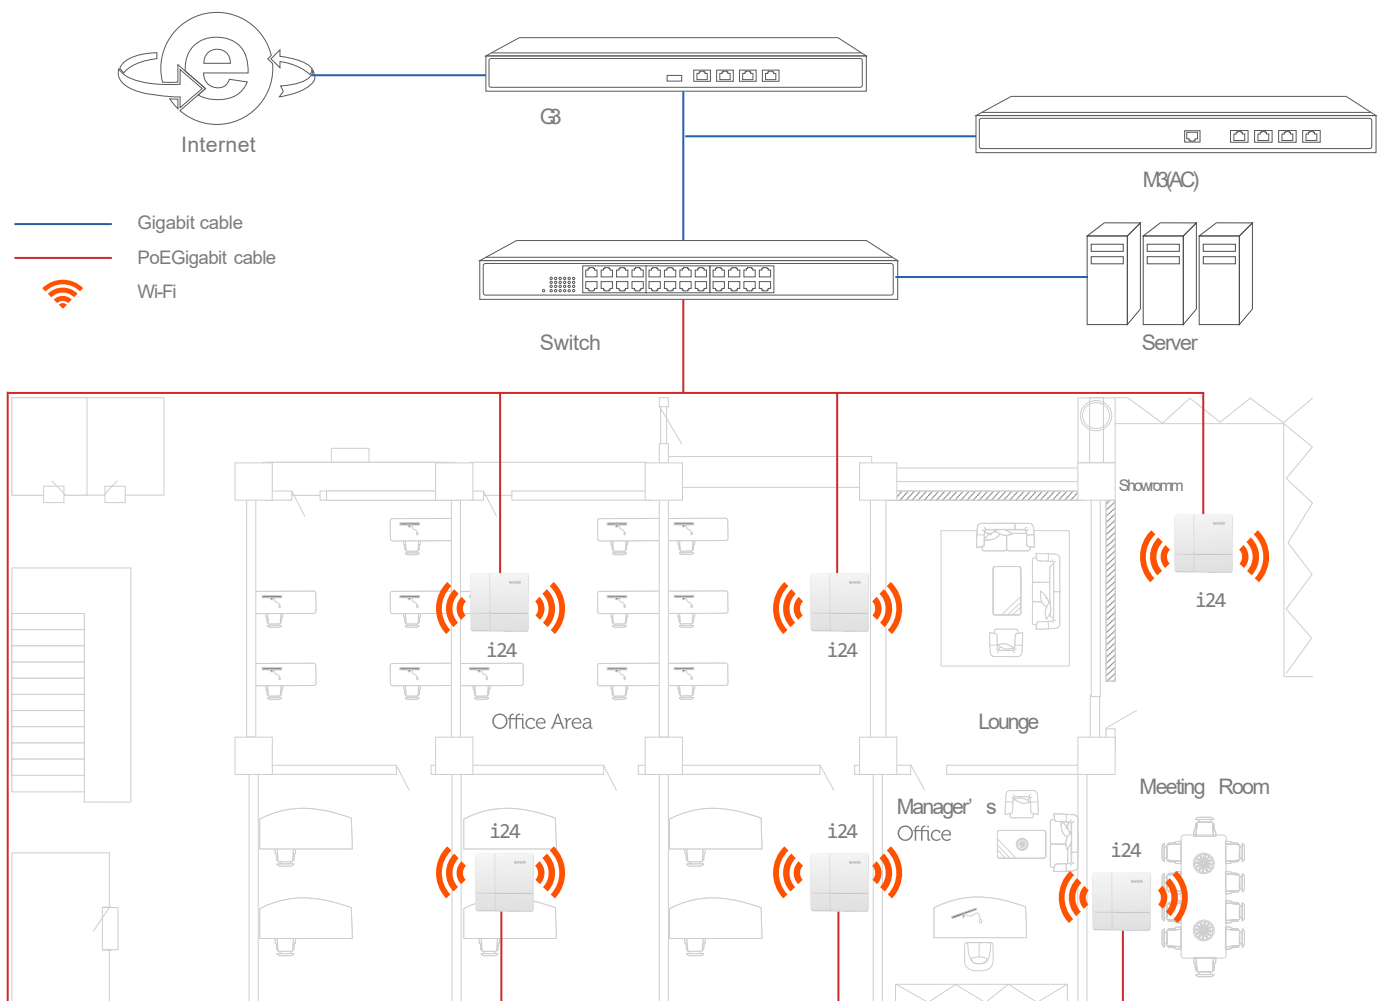

# Specification

Product Information		
Model	i24	
Appearance	Ceiling AP	
Dimensions	178 mm * 178 mm * 38 mm	
Hardware Specifications		
Frequency band	2.4 GHz, 5 GHz	
Wireless standards	IEEE802.11a, IEEE802.11b, IEEE802.11g, IEEE802.11n, IEEE802.11ac	
2.4 GHz data rate	1 - 300 Mbps	
5 GHz data rate	6 - 867 Mbps	
Ethernet port	1*10/100/1000 Base-TX port	
Button	1*Reset	
LED indicator	1*Power	
Max. power consumption	Full-load 11.5W	
Power supply standard	IEEE802.3af & 12V1A DC	
Hardware Specifications		
Operating modes	AP, Client+AP	
Hide SSID	Supported	
Max. No. of SSID	2.4 GHz: 8	5 GHz: 4
Max. connected clients	2.4 GHz: 128	5 GHz: 128
WEP	Supported	
WPA-PSK	Supported	
WPA2-PSK	AES/TKIP	
WPA	Supported	
WPA2	Supported	
Access control	MAC address-based	
Adjustable power transmit	Supported	
AP isolation	Supported	
Connected clients control	Supported	
RSSI threshold	Supported	
WMM	Supported	
VLAN tagging for SSID	Supported	
Antenna gain	4 dBi	
2.4 GHz Transmit power	23 +/- 1.5 dBm	
5 GHz Transmit power	23 +/- 1.5 dBm	
802.11b RX sensitivity	-93 dBm	
2.4 GHz 802.11n (MCS7) RX sensitivity	-72 dBm	
5 GHz 802.11a RX sensitivity	-93 dBm	

# Specification

5 GHz802.11n (MCS7)RXsensitivity	-74 dBm
LEDcontrol	Supported
Diagnostics tool	Ping, Traceroute
Scheduled reboot	Supported
Reboot at specified interval	Supported
Management	Web UI
System logs	Supported
Firmware upgrade	Local and ACupgrade
Reboot	Local and ACreboot
Reset	Local and ACreset
Backupconfiguration	Supported
Restoreconfiguration	Supported

Operating Environment	
Default login IPaddress	192.168.0.254
Default user name	admin
Default password	admin
Operating temperature	-10℃ - 45℃
Operating humidity	(10% - 90%) RH,non-condensing
Storage temperature	-30℃ - 70℃
Storage humidity	(10%~90%) RH,non-condensing

Certificates	
Certificates	CE/FCC/RoHS

## SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int' I E-City,  
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn  
Tel:+86-755-2765 7098  
Fax:+86-755-2765 7178  
PC:518055