

# DH-IPC-HDW1439V-PV

## 4MP Entry Smart Dual Light Active Deterrence Fixed-focal Eyeball Network Camera



### Series Overview

With features of simple installation, easy operation, and high performance-cost ratio, Dahua Entry series network camera is applicable to small and medium-sized scenes, such as homes/residences, small-sized retail stores, and other small and medium-sized enterprises.

### Functions

#### Siren and Light Active Deterrence

Dahua siren and light active deterrence network camera supports the light alarm and voice alarm when perimeter event occurs, to realize the deterrence and effective intervention. The camera is built in multiple voices for selection, and supports customized voice importing.

#### Smart Dual Light

Dahua Smart Dual Light technology adopts smart algorithm to detect targets. Usually, the IR illuminator is on at night; when the target appears in the monitoring area, the white light is on, and the camera records the full-color video and information of key events. That is, the camera links snapshot and video with full-color image. When the target is out of the monitoring area, the white light is off and the IR illuminator is on, which reduces light pollution efficiently.


#### Human Detection

Dahua intelligent algorithms extract moving human targets from videos and filters out alarms that are triggered by non-human targets to increase the accuracy and effectiveness of alarms.

#### Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

- 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 4 MP (2560 × 1440)@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in IR LED and warm light, and the max. IR distance is 30 m, the max. warm light distance is 30 m.
- WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Abnormality detection: Motion detection, video tampering, audio detection, network disconnection, IP conflict and illegal access.
- Built-in Mic; built-in speaker; support two-way talk.
- 12 VDC/PoE power supply, easy for installation.
- IP67 protection.
- Sound and light alarm.
- Supports human detection.
- One-tap arming/disarming.



#### Protection (IP67, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows ±30% (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification						Smart Codec	Smart H.265+; Smart H.264+
Camera						Video Frame Rate	Main stream: 2560 × 1440@(1~25/30 fps) sub stream: 704 × 576@(1~25 fps)/704 × 480@(1~30 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Image Sensor	1/2.9" CMOS					Streaming Capability	2 streams
Max. Resolution	2560 (H) × 1440 (V)					Resolution	4M (2560 × 1440); 3M (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
ROM	128 MB					Bit Rate Control	CBR/VBR
RAM	128 MB					Video Bit Rate	H.264: 32 kbps~4096 kbps; H.265: 12 kbps~4096 kbps
Scanning System	Progressive					Day/Night	Auto(ICR)/Color/B/W
Electronic Shutter Speed	Auto/Manual 1/3 s~1/100,000 s					BLC	Yes
Min. Illumination	0.006 lux@F1.6 (Color, 30 IRE) 0.0006 lux@F1.6 (B/W, 30 IRE) 0 lux (Illuminator on)					HLC	Yes
S/N Ratio	>56 dB					WDR	120 dB
Illumination Distance	Up to 30 m (98.43 ft) (IR) Up to 30 m (98.43 ft) (Warm light)					White Balance	Auto; natural; street lamp; outdoor; manual; regional custom
Illuminator On/Off Control	Auto;Manual					Gain Control	Manual;Auto
Illuminator Number	1 (IR LED); 1 (Warm light)					Noise Reduction	3D NR
Angle Adjustment	Pan: 0°~360° Tilt: 0°~78° Rotation: 0°~360°					Motion Detection	OFF/ON (4 areas, rectangular)
Lens						Region of Interest (RoI)	Yes (4 areas)
Lens Type	Fixed-focal					Smart Illumination	Yes
Lens Mount	M12					Smart Dual Light	Yes
Focal Length	2.8 mm; 3.6 mm					Image Rotation	0°/180°
Max. Aperture	F1.6					Mirror	Yes
Field of View	2.8 mm: H: 94°; V: 51°; D: 110° 3.6 mm: H: 78°; V: 42°; D: 92°					Privacy Masking	4 areas
Iris Control	Fixed					Audio	
Close Focus Distance	2.8 mm: 1.1 m (3.61 ft) 3.6 mm: 1.5 m (4.92 ft)					Built-in MIC	Yes, built-in Mic
DORI Distance	Lens	Detect	Observe	Recognize	Identify	Built-in Speaker	Yes, built-in speaker
		2.8 mm	64.0 m ( 209.97 ft)	25.6 m ( 83.99 ft)	12.8 m ( 41.99 ft)	Audio Compression	G.711a; G.711Mu; PCM; G.726
DORI Distance	3.6 mm	78.0 m ( 255.91 ft)	31.2 m ( 102.36 ft)	15.6 m ( 51.18 ft)	7.8 m ( 25.59 ft)	Alarm	
		*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool.				Alarm Event	Network disconnection; IP conflict; illegal access; motion detection; video tampering; audio detection; SMD (human); security exception;
Intelligence						Network	
Human Detection	Support the classification and accurate detection of human					Network Port	RJ-45 (10/100 Base-T)
Smart Search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos					SDK and API	Yes
Video						Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; DHCP; DNS; DDNS; NTP; Multicast; ICMP; IGMP ; P2P; Auto Registration
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)					Interoperability	ONVIF (Profile S & Profile T); CGI
						User/Host	6 (Total bandwidth: 24 M)
						Storage	FTP

# Entry Series | DH-IPC-HDW1439V-PV

Browser	IE; Chrome; Firefox
Management Software	Smart PSS Lite; DSS; DMSS
Mobile Client	iOS;Android
Security	Digest;WSSE;Account lockout;Security logs;Generation and importing of X.509 certification;HTTPS;Trusted boot;Trusted execution;Trusted upgrade

## Certification

Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU
----------------	--

## Power

Power Supply	12 VDC/PoE (802.3af)
Power Consumption	Basic: 1.8 W (12 VDC); 2.5 W (PoE); Max.: 8.5 W (12 VDC); 10 W (PoE) (H.265 + intelligence on + WDR + IR intensity + warm light deterrence + speaker)
ePoE	No

## Environment

Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Operating Humidity	≤95% (RH), non-condensing
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)
Storage Humidity	≤95% (RH), non-condensing
Protection	IP67

## Structure

Casing Material	Inner core: Metal + Plastic; Cover: Plastic
Product Dimensions	100.9 mm × Φ109.9 mm (3.97" × Φ4.33")
Net Weight	0.32 kg (0.71 lb)
Gross Weight	0.46 kg (1.01 lb)

## Ordering Information

Type	Model	Description
IP CAMERA	DH-IPC-HDW1439V-PV	4MP Entry Smart Dual Light Active Deterrence Fixed-focal Eyeball Network Camera
	DH-PFA109	Mount Adapter
	DH-PFB220C	Ceiling Mount Bracket
	DH-PFB305W	Wall Mount Bracket
	DH-PFA151	Corner Mount Bracket
	DH-PFA150	Pole Mount Bracket
	DH-PFA152-E	Pole Mount Bracket
	DH-PFB205W-E	Wall Mount Bracket
	DH-PFM321-EN	DC12V1A power adapter
	PFM900-E	Integrated Mount Tester

## Accessories

Optional:



DH-PFA109  
Mount Adapter



DH-PFA13G  
Junction Box



DH-PFA150  
Pole Mount Bracket



DH-PFA151  
Corner Mount Bracket



DH-PFA152-E  
Pole Mount Bracket



DH-PFB205W-E  
Wall Mount Bracket



DH-PFB220C  
Ceiling Mount Bracket



DH-PFB305W  
Wall Mount Bracket





DH-PFM320D-EN  
DC12V2A power adapter



DH-PFM321-EN  
DC12V1A power adapter



PFM900-E  
Integrated Mount Tester

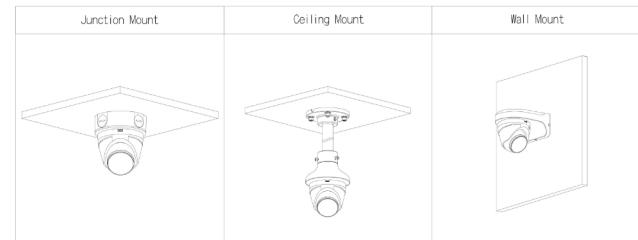

## Dimensions (mm[inch])

mm [inch]

