


Tire Razor Dial Indicator Bracket – Installation Instructions

Step 1 – Orient the Mounting Bracket and Position Properly

Note the bracket has three (3) set screws. Be sure to orient the bracket so the side with a single set screw is pointing toward the front of the Tire Razor as shown in the accompanying picture. The bracket should be mounted so it is flush with the top of the axle block as shown.

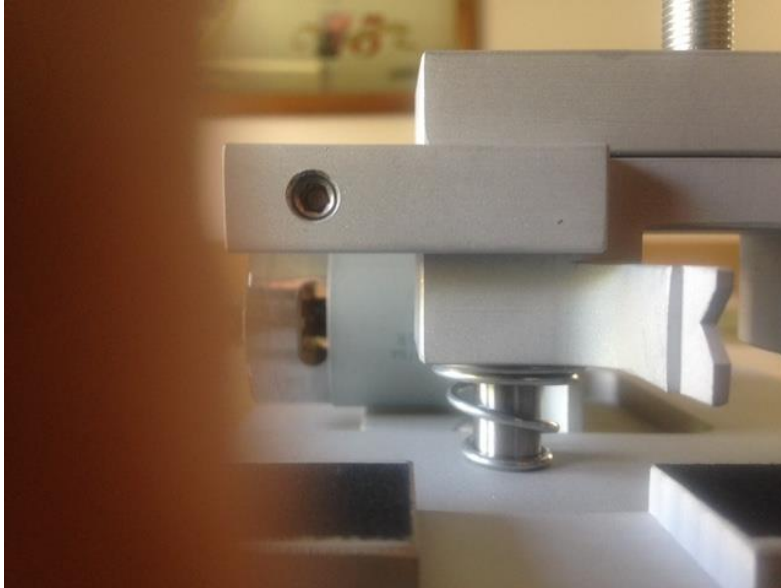



Step 2 – Secure the Mounting Bracket in Place

Looking at the back side of the mounting bracket, you will see 2 set screws that secure the mounting bracket to the Tire Razor. Double-check the alignment as described in Step 1 and carefully tighten the set screws – **DO NOT OVERTIGHTEN!**



Step 3 – Mount the Dial Indicator

After the mounting bracket is attached to the Tire Razor as described in the previous steps, carefully slide the dial indicator mounting stem into the mounting hole. Adjust so dial indicator is facing toward the front of the Tire Razor and the stem is flush with bottom of bracket (refer to accompanying picture). Carefully tighten the set screw taking care **NOT TO OVERTIGHTEN or you can damage the dial indicator.**

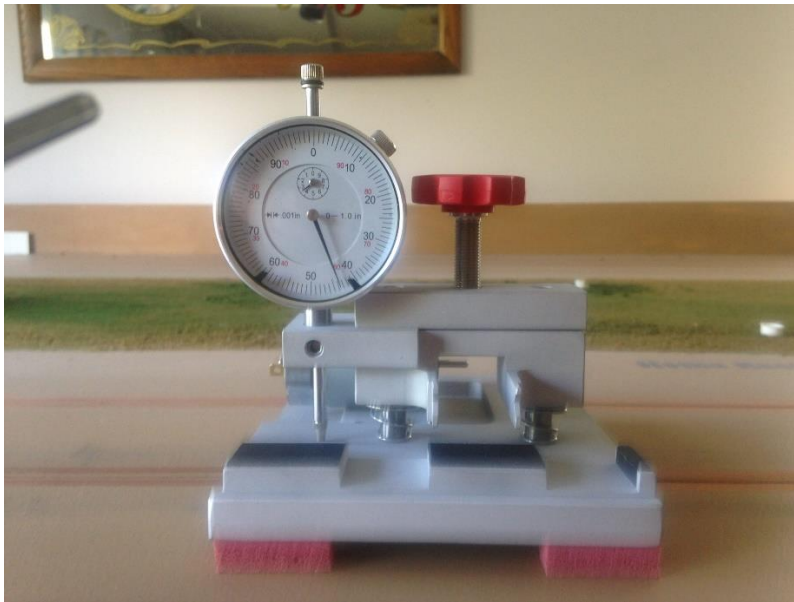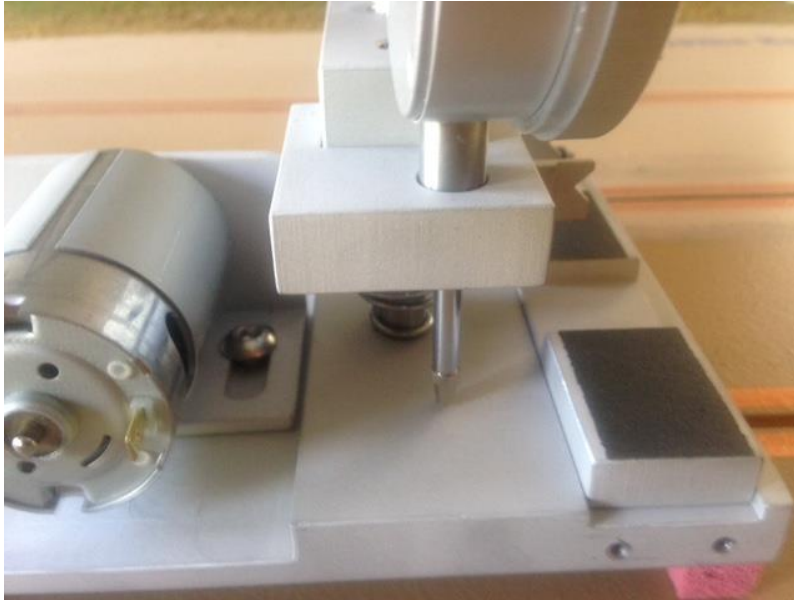

Your Tire Razor Dial Indicator is now ready for use.