



Product designation

Product type designation

Description

Accessories for

Auxiliary contact characteristics

Rated insulation voltage U_i IEC/EN

V 690

Rated impulse withstand voltage U_{imp}

kV 4

Operational characteristics

IEC maximum current (I_{max})

A 63


Mechanical features

Weight

g 28

Dimensions

Three-phase
connection
busbars
45mm/1.77"
spacing
11SMX
Three-phase
connection
busbars
45mm/1.77"
spacing
SM1P..., SM1R...

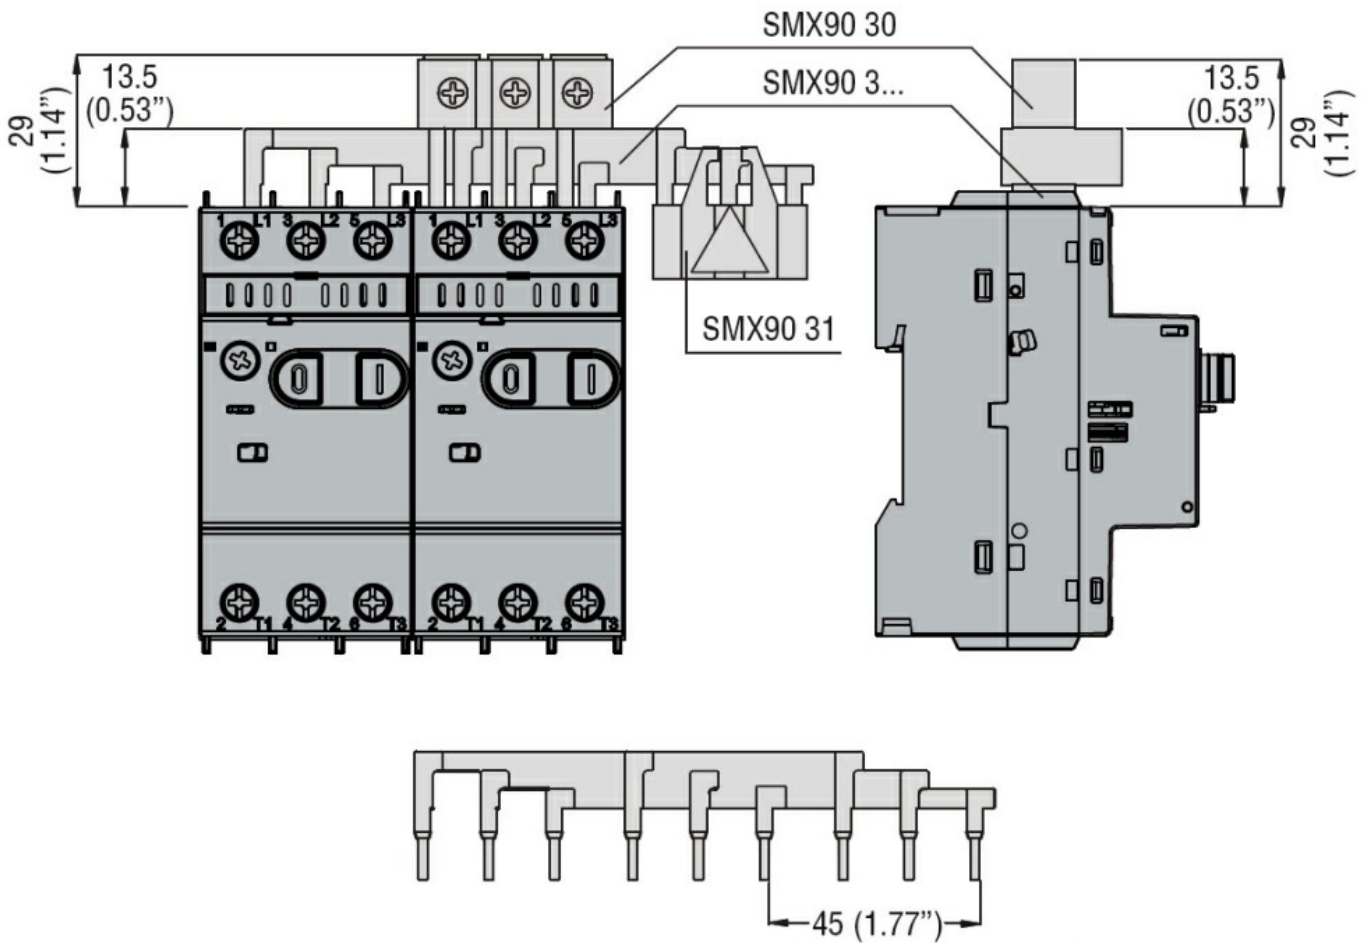

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification