

PULSED OR CONTINUOUS SOUND MODULE COMPLETE WITH COVER. Ø70MM, 110...120VAC, PULSED (78DB) OR CONTINUOUS (75DB) SOUND. IP65 PROTECTION. BLACK



Signal tower Ø70mm/2.75" 8LT7S - Sound

modules

Product designation

Product type designation


General characteristics		
Diameter	mm - inch	70 / 2.75
Supply voltage (AC)	V	110120
Colour		Black
IEC degree of protection		IP65
Sound module consumption (AC)	mA	40
Sound intensity	dB	75
Mechanical features		
Weight	g	240
Ambient conditions		
Tanananatura		


Temperature

Operating temperature

min	°C	-20
max	°C	+50


Dimensions





PULSED OR CONTINUOUS SOUND MODULE COMPLETE WITH COVER. Ø70MM, 110...120VAC, PULSED (78DB) OR CONTINUOUS (75DB) SOUND. IP65 PROTECTION. BLACK

Wiring diagrams

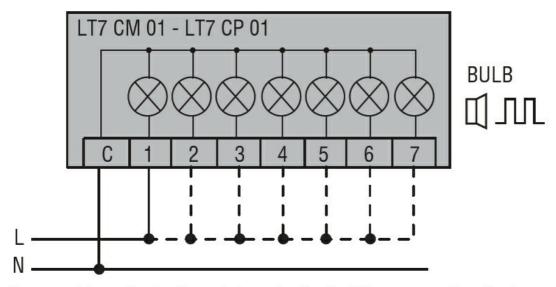

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance		
Compliance		
	CSA C22.2 n°14	
	IEC/EN 60947-1	
	IEC/EN 60947-5-1	
	UL508	
Certificates		
	cULus	

ETIM classification

EAC

ETIM 8.0

EC001261 -Acoustic module for signal tower