




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

Catégorie	Contacts interface	Protocole de communication
Tension d'alimentation	Alimenté par batterie	Piles d'alimentation
Output power	8 dBm	N. canaux en entrée
Tension des entrées	Libre de potentiel	Longueur max des câbles
Norme	2014/53/EU, EN 60669-2-1, EN 60669-1, ETSI EN 300-328	Indice de protection
Température de fonctionn.	-5 ÷ +45 °C	Température de stockage
Relative humidity (non-condensative)	Max 93%	Dimensions LxHxP (mm)
Electrocod	051A	-25 ÷ +70 °C
		42x40x20

DIMENSIONS

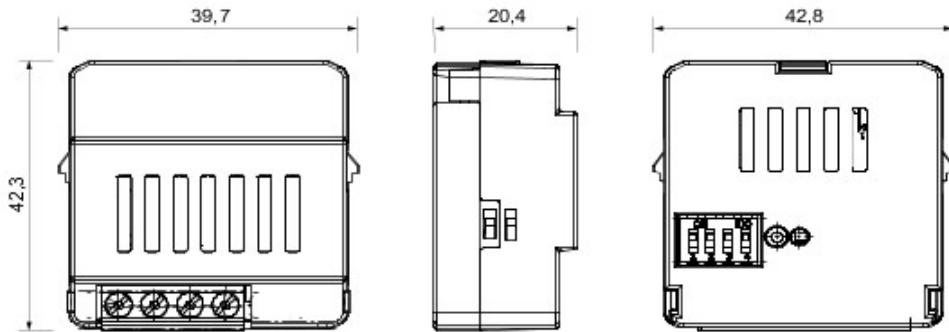

SYMBOLE TECHNIQUE

IP

IP20

NORMES ET HOMOLOGATIONS

