




Product designation  
Product type designation  
Number of poles  
Operating voltage type

Fourth pole  
GLX42  
Nr. 1  
AC

**Contact characteristics**

IEC Conventional free air thermal current I <sub>th</sub>	A	630
Rated insulation voltage U <sub>i</sub> IEC/EN	V	1000
Rated impulse withstand voltage U <sub>imp</sub>	kV	12
Rated short time current (0.3s) I <sub>cw</sub> (rms)	kA	0

**Dimensions**

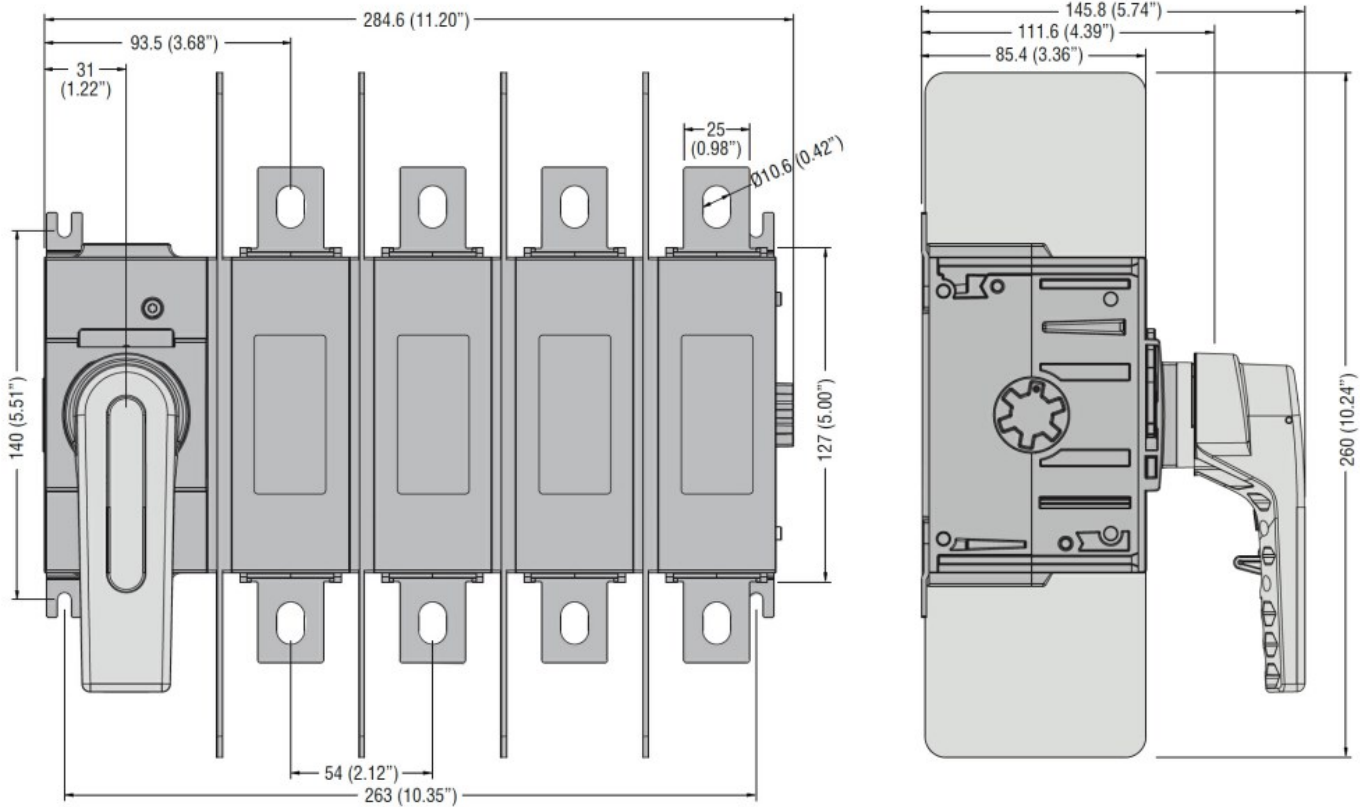

**Wiring diagrams**



**Certifications and compliance**

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

**ETIM classification**

ETIM 8.0

EC002498 -  
 Accessories/spare  
 parts for low-  
 voltage switch  
 technology