

Product designation	Direct-on-line starter		
Product type designation	M3P08012...B8		
Electrical features			
Relay adj range	A	60-82	
IEC technical characteristics ($\leq 440V$)			

le	A	80
kW	kW	37...45

Components	
Starter enclosure standard supplied	M3PA
Contactor standard supplied	BF8000A
Thermal relay standard supplied	RF828200

UL technical data			
Maximum UL/CSA horsepower ratings three-phase, 3-pole			
	200V-208V	HP	25
	220V-240V	HP	30
	440V-480V	HP	60
	550V-600V	HP	75


Mechanical features	
Weight	g 3760

Ambient conditions			
Operating temperature			
	min	°C	-25
	max	°C	+60


Storage temperature			
	min	°C	-40
	max	°C	+70

Resistance & Protection	
Frontal IP degree	IP65

Dimensions

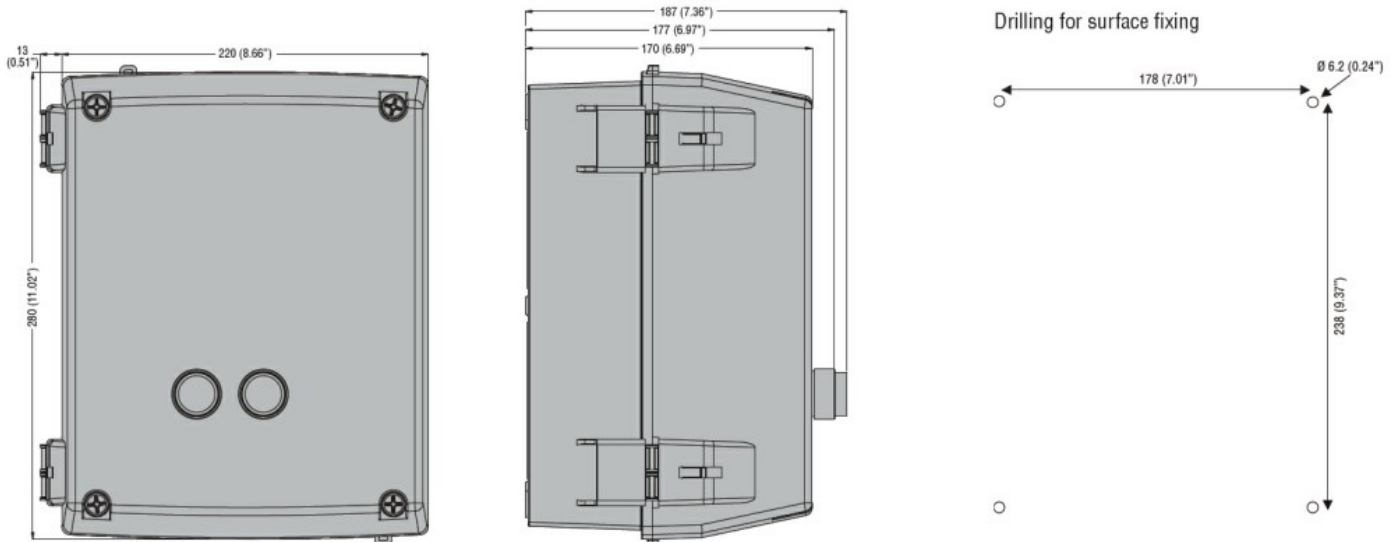

Wiring diagrams

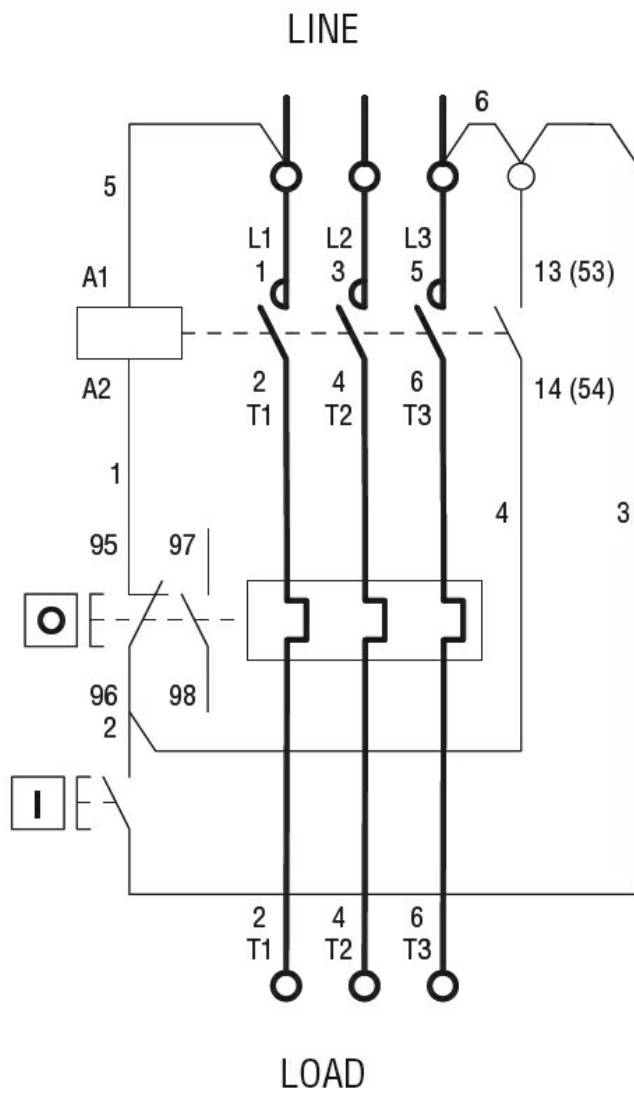

I = Start; O = Stop/Reset

ETIM classification

ETIM 8.0

EC001037 -
 Motor
 starter/Motor
 starter
 combination