



Product designation


Signal tower Ø70mm/2.75" 8TL7GL - Light mudules


Product type designation

General characteristics			
Diameter	n	nm - inch	n 70 / 2.75
Supply voltage (AC)		V	24
Supply voltage (DC)		V	24
Colour			Green
IEC degree of protection			IP65
Mechanical features			
Weight		g	83
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+50
Dimensions			


Dimensions







Wiring diagrams

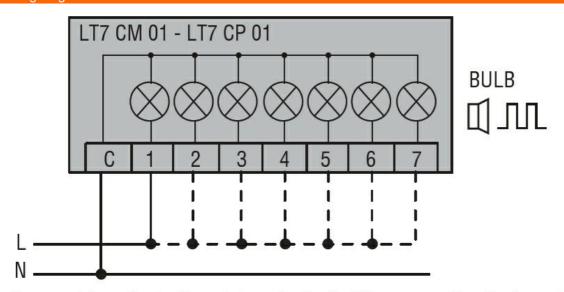

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n° 14



ENERGY AND AUTOMATION

8LT7GLB3

BLINKING LIGHT MODULE. Ø70MM. BA15D FITTING, GREEN, 24VAC/DC

	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC
ETIM elegation	

ETIM classification

ETIM 8.0

EC000232 -Optical module for signal tower