


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	TAP		RUN		DIMENSIONS in. [mm]				
	AWG [mm <sup>2</sup> ]	∅ ±.01 [0.3]	AWG [mm <sup>2</sup> ]	∅ ±.01 [0.3]	L ±.02 [0.5]	W ±.02 [0.5]	H ±.02 [0.5]	C ±.02 [0.4]	M ±.02 [0.6]
EQSP10-18D	#18-14 [0.75-1.5]	.16 [4.0]	#12-10 [4.0]	.19 [4.7]	.83 [21.1]	0.60 [15.2]	0.43 [10.9]	0.43 [10.9]	1.32 [33.5]

NOTES:

- USED FOR:
  - STRANDED COPPER WIRE ONLY
  - 221°F [105°C] MAX. OPERATING TEMPERATURE
  - 600 V. MAX VOLTAGE RATING
- MATERIAL:
  - STAMPING: .028" [0.7] THICK BRASS, TIN PLATED
  - HOUSING: POLYPROPYLENE, BROWN
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

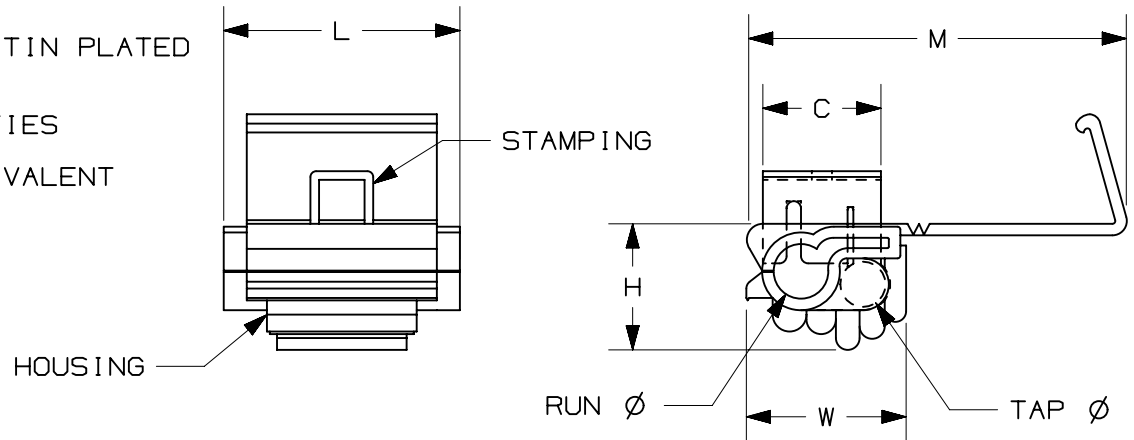

LISTED  
2000  
E52164

TITLE <b>STRONGHOLD QUICK SPLICE CONNECTOR INSULATION DISPLACEMENT #18-14 TO #12-10</b> CUSTOMER DRAWING					
ITEM REVISION NAME 00123SSI/01					
DATASET FILE NAME 00123SSI/01					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]					MATERIAL:  SEE NOTES
.x ± .1 [ 2.54 ]		.xxx ± .005 [ .127 ]			
.xx ± .01 [ .25 ]		ANGLES ± 5 °			
THIRD ANGLE PROJECTION			DRAWING NUMBER: <b>00123SSI-DC</b>		
DRAWN BY JHNU	DATE -	CHK -	SCALE N.T.S.	SHT 1 OF 1	
REV					SIZE <b>A</b>

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	6/21	JHNU	TMR	JADE	REMOVED TOOL COLUMN	102186
00	2/18	JHNU	TMR	RGB	DRAWING RELEASED	00123SS

D10100DA/15