# 1SNK900203R0000 - ACTIVE

#### ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK900203R0000 Terminal Block & Strip Conducting Accessories, Test Adapter, Dark Gray, Product Spacing .299 in [7.6 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK

#### View on TE.com >



Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Conducting Accessories



Conducting Accessory Type: **Test Adapter** PCB Mount Retention Type: **Plug-In** Primary Product Color: **Dark Gray** 

Product Spacing: 7.6 mm [.299 in ]

Contact Current Rating (Max): 10 A

## Features

### Product Type Features

Conducting Accessory Type	Test Adapter
Electrical Characteristics	
Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Voltage Rating (CSA)	600 V
Dielectric Test Voltage	2200 V
Short-Time Withstanding Current Rating @ 1s	60 A
Voltage Rating (IEC)	1000 V
Current Rating (IEC)	10 A
Body Features	
Plastic & Resin Material Type	Polyamide
Product Weight	1.7 g[.06 oz]
Primary Product Color	Dark Gray
Contact Features	

**C** For support call+1 800 522 6752

Terminal Block & Strip Conducting Accessories, Test Adapter, Dark Gray, Product Spacing .299 in [7.6 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



Contact Current Rating (Max)	10 A
Mechanical Attachment	
PCB Mount Retention Type	Plug-In
Dimensions	
Product Depth	52.15 mm[2.053 in]
Product Width	7.6 mm[.299 in]
Product Height	7.6 mm[.299 in]
Product Spacing	7.6 mm[.299 in]
Usage Conditions	
Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5-40 °C[23-104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Industry Standards	
IP Rating	IP20

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

Terminal Block & Strip Conducting Accessories, Test Adapter, Dark Gray, Product Spacing .299 in [7.6 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

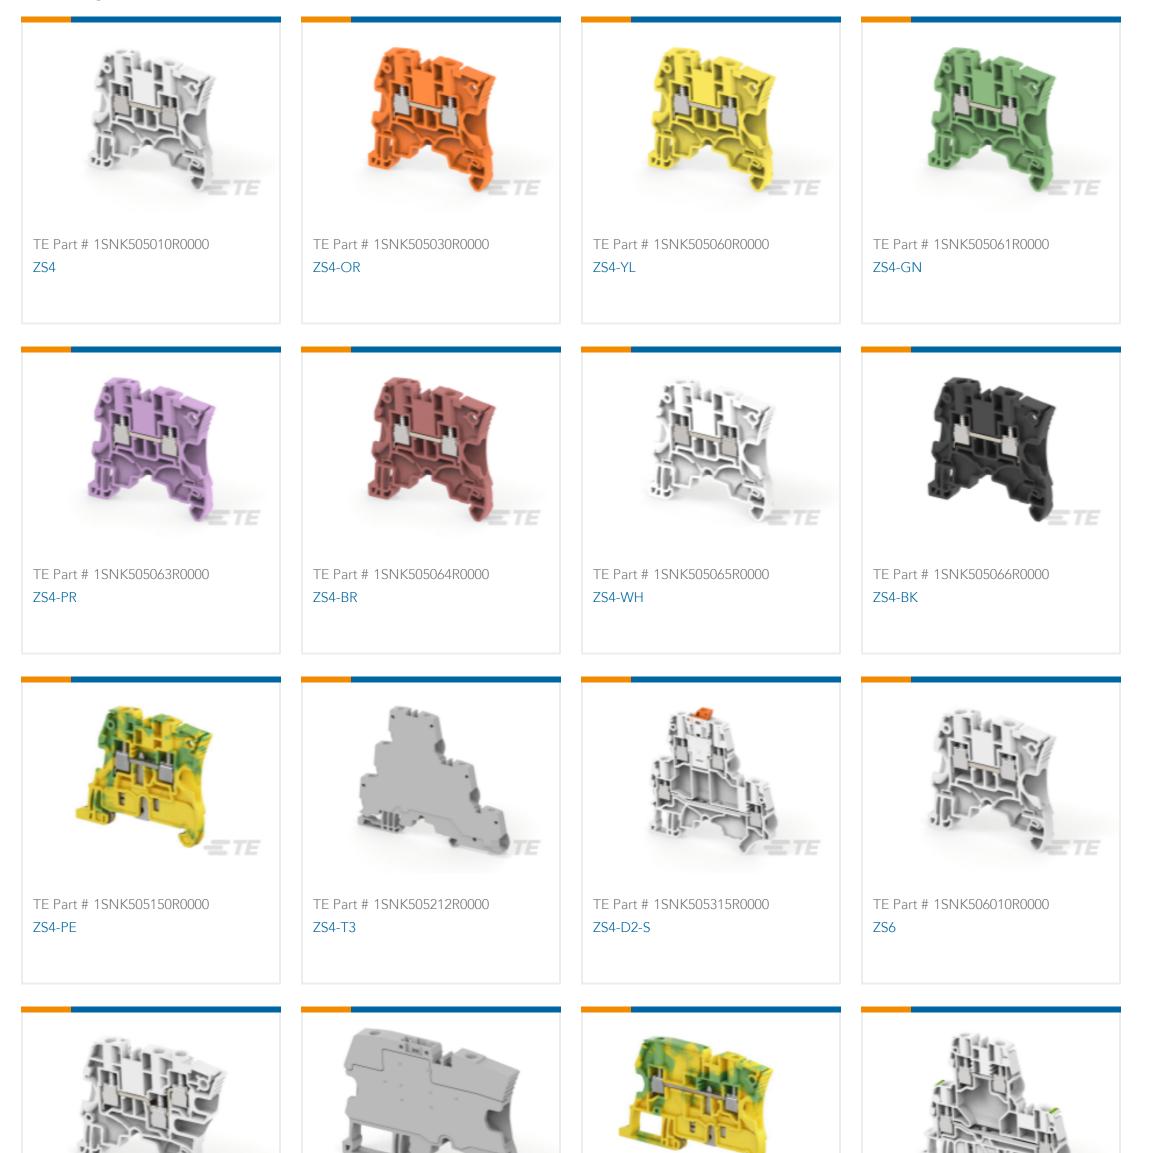

-ETE

TE Part # 1SNK506212R0000

ZS6-D2-PE

TE Part # 1SNK506153R0000

ZS4-PE-R2

TE Part # 1SNK506011R0000


ZS6-3S

TE Part # 1SNK506013R0000


ZS4-R2

Terminal Block & Strip Conducting Accessories, Test Adapter, Dark Gray, Product Spacing .299 in [7.6 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK




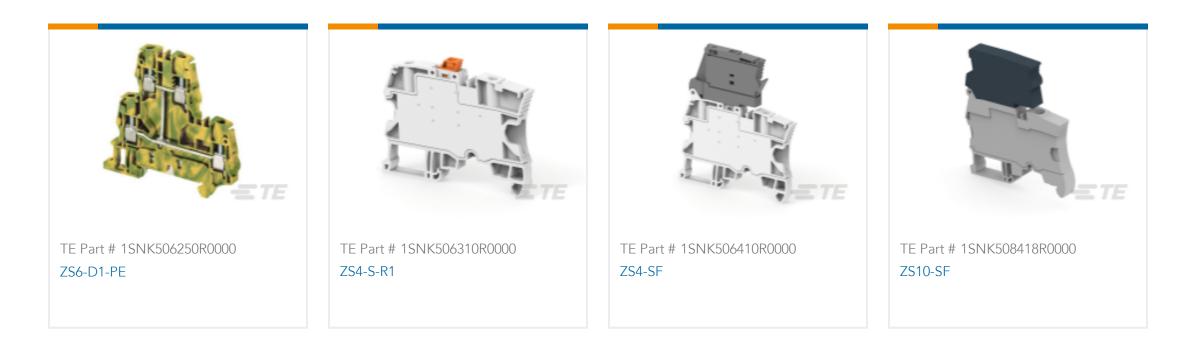

# Also in the Series | ENTRELEC SNK

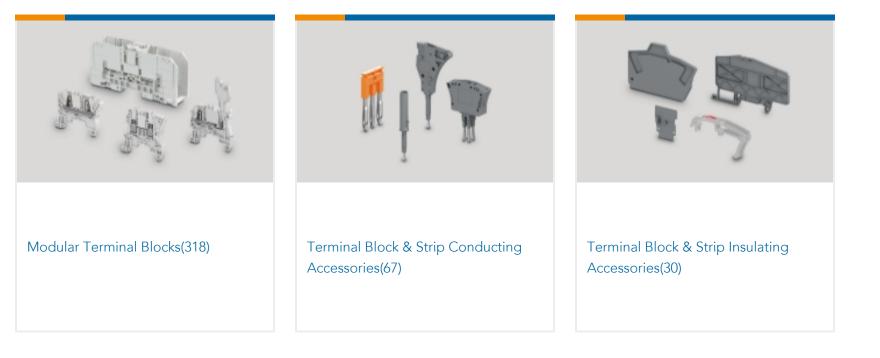

# Customers Also Bought

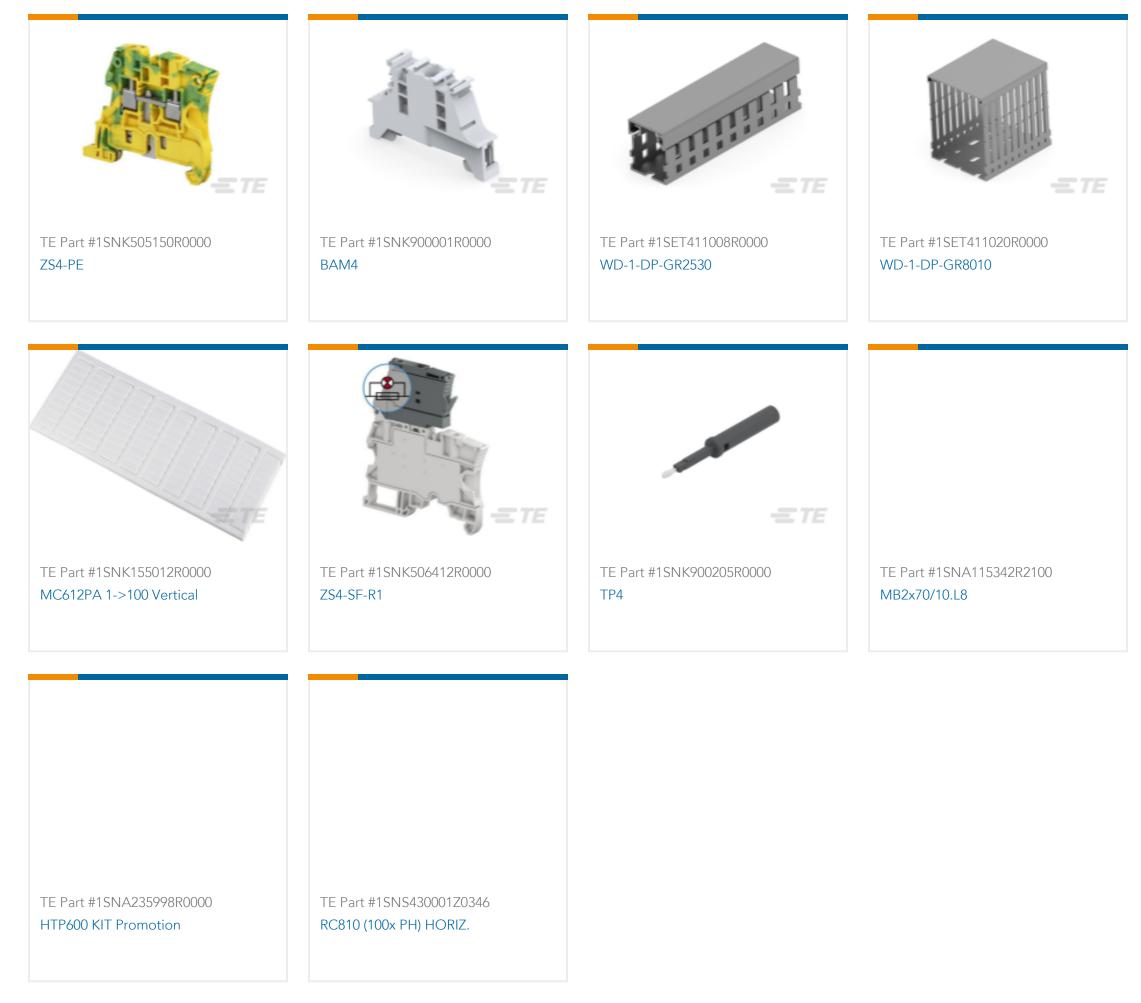

Terminal Block & Strip Conducting Accessories, Test Adapter, Dark Gray, Product Spacing .299 in [7.6 mm], -67 – 230 °F [-55 – 110 °C], ENTRELEC SNK



## Documents

CAD Files 3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1SNK900203R0000\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK900203R0000\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SNK900203R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog

English

TP2

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)